

Faculty of Mathematics and Computer Science

Heidelberg University

Master thesis

in Computer Science

submitted by

Stefan Machmeier

born in Heidelberg

2021

Honeypot Implementation in a Cloud Environment

This Master thesis has been carried out by Stefan Machmeier

at the

Engineering Mathematics and Computing Lab

under the supervision of

Herrn Prof. Dr. Vincent Heuveline

(Titel der Masterarbeit - deutsch):

(Title of Master thesis - english):

Acknowledgements

Contents

Acronyms	III
List of Figures	V
List of Tables	VII
1 Introduction	1
1.1 Problem description	1
1.2 Justification, motivation and benefits	2
1.3 Research questions	2
1.4 Limitations	2
2 Background	3
2.1 Virtualization	3
2.2 Cloud Computing	3
2.2.1 Definition of Cloud Computing	4
2.2.2 Service models	5
2.2.3 Deployment models	6
2.3 Honeypots	7
2.3.1 Definition of a Honeypot	7
2.3.2 Level of Interaction	9
2.3.3 Security concepts	10
2.3.4 Value of Honeypots	11
2.3.5 Honeynets	12
2.3.6 Legal Issues	13
2.3.7 Related Work	14
3 Analyze Honeypot Attacks in the Cloud	15
3.1 Introduction	15
3.2 Methodology	17
3.2.1 heiCLOUD	17
3.2.2 T-Pot	18
3.3 Results	23
3.4 Discussion	30

4	Catching Attackers in Restricted Network Areas	37
4.1	Introduction	37
4.2	Heidelberg Connection Acceptance Tool	37
4.3	Results	39
4.3.1	HeiCloud	39
4.3.2	Eduroam	39
4.3.3	219 Zone	39
5	Mitigate Fingerprinting of Honeypots	43
5.1	Fingerprinting Cowrie	43
5.2	Disguising Cowrie	45
5.3	Experiment	45
6	Conclusion	51
6.1	Future work	51
	Bibliography	VII
	Appendices	XIII
A	T-Pot	XV
B	Installation and Configuration	XVII

Acronyms

ACL Access Control List

ADB Android Debug Bridge

ADC Application Delivery Controller

ASA Adaptive Security Appliance

AWS Amazon Web Services

BeIWÜ Baden-Württembergs extended LAN

CERT Computer Emergency Response Team

CHARGEN Character Generator Protocol

DaaS Data-as-a-Service

DDoS Distributed Denial of Service

DICOM Digital Imaging and Communications in Medicine

DMZ demilitarized zone

DNS Domain Name System

DTK Deception Toolkit

EU European Union

FHIR Fast Healthcare Interoperability Resources

GCP Google Cloud Platform

HaaS Hardware-as-a-Service

HTTP Hypertext Transfer Protocol

IaaS Infrastructure-as-a-Service

ICS Industrial control systems

IDS intrusion detection system

IOCTA Internet Organised Crime Threat Assessment

IPD intrusion prevention system
IPP Internet Printing Protocol
NIST National Institute of Standards and Technology
NSM network security monitoring
NTP Network Time Protocol
OS operating system
PaaS Platform-as-a-Service
RDP Remote Desktop Protocol
SaaS Software-as-a-Service
SCADA Supervisory Control and Data Acquisition
SSDP Simple Service Discovery Protocol
VM virtual machine
VMM virtual machine monitors

List of Figures

2.1	Abstract visualization of service models	5
2.2	Example of honeypots in a simplified network (derived from [63]) . . .	8
2.3	Example of honeynets in a simplified network (derived from [63]) . . .	13
3.1	Draft for data collection	18
3.2	T-Pot architecture	20
3.3	Distribution of honeypot attacks	25
3.4	Attack distribution of T-Pot	26
3.5	Attack histogram of T-Pot	27
3.6	Suricata results of T-Pot	28
3.7	RDPY results of T-Pot	29
3.8	Honeytrap results of T-Pot	30
3.9	Cowrie results of T-Pot	32
3.10	Cowrie top 10 credentials on T-Pot	35
4.1	MADCAT architecture	39
4.2	HeiCAT concept	40
4.3	Attack distribution of MADCAT	40
4.4	Protocol distribution of MADCAT	41
5.1	(derived from [71])	44
5.2	Architecture of OpenSSH and Cowrie	45

List of Tables

2.1	Distinction between security concepts (derived from [48])	11
3.1	Overview of attacks on cloud providers	16
3.2	Overview honeypots of T-Pot	24
3.3	Overview of attacks on cloud providers	31
5.1	Overview of the cosine similarity of OpenSSH, Cowrie, and Twisted. .	49

Chapter 1

Introduction

1.1 Problem description

Due to the pandemic, the last two years kept us at home, and we were tempted to use the Internet more often. Recent statistics of the monthly in-home data usage in the United States from January to March 2020 showed a drastic increase compared to the years before [64]. Even Europol (an agency that fights against terrorism, cybercrime, and other threats [27]) rose awareness of new cyber threats related to an increase of misinformation. As stated in their yearly Internet Organised Crime Threat Assessment (IOCTA), citizens and businesses are looking for any kind of information that is desperately needed. Both contributes to cybercriminal acts. [26]

The increase of cyberattacks is merely connected to the pandemic, also fast-growing technology comes along with new security concerns. Especially in cloud computing due to access to large pools of data and computational resources, controlling access to services is becoming a tougher challenge nowadays. Besides traditional security leverages such as firewalls or intrusion detection systems, one known methodology to strengthen infrastructures is to learn from those who attacks it. Honeypots are a security resource whose value lies in being probed, attacked, or compromised [63]. By getting attacked from others, zero-day-exploits, worm activity, or bots can be detected. In retrospect, this helps to adapt, or fix infrastructures before more damage occurs. As a cloud provider, it is a crucial point if and how attacks on production server could have been prevented. Considering the Global Security Report by Trustwave, the amount of attacks doubled in 2019, and increased by 20% in 2020 [1]. It puts cloud providers to the third most targeted environments for cyberattacks. Corporate and internal networks are on top of this ranking. However, this rise of attacks on cloud infrastructures has shown the importance why more security will be necessary in the future. Thus, making it a thrilling challenge for the upcoming years.

1.2 Justification, motivation and benefits

1.3 Research questions

The following research questions have been answered in this thesis:

1. How can honeypots contribute to a more secure cloud environment including baiting adversaries to our honeypots, and controlling their requests?
2. What is a preferable way to handle data management and visualization?
3. How can we analyze our data to get more information?

1.4 Limitations

Heidelberg offers a cloud service, called “HeiCloud”. Since we tailor our implementation for this service. Moreover, it exists a vast variety of different honeypots which bound us to a very few of them.

Chapter 2

Background

Using honeypots in a cloud environment merge two varying principals together. This chapter introduces the fundamental knowledge that is needed to comprehend the upcoming experiments. If the reader has a profound understanding of cloud computing, honeypots, and virtualization he can skip this chapter.

2.1 Virtualization

Virtualization, often referred to virtual machine (VM), is defined by Kreuter [42] as “an abstraction layer or environment between hardware component and the end-user”. A VM runs on top of an operating system (OS) core components. Through an abstraction layer, the virtual machine is connected with the real machine by hypervisors or virtual machine monitors (VMM). Hypervisors can use real machine hardware components, but also support virtual machine operating systems and configurations. Both are similar to emulators, that are defined by HA [32] as “process whereby one computer is set up to permit the execution of programs written for another computer”. This allows to manage multiple VM with real machine resources. There are three different types of virtualization, (i) software virtual machines, (ii) hardware virtual machines, and (iii) virtual OS/containers. Software virtual machine’s manage interactions between the host operating system and guest operating system. Hardware virtual machine’s offers direct and fast access to the underlying resources. It uses hypervisors, modified code, or APIs. Lastly, virtual OS/container partitions the host operating system into containers or zones. [19]

2.2 Cloud Computing

Cloud Computing has become a very popular keyword these days. It has been used by various large companies such as Google and Amazon. However, the term “cloud computing” dates back to the late 1996, when a small group of technology executives

of Compaq Computer framed new business ideas around the Internet.[54] Starting from 2007 cloud computing evolved into a serious competitor and outnumbered the keywords “virtualization”, and “grid computing” as reported by Google trends [72]. Shortly, various cloud provider become publicly available, each with their own strengths and weaknesses. For example IBM’s Cloud¹, Amazon Web Services², and Google Cloud³. Why are clouds so attractive in practice?

- It offers major advantages in terms of cost and reliability. When demand is needed, consumers do not have to invest in hardware when launching new services. Pay-as-you-go allows flexibility.
- Consumer can easily scale with demand. When more computational resources are required due to more requests, scaling up instances in conjunction with a suited price model are straightforward.
- Geographically distributed capabilities supply the need for world-wide scattered services.

2.2.1 Definition of Cloud Computing

With reference to the definition by Brian Hayes, cloud computing is “a shift in the geography of computation” [33]. Thus, computational workload is moved away from local instances towards services and datacenters that provide the user’s needs[4].

The National Institute of Standards and Technology (NIST) defines cloud computing as “a model for enabling ubiquitous, convenient, on-demand network access to a shared pool of configurable computing resources (e.g., networks, servers, storage, applications, and services) that can be rapidly provisioned and released with minimal management effort or service provider interaction” [45]. NIST not only reflects the geographical shift of resources such as datacenters, but also mentions on-demand usage that contributes to a flexible resource management. Moreover, NIST composes the term in five essential characteristics, three service models (see subsection 2.2.2), and four deployment models (see subsection 2.2.3) [45]

On-demand-self-service refers to the unilaterally provision computing capabilities. Consumers can acquire server time and network storage on demand without a human interaction.

Broad network access characterizes the access of capabilities of the network through standard protocols such as Hypertext Transfer Protocol (HTTP). Heterogeneous thin and thick client platforms should be supported.

¹<https://www.ibm.com/cloud>

²<https://aws.amazon.com/>

³<https://cloud.google.com/>

Resource pooling allows the provider’s computing resources to be pooled across several consumers. A multi-tenant model with different physical and virtual resources are assigned on demand. Other aspects such as location are independent and cannot be controlled on a low-level by consumers. Moreover, high-level access to specify continent, state, or datacenter can be available.

Rapid elasticity offers consumers to extend and release capabilities easily. Further automatization to quickly increase resources when demand skyrockets significantly can be supported regardless limit and quantity at any time.

Measured service handles resources in an automated and optimized manner. It uses additional metering capabilities to trace storage, processing, bandwidth, and active user accounts. This helps to monitor, and control resource usage. Thus, contributing to transparency between provider and consumer.

2.2.2 Service models

Service models are categorized by NIST into three basic models based on usage and abstraction level. Figure 2.1 shows the connection between each model whereas cloud resource are defined in subsection 2.2.3. Due to the vast range of functionalities, Infrastructure-as-a-Service (IaaS) builds the foundation of service models. Each model on top represents a user-friendly abstraction with derated capabilities.

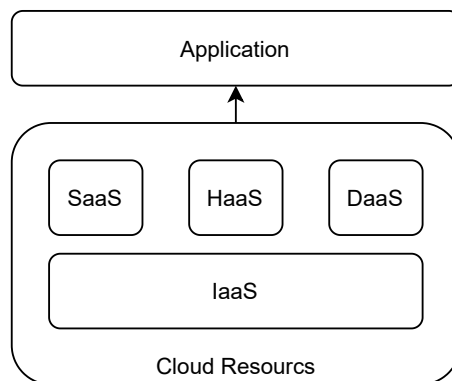


Figure 2.1: Abstract visualization of service models. The lowest level within the container “cloud resources” represents the depth of functionalities. Therefore, Infrastructure-as-a-Service (IaaS) offers the most functionalities whereas the others have a user-friendly abstraction.

Software-as-a-Service (SaaS) is a high-level abstraction to consumers. Controlling the underlying infrastructure is not supported. Providers often use a multi-tenancy system architecture to organize each consumer’s application in a separate environment. It helps to employ scaling with respect to speed, security availability, disaster recovery, and maintenance. Main objective of SaaS is to host consumer’s software or

application that can be accessed over the Internet using either a thin or rich client. [22] “Limited user-specific application configuration settings” can be made [45].

Platform-as-a-Service (PaaS) pivots on the full “Software Lifecycle” of an application whereas SaaS distinct on hosting complete applications. PaaS offers ongoing development and includes programming environment, tools, configuration management, and other services. In addition, the underlying infrastructure is not managed by the consumer. [45]

Infrastructure-as-a-Service (IaaS) offers a low-level abstraction to consumers with the ability to run arbitrary software regardless of operating system or application. In contrast to SaaS, IT infrastructures capabilities (such as storage, networks) can be used. It strongly depends on virtualization due to integration, or decomposition of physical resources. [45]

Data-as-a-Service (DaaS) serves as a virtualized data storage service on demand. Motivations behind such services could be upfront costs of on-premise enterprise database systems. [22] Mostly they require “dedicated server, software license, post-delivery services, and in-house IT maintenance” [22] Whereas DaaS costs solely what consumer’s need. When dealing with a tremendous amount of data, file systems and RDBMS often lack in performance. DaaS outruns such weak links by employing a table-style abstraction that can be scaled.[22]

Hardware-as-a-Service (HaaS) offers IT hardware, or datacenters to buy as a pay-as-you-go subscription service. The term dates back to 2006 during a time when hardware virtualization became more powerful. It is flexible, scalable and manageable.[72]

2.2.3 Deployment models

Deployment models are categorized by NIST into four basic models. Each differs in data privacy, location, and manageability [45].

Private clouds offer the highest level of control in regard of data privacy, and utilization. Mostly, such clouds are deployed within in a single organization, either managed by in-house teams or third party suppliers. In addition, it can be on or off premise. Within private clouds consumers have full control of their data. Especially for European data privacy laws, it is not negligible when data is stored abroad and thus under law of foreign countries. However, its popularity has not been diminished due to the immense cost of switching to public clouds. [22, 45]

Community clouds can be seen as a conglomerate of multiple organizations that merge their infrastructure with respect to a commonly defined policy, terms, and condition beforehand. [45]

Public clouds represent the most used deployment models. In contrary, to private one, public clouds are fully owned by the service provider such as business, academics, or government organization. Consumers do not know where their data is distributed. In addition, contracts underlie custom policies. [45]

Hybrid cloud is a mixture of two or more cloud infrastructures, such as private and public cloud. However, each entity keeps its core element. Hybrid clouds defines “standardized or proprietary technology to enables data and application portability”[45].

2.3 Honeypots

The term “honeypot” exists since more than a decade. 1997 was the first time that a free honeypot solution became public. Deception Toolkit (DTK), developed by Fred Cohen, released the first honeypot solution. However, the earliest drafts of honeypots are from 1990/91, and built the foundation for Fred Cohen’s DTK. Clifford Stoll’s book “The Cuckoo’s Egg”[65], and Bill Cheswick’s whitepaper “An Evening With Berferd”[9] describe concepts that are considered nowadays as honeypots.[63] A honeypot itself is a security instrument that collects information on buzzing attacks. It disguises itself as a system, or application with weak links, so that it gets exploited and gathers knowledge about the adversary. In 2002 a Solaris honeypot helped to detect an unknown `dtspcd` exploit. Interestingly, a year before in 2001 the Coordination Center of Computer Emergency Response Team (CERT), “an expert group that handles computer security incidents”[30], shared their concerns regarding the `dtspcd`. Communities were aware that the service could be exploited to get access and remotely compromise any Unix system. However, during this time such an exploit was not known, and experts did not expect any in the near future. Gladly, early instances based on honeypot technologies could detect new exploits and avoid further incidents. Such events lay emphasis on the importance of honeypots.

2.3.1 Definition of a Honeypot

A Dozen of definitions for honeypots circulate through the web that causes confusion, and misunderstandings. In general, the objective of a honeypot is to gather information about attacks, or attack patterns [48]. Thus, contributing as an additional source of security measure. See subsection 2.3.3 for a detailed view regarding honeypots in the security concept. As Spitzner [63] has listed, most misleading definitions are: honeypot is a tool for deception, it is a weapon to lure adversaries, or a part of an intrusion detection system. In order to get a basic understanding, we want to exhibit some key definitions. Spitzner [63] defines honeypots as a “security resource whose value lies in being probed, attacked, or compromised”. Independent

of its source (e.g. server, application, or router), we expect that our instance is getting probed, attacked, and eventually exploited. If a honeypot does not match this behaviour, it will not provide any value. It is important to mention that honeypots do not have any production value, thus, any communication that is acquired is suspicious by nature [63]. In addition, Spitzner [63] points out that honeypots are not bounded to solve a single problem, hence, they function as a generic perimeter, and fit into different situation. Such functions are attack detection, capturing automated attacks, or alert/warning generator. Figure 2.2 show an example how honeypots could be used in an IT infrastructure.



Figure 2.2: Example of honeypots in a simplified network (derived from [63]). Each of the demilitarized zone (DMZ), and internal network are separated by a router and a Layer-3 switch. As derived from above, in each network a honeypot is available (honeypot A, B). The read path symbolizes the path of an attacker coming from the gateway router.

In general, we differentiate two types of honeypots (i) Production honeypots (ii) Research honeypots. This categorization has their origin from Mark Rosch developer of Snort during his work at GTE Internetworking.

Production honeypots are the common type of honeypots that people would think of. The objective is to protect production environments, and to mitigate the risk of attacks. Normally, production honeypots are easy to deploy within an organization. Mostly, low-interaction honeypots are chosen due to a significant reduce in risk. Thus, adversaries might not be able to exploit honeypots to attack other systems. The downside of a low-interaction honeypot is a lack of information, for example standard information like the origin of attacks, or what exploits are used can be collected, whereas insides about communication of attackers, or deployment of such attacks are unlikely to obtain. In contrast, research honeypots do fulfill this objective.[63]

Research honeypots are used to learn more in detail about attacks. The objective is to collect information about the clandestine organizations, new tools for attacks, or the origin of attacks. Research honeypots are unlikely suitable for production environments due to a higher increase of risk. Facing an increase in deployment complexity, and maintenance does not attract a production usage.[63]

It is worth to mention that there is no exact line between research or production honeypots. Possible cases are honeypots that could function as either a production or a research honeypot. Due to their dynamic range in which they are applicable it makes it hard to distinguish.

Provos [53] adds a differentiation for the virtual honeypot framework and splits it into the following types:

- Physical honeypots are “real machines on the network with its own IP address” [53]
- Virtual honeypots are “simulated by another machine that responds to network traffic sent to the virtual honeypot” [53]

2.3.2 Level of Interaction

When building and deploying a honeypot, the depth of information has to be defined beforehand. Should it gather unauthorized activities, such as an NMAP scan? Do you want to learn about buzzing tools and tactics? Each depth brings a different level of interaction because some information depends on more actions of adversaries. Therefore, honeypots differ in level of interaction.

Low-interaction honeypots provide the lowest level of interaction between an attacker and a system. Only a small set of services like SSH, Telnet, or FTP are supported which contributes to the deployment time. In terms of risk, a low-interaction

honeypot does not give access to the underlying OS which makes it safe to use in a production environment. For example using an SSH honeypot, such services are emulated, thus, attackers can attempt to log in by brute force or by guessing, and execute commands. However, the adversary will never gain more access because it is not a real OS. However, safety comes with the downside of less information. Collected is limited for statistical purpose such as (i) Time and data of attack (ii) Source IP address and source port of the attack (iii) Destination IP address and destination port of the attack. Transactional information can not be collected. [63]

A medium-interaction honeypot offers more sophisticated services with higher level of interaction. It is capable to respond to certain activities. For example a Microsoft IIS Web server honeypot could be able to respond in a way that a worm is expecting it. The worm would get emulated answers, and could be able to interact with it more in detail. Thus, gathering more severe information about the attack, including privilege assessment, toolkit capturing, and command execution. In comparison, medium-interaction honeypots allocate more time to install and configure. Also, more security checks have to be performed due to a higher interaction level than low-interaction honeypots. [63]

High-interaction honeypots are the highest level interaction. Mostly, they represent a real OS to provide a full set of interactions to attackers. They are so powerful because other production servers do not differ much to high-interaction honeypots. They represent real systems in a controlled environment. Obviously, the amount of information is tremendous. It helps to learn about (i) new tools (ii) finding new bugs in the OS (iii) the black hat community. However, the risk of such a honeypot is extremely high. It needs severe deployment and maintenance processes. Therefore, it is time-consuming.

2.3.3 Security concepts

Security concepts are classified by Schneier [61] in prevention, detection, and reaction. Prevention includes any process that (i) discourages intruders and (ii) hardens systems to avoid any kind of breaches. Detection scrutinizes the identification of attacks that threatens the systems' (i) confidentiality (ii) integrity and (iii) availability. Reaction treats the active part of the security concept. When attacks are detected, it conducts reactive measures to remove the threat. Each part is designed to be sophisticated so that all of them contribute to a secure environment. [48]

Honeypots contribute to the security concept like firewalls, or intrusion detection system (IDS). Regarding prevention, honeypots add only a small value because security breaches cannot be identified. Moreover, attackers would avoid wasting time on honeypots and go straight for production systems instead.

However, detection is one of the strengths of honeypots. Attacks often vanish in the sheer quantity of production activities. If any connection is obtained to a honeypot

it is suspicious by nature. In conjunction with an alerting tool, attacks can be detected.

Honeypots strongly supply reaction tools due to their clear data. In production environments, finding attacks for further data analysis are not easy to grasp. Often data submerge with other activities which complicates the process of reaction. [48] Nawrocki et al. [48] distinct honeypots from other objectives such as firewall, or log-monitoring.

Table 2.1: Distinction between security concepts based on areas of operations (derived from [48]).

Objective	Prevention	Detection	Reaction
Honeypot	+	++	+++
Firewall	+++	++	+
Intrusion Detection Sys.	+	+++	+
Intrusion Prevention Sys.	++	+++	++
Anti-Virus	++	++	++
Log-Monitoring	+	++	+
Cybersecurity Standard	+++	+	+

2.3.4 Value of Honeypots

To assess the value of honeypots we want to take a closer look to their advantages and disadvantages.[47, 38, 63]

Advantages

- **Data Value:** Collected data is often immaculate and does not contain noise from other activities. Thus, reducing the total size of data, and speeding up the analyzation.
- **Resources:** Firewalls, and IDS are often overwhelmed by the gigabits of traffic, thus, dropping network packets for analyzation. This results in a far less effective detection for malicious network activities. However, honeypots are independent of resources because they only capture their activities at itself. Due to resource limitation, expensive hardware is not needed.
- **Simplicity:** A honeypot do not require any complex algorithms, or databases. It should be able to quickly deploy it somewhere. Research honeypots might come with a certain increase of complexity. However, if a honeypot is complex, it will lead to misconfigurations, breakdowns, and failures.

- **Return on Investment:** Capturing attacks immediately informs users that attack occur on the infrastructure. This helps to demonstrate their value, and contributes to new investment in other security measurements.

In addition, Nawrocki et al. [48] listed four more advantages of honeypots:

- **Independent of Workload:** Honeypots only process traffic that is direct to them.
- **Zero-Day-Exploit Detection:** It helps to detect unknown strategies and zero-day-exploits.
- **Flexibility:** Well-adjusted honeypots for a variety of specific tasks are available.
- **Reduced False Positives and Negatives:** Any traffic or connection to a honeypot is suspicious. Client-honeypots verify such attacks based on system state changes. This results in either false positive, or false positive.

Disadvantages

- **Narrow Field of View:** Only direct attacks on honeypots can be investigated whereas attacks on production system are not detected by it.
- **Fingerprinting:** A honeypot often has a certain fingerprint that can be identified by attackers. Especially commercial ones can be detected by their responses or behaviors.
- **Risk to the Environment:** Using honeypots in an environment always increase the risk. However, it depends on the level of interaction.

2.3.5 Honeynets

Instead of having single honeypots that can be attacked, a honeynet offers a complete network of standard production systems such as you would find in an organization. Those systems are high-interaction honeypots, thus, allowing to fully interact with the OS, and applications. Key idea is that an adversary can probe, attack, and exploit these systems so that we can derive interaction within this network. It should be mentioned that a honeynet have to be protected by firewall. Figure 2.3 represents such a honeynet within an organization.

In comparison to regular honeypot, the greatest value of honeynets is the usage of true production systems. Black hats often do not know that they attack a honeynet, thus, adding value to prevention. However, the downsides are high complexity and maintenance that is needed to keep a honeynet running. [63]

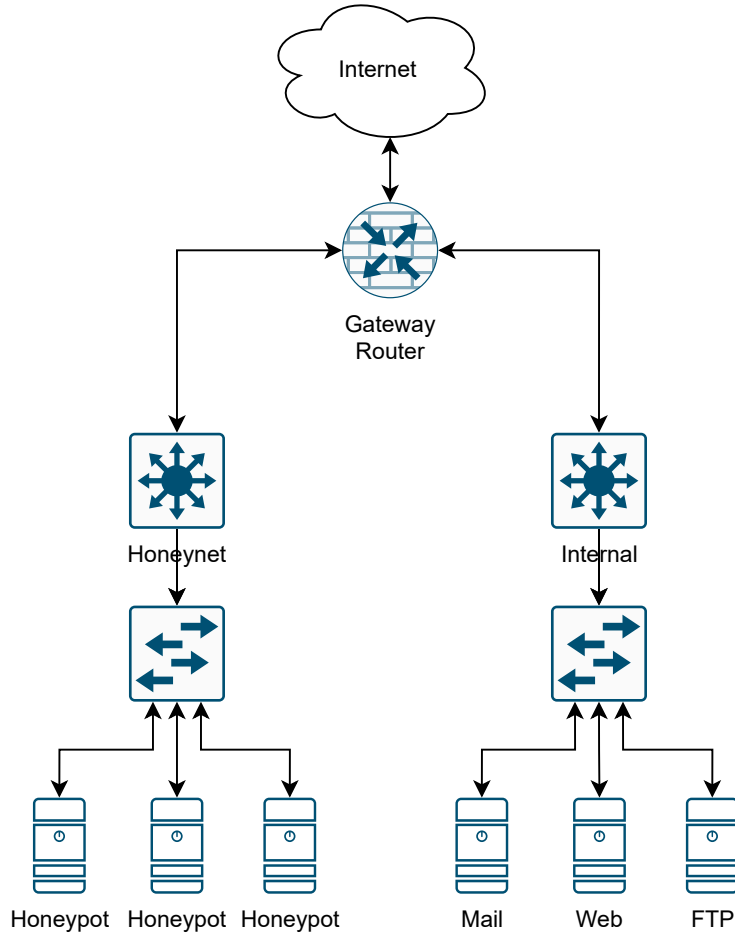


Figure 2.3: Example of honeynets in a simplified network (derived from [63]). On the left, this network presents the honeynet consisting of several other honeypots. On the right the network presents an ordinary subnet consisting of mail, web, and FTP server.

2.3.6 Legal Issues

Considering questions related to legal issues of honeypots can easily exceed this thesis. In this regard, we restrict the study to the country we reside in. Thus, we are only concerned about the European Union (EU) regulations, EU directives, and international agreements. Honeypots collect (i) content data that is used for communication, and (ii) transactional data that is used to establish the connection. Sokol et al. [62] studied the legal conditions for data collection and data retention. They come to the conclusion that administrators of honeypots have a legal ground of legitimate interest to store and process personal data, such as IP addresses. Moreover, for production honeypots the legitimate interest is to secure services. Regarding the length of data retention, the principle of data minimization has to be consid-

ered which means there is no clear answer for it. Any published data of research honeypots needs to be anonymized.

2.3.7 Related Work

The Snort [8] inline extension *Bait'n'Switch* [2] redirects attackers from production systems to honeypots. Usually Snort drops malicious packets when they are detected, and creates a specific rule to block malicious activity from the source. In contrast, *Bait'n'Switch* does not create a rule to block more request, instead it redirects them to honeypots. The attacker does not realize that all packets are rerouted, and that the original target has changed. The IDS is bounded to its signature database and can only redirect known attacks.[21]

Whereas *Bait'n'Switch* had to drop the first attack which leads to a suspicious behavior for attackers, the *Intrusion Trap System* [67] is capable of forwarding the first request. Therefore, the first recognized attack by the IDS can be forwarded and answered by honeypots. [21]

The *honeyd* [53] extension *Honeycomb* [41] enables automatically generates *Snort* and *Bro* [51] signatures for all incoming traffic. In addition, new signatures are created for similar patterns if they do not exist already, and updating of existing ones to improve their quality. This is based on the incoming traffic, and the corresponding attack session. Even mutations of attacks are considered. It generates a more generic description for signatures in order to match the original attack, and the mutation. It helps to keep the size of signatures small. However, the downside of this extension is the missing verification of attacks. Wrongly redirected traffic will not be proofed if an attack was successful even though a signature has been created. [21]

Chapter 3

Analyze Honeypot Attacks in the Cloud

Attacks from the Internet are often originated from bots. A bot, short for “robot”, is an automated process that interacts with different network services. Besides good intentions, bots can be used for malicious purposes. Mostly, bots try to self-propagate malware across the Internet and try to capture hosts that merge into a botnet. A botnet has a central server or servers that act as a command and control center for all infected hosts.[28] Recently, Universities in Germany received more cyberattacks than ever, respectively increasing their costs for damage repairs. Honeypots are a good solution to catch attackers and learn from their exploits. However, there is no conclusion if honeypots in times of bots give a proper countermeasure to avoid such damage. Following the rise of cyberattacks, we introduce a method to collect and analyze cyberattacks in a cloud environment. We further propose an answer if honeypots are helpful to prevent such scenarios from happening.

3.1 Introduction

As previously mention in section 2.2, using cloud resources are becoming the go-to option for new services and applications. Kelly et al. [39] thoroughly investigated honeypots on Azure, Amazon Web Services (AWS), and Google Cloud Platform (GCP). Followingly, we present their results that we want to compare on with the ones heiCLOUD achieves. The results are collected by T-Pot version 20.06.0 over a duration of 3 weeks. In addition, Kelly et al. [39] considered different server geographical locations. They have collected data from East US, West Europe, and Southeast Asia. Table 3.1 shows the results presented by Kelly et al. [39]. Dionaea (a honeypot to capture malicious payload), Cowrie (SSH and Telnet honeypot), and Conpot (industrial honeypot for ICS, and SCADA) are the most attacked honeypots in comparison to the others. Regarding AWS, Dionaea account 91% of the total attacks, Glutton and Cowrie are minor with 5%, and 2%. Interestingly, Cowrie

Table 3.1: Overview of attacks on cloud providers. For a better overview, only the three most attacked honeypots are listed. The others combine several honeypots.

PROVIDER	HONEYPOT				IN TOTAL
	Dionaea	Cowrie	Glutton	others	
Amazon Web Services	228 075	4 503	11 878	3 688	248 144
Google Cloud Platform	162 570	297 818	84 375	36 403	581 116
Microsoft Azure	308 102	9 012	17 256	6 365	340 735

reported several attacks related to the COVID-19 pandemic to enable social engineering methods. In contrast to AWS, Cowrie logged the majority of attacks with 51% on GCP. Beside several automated attacks trying to log in with default credentials, adversaries tried to gather information about CPU architecture, scheduled tasks, and privilege escalation. Microsoft Azure reflects nearly the same results as the other two cloud providers beforehand.

The overall results show an average ratio of 55.000 attacks per day, summing up to roughly 1.3 million in total. Similar results for different regions could have been reproduced. Their results clearly show the disparity of the regions Europe, US, and Asia. An important question that Kelly et al. [39] answered is if attackers target services on cloud providers based on the cloud providers’ market share. They could not confirm this assumption based on the fact that Google Cloud with the smallest market share received most of the attacks. In total, most of the attacks are originated from Vietnam, Russia, United States, and China. Due to technologies such as VPN, or Tor, the geolocation only indicates the last node, so location data might be distorted. Across all providers roughly 80% of the source IP addresses had a bad reputation and could have been filtered by the organization. The operating devices used for attacking the services are mostly Windows 7 or 8, and different Linux kernels and distributions. Windows devices target vulnerabilities in remote desktop sharing software. Such vulnerabilities are (i) CVE-2006-2369[14] (RealVNC) in the US region, (ii) CVE-2001-0540[12] (RDP) in EU and Asia regions, (iii) CVE-2012-0152[15] (RDP) in the Asia region, and (iv) CVE-2005-4050[13] (VoIP) in EU region. In addition, attackers were also capable of disguising any fingerprinting activity of p0f.

We want to compare the findings Kelly et al. [39] claimed in the paper “A Comparative Analysis of Honeypots on Different Cloud Platforms” with ours using the University Heidelberg’s cloud solution. First, a short introduction of heiCLOUD is held, followed by a closer lookup of T-Pot that is used to acquire data. Lastly, we present our results and do a thorough comparison closing up with a discussion based on a technical report of the Cambridge University.

3.2 Methodology

Our foremost goal is to track as most attacks as possible. We want to verify if most of the attacks on the Internet are originated from bots. To gather various attacks from the Internet Figure 3.1 sketches our concept we plan to apply. Honey-pots should be deployed on a single instance, and store their data, or log files in a database. By the help of data visualization tools, we analyze the attacks. For security reasons, honeypots should run in a virtualized environment to avoid any harm to our host system. We use Debian as a base Linux distribution. Our instance runs on heiCLOUD, a cloud service provided by Heidelberg University. It is capable of 16 GB of RAM, 8 VCPU's, and a volatile memory of 30 GB. In addition, we mount a 125 GB permanent memory to securely store our data. In its very early stages, we compared different approaches to achieve this goal. As an example, we compared native implementation approaches, using additional frameworks, and ready-to-use solutions. However, the T-Pot, developed by Telekom, offers a profoundly ready-to-use solution with major advantages. It combines several honeypots in conjunction with various analytic tools to trace the newest attacks. Furthermore, it helps to compare our findings with the ones Kelly et al. [39] claim.

Running our instance and exposing it to the Internet needs some adjustments beforehand. Therefore, a virtual network with subnet `192.168.145.0/24` has been created wherein our instance with IP address `192.168.145.4` is assigned to. The instance is accessible from the outside with floating IP address `129.206.5.74`. Access rules are similar to a stateful firewall, and thus, do not block any attacks. Ports `1–64000` are exposed and can be attacked by anyone. Ports higher than `64000` are only accessible through the University network `129.206.0.0/16` or eduroam `147.142.0.0/16` and should provide a basic authentication with username and password.

3.2.1 heiCLOUD

University Computing Center Heidelberg [69] offers a “IaaS specially tailored for higher education and research institutions” called heiCLOUD. It supplies multiple institutes at Heidelberg University with storage, virtual machines, or network components. In addition, heiCLOUD is a DFN¹ member, and offers others to use their services. As stated on their information website[68], it is (i) capable of freely manageable IT resources, (ii) beholds a stable and fast connection, (iii) ensures high availability and scalability, (iv) has freely selectable VM operating systems, and (v) has a transparent payment model [68]. Based on the open source application

¹German National Research and Education Network, the communications network for Science and research in Germany

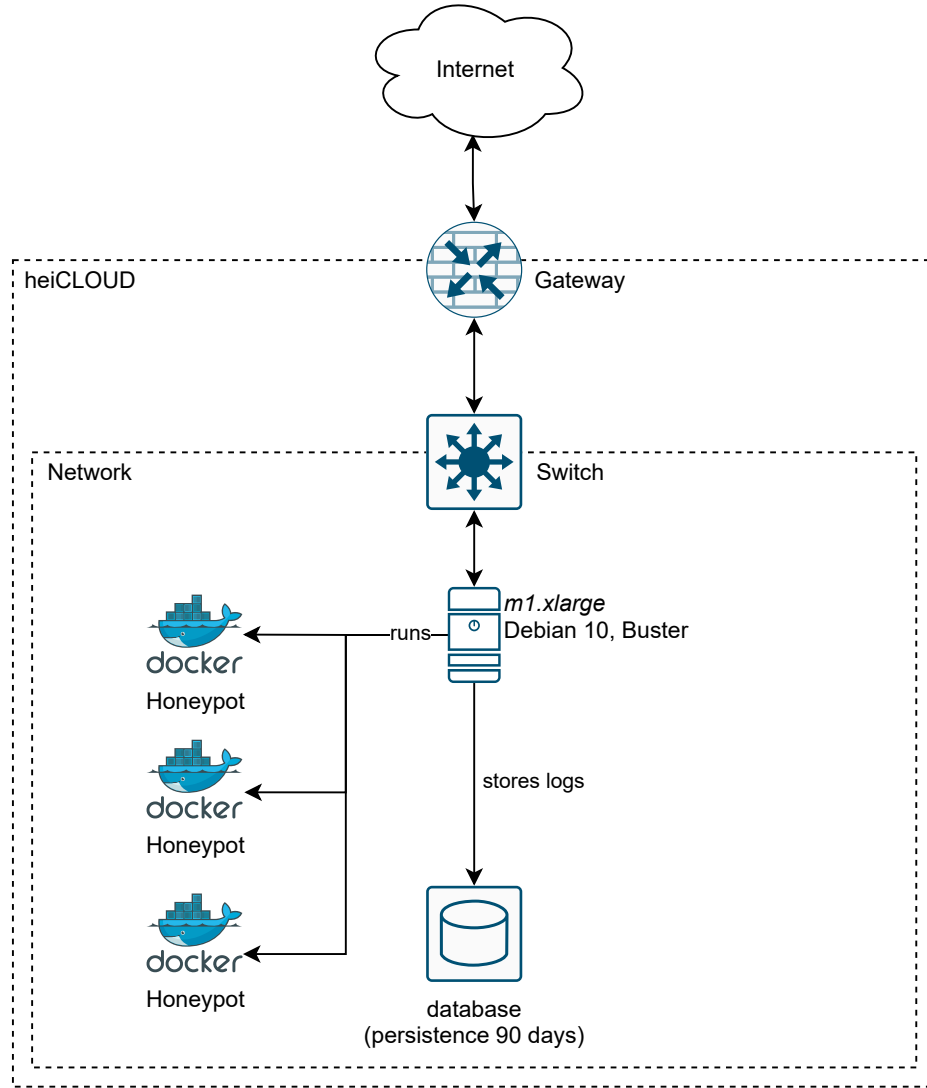


Figure 3.1: Concept to collect honeypot attacks

OpenStack, users can easily create own network areas, and manage their space individually. Unlike well-known cloud providers, heiCLOUD servers are located withing Germany, thus, abide by the European data privacy law. HeiCLOUD have never considered honeypots for additional cybersecurity measurements.

3.2.2 T-Pot

To be able to compare our results with Kelly et al. [39], we use the same approach to capture recent cyberattacks. The T-Pot solution, a mixture of Telekom and Honeypot, stands out with their sheer quantity of various honeypots. It requires 8 GB RAM and a minimum of 128 GB hard drive storage. Based on a Debian 10 Buster

distribution, it relies on Docker to run their services [24]. T-Pot has to be deployed in a reachable network where intruders are expected. Either TCP and UDP traffic are forwarded without filtering to the network interface, or it runs behind a firewall with forwarding rules. Specified ports for attackers are 1-64000, higher ports are reserved for trusted IPs, thus, a reverse proxy asks for basic authentication. All daemons and tools run on the same network interface whereas some of them are encapsulated in their own Docker network. Docker is a lightweight virtualization technology that uses containers to run on the host system [11]. Unlike virtual machines, Docker reduces overhead with the downside of a greater attack surface. To mitigate attacks, Docker wraps containers in an isolated environment. This is achieved by restricting the kernel namespace and control groups (**cgroups**). Figure 3.2 visualizes the technical concept of T-Pot. Each service has dedicated ports or port ranges that are exposed. Attackers can communicate either with TCP or UDP. All honeypots and tools create log files that are used to get any knowledge about attackers. In order to view and trace current attacks, T-Pot uses the ELK stack. ELK is the acronym of Elasticsearch, Logstash and Kibana [25]. Elasticsearch is a search engine based on Lucene. It is multitenant-capable and offers full-text search via HTTP. Logstash is used to feed Elasticsearch. In general, it offers an open server-side data processing pipeline that helps to send data from multiple sources to an Elasticsearch node. Kibana is the main data visualization tool. It offers users to create plots and dashboards, crawl Elasticsearch, and trace the system health. All logs of the honeypots and tools are forwarded to the search engine Elasticsearch by Logstash. The ELK stack is not directly exposed to the Internet, thus, an authentication is not needed. Users can monitor all log files with Kibana by pre-defined dashboards, or custom search queries. In addition, T-Pot features different services types, namely (i) standard, (ii) sensor, (iii) industrial, (iv) collector, (v) next generation, and (vi) medical. Each service type has a different set of honeypots and tools tailored to their core idea. T-Pot feeds their data to an external Telekom service, however, this data submission can be turned off. For this chapter we restrict ourselves to the latest version 20.06.0. Newer versions might be available by time and could differ from ours.

Honeypots

T-Pot consists of 20 honeypots. Albeit the sheer quantity of it, we will give a short explanation. In addition, Table 3.2 gives a quick overview of all available honeypots in conjunction with (i) the port they are running on, (ii) their interaction level, and (iii) a short description.

ADBHoney [10] is a low interaction Android Debug Bridge (ADB) honeypot over TCP/IP. The importance of it lies in the ADB protocol that is used to debug and push content to Android device. However, unlike USB it does not support any kind of ample mechanisms of authentication and protection. By exposing the ADB



Figure 3.2: T-Pot architecture derived from [49]. HoneyPots are encapsulated in their own network. NSM runs on the host network, and thus, receives every packet. ELK and tools run on localhost, and are accessible through NGINX.

service over any port, an adversary could connect and exploit it. ADBHoney is designed to catch malware that has been pushed onto devices.

Cisco Adaptive Security Appliance (ASA) [55] is a low interaction honeypot that detects CVE-2018-0101[16]. It is a vulnerability that could allow an unauthenticated remote attacker to cause a reload of the affected system and to remotely execute code. This can be achieved by flooding a webvpn-configured interface with crafted XML packets. Consequently, the attacker obtain full control by executing arbitrary code.

Citrix Application Delivery Controller (ADC) honeypot [34] detects and logs CVE-2019-19781[17] scans and exploitation attempts. This vulnerability allows adversaries to perform directory traversal attacks. Files are accessible by path strings to denote the file or directory. In addition, some file systems include special character to easily traverse the hierarchy. Attackers take advantage of it by combining special characters in order to get access to restricted areas. [29]

Conpot [56] is a low interaction industrial honeypot for ICS, and SCADA. It provides a variety of different common industrial control protocols. An adversary should be tricked by the complex infrastructure, and lure him into attacks. In addition, a custom human machine interface can be connected to increase the attack surface. By randomly delaying the response time, Conpot tries to emulate a real machine handling a certain amount of load.

Cowrie [50] is a medium to high interaction SSH and Telnet honeypot. It offers to log brute-force attacks and shell interactions with attackers. In medium interaction mode cowrie emulates a UNIX shell in Python, whereas in high interaction mode it proxies all commands to another system.

DDoSPot [20] is a low interaction honeypot to log and detect UDP-based Distributed Denial of Service (DDoS) attacks. It is used as a platform to support various plugins for different honeypot services, and servers. Currently, it supports DNS, NTP, SSDP, CHARGEN, and random/mock UDP server.

Dicompot [40] is a low interaction honeypot for the Digital Imaging and Communications in Medicine (DICOM) protocol. As other honeypots before, it mocks a DICOM server in Go to collect logs and detect attacks.

Dionaea [23] is a medium interaction honeypot that tries to capture malware copies by exposing services. It supports a vast variety of protocols such as FTP, SMB, and HTTP. Several modules can be integrated to work with Dionaea such as VirusTotal for further malware results.

Elasticpot [5] is a low interaction honeypot for Elasticsearch, a search engine based on the Lucene library.

Glutton [57] is a generic low interaction honeypot that works as a MitM for SSH and TCP. However, lacking documentation does not provide a deeper inside of this honeypot.

Heralding [70] is a credential catching honeypot for protocols like FTP, Telnet, SSH, HTTP, or IMAP.

HoneyPy [31] is a low to medium interaction honeypot that supports several protocols such as UDP, or TCP. New protocols can be added by writing a custom plugin for it. HoneyPy should give the freedom of easily deploying and extending honeypots.

HoneySAP [31] is a low interaction honeypot tailored for SAP services.

Honeytrap [74] is a low interaction honeypot network security tool. As stated by Werner [74], Honeytrap is vulnerable to buffer overflow attacks.

IPPHoney [6] is a low interaction Internet Printing Protocol (IPP) honeypot.

Mailoney [44] is a low interaction SMTP honeypot written in Python.

MEDpot [60] is a low interaction honeypot focused on Fast Healthcare Interoperability Resources (FHIR). It is a standard description data format to transfer and exchange medical health records.

RDPY [52] is a low interaction honeypot of the Microsoft Remote Desktop Protocol (RDP) written in Python. It features client and server side, and it based on the event driven network engine Twisted. It supports authentication over SSL and NLA.

SNARE and TANNER [58, 59] is a honeypot project. SNARE is an abbreviation for Super Next generation Advanced Reactive honEypot. It is a successor of Glastopf, a web application sensor. In addition, it supports the feature of converting existing webpages into attack surfaces. TANNER [59] can be seen as SNARE's brain. Whenever a request has been sent to SNARE, TANNER decides how the response should like.

Tools

T-Pot integrates tools to screen network traffic.

FATT [36] is used to extract metadata and fingerprints such as JA3 [3] and HASSH [37] from captured packets. JA3 is a method for “creating SSL/TLS client fingerprints” whereas HASSH is a “network fingerprinting standard which can be used to identify specific client and server SSH implementations”. In addition, it features live network traffic. As noted by the author, FATT is based on a python wrapper for tshark, namely pyshark, and thus having performance downturns. T-Pot applies FATT on every request made on the host network.

Spiderfoot [46] is an open source intelligence automation tool that helps to screen targets to get information about what is exposed over the Internet. It can target different entities such as IP address, domain, hostname or network subnet. In addition, it features more than 200 modules that can be integrated as an extension. T-Pot uses it to scan defensively and thus not include any other module.

Suricata [66] is “a high performance IDS, intrusion prevention system (IPD) and network security monitoring (NSM) engine”. T-Pot lets Suricata analyze and assess any request made on the host network.

P0f [75] is a fingerprinting tool that uses passive traffic fingerprinting mechanisms to check TCP/IP communications. T-Pot lets p0f passively check any request made on the host network.

Endlesssh [73] is an SSH server that sends an endless, random SSH banner. The key idea is to lock up SSH clients that try to connect to the SSH server. It lowers the transaction speed by intentionally inserting delays. Due to connection establishing before cryptographic exchange, this module does not require any cryptographic libraries.

HellPot [35] is an “endless honeypot”. Connecting to this honeypot results in a memory overflow. Its key idea is to send an endless stream of data to the attacker until its memory, or storage runs out.

3.3 Results

Our T-Pot has been deployed for 3 weeks (from 22nd of September to 22nd of October) and collected in total 825,539 attacks. Overall, RDPY (47.94%), Honeytrap (32.27%), and Cowrie (12.60%) received most of the attacks with a total amount of 540,398 attacks. Figure 3.3 shows the distribution of honeypot attacks. The total numbers are based on Table 3.3.

Noticeable is the large disparity of the previously mentioned attacks on AWS, GCP, and Azure. Especially for honeypots like Dionaea, it is shallow why so little attacks have been performed. Therefore, we assume that packets run through a static filter. Heidelberg itself has a centralized packet filtering which indicates our assumption that certain ports or protocols are excluded. To prove that, a NMAP TCP SYN scan (`nmap -sS -A 129.206.5.74`) has been executed. Our result clearly shows that port 20, reserved for FTP, is filtered, although the access security explicitly allows it. Based on this, most of the attacks on Dionaea are made throughout FTP, and thus, explains the total number of attacks. Moreover, 96% of IP addresses connected to Dionaea are known attackers, and 70% were acquired on port 81, unofficially known for Tor routing. Neither any malware nor suspicious payload could be identified. Even with an Access Control List (ACL) running in the background, heiCLOUD

Table 3.2: Overview of all available honeypots and tools of T-Pot with interaction level, port, and a short description. Ports are marked with either TCP or UDP, if a port misses any definition, both TCP and UDP are allowed.

HONEYPOTS	Port	Interaction-level	Description
ADBBHoney [10]	5555/TCP	low	ADB protocol honeypot
Cisco ASA [55]	5000/UDP, 8443/TCP	low	honeypot for CVE-2018-0101[16] detection
Citrix honeypot [34]	443/TCP	low	detects and logs CVE-2019-19781[17] scans and exploitation attempts
Conpot [56]	80, 102, 161, 502, 623, 1025, 2404, 10001, 44818, 47808, 50100	low	industrial honeypot for ICS, and SCADA
Cowrie [50]	2222, 23	high	SSH and Telnet honeypot
DDoSPot [20]	1112/TCP	low	log and detect UDP-based DDoS attacks
Dicompot [40]	1112/TCP	medium	honeypot for the DICOM protocol
Dionaea [23]	21, 42, 69/UDP, 8081, 135, 443, 445, 1433, 1723, 1883, 1900/UDP, 3306, 5060/UDP, 5061/UDP	low	capture malware copies
Elasticpot [5]	9200	low	honeypot for Elasticsearch
Glutton [57]	NFQ	medium	MitM proxy for SSH and TCP
Heralding [70]	21, 22, 23, 25, 80, 110, 143, 443, 993, 995, 1080, 5432, 5900	low	credential catching honeypot
HoneyPy [31]	7, 8, 2048, 2323, 2324, 4096, 9200	low	extendable honeypot
HoneySAP [31]	3299/TCP	low	honeypot for SAP services
Honeytrap [74]	NFQ	medium	captures attacks via unknown protocols
IPPHoney [6]	631	low	IPP honeypot
Mailoney [44]	25	low	SMTP honeypot
MEDpot [60]	2575	low	FHIR honeypot
RDPY [52]	3389	low	Microsoft RDP honeypot
SNARE/TANNER [58]	80	low	web application honeypot

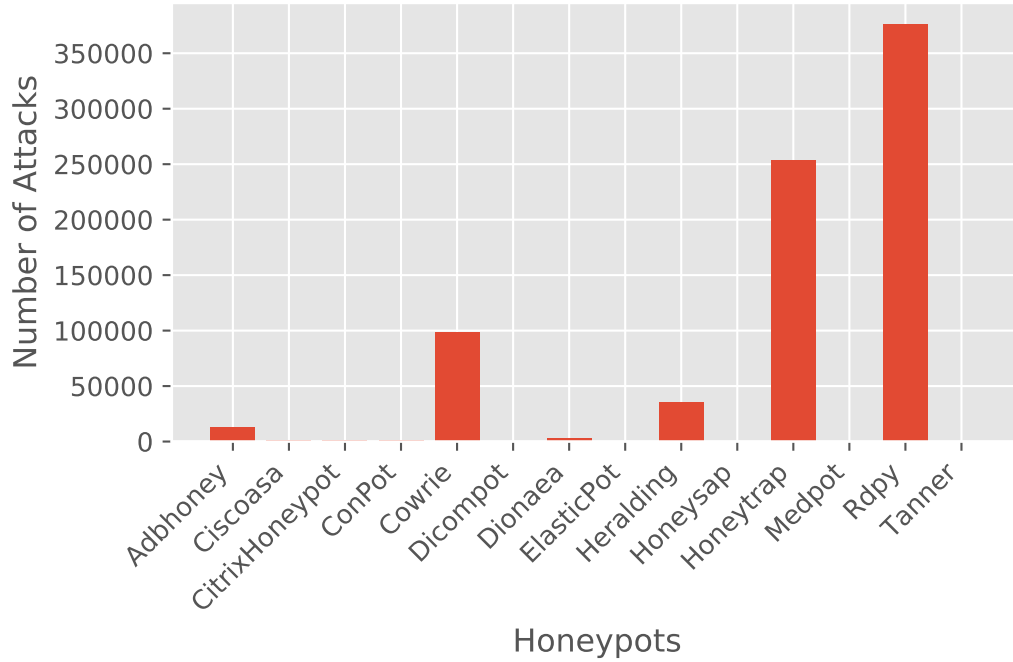


Figure 3.3: Distribution of honeypot attacks

received more attacks than ever. We assume that the real number might be even higher without packet filtering for FTP port 20. However, due to security concerns a temporarily exclude of this rule has been rejected.

Logstash uses GeoLite2 to resolve the source IP address with information such as location, ASN, continent code, country name, and AS organization. Figure 3.4 indicates the geographical location of connections acquired to any honeypot. Most attacks are originated from the United States, Germany, Russia, and China. Large security scans of DFN or Baden-Württembergs extended LAN (BelWÜ) pushes Germany on second place, therefore, Germany can be considered negligible. On the contrary, the geographical location of an IP address merely indicates the true origin. Due to technologies like VPN or Tor, the last known node of an IP address could be spoofed, and thus as stated by Kelly et al. [39], would remain insufficient to use. Hence, we do not strongly rely on the geographical information.

Attacks are not equally distributed among all honeypots, and thus, different protocols and application receive more attention than others. Figure 3.5 shows the timeline of attacks that are executed on our instance separated by honeypots. RDPY, Honeytrap, and Cowrie are clearly the most attacked honeypots. The high peak of Honeytrap in the middle indicates a full NMAP scan from Germany that has been done to get an inside of the packet filtering at the Heidelberg University. We clearly identify a bias towards remote desktop protocol attacks, shell-code



Figure 3.4: Attack distribution of T-Pot. USA, Russia, China, and Germany are the most attacking countries. Timestamp; 22nd of September to 22nd of November.

exploitation, and commands to retrieve information about CPU, scheduled tasks (`cat /proc/cpuinfo`, or `crontab`), or privilege escalation.

Suricata registered several alerts and CVE's. The vast majority of alerts are RDP related policies, VNC authentication failures, and NMAP scans. Most used vulnerabilities are (i) CVE-2001-0540[12] which is a memory leak in Terminal servers in Windows NT and Windows 2000 causing a denial of service (memory exhaustion) by malformed RDP requests, (ii) CVE-2006-2369[14] which is a RealVNC vulnerability allowing hackers to bypass authentication, and (iii) CVE-2012-0152[15] which enables attackers for RDP in Microsoft Windows Server 2008 R2 and R2 SP1 and Windows 7 Gold and SP1 to cause a denial of service by sending a series of crafted packets. As derived from Figure 3.6, our T-Pot have not received many attacks in the first week. Starting from 28th of October the numbers of alert are skyrocketing. This would indicate that bots crawl IP address ranges to find new machines and probe them. Interestingly, zero-day exploits like the Apache vulnerability [18] that came with version 2.49.0 got registered in CVE on the 6th of October, and immediately recognized by Suricata on the 15th of October. Attackers could perform a remote code execution using path traversal attacks when the CGI scripts of Apache are enabled. We could trace back similar attacks like `/cgi-bin/.\%2e/%2e/%2e/bin/sh` until the 7th of October, leaving an even smaller time frame to adapt to new exposures. This shows how fast bots adapt to new vulnerabilities in order to compromise more systems.

The results from RDPY in Figure 3.7 backups our assumption. It shows that only a small margin represents unique src IPs. The rest of the attacks result in either bad reputation, bot, crawler, or known attacker. Figure 3.6 shows the distribution of alert categories that Suricata identified. Respectively, misc activities sum up to roughly 1.5 million entries, RDP related alerts account two-third of it. Several RDP attacks from 2021 back to 2001 had been executed on our T-Pot. Respectively,

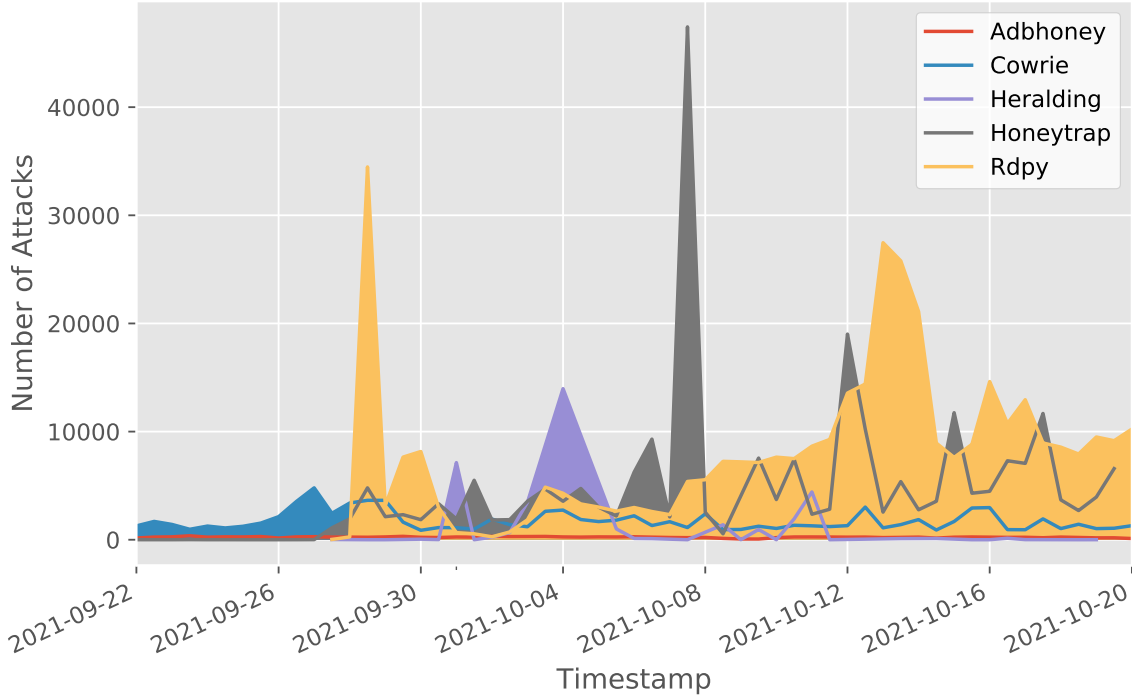


Figure 3.5: Attack histogram of T-Pot. Only the five most attacked honeypots are considered. Timestamp; 22nd of September to 22nd of November.

CVE-2012-0152 and CVE-2001-0540 coincide with the ones Kelly et al. [39] claim. We assume the skyrocketing number of attacks roots back to the Corona pandemic due to an increase of the remote desktop protocol. Furthermore, lack of updates and outdated servers using RDP remain an ease target for automatic attacks that scan the web and try to find new exposures.

For NFQ related attacks, Honeytrap could identify three major services that are not provided by default. Honeytrap functions as a honeypot to provide a service on ports which are not specified by default. NFQ intercepts incoming TCP connections during the TCP handshake and let Honeytrap providing a service for it. Most of these interceptions are made on (i) port 5038 which is merely used by a machine learning database called MLDB, (ii) port 5905 which is merely used by an Intel Online Connect Access on Windows machines, and (iii) port 7070 which is merely used by Apple’s QuickTime streaming server (RTSP). On nearly all ports attacks focused on RDP connection attempts (`Cookie: msthash=Administr`). However, 94% of all connected IP addresses are resolved as known attackers.

Third most compromised honeypot is Cowrie with a strong bias towards SSH, and FTP. Figure 3.9 shows all attacks executed on Cowrie separated by their port. Respectively, SSH port 22 is the most considered port, resulting in a high use for privilege escalation. Besides default credentials login attempts (`username: root`, `password: root`, see Figure 3.10 for top 10 credentials), adversaries used various

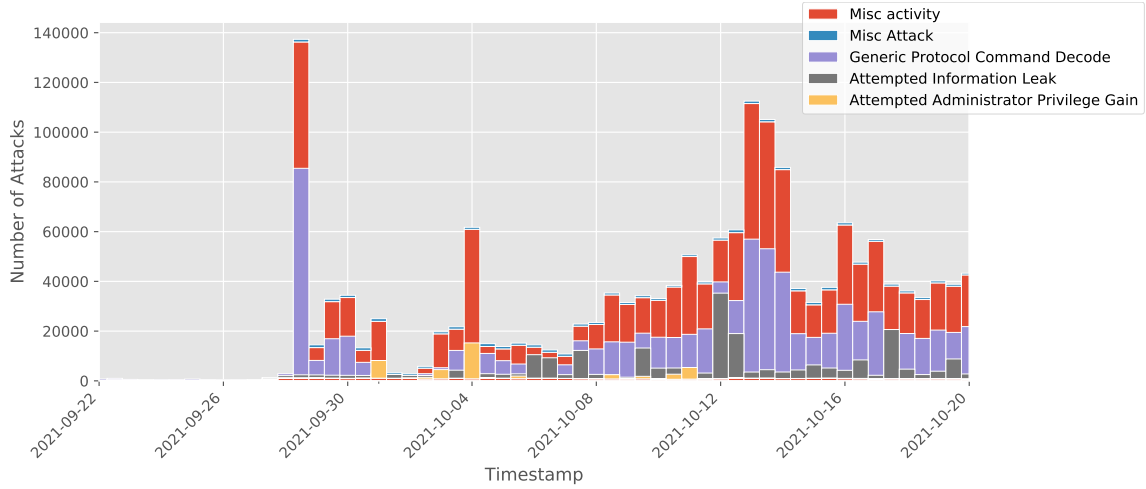


Figure 3.6: Suricata results of T-Pot. Displays the five most listed alert categories. Timestamp; 22nd of September to 22nd of November.

commands to retrieve any information about the host system (`nproc;uname -a, cat /proc/cpuinfo`). We could identify a unique information gathering attack that has been widely used on our T-Pot. Listing 3.1 shows all shell commands that are executed. Attackers try to gain knowledge about the running process on the system (`/bin/busybox`). Interestingly, crypto mining attacks are getting more attractive to criminals. As an example, XMRig has been the most downloaded malware for cryptocurrency mining. Some adversaries even executed complex tailored shell commands to exploit the host machine as a crypto miner (Listing 3.2). With respect to the current time it is not surprising that such attacks gain attraction. Attackers could exploit machines for crypto mining in order to earn more money. This looks more appealing than acquiring mining machines and hijacking electricity from surrounding apartments (Quelle!).

P0f identified different Windows versions and Linux distributions in conjunction with various SSH clients that are used to compromise our T-Pot. Like Kelly et al. [39], Windows 7 or 8 and Windows NT Kernel are the most used OS with 81%. Unfortunately, disguising OS fingerprinting activities account 84%. Lastly, we cleaned up our results and excluded all IPs from DFN and BelWÜ from our results. Both do frequent scans and check if any vulnerability exists. This distorts our findings, and thus, we filtered them based on their subnet addresses. However, the results show no big changes. The total number of attacks were merely influenced by it. This indicates that our own scans do not greatly interfere with our findings. Due to completeness, we leave our results as they are and do not show the filtered data.

Overall, heiCLOUD has nearly doubled the size of attacks. On average, heiCLOUD has received 195.31% more than Azure, GCP, and AWS. Attacks on Cowrie, RDPY, and Honeytrap are the most compromised honeypots. In contrast to Kelly et al. [39], Dionaea and Glutton used to be the most considered honeypots for adversaries. We

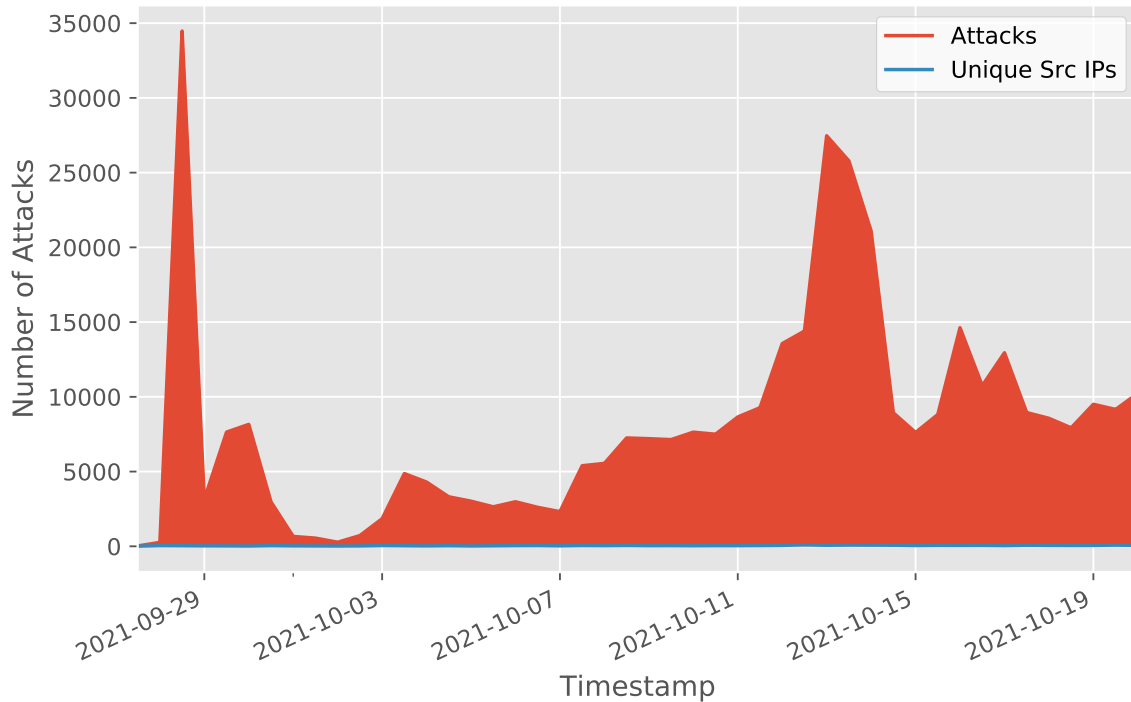


Figure 3.7: RDPY attacks separated in attacks and unique src IPs. Timestamp; 22nd of September to 22nd of November.

assume that attacks by bots have increased significantly since last year when Kelly et al. [39] did their research. Respectively, one question we are not able to answer is if other cloud providers filter their network traffic. It would explain the major difference between Heidelberg University and the big tech companies. The cause for such an increase remains doubtful. One explanation could root back to the Corona pandemic and the skyrocketing increase in home office activities. Related to that is a higher usage in screen sharing software. Considering the BSI² report for cybersecurity 2021 [7], they revealed an increase of attack surfaces during the pandemic.(Quelle!) Respectively, the IT infrastructure could not keep up with this fast change and widen the attack surface of the company. Their conclusion overlays our assumption that attackers took advantage and increase their activities. This phenomenon shows that nearly all attacks originate from bots which scan through IP address ranges. In total, 73% of all IP address are unresolved, known attacker reputation represents the largest part of resolved IP addresses with 23%. Fortunately, such reputations could technically be filtered by an organization's firewall and would lower the chance of an exploit. Interestingly, after 3 weeks the number of attacks originated from China decreased to almost zero percent. This might be an indication that our honeypot has been exposed, and further attacks represent a

²The Federal Office for Information Security is responsible for managing communication security for the German government. Each year they publish a report for recent cybersecurity threats.

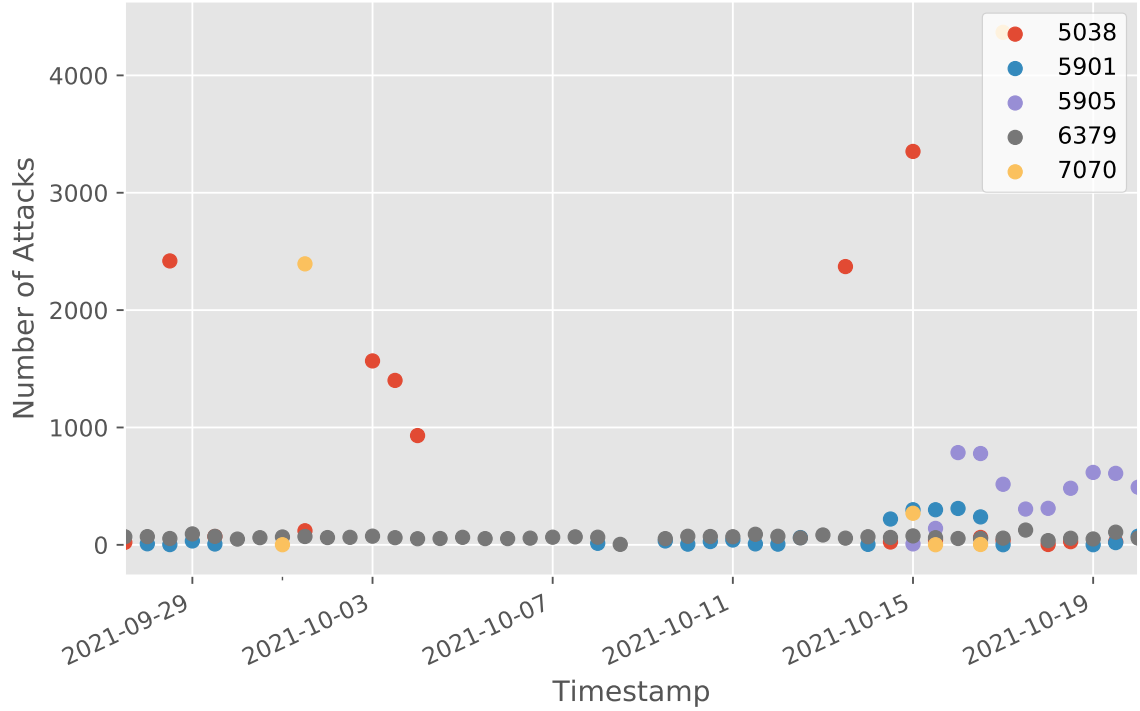


Figure 3.8: Honeytrap results of T-Pot. Timestamp; 22nd of September to 22nd of November.

risk of revealing their compromises. However, this assumption cannot be confirmed due to the lax geographical reliability of IP addresses.

Our results lay emphasis on the importance of honeypots. It shows that recent bot activities can be traced to find the newest trends of attacks.

3.4 Discussion

One downside of T-Pot is the static hostname representation of Cowrie. It always returns `#1 SMP Debian 3.2.68-1+deb7u1 (uname -a)` as hostname information, leaving a tiny footprint when bots crawl through the web. A random choice of hostname information could harden Cowrie from being exposed. Next, if attackers would scan open ports on T-Pot, it might be suspicious when many ports with services are widely open. From a technical perspective, bots could check this state if it is uncommon, and thus, exclude T-Pot from being probed. However, T-Pot includes good preventions like random hostname and scheduled tasks. Another major drawback is the latest endeavor to fingerprint honeypots. As recently investigated by Vetterl [71], fingerprinting honeypots is becoming easier due to a fatal flaw in the underlying protocol implementation. Vetterl [71] states that attackers always try to prevent their methods, exploits and tools from being divulged. Therefore, detecting

Table 3.3: Overview of attacks on heiCLOUD, AWS, GC and Azure. Only the top 10 most attacked honeypots are considered. “_” entails that a honeypot is not part of the top 10.

HONEYPOTS	BASIS heiCLOUD		AWS		COMPARISON GC		AZURE	
	Number	Pct.	Number	Pct.	Number	Pct.	Number	Pct.
ADBHoney	13292	1.65%	413	0.13%	2497	0.43%	442	0.13%
Cisco ASA	944	0.11%	260	0.08%	750	0.13%	134	0.04%
Citrix honeypot	1471	0.18%	-	-	-	-	-	-
Conpot	1003	0.10%	-	-	-	-	-	-
Cowrie	990069	11.97%	4503	1.46%	297818	51.25%	9012	2.64%
DDoSPot	0	0%	-	-	-	-	-	-
Dicompot	25	0%	-	-	-	-	-	-
Dionaea	3110	0.40%	288075	93.49%	162570	27.98%	308102	90.42%
Elasticpot	512	0.06%	-	-	-	-	-	-
Glutton	0	0%	11878	3.85%	84375	15.52%	17256	5.06%
Heralding	35836	4.34%	1885	0.61%	12255	2.11%	3370	0.99%
HoneyPy	0	0%	172	0.06%	2149	0.37%	497	0.15%
HoneySAP	18	0%	-	-	-	-	-	-
Honeytrap	253854	32.01%	-	-	-	-	-	-
IPPHoney	0	0%	-	-	-	-	-	-
Mailoney	0	0%	720	0.23%	9419	1.62%	146	0.04%
MEDpot	3	0%	-	-	-	-	-	-
RDPY	377045	49.15%	100	0.03%	7916	1.36%	1463	0.43%
SNARE/TANNER	382	0.02%	138	0.04%	1367	0.24%	313	0.09%
IN TOTAL	786564	100%	308144	100%	581116	100%	340735	100%

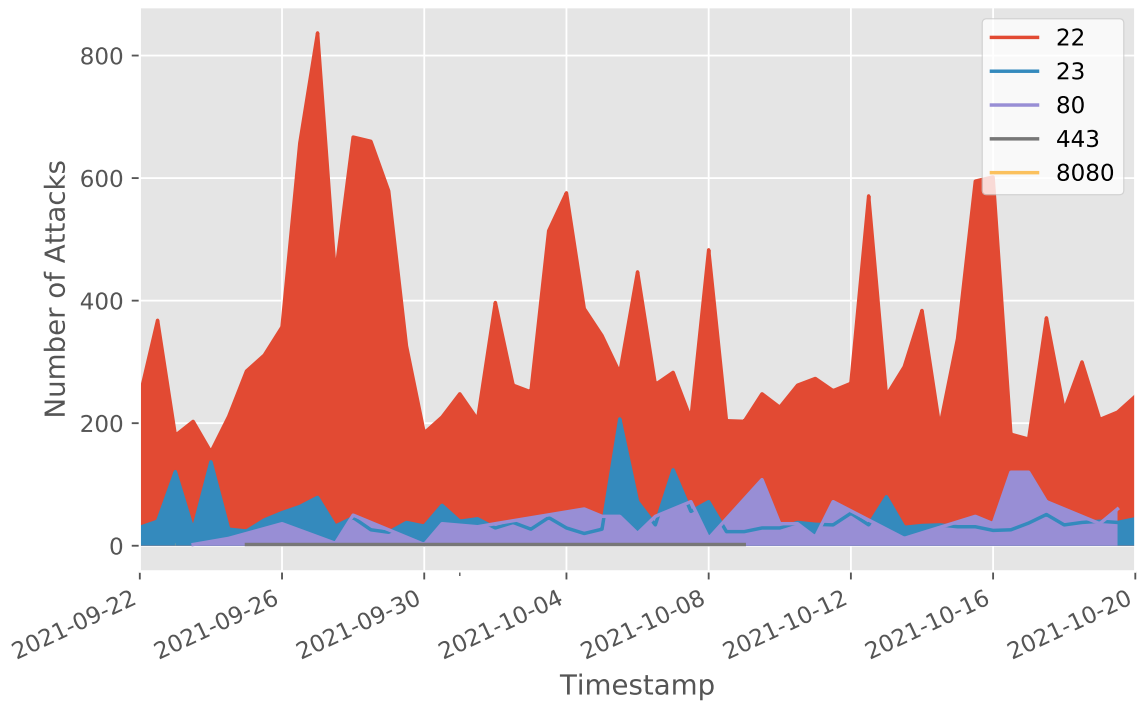


Figure 3.9: Cowrie results of T-Pot. Timestamp; 22nd of September to 22nd of November.

honeypots before attack them is a strong motivation for black hats. In chapter 5 we will present a way to avoid fingerprinting of Cowrie.

Listing 3.1: Cowrie attack to gather various information about the system


```
1 enable
2 system
3 shell
4 sh
5 cat /proc/mounts; /bin/busybox $PROCESS_NAME
6 cd /dev/shm; cat .s || cp /bin/echo .s; /bin/busybox
  ↪ $PROCESS_NAME
7 tftp; wget; /bin/busybox $PROCESS_NAME
8 dd bs=52 count=1 if=.s || cat .s || while read i; do echo
  ↪ $i; done < .s
9 while read i
10 /bin/busybox $PROCESS_NAME
11 rm .s; exit
```

Listing 3.2: Cowrie attack to exploit the host machine as a crypt miner


```

1 mkdir -p /home/osmc/.ssh/
2 echo ssh-rsa $RSA_KEY >> /home/osmc/.ssh//
  ↳ authorized_keys
3 echo '<cmd7uname>'; uname -a
4 echo '</cmd7uname><cmd7uptime>'; uptime
5 echo '</cmd7uptime><cmd7w>'; w
6 echo '</cmd7w><cmd7who>'; who
7 echo '</cmd7who><cmd7last>'; last
8 echo '</cmd7last><cmd7lastlog>'; lastlog
9 echo '</cmd7lastlog><cmd7authkey>'; cat /home/osmc/.ssh//
  ↳ authorized_keys
10 echo '</cmd7authkey><cmd7lshome>'; ls -la /home
11 echo '</cmd7lshome><cmd7passwd>'; cat /etc/passwd
12 echo '</cmd7passwd><cmd7shadow>'; sudo -n cat /etc/shadow
13 echo '</cmd7shadow><cmd7psfaux>'; ps -faux
14 echo '</cmd7psfaux><cmd7netstat>'; netstat -npta
15 echo '</cmd7netstat><cmd7arpan>'; /usr/sbin/arp -an
16 echo '</cmd7arpan><cmd7ifconfig>'
17 /usr/sbin/ifconfig
18 echo '</cmd7ifconfig><cmd7localconf>'; cat /home/ethos/
  ↳ local.conf
19 echo '</cmd7localconf><cmd7remoteconf>'
20 cat /home/ethos/remote.conf
21 echo '</cmd7remoteconf><cmd7rclocal>'
22 cat /etc/rc.local
23 echo '</cmd7rclocal><cmd7claymorestub>'; cat /home/ethos/
  ↳ claymore.stub.conf
24 cat /hive-config/rig.conf; cat /hive-config/wallet.conf
25 cat /hive-config/vnc-password.txt
26 echo '</cmd7claymorestub><cmd7claymorezstub>'
27 cat /home/ethos/claymore-zcash.stub.conf
28 echo '</cmd7claymorezstub><cmd7sgminerconf>'
29 cat /var/run/ethos/sgminer.conf
30 echo '</cmd7sgminerconf><cmd7iptables>'
31 sudo -n iptables -S && sudo -n iptables -t nat -S
32 echo '</cmd7iptables><cmd7crontab>'; crontab -l; echo '</
  ↳ cmd7crontab>'
33 exit

```

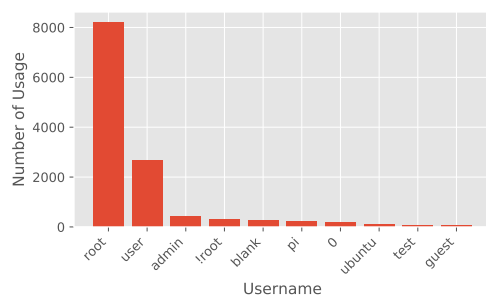

(a) Cowrie username credentials

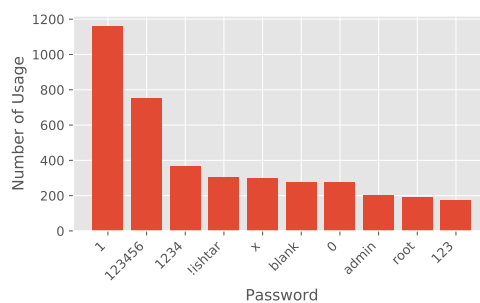

(b) Cowrie password credentials

Figure 3.10: Cowrie top 10 credentials used on T-Pot. Timestamp 22nd of September to 18th of October

Chapter 4

Catching Attackers in Restricted Network Areas

Zoning a network is often well-known method to restrict By the help of our honeypot, we show that we identified attacks on the internal zone of the University network. This result contributed to an adaption of the ACL

4.1 Introduction

Honeypots that are accessible via the Internet do receive a broad range of attacks. As Spitzner [63] noted, a honeypot is not strictly bound to run in a demilitarized zone (DMZ) or a network with direct Internet access. Moreover, the correct location has to be chosen based on the goals of the honeypots. For example, one goal is to catch attackers behind a perimeter firewall to reveal leaks or vulnerabilities. Beforehand, our honeypot was broadly available on the Internet, and attackers could probe it easily. It collected on average 55 000 attacks per day, resulting in a total amount of 786 564 attacks. This amount sounds reasonable when no perimeter firewall secures the server. Heidelberg University works ...An interesting question is if attackers have access to restricted zones at the Heidelberg University. It arises during the research of T-Pot if an adversary would try to probe any hosts in the internal University network. In order to detect such events we present the Heidelberg Connection Acceptance Tool that helps to identify any threats in a network. In addition, it offers to deploy multiple instance and collect their data in a centralized instance.

4.2 Heidelberg Connection Acceptance Tool

The acronym MADCAT stands for Mass Attack Detection Connection Acceptance Tools.

It works as a honeypot-like detection application with low interaction level. Its key idea is to log every connection attempt and further process it to retrieve credentials, or shell exploitation. Figure 4.1 gives an inside how MADCAT works. It runs on an Ubuntu distribution either 18.04 or 20.04. We have tested it on Ubuntu 18.04. It processes packets from any interface that has been configured. As an example, we could process Ethernet and wireless packets. MADCAT itself consists of six independent modules that communicating with each other through a pipeline. Respectively, for TCP, UDP, ICMP, and RAW packets it provides a module for it. A module is responsible for analyzing packets and logging the results in a queue. In addition, UDP and TCP offers proxies to tunnel to packets to a service. TCP postprocessor reads in a 5 seconds interval the newly arrived TCP packets and processes them accordingly. It resolves packets to log data including source IP address, protocol and event type. The enrichment processor is the final process step. Its purpose is to log all written packets of the queue in a specified format for further analyzation. The key idea of MADCAT is to get an inside if attackers have access to a certain network. In contrast to T-Pot, we do not want to know what specific attacks are operated on our honeypot. Instead, we do want to ensure that no one else than authorized users have access. Especially in high confidential areas, no attacker should be capable of sending even a single packet to a host in the network. Tracking packets on a detailed level is not provided by the vast range of honeypots.

The question of how secure the internal University network is arose during the deployment of T-Pot. At the University, the network splits into different zones. We decided to focus on the 219-zone that is similar to a restricted zone. This zone is specified by the subnet `129.206.219.0/24`. In this zone Respectively, our host machine is located with the that network with `129.206.219.88`

Our goal is to catch any connection attempt that has been made to our honeypot. Figure 4.2 carries out our concept. Our concept is divided into to hosts. The first one is responsible for providing Kibana, and Elasticsearch to crawl through logs. The honeypot consists of MADCAT in conjunction with P0f, Suricata, and FATT for additional information. Like T-Pot, we use Logstash to forward our data to Elasticsearch. One benefit is the centralized approach to store data. It allows to randomly deploy more instances to collect data from other zones.

In total, we consider three different approaches.

1. heicloud
2. Eduroam
3. 219 Zone

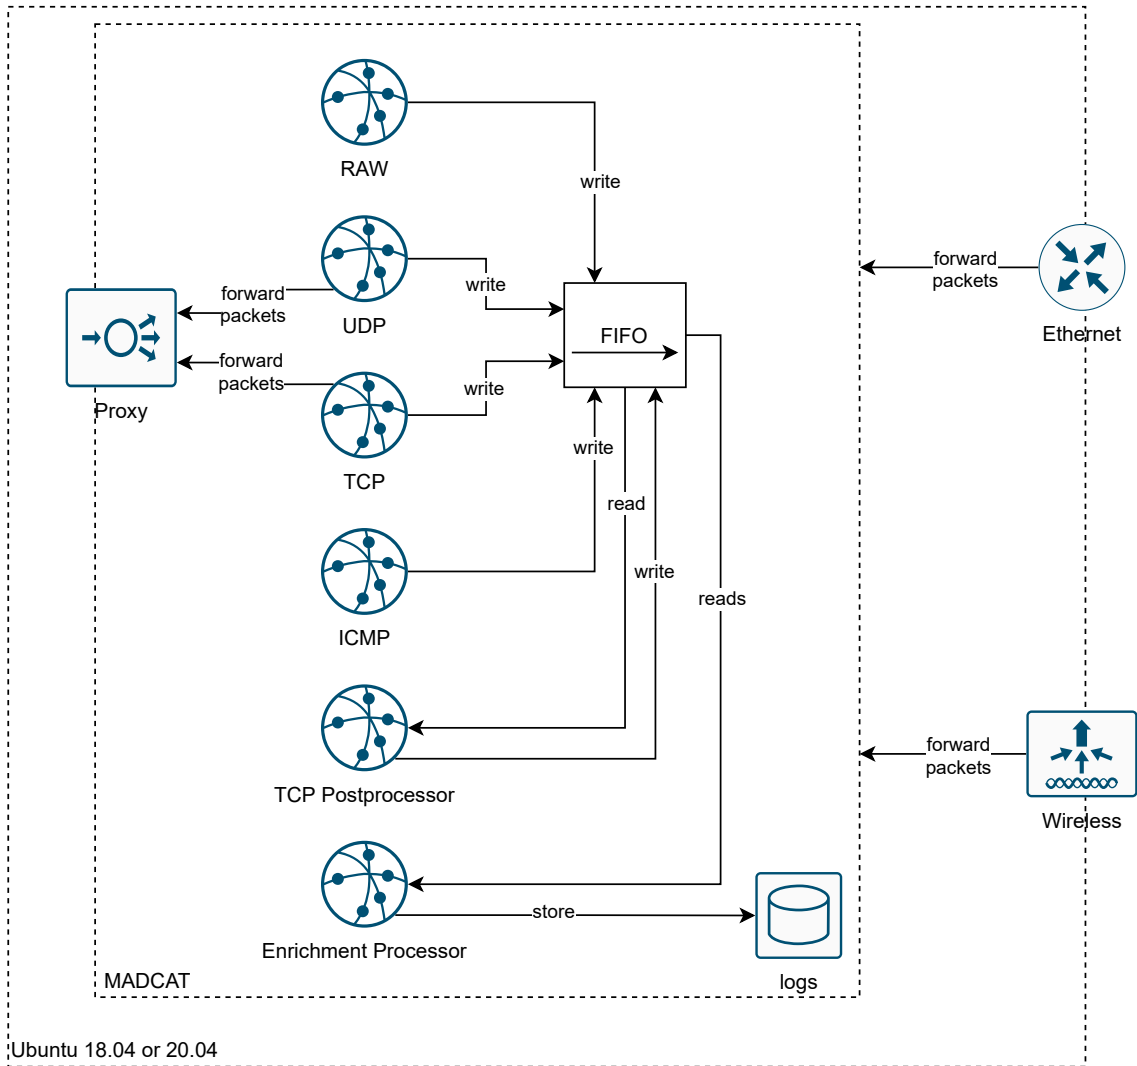


Figure 4.1: MADCAT architecture. The Ethernet and wireless interface forwards the respective packets to the desired module.

4.3 Results

4.3.1 HeiCloud

4.3.2 Eduroam

4.3.3 219 Zone

Figure 4.3 shows the attack distribution. Most of the connection attempts are originated from the United States, Germany, and China.

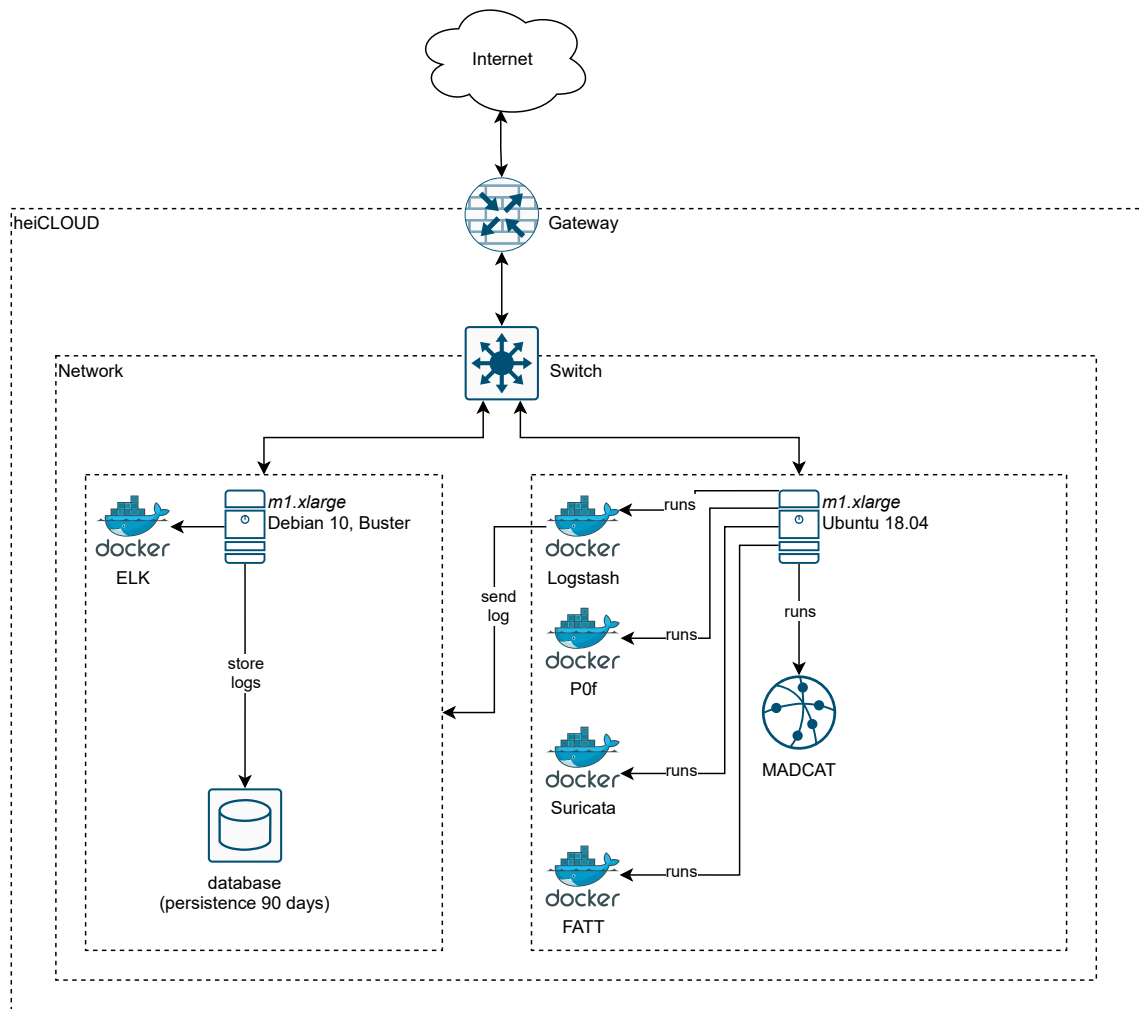


Figure 4.2: HeiCAT concept.

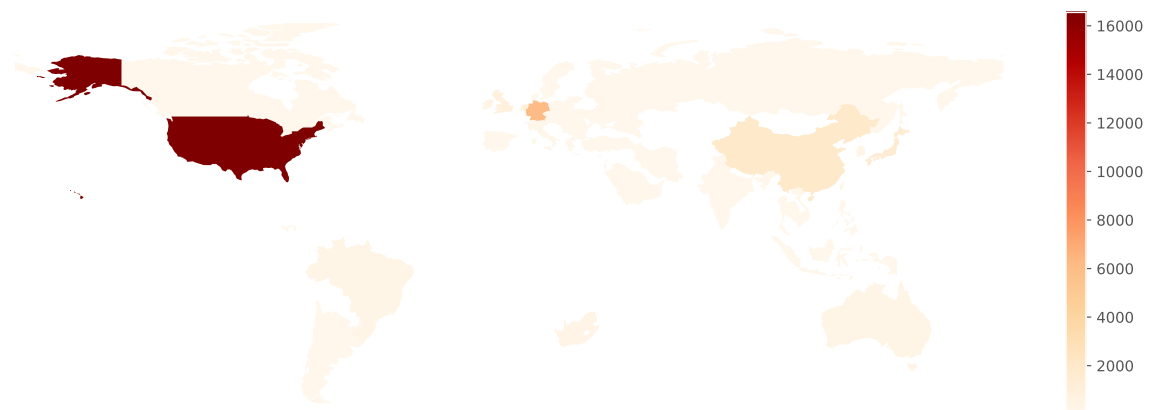


Figure 4.3: Attack distribution of MADCAT. USA, Russia, China, and Germany are the most attacking countries. Timestamp; 22nd of September to 22nd of November.

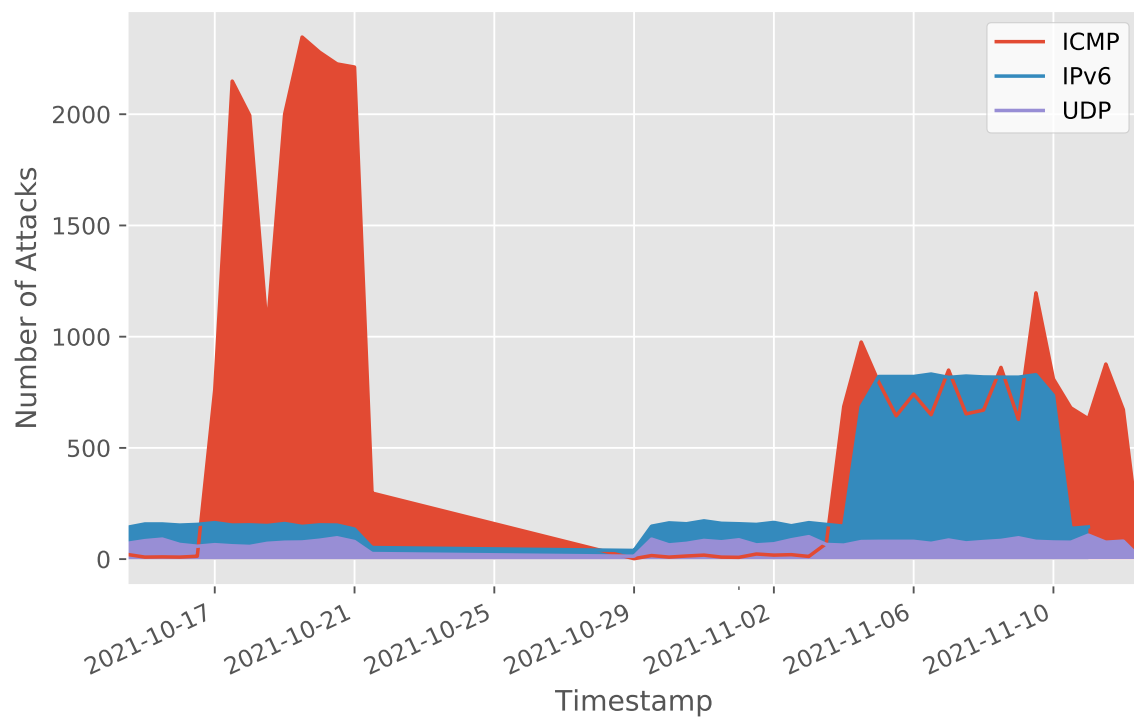


Figure 4.4: Protocol distribution of MADCAT. USA, Russia, China, and Germany are the most attacking countries. Timestamp; 22nd of September to 22nd of November.

Chapter 5

Mitigate Fingerprinting of Honeypots

5.1 Fingerprinting Cowrie

Attackers have a strong motivation to reveal honeypots before launching an attack. Without any protection attackers would disclose their methods, and thus, newly developed attacks would become useless. As shown in chapter 3, attackers do try to get information about the host system. Vetterl [71] discussed various methods of fingerprinting, however, executing commands in a login shell and examining the response leaves precarious information to the honeypot itself. In his work he evaluated methods to detect honeypots at the transport level. As stated, the value of a honeypot would be merely zero if a detection on transport level would work. He presents fingerprinting methods for SSH, Telnet, and HTTP/Web. Due to the complexity of each method, we focus on SSH fingerprinting with the honeypot Cowrie. The idea to detect SSH honeypots is to look for deviations in the response. Therefore, Vetterl [71] sends a set of probes $P = \{P_1, P_2, \dots, P_n\}$ to a given set of implementations of a network protocol $I = \{I_1, I_2, \dots, I_n\}$ and stores the set of responses $R = \{R_1, R_2, \dots, R_n\}$. For the given set of responses he calculated the cosine similarity coefficient C . Goal is to find the best P_i where the sum of C is the lowest. Figure 5.1 presents these steps.

Cosine similarity outputs the similarity between vectors of numerical attributes. In text semantics it is widely used to measure the similarity of sets of information such as two sentences. Vetterl [71] outlines that it can be used in “traffic analysis to find abnormalities and to measure domain similarity”. Mathematically, it computes the angle between two vectors. For each set of information A , we create a vector D_A . Referring to our use case with SSH, we use the response from the server as information A . If θ is the angle between D_A and D_B , then:

$$\cos \theta = \frac{D_A \cdot D_B}{\|D_A\| \|D_B\|} \quad (5.1)$$

where “ \cdot ” is the dot product obtained by:

$$D_A \cdot D_B = \sum_{i=1}^n (D_{A_i} \times D_{B_i}) \quad (5.2)$$

and $\|D_A\|$ (resp. $\|D_B\|$) is the Euclidean norm, obtained by $\sqrt{\sum_{i=1}^n D_{A_i}^2}$ (resp. $\sqrt{\sum_{i=1}^n D_{B_i}^2}$). The values of vectors are non-negative. The similarity between items is the value $\cos \theta$, $\cos \theta = 1$ indicates equality.

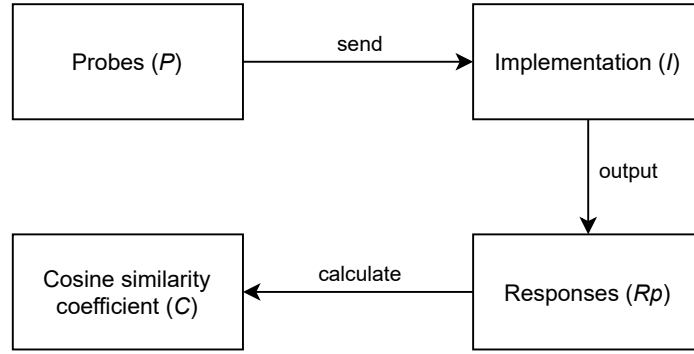


Figure 5.1: Outline to

In order to find the best P_i for SSH, Vetterl [71] first created different SSH version strings based on the format `SSH-protoversion-swversion SP comment crlf`. He used different lower and upper case variations, 12 different protoversions ranging from 0.0 to 3.2, swversion set to OpenSSH or empty string, comment set to FreeBSD or empty string, and crlf to either `\r\n` or empty string. In total, summing up to 192 client version strings. Second, he created different `SSH2_MSG_KEXINIT` packets with 16 key-exchange algorithms, 2 host key algorithms, 15 encryption algorithms, 5 MAC algorithms and 3 compression algorithms. In total, he sent 58 752 `SSH2_MSG_KEXINIT` packets. Combining them with the 192 client versions, he ended up sending 157 925 376 packets. The version string `SSH-2.2-OpenSSH\r\n` and the `SSH2_MSG_KEXINIT` packet including `ecdh-sha2-nistp521` as key-exchange algorithm, `ssh-dss` as host key algorithm, `blowfish-cbc` as encryption algorithm, `hmac-sha1` as mac algorithm and `zlib@openssh.com` as compression algorithm, with the wrong padding results in the lowest cosine similarity coefficient C . Table 5.1 presents the cosine similarity of OpenSSH, Twisted, and Cowrie. As it outlines, Cowrie responses are not close to OpenSSH. Thus, distinguishing Cowrie from OpenSSH with SSH

packets is feasible. Moreover, Vetterl [71] performed an Internet-wide scan, and detected 758 Kippo and 2021 Cowrie honeypots. These results show that the values of honeypots would decrease to zero when large fingerprinting activities are used.

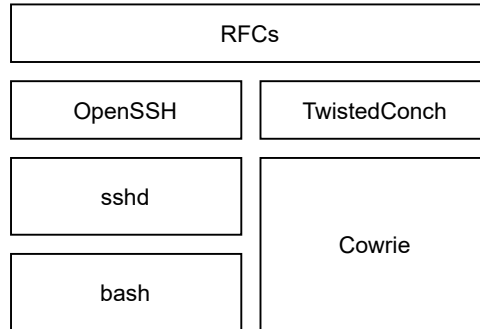


Figure 5.2: Architecture of OpenSSH and Cowrie. OpenSSH and TwistedConch have subtle differences.

Vetterl [71] states that current low- and medium-interaction honeypots have a generic weakness due to the underlying off-the-shelf libraries. Cowrie is based on TwistedConch, a Python 2/3 library that implements the SSH protocol. Any bash command and its response are tweaked by Cowrie, and thus, resulting in a discrepancy to OpenSSH. For example, Cowrie version 1.1.0 missed `tftp` and came with version 1.2.0. So, it is a continuous struggle of adding new commands to avoid early disclosures of Cowrie. Figure 5.2 shows the difference between OpenSSH and Cowrie. Both have to fulfill the RFC 4250[43] requirements. The subtle differences in TwistedConch, sshd, bash, and Cowrie leads to divergent in the cosine similarity coefficient.

5.2 Disguising Cowrie

Proxying SSH commands to Cowrie helps to block any fingerprinting activities.

5.3 Experiment

Listing 5.1: OpenSSH connection attempt with probed SSH packet

```
1 ./ssh -v -C 129.206.5.157
2 OpenSSH_8.8p1, OpenSSL 1.1.1l 24 Aug 2021
3 debug1: Reading configuration data /home/stefan/.ssh/
  ↳ config
4 debug1: Authenticator provider $SSH_SK_PROVIDER did not
  ↳ resolve; disabling
5 debug1: Connecting to 129.206.5.157 [129.206.5.157] port
  ↳ 22.
6 debug1: Connection established.
7 debug1: Local version string SSH-2.2-OpenSSH
8 debug1: Remote protocol version 2.0, remote software
  ↳ version OpenSSH_7.9p1 Debian-10+deb10u2
9 debug1: compat_banner: match: OpenSSH_7.9p1 Debian-10+
  ↳ deb10u2 pat OpenSSH* compat 0x04000000
10 debug1: Authenticating to 129.206.5.157:22 as 'debian'
11 debug1: SSH2_MSG_KEXINIT sent
12 debug1: SSH2_MSG_KEXINIT received
13 debug1: kex: algorithm: ecdh-sha2-nistp521
14 debug1: kex: host key algorithm: ssh-ed25519
15 debug1: kex: server->client cipher: chacha20-
  ↳ poly1305@openssh.com MAC: <implicit> compression:
  ↳ zlib@openssh.com
16 debug1: kex: client->server cipher: chacha20-
  ↳ poly1305@openssh.com MAC: <implicit> compression:
  ↳ zlib@openssh.com
17 ssh_dispatch_run_fatal: Connection to 129.206.5.157 port
  ↳ 22: memory allocation failed
```

Listing 5.2: Cowrie connection attempt with probed SSH packet

```
1 ./ssh -v -C 129.206.5.74
2 OpenSSH_8.8p1, OpenSSL 1.1.1l 24 Aug 2021
3 debug1: Reading configuration data /home/stefan/.ssh/
  ↳ config
4 debug1: Authenticator provider $SSH_SK_PROVIDER did not
  ↳ resolve; disabling
5 debug1: Connecting to 129.206.5.74 [129.206.5.74] port
  ↳ 22.
6 debug1: Connection established.
7 debug1: Local version string SSH-2.2-OpenSSH
8 debug1: Remote protocol version 2.0, remote software
  ↳ version OpenSSH_7.9p1
9 debug1: compat_banner: match: OpenSSH_7.9p1 pat OpenSSH*
  ↳ compat 0x04000000
10 debug1: Authenticating to 129.206.5.74:22 as 'stefan'
11 debug1: load_hostkeys: fopen /home/stefan/.ssh/
  ↳ known_hosts2: No such file or directory
12 debug1: load_hostkeys: fopen /usr/local/etc/
  ↳ ssh_known_hosts: No such file or directory
13 debug1: load_hostkeys: fopen /usr/local/etc/
  ↳ ssh_known_hosts2: No such file or directory
14 debug1: SSH2_MSG_KEXINIT sent
15 Bad packet length 1349676916.
16 ssh_dispatch_run_fatal: Connection to 129.206.5.74 port
  ↳ 22: message authentication code incorrect
```

Listing 5.3: Disguised Cowrie connection attempt with probed SSH packet

```
1 ./ssh -v -C 129.206.5.65
2 OpenSSH_8.8p1, OpenSSL 1.1.1l 24 Aug 2021
3 debug1: Reading configuration data /home/stefan/.ssh/
  ↳ config
4 debug1: Authenticator provider $SSH_SK_PROVIDER did not
  ↳ resolve; disabling
5 debug1: Connecting to 129.206.5.65 [129.206.5.65] port
  ↳ 22.
6 debug1: Connection established.
7 debug1: Local version string SSH-2.2-OpenSSH
8 debug1: Remote protocol version 2.0, remote software
  ↳ version OpenSSH_7.9p1 Debian-10+deb10u2
9 debug1: compat_banner: match: OpenSSH_7.9p1 Debian-10+
  ↳ deb10u2 pat OpenSSH* compat 0x04000000
10 debug1: Authenticating to 129.206.5.65:22 as 'debian'
11 debug1: SSH2_MSG_KEXINIT sent
12 debug1: SSH2_MSG_KEXINIT received
13 debug1: kex: algorithm: ecdh-sha2-nistp521
14 debug1: kex: host key algorithm: ssh-ed25519
15 debug1: kex: server->client cipher: chacha20-
  ↳ poly1305@openssh.com MAC: <implicit> compression:
  ↳ zlib@openssh.com
16 debug1: kex: client->server cipher: chacha20-
  ↳ poly1305@openssh.com MAC: <implicit> compression:
  ↳ zlib@openssh.com
17 ssh_dispatch_run_fatal: Connection to 129.206.5.65 port
  ↳ 22: memory allocation failed
```

Table 5.1: Overview of the cosine similarity of OpenSSH, Cowrie, and Twisted.

		A	B	C	D	E	F	G	H	I	J
OpenSSH 6.6	A	-	0.98	0.98	0.94	0.94	0.42	0.78	0.79	0.79	0.79
OpenSSH 6.7	B		-	0.98	0.98	0.98	0.41	0.80	0.81	0.81	0.80
OpenSSH 6.8	C			-	0.96	0.96	0.42	0.78	0.79	0.79	0.79
OpenSSH 7.2	D				-	0.98	0.42	0.80	0.80	0.80	0.80
OpenSSH 7.5	E					-	0.42	0.78	0.79	0.79	0.79
Twisted 15.2.1	F						-	0.50	0.51	0.51	0.52
Cowrie 96ca2ba	G							-	0.98	0.98	0.98
Cowrie dc45961	H								-	0.99	0.99
Cowrie dbe88ed	I									-	0.99
Cowrie fd801d1	J										-

Chapter 6

Conclusion

6.1 Future work

Bibliography

- [1] Fahim Abbasi. 2020 trustwave global security report. *Trustwave*, 2020.
- [2] Jack Whitsitt Alberto Gonzalez. The bait and switch honeypot: An active and aggressive part of your network security infrastructure. <http://baitnswitch.sourceforge.net/>, 2002. Accessed: 2021-09-06.
- [3] John B. Althouse, Jeff Atkinson, and Josh Atkins. JA3 - a method for profiling ssl/tls clients. <https://github.com/salesforce/ja3>, 2021. Accessed: 2021-09-26.
- [4] Michael Armbrust, Armando Fox, Rean Griffith, Anthony D. Joseph, Randy Katz, Andy Konwinski, Gunho Lee, David Patterson, Ariel Rabkin, Ion Stoica, and Matei Zaharia. A view of cloud computing. *Communications of the ACM*, 53(4):50–58, April 2010. doi: 10.1145/1721654.1721672. URL <https://doi.org/10.1145/1721654.1721672>.
- [5] Vesselin Bontchev. Elasticpot: an elasticsearch honeypot. <https://gitlab.com/bontchev/elasticpot>, 2021. Accessed: 2021-09-26.
- [6] Vesselin Bontchev. Ipphoney: an internet printing protocol honeypot. <https://gitlab.com/bontchev/ipphoney>, 2021. Accessed: 2021-09-26.
- [7] BSI. Die lage der it-sicherheit in deutschland 2021. Technical Report BSI-LB21/510, Bundesamt für Sicherheit in der Informationstechnik, Sep 2021. URL https://www.bsi.bund.de/DE/Service-Navi/Publikationen/Lagebericht/lagebericht_node.html.
- [8] Brian Caswell, James C. Foster, Ryan Russell, Jay Beale, and Jeffrey Posluns. *Snort 2.0 Intrusion Detection*. Syngress Publishing, 2003. ISBN 1931836744.
- [9] Bill Cheswick. An evening with berferd in which a cracker is lured, endured, and studied. In *In Proc. Winter USENIX Conference*, pages 163–174, 1992.
- [10] Gabriel Cirlig. ADBHoney. <https://github.com/huuck/ADBHoney>, 2021. Accessed: 2021-09-26.
- [11] Theo Combe, Antony Martin, and Roberto Di Pietro. To docker or not to docker: A security perspective. *IEEE Cloud Computing*, 3(5):54–62, 2016. doi: 10.1109/MCC.2016.100.

- [12] CVE-2001-0540. CVE-2001-0540. Available from MITRE, CVE-ID CVE-2001-0540., March 09 2002. URL <http://cve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2001-0540>.
- [13] CVE-2005-4050. CVE-2005-4050. Available from MITRE, CVE-ID CVE-2005-4050., December 07 2005. URL <http://cve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2005-4050>.
- [14] CVE-2006-2369. CVE-2006-2369. Available from MITRE, CVE-ID CVE-2006-2369., May 15 2006. URL <http://cve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2006-2369>.
- [15] CVE-2012-0152. CVE-2012-0152. Available from MITRE, CVE-ID CVE-2012-0152., December 13 2011. URL <http://cve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2012-0152>.
- [16] CVE-2018-0101. CVE-2018-0101. Available from MITRE, CVE-ID CVE-2018-0101., November 27 2017. URL <http://cve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2018-0101>.
- [17] CVE-2019-19781. CVE-2019-19781. Available from MITRE, CVE-ID CVE-2019-19781., December 13 2019. URL <http://cve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2019-19781>.
- [18] CVE-2021-42013. CVE-2021-42013. Available from MITRE, CVE-ID CVE-2021-42013., October 06 2021. URL <http://cve.mitre.org/cgi-bin/cvename.cgi?name=CVE-2021-42013>.
- [19] Jeff Daniels. Server virtualization architecture and implementation. *XRDS*, 16(1):8–12, September 2009. ISSN 1528-4972. doi: 10.1145/1618588.1618592. URL <https://doi.org/10.1145/1618588.1618592>.
- [20] ddosspot. DDoSPot. [https://github.com/aelth/ddospot](https://github.com/aelth/ddosspot), 2021. Accessed: 2021-09-26.
- [21] Patrick Diebold, Andreas Hess, and Günter Schäfer. A honeypot architecture for detecting and analyzing unknown network attacks. In Paul Müller, Reinhard Gotzhein, and Jens B. Schmitt, editors, *Kommunikation in Verteilten Systemen (KiVS)*, pages 245–255, Berlin, Heidelberg, 2005. Springer Berlin Heidelberg. ISBN 978-3-540-27301-1.
- [22] Tharam Dillon, Chen Wu, and Elizabeth Chang. Cloud computing: Issues and challenges. In *2010 24th IEEE International Conference on Advanced Information Networking and Applications*. IEEE, 2010. doi: 10.1109/aina.2010.187. URL <https://doi.org/10.1109/aina.2010.187>.
- [23] dionaea. dionaea - catches bugs. <https://github.com/DinoTools/dionaea>, 2021. Accessed: 2021-09-26.

- [24] Docker. Docker overview. <https://docs.docker.com/get-started/overview/>, 2021. Accessed: 2021-09-21.
- [25] elasticsearch. The Elastic Stack. <https://www.elastic.co/elastic-stack/>, 2021. Accessed: 2021-09-26.
- [26] Europol. Internet organised crime threat assessment (iocta). *European Union Agency for Law Enforcement Cooperation*, 9(1), 2020.
- [27] Europol. About europol. <https://www.europol.europa.eu/about-europol>, 2021. Accessed: 2021-09-04.
- [28] Maryam Feily, Alireza Shahrestani, and Sureswaran Ramadass. A survey of bot-net and botnet detection. In *2009 Third International Conference on Emerging Security Information, Systems and Technologies*, pages 268–273, 2009. doi: 10.1109/SECURWARE.2009.48.
- [29] Michael Flanders. A simple and intuitive algorithm for preventing directory traversal attacks, 2019.
- [30] Federal Office for Information Security. Cert-bund. https://www.bsi.bund.de/EN/Topics/IT-Crisis-Management/CERT-Bund/cert-bund_node.html, 2021. Accessed: 2021-09-12.
- [31] Martin Gallo. Honeysap: Sap low-interaction honeypot. <https://github.com/SecureAuthCorp/HoneySAP>, 2021. Accessed: 2021-09-26.
- [32] Lichstein. HA. When should you emulate. *Datamation*, 15(11):205, 1969.
- [33] Brian Hayes. Cloud computing. *Commun. ACM*, 51(7):9–11, July 2008. ISSN 0001-0782. doi: 10.1145/1364782.1364786. URL <https://doi.org/10.1145/1364782.1364786>.
- [34] Marcus Hutchins. Honepot for cve-2019-19781 (citrix adc). <https://github.com/MalwareTech/CitrixHoneypot>, 2020. Accessed: 2021-09-26.
- [35] Yung Innanet. Hellpot. <https://github.com/yunginnanet/HellPot>, 2021. Accessed: 2021-09-26.
- [36] Adel Karimi. FATT /fingerprintAllTheThings - a pyshark based script for extracting network metadata and fingerprints from pcap files and live network traffic. <https://github.com/0x4D31/fatt>, 2021. Accessed: 2021-09-26.
- [37] Adel Karimi, Ben Reardson, John Althouse, Jeff Atkinson, and Josh Atkins. HASSH - a profiling method for ssh clients and servers. <https://github.com/salesforce/hassh>, 2021. Accessed: 2021-09-26.
- [38] Tejvir Kaur, Vimmi Malhotra, and Dheerendra Singh. Comparison of network security tools- firewall, intrusion detection system and honeypot. In *International Journal of Enhanced Research in Science Technology & Engineering*, volume 3, pages 200–204, 2014.

- [39] Christopher Kelly, Nikolaos Pitropakis, Alexios Mylonas, Sean McKeown, and William J. Buchanan. A comparative analysis of honeypots on different cloud platforms. *Sensors*, 21(7):2433, April 2021. doi: 10.3390/s21072433. URL <https://doi.org/10.3390/s21072433>.
- [40] Mikael Keri. Dicompot - A Digital Imaging and Communications in Medicine (DICOM) Honeypot. <https://github.com/nsmfoo/dicompot>, 2021. Accessed: 2021-09-26.
- [41] Christian Kreibich and Jon Crowcroft. Honeycomb: Creating intrusion detection signatures using honeypots. *SIGCOMM Comput. Commun. Rev.*, 34(1):51–56, January 2004. ISSN 0146-4833. doi: 10.1145/972374.972384. URL <https://doi.org/10.1145/972374.972384>.
- [42] D Kreuter. Where server virtualization was born. *Virtual Strategy Magazine*, 2004.
- [43] Sami Lehtinen and Chris Lonvick. The Secure Shell (SSH) Protocol Assigned Numbers. RFC 4250, RFC Editor, January 2006. URL <https://www.rfc-editor.org/rfc/rfc4250.txt>.
- [44] mailoney. Mailoney - an SMTP honeypot. <https://github.com/phin3has/mailoney>, 2021. Accessed: 2021-09-26.
- [45] P M Mell and T Grance. The NIST definition of cloud computing. Technical report, National Institute of Standards and Technology, 2011. URL <https://doi.org/10.6028/nist.sp.800-145>.
- [46] Steve Micallef. Spiderfoot automates osint for threat intelligence and mapping your attack surface. <https://github.com/smicallef/spiderfoot>, 2021. Accessed: 2021-09-26.
- [47] Iyatiti Mokube and Michele Adams. Honeypots: Concepts, approaches, and challenges. In *Proceedings of the 45th Annual Southeast Regional Conference*, ACM-SE 45, page 321–326, New York, NY, USA, 2007. Association for Computing Machinery. ISBN 9781595936295. doi: 10.1145/1233341.1233399. URL <https://doi.org/10.1145/1233341.1233399>.
- [48] Marcin Nawrocki, Matthias Wählisch, Thomas C. Schmidt, Christian Keil, and Jochen Schönfelder. A survey on honeypot software and data analysis. *CoRR*, abs/1608.06249, 2016. URL <http://arxiv.org/abs/1608.06249>.
- [49] Marco Ochse. T-Pot. <https://github.com/telekom-security/tpotce>, 2021. Accessed: 2021-09-26.
- [50] Michel Oosterhof. Cowrie SSH/Telnet Honeypot. <https://github.com/cowrie/cowrie>, 2021. Accessed: 2021-09-26.

- [51] Vern Paxson. Bro: A system for detecting network intruders in real-time. *Comput. Netw.*, 31(23–24):2435–2463, December 1999. ISSN 1389-1286. doi: 10.1016/S1389-1286(99)00112-7. URL [https://doi.org/10.1016/S1389-1286\(99\)00112-7](https://doi.org/10.1016/S1389-1286(99)00112-7).
- [52] Sylvain Peyrefitte. Rdpv: Remote desktop protocol in twisted python. <https://github.com/citronneur/rdpv>, 2021. Accessed: 2021-09-26.
- [53] Niels Provos. Honeyd - a virtual honeypot daemon. In *10th DFN-CERT Workshop*, Washington, D.C., August 2003. USENIX Association.
- [54] Antonio Regalado. Who coined 'cloud computing'?, Feb 2020. URL <https://www.technologyreview.com/2011/10/31/257406/who-coined-cloud-computing/>.
- [55] Cymmetria Research. Cisco ASA honeypot. https://github.com/Cymmetria/ciscoasa_honeypot, 2018. Accessed: 2021-09-26.
- [56] Lukas Rist, Johnny Vestergaard, Daniel Haslinger, Andrea Pasquale, and John Smith. Conpot ics scada honeypot. <http://conpot.org/>, 2021. Accessed: 2021-09-26.
- [57] Lukas Rist, Johnny Vestergaard, Daniel Haslinger, Andrea Pasquale, and John Smith. Glutton: low interaction honeypot. <https://github.com/mushorg/glutton>, 2021. Accessed: 2021-09-26.
- [58] Lukas Rist, Johnny Vestergaard, Daniel Haslinger, Andrea Pasquale, and John Smith. Snare: Super next generation advanced reactive honeypot. <https://github.com/mushorg/snare>, 2021. Accessed: 2021-09-26.
- [59] Lukas Rist, Johnny Vestergaard, Daniel Haslinger, Andrea Pasquale, and John Smith. Tanner: He who flays the hide. <https://github.com/mushorg/tanner>, 2021. Accessed: 2021-09-26.
- [60] Markus Schmall. Medpot: HL7 / FHIR honeypot. <https://github.com/schmalle/medpot>, 2021. Accessed: 2021-09-26.
- [61] Bruce Schneier. *Secrets & lies - IT-Sicherheit in einer vernetzten Welt*. Dpunkt-Verlag, Köln, 2004. ISBN 978-3-898-64302-3.
- [62] Pavol Sokol, Jakub Míšek, and Martin Husák. Honeypots and honeynets: issues of privacy. *EURASIP Journal on Information Security*, 2017, 02 2017. doi: 10.1186/s13635-017-0057-4.
- [63] Lance Spitzner. *Honeypots - Tracking Hackers*. Addison-Wesley, Amsterdam, 2003. ISBN 978-0-321-10895-1.

- [64] Statista. Year-over-year change in average monthly in-home data usage by device in the united states from january to march 2020. <https://www.statista.com/statistics/1106821/covid-19-change-in-in-home-data-usage-in-us-2020/>, 2021. Accessed: 2021-09-04.
- [65] Clifford Stoll. *The Cuckoo's Egg: Tracking a Spy through the Maze of Computer Espionage*. Pocket Books, 2000. ISBN 0743411463.
- [66] suricata. Suricata. <https://github.com/OISF/suricata>, 2021. Accessed: 2021-09-26.
- [67] K. Takemori, K. Rikitake, Y. Miyake, and K. Nakao. Intrusion trap system: an efficient platform for gathering intrusion-related information. In *10th International Conference on Telecommunications, 2003. ICT 2003.*, volume 1, pages 614–619 vol.1, 2003. doi: 10.1109/ICTEL.2003.1191480.
- [68] University Computing Center Heidelberg. heicloud - the heidelberg university cloud infrastructure. <https://heicloud.uni-heidelberg.de/heicLOUD>, 2021. Accessed: 2021-09-02.
- [69] University Computing Center Heidelberg. Heicloud. <https://www.urz.uni-heidelberg.de/en/service-catalogue/cloud/heicloud>, 2021. Accessed: 2021-09-02.
- [70] Johnny Vestergaard. Heralding: Credentials catching honeypot. <https://github.com/johnnykv/heralding>, 2021. Accessed: 2021-09-26.
- [71] Alexander Vetterl. Honeypots in the age of universal attacks and the Internet of Things. Technical Report UCAM-CL-TR-944, University of Cambridge, Computer Laboratory, February 2020. URL <https://www.cl.cam.ac.uk/techreports/UCAM-CL-TR-944.pdf>.
- [72] Lizhe Wang, Gregor von Laszewski, Andrew Younge, Xi He, Marcel Kunze, Jie Tao, and Cheng Fu. Cloud computing: a perspective study. *New Generation Computing*, 28(2):137–146, April 2010. doi: 10.1007/s00354-008-0081-5. URL <https://doi.org/10.1007/s00354-008-0081-5>.
- [73] Christopher Wellons. Endlessh: an ssh tarpit. <https://github.com/skeeto/endlessh>, 2021. Accessed: 2021-09-26.
- [74] Tillmann Werner. Honeytrap. <https://github.com/armedpot/honeytrap/>, 2021. Accessed: 2021-09-26.
- [75] Michal Zalewski. p0f v3: passive fingerprinter. <https://github.com/p0f/p0f>, 2021. Accessed: 2021-09-26.

Appendices

Appendix A

T-Pot

...pictures of view

Appendix B

Installation and Configuration