



REGIONE AUTONOMA
DELLA SARDEGNA



Servizio di Transizione

Titolo: XMPI/JBF/JAUF

Codice: AREAS_AP_01_JBF

Profilo: Analista Programmatore

www.eng.it



REGIONE AUTONOMA
DELLA SARDEGNA




ARGOMENTI DI QUESTE SLIDE

- View in JAUF (components)
- Esercizi:
 - Gestione testata/dettaglio
 - Lookup
 - Field visibility
 - Free layout


www.eng.it

MVC Pattern in AREAS

AREAS uses a simple and standard **MVC pattern** to design all its web pages and functionalities. We do a quick recap about the web pages in AREAS.

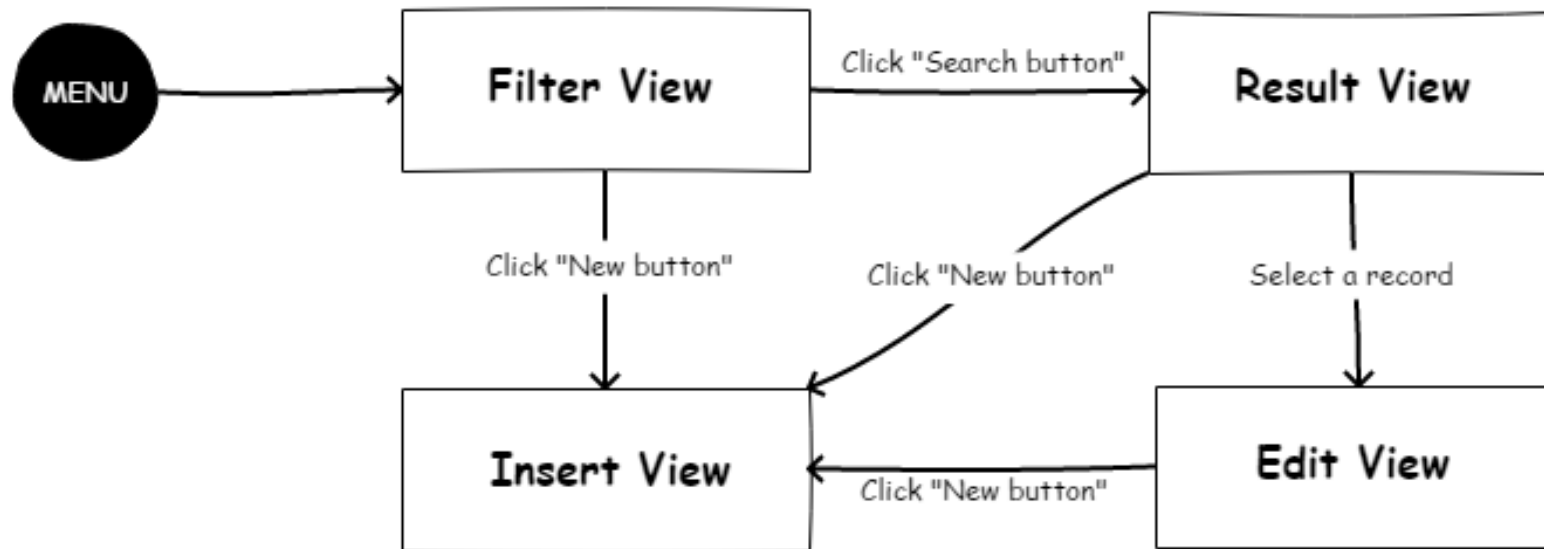

MVC Pattern in AREAS

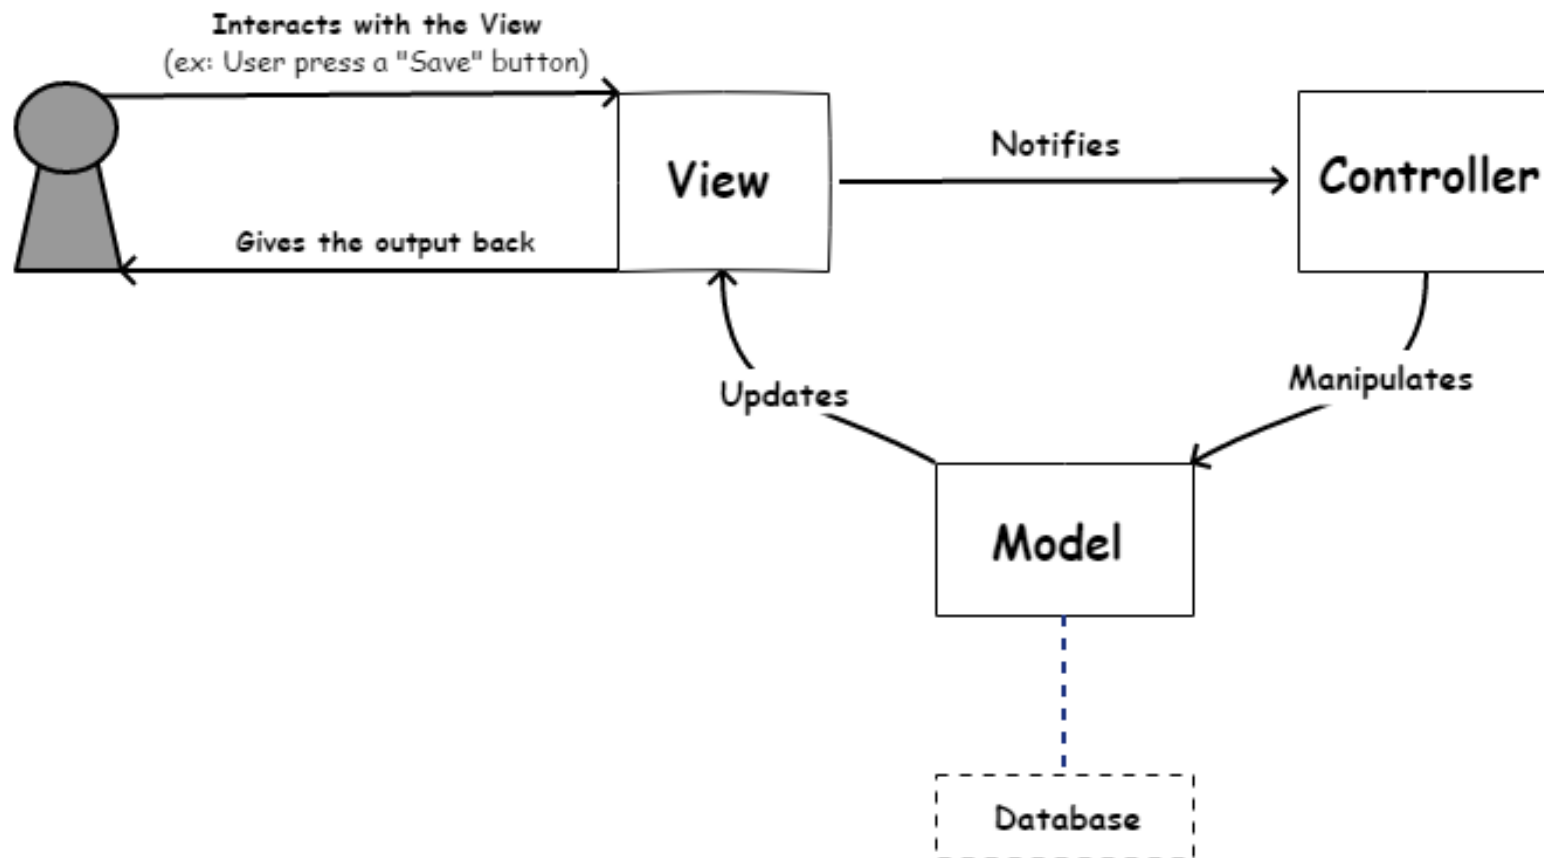


MVC Pattern in AREAS / The Model

In AREAS a **Model** is a simple Java Bean (**POJO**) that also implements some particular Java interfaces to handle the persistence layer and other additional information.

The model and the persistence layer are strictly connected, so it's the responsibility of the Model to persist itself inside the database.

One Bean is connected to one record of one table of the database. That makes the model involved in the web pages of the “**Edit View**” and “**Insert View**”.

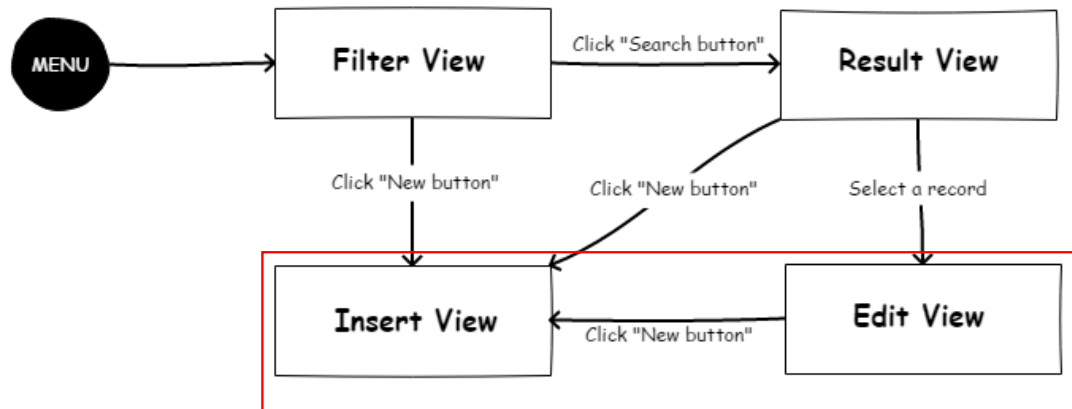

```
public class Dog {  
    protected String name;  
    protected String owner;  
  
    public String getName() {  
        return name;  
    }  
    public void setName(String name) {  
        this.name = name;  
    }  
    ...other getters and setters...  
}
```

MVC Pattern in AREAS / The Model


More specifically, to design a Model in AREAS we need:

- **A POJO Bean**
- **An additional XML file that maps all the POJO attributes with the database fields**
- The POJO must implement the **Persistent** Java interface in order to implement these methods:
 - **Retrieve**. It's invoked to load a single record of the database into the Bean
 - **Store**. It's invoked to insert or update a record of the database
 - **Remove**. It's invoked to delete a record of the database
- The POJO must implement a **ValidableInterface** in order to implement this method:
 - **validate**. It's invoked before the Store method, to check if the Bean can be stored inside the database. It can throw a warning message (the bean get stored in any case) or an error message (the store method is not invoked).
- The POJO must implement a **DynamicInfoInterface** in order to implement this method:
 - **getObjectInfo**. It gives the bean the opportunity to describe itself more. By this method, the bean can tell the framework, for example, which properties are mandatory, or which properties are not editable.

MVC Pattern in AREAS / The Model

Exercise 1

Based on what we just learned, we can start doing this exercise by designing the Model

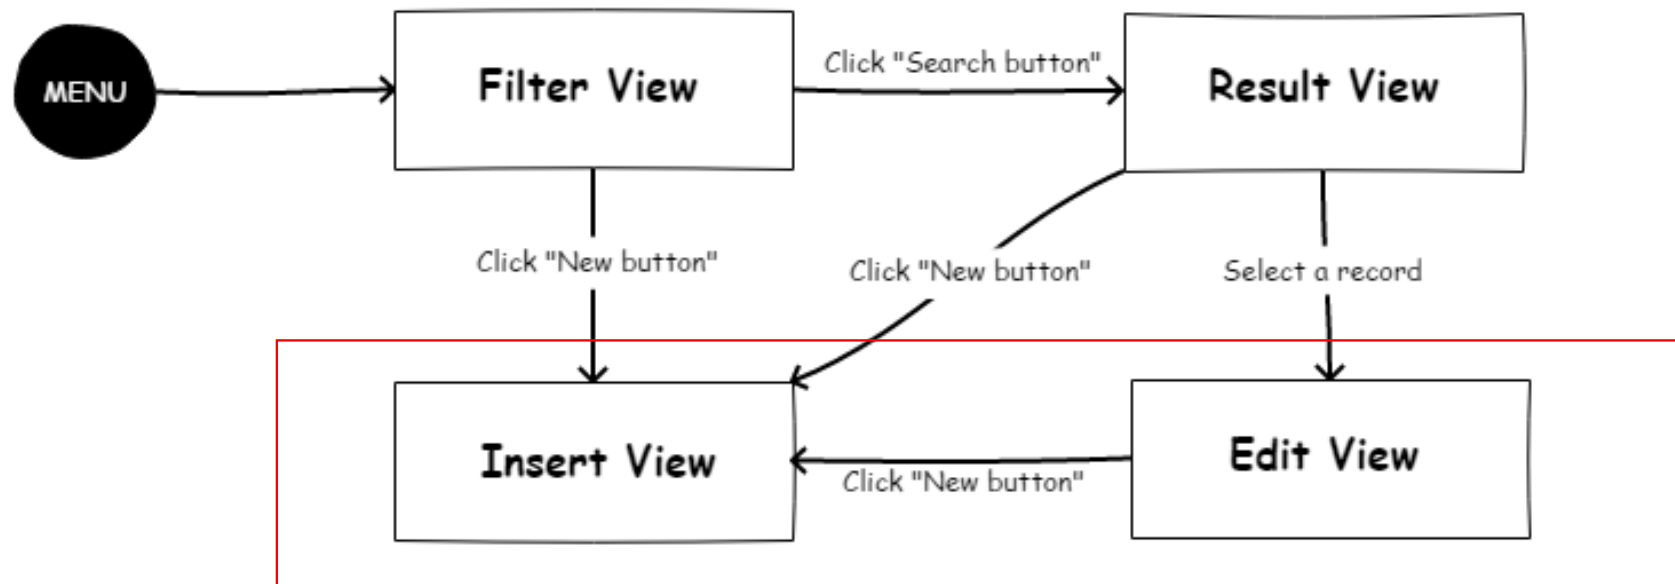

MVC Pattern in AREAS / The Query

As we already said, one Bean is connected to one record of the database only. That makes the model involved in the “**Edit View**” and “**Insert View**”.

But when we search something through the “**Filter View**” we need to model a **list of records** (the result of the search) and not only one record. To do this, we introduce the concept of the “**Query class**”.

The purpose of this Java class is to build the SQL statement that will be executed on the Database. The result of the query is then parked inside an ArrayList variable, in memory.


More specifically, to realize a Query class in AREAS we need:

- A Java class extending the abstract class **CustomQueryProfile** and implementing this method:
 - **getCustomSQLString**. It's invoked when the user presses the “Search” button. By using the method **getFilterValue** we can access the filters and search criteria the user typed into the “Search page”. The output of this method is the SQL that will be later executed by the framework.

MVC Pattern in AREAS / The Query

Exercise 1

Based on what we just learned, we can keep doing this exercise by designing the Query

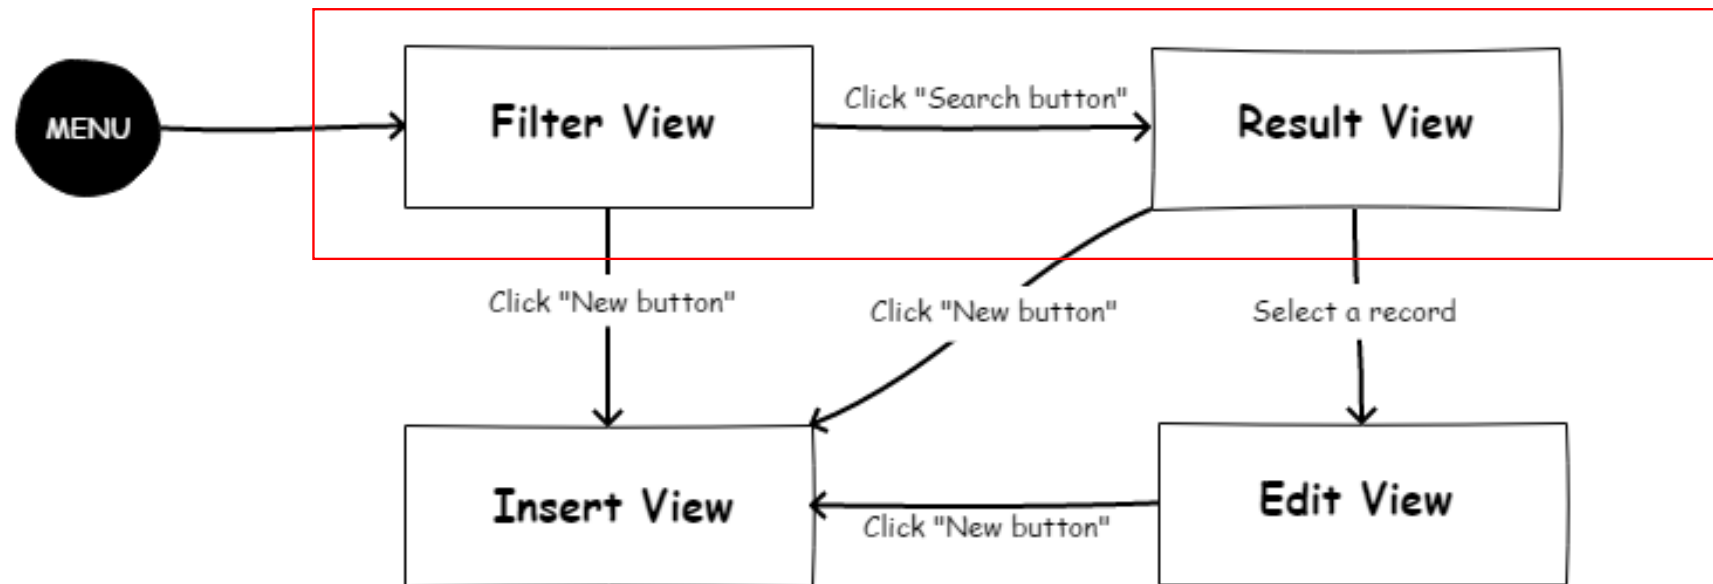

MVC Pattern in AREAS / The Views

The “**Views**” in AREAS are realized using a series of Java class called “**components**”. Usually is enough to implement 3 components:


- **Filter component.** It's the component that design the “Filter View”, showing the user the all possible filters he can type in
- **Edit Component.** It's the component that design the “Edit View”, allowing the user to edit a record
- **Insert Component.** It's the component that design the “Insert View”, allowing the user to insert a new record

So the HTML page the user sees, it's actually **built in JAVA**. To design our page and define our input fields, checkbox...etc..the framework provides a set of java classes (widgets) called “**FormFields**” such us FormTextField, FormDateField, FormNumericField..etc..The binding between Views and Model is guaranteed by an object called **bindings**, that allows to link one property to one field.

MVC Pattern in AREAS / The Views

Exercise 1

Based on what we just learned, we can keep doing this exercise by designing all the needed Views

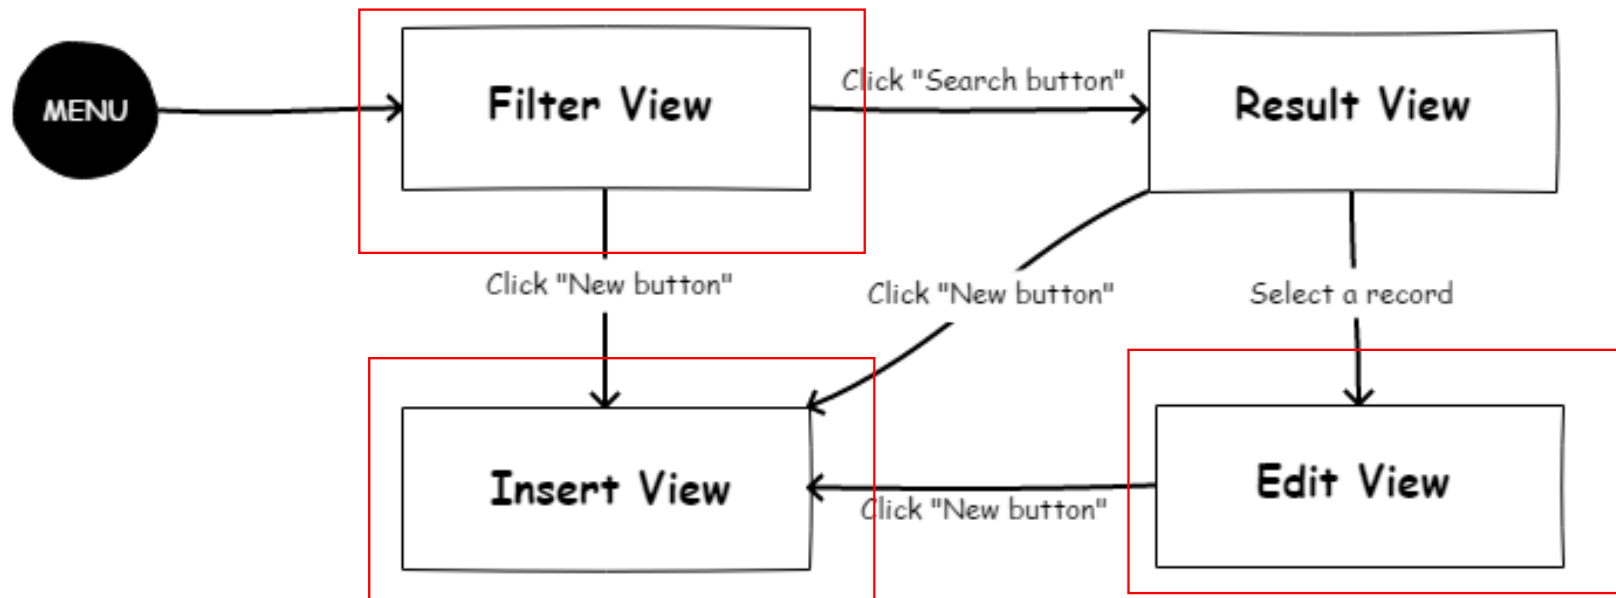

MVC Pattern in AREAS / The Controller

The **Controller** side is implemented by a Java Class, and its duty is to take care about all the action the user can submit through the Views.

More specifically, to realize a Controller in AREAS we need:

- A Java class extending the abstract class **W3ControllerPersistentJAUF** and implementing this method:
 - **init**. It's invoked when the user accesses our web pages in order to initialize the Controller.
- A series of **annotation** used to list our view components



MVC Pattern in AREAS / The Controller

Exercise 1

Based on what we just learned, we can keep doing this exercise by designing the Controller. Once it is done, we can deploy what we just created!

MVC Pattern in AREAS / The Controller Dispatcher

If you give a deeper look on the Controllers in AREAS, you will notice that they are not servlet. That means that all the user's requests are not addressed directly to our controllers.

In AREAS there is one unique servlet, which is the entry point of all the user's requests. This servlet is called **ControllerDispatcher**.

The duty of the Dispatcher is to receive the user request and to address it to the right controller (managing also the initialization process).

To locate the right controller, all the controllers are identified by a **mapping**.

MVC Pattern in AREAS / The Mapping

A **mapping** is the logical name of a Controller, and it represents how the controller will be invoked via URL. Let's take the login page as an example: <http://10.10.10.10:8080/areas/mainLogin.do>


The **mainLogin.do** is the mapping of the Controller responsible for the login page. The association between the mapping and the corresponding Java Class, it's made inside a properties file located in every project of AREAS: **/jsp/WEB-INF/controllers** (es: controllers.properties in PSGExt).

mapping.mainLogin = PSGExt.profile.w3.Login2W3

The **ControllerDispatcher** is configured (inside the web.xml) to catch all the URL that ends with the string **".do"**. In our case the ControllerDispatcher:

- 1.takes the mapping part of the URL: **mainLogin**
- 2.looks inside all the controllers.properties if it exists a declared mapping
- 3.instantiates the Java class **Login2W3** and it calls its init method.

MVC Pattern in AREAS / The Controller Dispatcher Flow

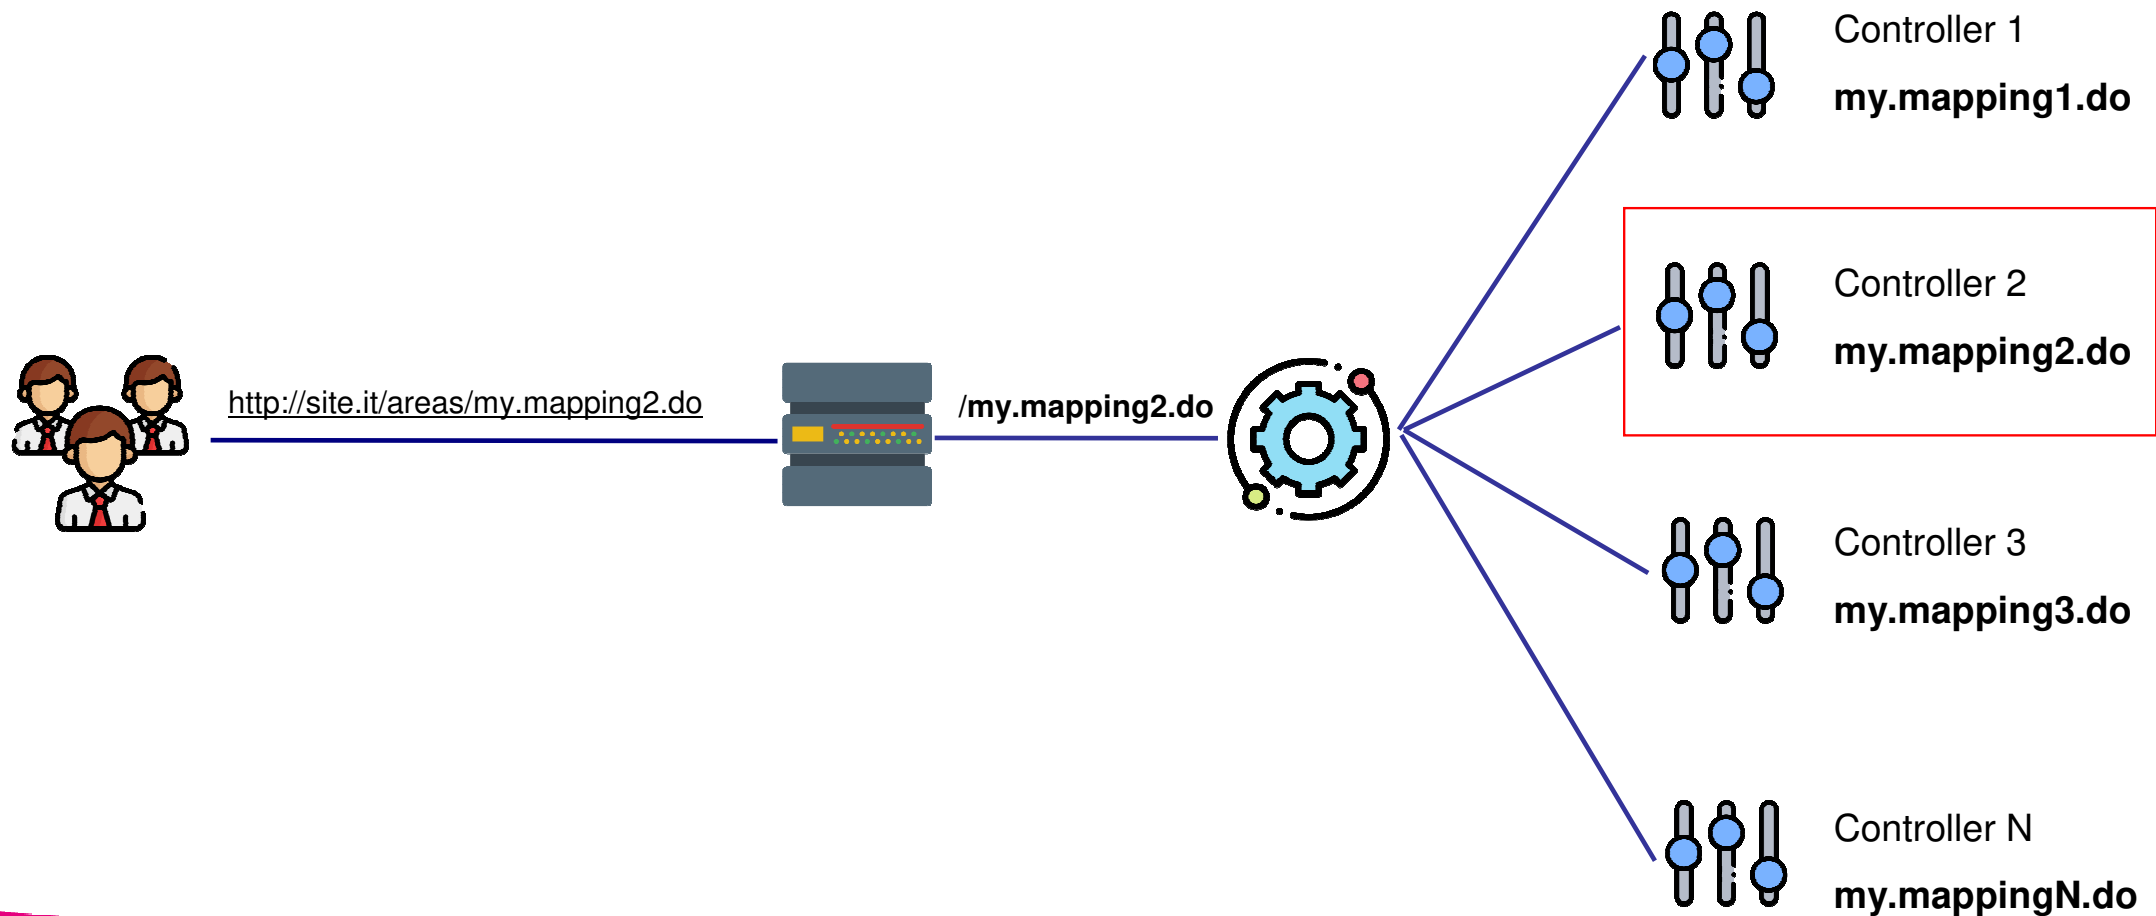

Exercises

Keep up following all the other exercises in the document **Exercises.doc**