

Draft

Ecma/TC39/2012/0xx

Standard ECMA-262

6th Edition / Draft December 21, 2012

Draft

**ECMAScript Language
Specification**

Report Errors and Issues at: <https://bugs.ecmascript.org>

Product: Draft for 6th Edition
Component: choose an appropriate one
Version: December 21, 2012 Draft

Standard

Rue du Rhône 114 CH-1204 Geneva T: +41 22 849 6000 F: +41 22 849 6001

DRAFT



COPYRIGHT PROTECTED DOCUMENT

Contents

	Page
Introduction.....	vii
1 Scope	1
2 Conformance.....	1
3 Normative references	1
4 Overview.....	1
4.1 Web Scripting.....	2
4.2 Language Overview	2
4.2.1 Objects.....	3
4.2.2 The Strict Variant of ECMAScript	4
4.3 Terms and definitions.....	4
5 Notational Conventions.....	7
5.1 Syntactic and Lexical Grammars	7
5.1.1 Context-Free Grammars	7
5.1.2 The Lexical and RegExp Grammars	8
5.1.3 The Numeric String Grammar	8
5.1.4 The Syntactic Grammar	8
5.1.5 The JSON Grammar	9
5.1.6 Grammar Notation	9
5.2 Algorithm Conventions	12
5.3 Static Semantic Rules	13
6 Source Text	14
7 Lexical Conventions	15
7.1 Unicode Format-Control Characters	16
7.2 White Space.....	16
7.3 Line Terminators.....	17
7.4 Comments	18
7.5 Tokens	19
7.6 Identifier Names and Identifiers	19
7.6.1 Reserved Words.....	20
7.7 Punctuators	21
7.8 Literals	22
7.8.1 Null Literals	22
7.8.2 Boolean Literals	22
7.8.3 Numeric Literals	22
7.8.4 String Literals.....	25
7.8.5 Regular Expression Literals.....	27
7.8.6 Template Literal Lexical Components	28
7.9 Automatic Semicolon Insertion	30
7.9.1 Rules of Automatic Semicolon Insertion	30
7.9.2 Examples of Automatic Semicolon Insertion.....	31
8 Types	32
8.1 ECMAScript Language Types	33
8.1.1 The Undefined Type.....	33
8.1.2 The Null Type	33
8.1.3 The Boolean Type	33
8.1.4 The String Type.....	33
8.1.5 The Number Type.....	33
8.1.6 The Object Type	34

8.2.1 Data Blocks	44
8.2.2 The List and Record Specification Type	45
8.2.3 The Completion Record Specification Type	45
8.2.4 The Reference Specification Type	46
8.2.5 The Property Descriptor Specification Type.....	48
8.2.6 The Lexical Environment and Environment Record Specification Types	50
8.3 Ordinary Object Internal Methods and Internal Data Properties	50
8.3.1 [[GetInheritance]] ()	50
8.3.2 [[SetInheritance]] (V).....	50
8.3.3 [[IsExtensible]] ()	51
8.3.4 [[PreventExtensions]] ().....	51
8.3.5 [[HasOwnProperty]] (P)	51
8.3.6 [[GetOwnProperty]] (P)	51
8.3.7 [[DefineOwnProperty]] (P, Desc).....	51
8.3.8 [[HasProperty]](P).....	54
8.3.9 [[GetP]] (P, Receiver)	54
8.3.10 [[SetP]] (P, V, Receiver)	54
8.3.11 [[Delete]] (P).....	55
8.3.12 [[Enumerate]] ()	56
8.3.13 [[OwnPropertyKeys]] ().....	56
8.3.14 [[Freeze]] ()	56
8.3.15 [[Seal]] ()	57
8.3.16 [[IsFrozen]] ()	57
8.3.17 [[IsSealed]] ()	57
8.3.18 ObjectCreate Abstract Operation	57
8.3.19 Ordinary Function Objects	57
8.4 Built-in Exotic Object Internal Methods and Data Fields	60
8.4.1 Bound Function Exotic Objects	60
8.4.2 Array Exotic Objects.....	61
8.4.3 String Exotic Objects.....	63
8.4.4 Exotic Symbol Objects	64
8.4.5 Exotic Arguments Objects	66
8.4.6 Indexed Delegation Exotic Objects	67
8.4.7 Built-in Function Objects	67
8.5 Proxy Object Internal Methods and Internal Data Properties	68
8.5.1 [[GetInheritance]] ()	68
8.5.3 [[IsExtensible]] ()	69
8.5.4 [[PreventExtensions]] ()	69
8.5.5 [[HasOwnProperty]] (P)	70
8.5.6 [[GetOwnProperty]] (P)	71
8.5.7 [[DefineOwnProperty]] (P, Desc).....	71
8.5.8 [[HasProperty]] (P)	72
8.5.9 [[GetP]] (P, Receiver)	73
8.5.10 [[SetP]] (P, V, Receiver)	73
8.5.11 [[Delete]] (P).....	74
8.5.12 [[Enumerate]] ()	74
8.5.13 [[OwnPropertyKeys]] ().....	74
8.5.14 [[Freeze]] ()	75
8.5.15 [[Seal]] ()	75
8.5.16 [[IsFrozen]] ()	75
8.5.17 [[IsSealed]] ()	75
8.5.18 [[Call]] (thisArgument, argumentsList).....	75
8.5.19 [[Construct]] Internal Method	76
9 Abstract Operations	76
9.1 Type Conversion and Testing	76
9.1.1 ToPrimitive	76
9.1.2 ToBoolean	77
9.1.3 ToNumber	78
9.1.4 ToInteger.....	81

9.1.5	ToInt32: (Signed 32 Bit Integer)	81
9.1.6	ToUint32: (Unsigned 32 Bit Integer)	81
9.1.7	ToUint16: (Unsigned 16 Bit Integer)	82
9.1.8	ToString	82
9.1.9	ToObject	83
9.1.10	ToPropertyKey	83
9.2	Testing and Comparison Operations	84
9.2.1	CheckObjectCoercible	84
9.2.2	IsCallable	84
9.2.3	The SameValue Algorithm	84
9.2.4	IsConstructor	85
9.2.5	IsPropertyKey	85
9.3	Operations on Objects	85
9.3.1	Get (O, P)	85
9.3.2	Put (O, P, V, Throw)	85
9.3.3	CreateOwnProperty (O, P, V)	85
9.3.4	DefinePropertyOrThrow (O, P, desc)	86
9.3.5	DeletePropertyOrThrow (O, P)	86
9.3.6	HasProperty (O, P)	86
9.3.7	GetMethod (O, P)	86
9.3.8	Invoke(O,P [,args])	87
9.3.9	MakeObjectSecure (O, immutable)	87
9.3.10	TestIfSecureObject (O, immutable)	88
9.3.11	CreateArrayFromList (elements)	88
9.3.12	OrdinaryHasInstance (C, O)	88
9.3.13	OrdinaryCreateFromConstructor (constructor, intrinsicDefaultProto)	89
10	Executable Code and Execution Contexts	89
10.1	Types of Executable Code	89
10.1.1	Strict Mode Code	90
10.1.2	Non-ECMAScript Functions	90
10.2	Lexical Environments	90
10.2.1	Environment Records	91
10.2.2	Lexical Environment Operations	102
10.3	Code Realms	103
10.4	Execution Contexts	104
10.4.1	Identifier Resolution	105
10.4.2	GetThisEnvironment	105
10.4.3	This Resolution	105
10.4.4	GetGlobalObject	105
10.5	Declaration Binding Instantiation	106
10.5.1	Global Declaration Instantiation	106
10.5.2	Module Declaration Instantiation	107
10.5.3	Function Declaration Instantiation	107
10.5.4	Block Declaration Instantiation	109
10.5.5	Eval Declaration Instantiation	109
10.6	Arguments Object	109
11	Expressions	112
11.1	Primary Expressions	112
11.1.1	The this Keyword	113
11.1.2	Identifier Reference	113
11.1.3	Literals	113
11.1.4	Array Initialiser	114
11.1.5	Object Initialiser	117
11.1.6	Function Defining Expressions	120
11.1.7	Generator Comprehensions	120
11.1.8	Regular Expression Literals	120
11.1.9	Template Literals	121
11.1.10	The Grouping Operator	124

11.2 Left-Hand-Side Expressions	125
11.2.1 Property Accessors	126
11.2.2 The new Operator	127
11.2.3 Function Calls	128
11.2.4 The super Keyword	129
11.2.5 Argument Lists	130
11.2.6 Tagged Templates	131
11.3 Postfix Expressions	131
11.3.1 Postfix Increment Operator	132
11.3.2 Postfix Decrement Operator	132
11.4 Unary Operators	132
11.4.1 The delete Operator	133
11.4.2 The void Operator	134
11.4.3 The typeof Operator	134
11.4.4 Prefix Increment Operator	134
11.4.5 Prefix Decrement Operator	135
11.4.6 Unary + Operator	135
11.4.7 Unary - Operator	135
11.4.8 Bitwise NOT Operator (~)	135
11.4.9 Logical NOT Operator (!)	136
11.5 Multiplicative Operators	136
11.5.1 Applying the * Operator	136
11.5.2 Applying the / Operator	137
11.5.3 Applying the % Operator	137
11.6 Additive Operators	138
11.6.1 The Addition operator (+)	138
11.6.2 The Subtraction Operator (-)	139
11.6.3 Applying the Additive Operators to Numbers	139
11.7 Bitwise Shift Operators	139
11.7.1 The Left Shift Operator (<<)	140
11.7.2 The Signed Right Shift Operator (>>)	140
11.7.3 The Unsigned Right Shift Operator (>>>)	140
11.8 Relational Operators	141
11.8.1 Runtime Semantics	142
11.9 Equality Operators	144
11.9.1 Runtime Semantics	145
11.10 Binary Bitwise Operators	147
11.11 Binary Logical Operators	148
11.12 Conditional Operator (? :)	149
11.13 Assignment Operators	150
Static Semantics	150
Runtime Semantics	151
11.13.1 Destructuring Assignment	151
11.14 Comma Operator (,)	155
12 Statements and Declarations	156
Static Semantics	156
Runtime Semantics	156
12.1 Block	157
12.2 Declarations and the Variable Statement	160
12.2.1 Let and Const Declarations	160
12.2.2 Variable Statement	163
12.2.4 Destructuring Binding Patterns	165
12.3 Empty Statement	170
12.4 Expression Statement	170
12.5 The if Statement	170
12.6 Iteration Statements	171
12.6.1 The do-while Statement	172

12.6.2	The while Statement.....	172
12.6.3	The for Statement.....	173
12.6.4	The for-in and for-of Statements	174
12.7	The continue Statement	178
12.8	The break Statement.....	178
12.9	The return Statement	179
12.10	The with Statement.....	179
12.11	The switch Statement	180
12.12	Labelled Statements	184
12.13	The throw Statement.....	185
12.14	The try Statement.....	186
12.15	The debugger statement.....	188
13	Functions and Generators	188
13.1	Function Definitions	188
13.2	Arrow Function Definitions	194
13.3	Method Definitions.....	197
13.4	Generator Definitions	200
13.5	Class Definitions.....	201
13.6	Creating Function Objects and Constructors	205
13.7	Tail Position Calls	206
14	Scripts and Modules	207
14.1	Script	207
14.1.1	Directive Prologues and the Use Strict Directive	209
14.2	Modules	210
15	Standard Built-in ECMAScript Objects.....	210
15.1	The Global Object	211
15.1.1	Value Properties of the Global Object	211
15.1.2	Function Properties of the Global Object	212
15.1.3	URI Handling Function Properties	214
15.1.4	Constructor Properties of the Global Object	219
15.1.5	Other Properties of the Global Object	220
15.2	Object Objects.....	220
15.2.1	The Object Constructor Called as a Function.....	220
15.2.2	The Object Constructor	221
15.2.3	Properties of the Object Constructor	221
15.2.4	Properties of the Object Prototype Object	224
15.2.5	Properties of Object Instances	226
15.3	Function Objects.....	226
15.3.1	The Function Constructor Called as a Function.....	226
15.3.2	The Function Constructor	227
15.3.3	Properties of the Function Constructor	228
15.3.4	Properties of the Function Prototype Object	228
15.3.5	Properties of Function Instances	230
15.4	Array Objects	230
15.4.1	The Array Constructor Called as a Function	231
15.4.2	The Array Constructor	231
15.4.3	Properties of the Array Constructor	232
15.4.4	Properties of the Array Prototype Object.....	233
15.4.5	Properties of Array Instances	252
15.4.6	Array Iterator Object Structure	252
15.5	String Objects	254
15.5.1	The String Constructor Called as a Function	254
15.5.2	The String Constructor.....	254
15.5.3	Properties of the String Constructor	254
15.5.4	Properties of the String Prototype Object	256
15.5.5	Properties of String Instances	268
15.6	Boolean Objects.....	268

15.6.1 The Boolean Constructor Called as a Function.....	268
15.6.2 The Boolean Constructor	268
15.6.3 Properties of the Boolean Constructor	269
15.6.4 Properties of the Boolean Prototype Object	269
15.6.5 Properties of Boolean Instances	270
15.7 Number Objects	270
15.7.1 The Number Constructor Called as a Function	270
15.7.2 The Number Constructor.....	270
15.7.3 Properties of the Number Constructor	270
15.7.4 Properties of the Number Prototype Object.....	272
15.7.5 Properties of Number Instances	276
15.8 The Math Object	276
15.8.1 Value Properties of the Math Object.....	277
15.8.2 Function Properties of the Math Object	278
15.9 Date Objects	285
15.9.1 Overview of Date Objects and Definitions of Abstract Operations	285
15.9.2 The Date Constructor Called as a Function	290
15.9.3 The Date Constructor	290
15.9.4 Properties of the Date Constructor.....	291
15.9.5 Properties of the Date Prototype Object	293
15.9.6 Properties of Date Instances	301
15.10 RegExp (Regular Expression) Objects	301
15.10.1 Patterns	301
15.10.2 Pattern Semantics.....	303
15.10.3 The RegExp Constructor Called as a Function	315
15.10.4 The RegExp Constructor.....	315
15.10.5 Properties of the RegExp Constructor	316
15.10.6 Properties of the RegExp Prototype Object.....	316
15.10.7 Properties of RegExp Instances	318
15.11 Error Objects	319
15.11.1 The Error Constructor Called as a Function	319
15.11.2 The Error Constructor	319
15.11.3 Properties of the Error Constructor.....	319
15.11.4 Properties of the Error Prototype Object	320
15.11.5 Properties of Error Instances	320
15.11.6 Native Error Types Used in This Standard	320
15.11.7 NativeError Object Structure.....	321
15.12 The JSON Object	322
15.12.1 The JSON Grammar	323
15.12.2 JSON.parse (text [, reviver])	324
15.12.3 JSON.stringify (value [, replacer [, space]])	326
15.13 Binary Data Objects	330
15.13.1 The BinaryData Module	330
15.13.2 The BinaryData.Type Object	330
15.13.3 The BinaryData.ArrayType Object	330
15.13.4 The BinaryData.StructType Object	330
15.13.5 ArrayBuffer Objects	330
15.13.6 TypedArray Object Structures	334
15.13.7 DataView Objects	342
15.14 Map Objects	346
15.14.1 Abstract Operations For Map Objects	346
15.14.2 The Map Constructor Called as a Function.....	347
15.14.3 The Map Constructor	347
15.14.4 Properties of the Map Constructor	347
15.14.5 Properties of the Map Prototype Object	348
15.14.6 Properties of Map Instances	351
15.14.7 Map Iterator Object Structure	351
15.15 WeakMap Objects	352
15.15.1 Abstract Operations For WeakMap Objects.....	353

15.15.2 The WeakMap Constructor Called as a Function	353
15.15.3 The WeakMap Constructor.....	354
15.15.4 Properties of the WeakMap Constructor.....	354
15.15.5 Properties of the WeakMap Prototype Object.....	354
15.15.6 Properties of WeakMap Instances.....	356
15.16 Set Objects	356
15.16.1 Abstract Operations For Set Objects	356
15.16.2 The Set Constructor Called as a Function	357
15.16.3 The Set Constructor.....	357
15.16.4 Properties of the Set Constructor.....	357
15.16.5 Properties of the Set Prototype Object	358
15.16.6 Properties of Set Instances	360
15.16.7 Set Iterator Object Structure	360
15.17 The Reflect Module	361
15.17.1 Exported Function Properties Reflecting the Essential Internal Methods	361
15.18 Proxy Objects.....	364
16 Errors	364
Annex A (informative) Grammar Summary.....	367
A.1 Lexical Grammar.....	367
A.2 Number Conversions.....	373
A.3 Expressions.....	374
A.4 Statements.....	378
A.5 Functions and Scripts	380
A.6 Universal Resource Identifier Character Classes.....	381
A.7 Regular Expressions	381
A.8 JSON	383
A.8.1 JSON Lexical Grammar	383
A.8.2 JSON Syntactic Grammar	384
Annex B (normative) Additional ECMAScript Features for Web Browsers	387
B.1 Additional Syntax.....	387
B.1.1 Numeric Literals.....	387
B.1.2 String Literals.....	387
B.2 Additional Properties	388
B.2.1 Additional Properties of the Global Object	388
B.2.2 Additional Properties of the String.prototype Object.....	389
B.2.3 Additional Properties of the Date.prototype Object	392
B.3 Other Additional Features	393
B.3.1 The __proto__ pseudo property	393
Annex C (informative) The Strict Mode of ECMAScript	395
Annex D (informative) Corrections and Clarifications with Possible Compatibility Impact	397
In Edition 6	397
In 5.1 Edition 5.1	397
In 5 th Edition 5	398
Annex E (informative) Additions and Changes that Introduce Incompatibilities with Prior Editions.....	401
In the 6 th Edition.....	401
In the 5 th Edition	401
Annex F (informative) Static Semantic Rule Cross Reference	405
Scrap Heap	407
8.3.10 [[Enumerate]] (includePrototype, onlyEnumerable)	408
10.5.3 Function Declaration Instantiation	409

DRAFT

Introduction

This Ecma Standard is based on several originating technologies, the most well known being JavaScript (Netscape) and JScript (Microsoft). The language was invented by Brendan Eich at Netscape and first appeared in that company's Navigator 2.0 browser. It has appeared in all subsequent browsers from Netscape and in all browsers from Microsoft starting with Internet Explorer 3.0.

The development of this Standard started in November 1996. The first edition of this Ecma Standard was adopted by the Ecma General Assembly of June 1997.

That Ecma Standard was submitted to ISO/IEC JTC 1 for adoption under the fast-track procedure, and approved as international standard ISO/IEC 16262, in April 1998. The Ecma General Assembly of June 1998 approved the second edition of ECMA-262 to keep it fully aligned with ISO/IEC 16262. Changes between the first and the second edition are editorial in nature.

The third edition of the Standard introduced powerful regular expressions, better string handling, new control statements, try/catch exception handling, tighter definition of errors, formatting for numeric output and minor changes in anticipation of forthcoming internationalisation facilities and future language growth. The third edition of the ECMAScript standard was adopted by the Ecma General Assembly of December 1999 and published as ISO/IEC 16262:2002 in June 2002.

Since publication of the third edition, ECMAScript has achieved massive adoption in conjunction with the World Wide Web where it has become the programming language that is supported by essentially all web browsers. Significant work was done to develop a fourth edition of ECMAScript. Although that work was not completed and not published¹ as the fourth edition of ECMAScript, it informs continuing evolution of the language. The fifth edition of ECMAScript (published as ECMA-262 5th edition) codifies de facto interpretations of the language specification that have become common among browser implementations and adds support for new features that have emerged since the publication of the third edition. Such features include accessor properties, reflective creation and inspection of objects, program control of property attributes, additional array manipulation functions, support for the JSON object encoding format, and a strict mode that provides enhanced error checking and program security.

The edition 5.1 of the ECMAScript Standard has been fully aligned with the third edition of the international standard ISO/IEC 16262:2011.

This present sixth edition of the Standard.....

ECMAScript is a vibrant language and the evolution of the language is not complete. Significant technical enhancement will continue with future editions of this specification.

This Ecma Standard has been adopted by the General Assembly of <month> <year>.

¹ Note: Please note that for ECMAScript Edition 4 the Ecma standard number "ECMA-262 Edition 4" was reserved but not used in the Ecma publication process. Therefore "ECMA-262 Edition 4" as an Ecma International publication does not exist.

"DISCLAIMER

This draft document may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published, and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this section are included on all such copies and derivative works. However, this document itself may not be modified in any way, including by removing the copyright notice or references to Ecma International, except as needed for the purpose of developing any document or deliverable produced by Ecma International.

This disclaimer is valid only prior to final version of this document. After approval all rights on the standard are reserved by Ecma International.

The limited permissions are granted through the standardization phase and will not be revoked by Ecma International or its successors or assigns during this time.

This document and the information contained herein is provided on an "AS IS" basis and ECMA INTERNATIONAL DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY OWNERSHIP RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE."

DRAFT

ECMAScript Language Specification

1 Scope

This Standard defines the ECMAScript scripting language.

2 Conformance

A conforming implementation of ECMAScript must provide and support all the types, values, objects, properties, functions, and program syntax and semantics described in this specification.

A conforming implementation of this Standard shall interpret characters in conformance with the Unicode Standard, Version 5.1.0 or later and ISO/IEC 10646. If the adopted ISO/IEC 10646-1 subset is not otherwise specified, it is presumed to be the Unicode set, collection 10646.

A conforming implementation of ECMAScript is permitted to provide additional types, values, objects, properties, and functions beyond those described in this specification. In particular, a conforming implementation of ECMAScript is permitted to provide properties not described in this specification, and values for those properties, for objects that are described in this specification.

A conforming implementation of ECMAScript is permitted to support program and regular expression syntax not described in this specification. In particular, a conforming implementation of ECMAScript is permitted to support program syntax that makes use of the "future reserved words" listed in 7.6.1.2 of this specification.

Deleted: 3

Deleted: -1 with either UCS-2 or UTF-16 as the adopted encoding form, implementation level 3

Deleted: BMP subset

Deleted: 300

Deleted: If the adopted encoding form is not otherwise specified, it is presumed to be the UTF-16 encoding form.

3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 9899:1996, *Programming Languages – C, including amendment 1 and technical corrigenda 1 and 2*

ISO/IEC 10646:2003: Information Technology – Universal Multiple-Octet Coded Character Set (UCS) plus Amendment 1:2005, Amendment 2:2006, Amendment 3:2008, and Amendment 4:2008, plus additional amendments and corrigenda, or successor

The Unicode Standard, Version 5.0, as amended by Unicode 5.1.0, or successor

Unicode Standard Annex #15, Unicode Normalization Forms, version Unicode 5.1.0, or successor

Unicode Standard Annex #31, Unicode Identifiers and Pattern Syntax, version Unicode 5.1.0, or successor

Deleted: ISO/IEC 10646-1:1993, *Information Technology – Universal Multiple-Octet Coded Character Set (UCS) plus its amendments and corrigenda*

4 Overview

This section contains a non-normative overview of the ECMAScript language.

ECMAScript is an object-oriented programming language for performing computations and manipulating computational objects within a host environment. ECMAScript as defined here is not intended to be computationally self-sufficient; indeed, there are no provisions in this specification for input of external data or output of computed results. Instead, it is expected that the computational environment of an ECMAScript program will provide not only the objects and other facilities described in this specification but also certain environment-specific objects, whose description and behaviour are beyond the scope of this specification except to indicate that they may provide certain properties that can be accessed and certain functions that can be called from an ECMAScript program.

Deleted: host

A **scripting language** is a programming language that is used to manipulate, customise, and automate the facilities of an existing system. In such systems, useful functionality is already available through a user interface, and the scripting language is a mechanism for exposing that functionality to program control. In this way, the existing system is said to provide a host environment of objects and facilities, which completes the capabilities of the scripting language. A scripting language is intended for use by both professional and non-professional programmers. ECMAScript was originally designed to be used as a scripting language, but has become widely used as a general purpose programming language.

ECMAScript was originally designed to be a **Web scripting language**, providing a mechanism to enliven Web pages in browsers and to perform server computation as part of a Web-based client-server architecture. ECMAScript is now used both as a general purpose programming language and to provide core scripting capabilities for a variety of host environments. Therefore the core language is specified in this document apart from any particular host environment.

Some of the facilities of ECMAScript are similar to those used in other programming languages; in particular Java™, Self, and Scheme as described in:

Gosling, James, Bill Joy and Guy Steele. The Java™ Language Specification. Addison Wesley Publishing Co., 1996.

Ungar, David, and Smith, Randall B. Self: The Power of Simplicity. OOPSLA '87 Conference Proceedings, pp. 227–241, Orlando, FL, October 1987.

IEEE Standard for the Scheme Programming Language. IEEE Std 1178-1990.

4.1 Web Scripting

A web browser provides an ECMAScript host environment for client-side computation including, for instance, objects that represent windows, menus, pop-ups, dialog boxes, text areas, anchors, frames, history, cookies, and input/output. Further, the host environment provides a means to attach scripting code to events such as change of focus, page and image loading, unloading, error and abort, selection, form submission, and mouse actions. Scripting code appears within the HTML and the displayed page is a combination of user interface elements and fixed and computed text and images. The scripting code is reactive to user interaction and there is no need for a main program.

A web server provides a different host environment for server-side computation including objects representing requests, clients, and files; and mechanisms to lock and share data. By using browser-side and server-side scripting together, it is possible to distribute computation between the client and server while providing a customised user interface for a Web-based application.

Each Web browser and server that supports ECMAScript supplies its own host environment, completing the ECMAScript execution environment.

4.2 Language Overview

The following is an informal overview of ECMAScript—not all parts of the language are described. This overview is not part of the standard proper.

ECMAScript is object-based: basic language and host facilities are provided by objects, and an ECMAScript program is a cluster of communicating objects. An ECMAScript **object** is a collection of **properties** each with zero or more **attributes** that determine how each property can be used—for example, when the Writable attribute for a property is set to **false**, any attempt by executed ECMAScript code to change the value of the property fails. Properties are containers that hold other objects, **primitive values**, or **functions**. A primitive value is a member of one of the following built-in types: **Undefined**, **Null**, **Boolean**, **Number**, and **String**; an object is a member of the remaining built-in type **Object**; and a function is a callable object. A function that is associated with an object via a property is a **method**.

ECMAScript defines a collection of **built-in objects** that round out the definition of ECMAScript entities. These built-in objects include the global object, the **Object** object, the **Function** object, the **Array** object, the **String**

Deleted: can
Deleted: ,
Deleted: and t
Deleted: scripting

object, the **Boolean** object, the **Number** object, the **Math** object, the **Date** object, the **RegExp** object, the **JSON** object, and the **Error** objects **Error**, **EvalError**, **RangeError**, **ReferenceError**, **SyntaxError**, **TypeError** and **URIError**.

ECMAScript also defines a set of built-in **operators**. ECMAScript operators include various unary operations, multiplicative operators, additive operators, bitwise shift operators, relational operators, equality operators, binary bitwise operators, binary logical operators, assignment operators, and the comma operator.

ECMAScript syntax intentionally resembles Java syntax. ECMAScript syntax is relaxed to enable it to serve as an easy-to-use scripting language. For example, a variable is not required to have its type declared nor are types associated with properties, and defined functions are not required to have their declarations appear textually before calls to them.

4.2.1 Objects

ECMAScript does not use classes such as those in C++, Smalltalk, or Java. Instead objects may be created in various ways including via a literal notation or via **constructors** which create objects and then execute code that initialises all or part of them by assigning initial values to their properties. Each constructor is a function that has a property named “**prototype**” that is used to implement **prototype-based inheritance** and **shared properties**. Objects are created by using constructors in **new** expressions; for example, **new Date(2009, 11)** creates a new Date object. Invoking a constructor without using **new** has consequences that depend on the constructor. For example, **Date()** produces a string representation of the current date and time rather than an object.

Comment [AWB101]: This description probably need to be tweaked in light of new features such as class declarations and explicit exposure of the [[Prototype]] property

Every object created by a constructor has an implicit reference (called the object’s **prototype**) to the value of its constructor’s “**prototype**” property. Furthermore, a prototype may have a non-null implicit reference to its prototype, and so on; this is called the **prototype chain**. When a reference is made to a property in an object, that reference is to the property of that name in the first object in the prototype chain that contains a property of that name. In other words, first the object mentioned directly is examined for such a property; if that object contains the named property, that is the property to which the reference refers; if that object does not contain the named property, the prototype for that object is examined next; and so on.

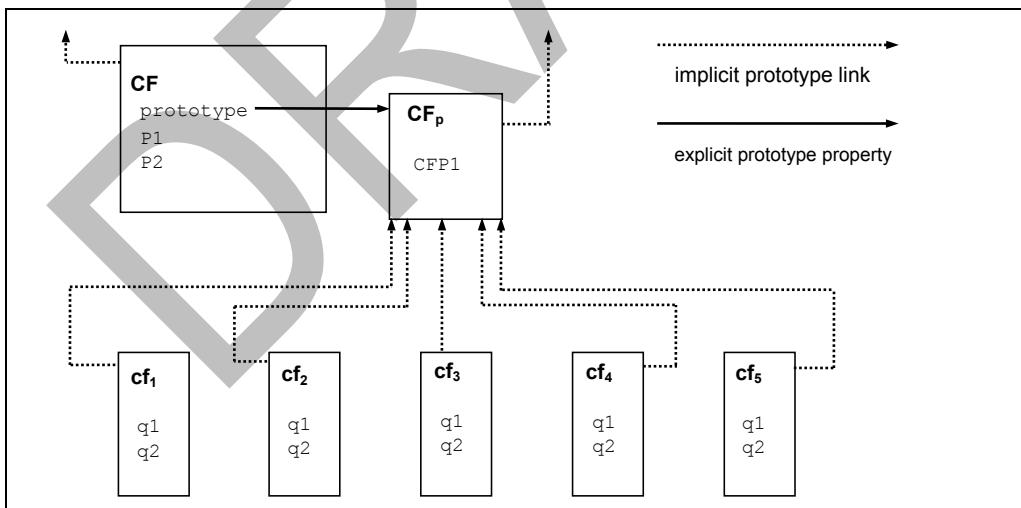


Figure 1 — Object/Prototype Relationships

In a class-based object-oriented language, in general, state is carried by instances, methods are carried by classes, and inheritance is only of structure and behaviour. In ECMAScript, the state and methods are carried by objects, while structure, behaviour, and state are all inherited.

Deleted: and

All objects that do not directly contain a particular property that their prototype contains share that property and its value. Figure 1 illustrates this:

CF is a constructor (and also an object). Five objects have been created by using `new` expressions: **cf₁**, **cf₂**, **cf₃**, **cf₄**, and **cf₅**. Each of these objects contains properties named **q₁** and **q₂**. The dashed lines represent the implicit prototype relationship; so, for example, **cf₃**'s prototype is **CF_p**. The constructor, **CF**, has two properties itself, named **P₁** and **P₂**, which are not visible to **CF_p**, **cf₁**, **cf₂**, **cf₃**, **cf₄**, or **cf₅**. The property named **CFP₁** in **CF_p** is shared by **cf₁**, **cf₂**, **cf₃**, **cf₄**, and **cf₅** (but not by **CF**), as are any properties found in **CF_p**'s implicit prototype chain that are not named **q₁**, **q₂**, or **CFP₁**. Notice that there is no implicit prototype link between **CF** and **CF_p**.

Unlike class-based object languages, properties can be added to objects dynamically by assigning values to them. That is, constructors are not required to name or assign values to all or any of the constructed object's properties. In the above diagram, one could add a new shared property for **cf₁**, **cf₂**, **cf₃**, **cf₄**, and **cf₅** by assigning a new value to the property in **CF_p**.

4.2.2 The Strict Variant of ECMAScript

The ECMAScript Language recognises the possibility that some users of the language may wish to restrict their usage of some features available in the language. They might do so in the interests of security, to avoid what they consider to be error-prone features, to get enhanced error checking, or for other reasons of their choosing. In support of this possibility, ECMAScript defines a strict variant of the language. The strict variant of the language excludes some specific syntactic and semantic features of the regular ECMAScript language and modifies the detailed semantics of some features. The strict variant also specifies additional error conditions that must be reported by throwing error exceptions in situations that are not specified as errors by the non-strict form of the language.

The strict variant of ECMAScript is commonly referred to as the *strict mode* of the language. Strict mode selection and use of the strict mode syntax and semantics of ECMAScript is explicitly made at the level of individual ECMAScript code units. Because strict mode is selected at the level of a syntactic code unit, strict mode only imposes restrictions that have local effect within such a code unit. Strict mode does not restrict or modify any aspect of the ECMAScript semantics that must operate consistently across multiple code units. A complete ECMAScript program may be composed for both strict mode and non-strict mode ECMAScript code units. In this case, strict mode only applies when actually executing code that is defined within a strict mode code unit.

In order to conform to this specification, an ECMAScript implementation must implement both the full unrestricted ECMAScript language and the strict mode variant of the ECMAScript language as defined by this specification. In addition, an implementation must support the combination of unrestricted and strict mode code units into a single composite program.

4.3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

4.3.1 type

set of data values as defined in Clause 8 of this specification

4.3.2 primitive value

member of one of the types Undefined, Null, Boolean, Number, or String as defined in Clause 8

NOTE A primitive value is a datum that is represented directly at the lowest level of the language implementation.

4.3.3 object

member of the type Object

NOTE An object is a collection of properties and has a single prototype object. The prototype may be the null value.

4.3.4**constructor**

function object that creates and initialises objects

NOTE The value of a constructor's "prototype" property is a prototype object that is used to implement inheritance and shared properties.

4.3.5**prototype**

object that provides shared properties for other objects

NOTE When a constructor creates an object, that object implicitly references the constructor's "prototype" property for the purpose of resolving property references. The constructor's "prototype" property can be referenced by the program expression `constructor.prototype`, and properties added to an object's prototype are shared, through inheritance, by all objects sharing the prototype. Alternatively, a new object may be created with an explicitly specified prototype by using the `Object.create` built-in function.

4.3.6**ordinary object**

object that has the default behaviour for the internal methods that must be supported by all ECMAScript objects.

Deleted: native

Deleted: in an ECMAScript implementation whose semantics are fully defined by this specification rather than by the host environment

4.3.7**exotic object**

object that has some alternative behaviour for one or more of the internal methods that must be supported by all ECMAScript objects.

NOTE Any object that is not an ordinary object is an exotic object.

4.3.8**standard object**

object whose semantics are defined by this specification.

Deleted: NOTE Standard native objects are defined in this specification. Some native objects are built-in; others may be constructed during the course of execution of an ECMAScript program.||

Deleted: 7

Deleted: Every built-in object is a native object.

4.3.9**built-in object**

object supplied by an ECMAScript implementation, independent of the host environment, that is present at the start of the execution of an ECMAScript program

Deleted: 4.3.8||

host exotic object||
object that has some alternative behaviour for one or more of the internal methods that must be supported by all ECMAScript objects supplied by the host environment to complete the execution environment of ECMAScript||
NOTE Any object that is not a native ordinary object is a host exotic object.||

Deleted: 9

Deleted: 10

Deleted: 11

Deleted: 12

4.3.10**undefined value**

primitive value used when a variable has not been assigned a value

Deleted: 13

4.3.11**Undefined type**

type whose sole value is the **undefined** value

4.3.12**null value**

primitive value that represents the intentional absence of any object value

4.3.13**Null type**

type whose sole value is the null value

4.3.14**Boolean value**

member of the Boolean type

NOTE There are only two Boolean values, **true** and **false**.

4.3.15

Boolean type

type consisting of the primitive values **true** and **false**

Deleted: 14

4.3.16

Boolean object

member of the Object type that is an instance of the standard built-in **Boolean** constructor

Deleted: 15

4.3.17

String value

primitive value that is a finite ordered sequence of zero or more 16-bit unsigned integer

NOTE A String value is a member of the String type. Each integer value in the sequence usually represents a single 16-bit unit of UTF-16 text. However, ECMAScript does not place any restrictions or requirements on the values except that they must be 16-bit unsigned integers.

Deleted: 16

4.3.18

String type

set of all possible String values

Deleted: 17

4.3.19

String object

member of the Object type that is an instance of the standard built-in **String** constructor

Deleted: 18

4.3.20

Number value

primitive value corresponding to a double-precision 64-bit binary format IEEE 754 value

NOTE A Number value is a member of the Number type and is a direct representation of a number.

Deleted: 19

4.3.21

Number type

set of all possible Number values including the special “Not-a-Number” (NaN) value, positive infinity, and negative infinity

Deleted: 20

Deleted: s

4.3.22

Number object

member of the Object type that is an instance of the standard built-in **Number** constructor

Deleted: 21

4.3.23

Infinity

number value that is the positive infinite Number value

Deleted: 22

4.3.24

NaN

number value that is a IEEE 754 “Not-a-Number” value

Deleted: 23

4.3.25**function**

member of the Object type that may be invoked as a subroutine

NOTE In addition to its properties, a function contains executable code and state that determine how it behaves when invoked. A function's code may or may not be written in ECMAScript.

Deleted: 24**Deleted:** is an instance of the standard built-in Function constructor and that**Deleted:** named**4.3.26****built-in function**

built-in object that is a function

NOTE Examples of built-in functions include `parseInt` and `Math.exp`. An implementation may provide implementation-dependent built-in functions that are not described in this specification.

Deleted: 25**4.3.27****property**

association between a name and a value that is a part of an object

NOTE Depending upon the form of the property the value may be represented either directly as a data value (a primitive value, an object, or a function object) or indirectly by a pair of accessor functions.

Deleted: 26**4.3.28****method**

function that is the value of a property

NOTE When a function is called as a method of an object, the object is passed to the function as its `this` value.

Deleted: 27**4.3.29****built-in method**

method that is a built-in function

NOTE Standard built-in methods are defined in this specification, and an ECMAScript implementation may specify and provide other additional built-in methods.

Deleted: 28**4.3.30****attribute**

internal value that defines some characteristic of a property

Deleted: 29**4.3.31****own property**

property that is directly contained by its object

Deleted: 30**4.3.32****inherited property**

property of an object that is not an own property but is a property (either own or inherited) of the object's prototype

Deleted: 31

5 Notational Conventions

5.1 Syntactic and Lexical Grammars

5.1.1 Context-Free Grammars

A context-free grammar consists of a number of *productions*. Each production has an abstract symbol called a *nonterminal* as its *left-hand side*, and a sequence of zero or more nonterminal and *terminal* symbols as its *right-hand side*. For each grammar, the terminal symbols are drawn from a specified alphabet.

Deleted:

A chain production is a production that has exactly one nonterminal symbol on its right-hand side along with zero or more terminal symbols.

Deleted: one

Starting from a sentence consisting of a single distinguished nonterminal, called the *goal symbol*, a given context-free grammar specifies a *language*, namely, the (perhaps infinite) set of possible sequences of terminal symbols that can result from repeatedly replacing any nonterminal in the sequence with a right-hand side of a production for which the nonterminal is the left-hand side.

5.1.2 The Lexical and RegExp Grammars

A *lexical grammar* for ECMAScript is given in clause 7. This grammar has as its terminal symbols characters (Unicode code units) that conform to the rules for *SourceCharacter* defined in Clause 6. It defines a set of productions, starting from the goal symbol *InputElementDiv* or *InputElementRegExp*, that describe how sequences of such characters are translated into a sequence of input elements.

Input elements other than white space and comments form the terminal symbols for the syntactic grammar for ECMAScript and are called ECMAScript *tokens*. These tokens are the reserved words, identifiers, literals, and punctuators of the ECMAScript language. Moreover, line terminators, although not considered to be tokens, also become part of the stream of input elements and guide the process of automatic semicolon insertion (7.9). Simple white space and single-line comments are discarded and do not appear in the stream of input elements for the syntactic grammar. A *MultiLineComment* (that is, a comment of the form “/*...*/” regardless of whether it spans more than one line) is likewise simply discarded if it contains no line terminator; but if a *MultiLineComment* contains one or more line terminators, then it is replaced by a single line terminator, which becomes part of the stream of input elements for the syntactic grammar.

A *RegExp grammar* for ECMAScript is given in 15.10. This grammar also has as its terminal symbols the characters as defined by *SourceCharacter*. It defines a set of productions, starting from the goal symbol *Pattern*, that describe how sequences of characters are translated into regular expression patterns.

Productions of the lexical and RegExp grammars are distinguished by having two colons “::” as separating punctuation. The lexical and RegExp grammars share some productions.

5.1.3 The Numeric String Grammar

Another grammar is used for translating Strings into numeric values. This grammar is similar to the part of the lexical grammar having to do with numeric literals and has as its terminal symbols *SourceCharacter*. This grammar appears in 9.3.1.

Productions of the numeric string grammar are distinguished by having three colons “:::” as punctuation.

5.1.4 The Syntactic Grammar

The *syntactic grammar* for ECMAScript is given in clauses 11, 12, 13 and 14. This grammar has ECMAScript tokens defined by the lexical grammar as its terminal symbols (5.1.2). It defines a set of productions, starting from the goal symbol *Script*, that describe how sequences of tokens can form syntactically correct independent components of an ECMAScript programs.

When a stream of characters is to be parsed as an ECMAScript *script*, it is first converted to a stream of input elements by repeated application of the lexical grammar; this stream of input elements is then parsed by a single application of the syntactic grammar. The *script* is syntactically in error if the tokens in the stream of input elements cannot be parsed as a single instance of the goal nonterminal *Script*, with no tokens left over.

Productions of the syntactic grammar are distinguished by having just one colon “:” as punctuation.

The syntactic grammar as presented in clauses 11, 12, 13 and 14 is actually not a complete account of which token sequences are accepted as correct ECMAScript *scripts*. Certain additional token sequences are also accepted, namely, those that would be described by the grammar if only semicolons were added to the sequence in certain places (such as before line terminator characters). Furthermore, certain token sequences that are described by the grammar are not considered acceptable if a terminator character appears in certain “awkward” places.

Deleted: Program

Deleted: program

Deleted: program

Deleted: Program

Deleted: programs

In certain cases in order to avoid ambiguities the syntactic grammar uses generalise productions that permit token sequences that are not valid ECMAScript scriptss. For example, this technique is used in with object literals and object destructuring patterns. In such cases a more restrictive *supplemental grammar* is provided that further restricts the acceptable token sequences. In certain contexts, when explicitly specific, the input elements corresponding to such a production are parsed again using a goal symbol of a supplemental grammar. The script is syntactically in error if the tokens in the stream of input elements cannot be parsed as a single instance of the supplemental goal symbol, with no tokens left over.

Deleted: program

Deleted:

Deleted: such situations

Deleted: is

Deleted: program

5.1.5 The JSON Grammar

The JSON grammar is used to translate a String describing a set of ECMAScript objects into actual objects. The JSON grammar is given in 15.12.1.

The JSON grammar consists of the JSON lexical grammar and the JSON syntactic grammar. The JSON lexical grammar is used to translate character sequences into tokens and is similar to parts of the ECMAScript lexical grammar. The JSON syntactic grammar describes how sequences of tokens from the JSON lexical grammar can form syntactically correct JSON object descriptions.

Productions of the JSON lexical grammar are distinguished by having two colons “::” as separating punctuation. The JSON lexical grammar uses some productions from the ECMAScript lexical grammar. The JSON syntactic grammar is similar to parts of the ECMAScript syntactic grammar. Productions of the JSON syntactic grammar are distinguished by using one colon “:” as separating punctuation.

5.1.6 Grammar Notation

Terminal symbols of the lexical, RegExp, and numeric string grammars, and some of the terminal symbols of the other grammars, are shown in **fixed width** font, both in the productions of the grammars and throughout this specification whenever the text directly refers to such a terminal symbol. These are to appear in a *script* exactly as written. All terminal symbol characters specified in this way are to be understood as the appropriate Unicode character from the ASCII range, as opposed to any similar-looking characters from other Unicode ranges.

Deleted: program

Nonterminal symbols are shown in *italic* type. The definition of a nonterminal (*also called a “production”*) is introduced by the name of the nonterminal being defined followed by one or more colons. (The number of colons indicates to which grammar the production belongs.) One or more alternative right-hand sides for the nonterminal then follow on succeeding lines. For example, the syntactic definition:

```
WhileStatement :
  while ( Expression ) Statement
```

states that the nonterminal *WhileStatement* represents the token **while**, followed by a left parenthesis token, followed by an *Expression*, followed by a right parenthesis token, followed by a *Statement*. The occurrences of *Expression* and *Statement* are themselves nonterminals. As another example, the syntactic definition:

```
ArgumentList :
  AssignmentExpression
  ArgumentList , AssignmentExpression
```

states that an *ArgumentList* may represent either a single *AssignmentExpression* or an *ArgumentList*, followed by a comma, followed by an *AssignmentExpression*. This definition of *ArgumentList* is recursive, that is, it is defined in terms of itself. The result is that an *ArgumentList* may contain any positive number of arguments, separated by commas, where each argument expression is an *AssignmentExpression*. Such recursive definitions of nonterminals are common.

The subscripted suffix “_{opt}”, which may appear after a terminal or nonterminal, indicates an optional symbol. The alternative containing the optional symbol actually specifies two right-hand sides, one that omits the optional element and one that includes it. This means that:

VariableDeclaration :
Identifier Initialiser_{opt}

is a convenient abbreviation for:

VariableDeclaration :
Identifier
Identifier Initialiser

and that:

IterationStatement :
for (*ExpressionNoIn_{opt}* ; *Expression_{opt}* ; *Expression_{opt}*) *Statement*

is a convenient abbreviation for:

IterationStatement :
for (; *Expression_{opt}* ; *Expression_{opt}*) *Statement*
for (*ExpressionNoIn* ; *Expression_{opt}* ; *Expression_{opt}*) *Statement*

which in turn is an abbreviation for:

IterationStatement :
for (; ; *Expression_{opt}*) *Statement*
for (; *Expression* ; *Expression_{opt}*) *Statement*
for (*ExpressionNoIn* ; ; *Expression_{opt}*) *Statement*
for (*ExpressionNoIn* ; *Expression* ; *Expression_{opt}*) *Statement*

which in turn is an abbreviation for:

IterationStatement :
for (; ;) *Statement*
for (; ; *Expression*) *Statement*
for (; *Expression* ;) *Statement*
for (; *Expression* ; *Expression*) *Statement*
for (*ExpressionNoIn* ; ;) *Statement*
for (*ExpressionNoIn* ; ; *Expression*) *Statement*
for (*ExpressionNoIn* ; *Expression* ;) *Statement*
for (*ExpressionNoIn* ; *Expression* ; *Expression*) *Statement*

so the nonterminal *IterationStatement* actually has eight alternative right-hand sides.

When the words “**one of**” follow the colon(s) in a grammar definition, they signify that each of the terminal symbols on the following line or lines is an alternative definition. For example, the lexical grammar for ECMAScript contains the production:

NonZeroDigit :: **one of**
 1 2 3 4 5 6 7 8 9

which is merely a convenient abbreviation for:

NonZeroDigit ::

1
2
3
4
5
6
7
8
9

If the phrase “[empty]” appears as the right-hand side of a production, it indicates that the production’s right-hand side contains no terminals or nonterminals.

If the phrase “[lookahead \notin set]” appears in the right-hand side of a production, it indicates that the production may not be used if the immediately following input token is a member of the given *set*. The *set* can be written as a list of terminals enclosed in curly braces. For convenience, the set can also be written as a nonterminal, in which case it represents the set of all terminals to which that nonterminal could expand. For example, given the definitions

DecimalDigit :: **one of**
0 1 2 3 4 5 6 7 8 9

DecimalDigits ::
DecimalDigit
DecimalDigits DecimalDigit

the definition

LookaheadExample ::
n [lookahead \notin {1, 3, 5, 7, 9}] *DecimalDigits*
DecimalDigit [lookahead \notin *DecimalDigit*]

matches either the letter **n** followed by one or more decimal digits the first of which is even, or a decimal digit not followed by another decimal digit.

If the phrase “[no LineTerminator here]” appears in the right-hand side of a production of the syntactic grammar, it indicates that the production is a **restricted production**: it may not be used if a *LineTerminator* occurs in the input stream at the indicated position. For example, the production:

ThrowStatement :
throw [no LineTerminator here] *Expression* ;

indicates that the production may not be used if a *LineTerminator* occurs in the script between the **throw** token and the *Expression*.

Deleted: program

Unless the presence of a *LineTerminator* is forbidden by a restricted production, any number of occurrences of *LineTerminator* may appear between any two consecutive tokens in the stream of input elements without affecting the syntactic acceptability of the script.

Deleted: program

The lexical grammar has multiple goal symbols and the appropriate goal symbol to use depends upon the syntactic grammar context. If a phrase of the form “[Lexical goal LexicalGoalSymbol]” appears on the right-hand-side of a syntactic production then the next token must be lexically recognized using the indicated goal symbol. In the absence of such a phrase the default lexical goal symbol is used.

When an alternative in a production of the lexical grammar or the numeric string grammar appears to be a multi-character token, it represents the sequence of characters that would make up such a token.

The right-hand side of a production may specify that certain expansions are not permitted by using the phrase “**but not**” and then indicating the expansions to be excluded. For example, the production:

Identifier ::
IdentifierName **but not** *ReservedWord*

means that the nonterminal *Identifier* may be replaced by any sequence of characters that could replace *IdentifierName* provided that the same sequence of characters could not replace *ReservedWord*.

Finally, a few nonterminal symbols are described by a descriptive phrase in sans-serif type in cases where it would be impractical to list all the alternatives:

SourceCharacter ::
any Unicode character

Deleted: code unit

5.2 Algorithm Conventions

The specification often uses a numbered list to specify steps in an algorithm. These algorithms are used to precisely specify the required semantics of ECMAScript language constructs. The algorithms are not intended to imply the use of any specific implementation technique. In practice, there may be more efficient algorithms available to implement a given feature.

Algorithms may be explicitly parameterized, in which case the names and usage of the parameters must be provided as part of the algorithm's definition. In order to facilitate their use in multiple parts of this specification, some algorithms, called *abstract operations*, are named and written in parameterised functional form so that they may be referenced by name from within other algorithms.

Algorithms may be associated with productions of one of the ECMAScript grammars. A production that has multiple alternative definitions will typically have a distinct algorithm for each alternative. When an algorithm is associated with a grammar production, it may reference the terminal and non-terminal symbols of the production alternative as if they were parameters of the algorithm. When used in this manner, non-terminal symbols refer to the actual alternative definition that is matched when parsing the script source code.

Unless explicitly specified otherwise, all chain productions have an implicit associated definition for every algorithm that might be applied to that production's left-hand side nonterminal. The implicit simply reapplies the same algorithm name with the same parameters, if any, to the chain production's sole right-hand side nonterminal and then result. For example, assume there is a production

Block :
{ *StatementList* }

Deleted: the

Deleted: program

Deleted: ra

but there is no evaluation algorithm that is explicitly specified for that production. If in some algorithm there is a statement of the form: “Return the result of evaluating *Block*” it is implicit that the algorithm has an evaluation algorithm of the form:

Runtime Semantics: Evaluation

Block : { *StatementList* }

1. Return the result of evaluating *StatementList*

For clarity of expression, algorithm steps may be subdivided into sequential substeps. Substeps are indented and may themselves be further divided into indented substeps. Outline numbering conventions are used to identify substeps with the first level of substeps labelled with lower case alphabetic characters and the second level of substeps labelled with lower case roman numerals. If more than three levels are required these rules repeat with the fourth level using numeric labels. For example:

1. Top-level step
 - a. Substep.

Deleted: When an algorithm is to produce a value as a result, the directive “return *x*” is used to indicate that the result of the algorithm is the value of *x* and that the algorithm should terminate. The notation *Result(n)* is used as shorthand for “the result of step *n*”. ¶

- b. Substep
 - i. Subsubstep.
 - ii. Subsubstep.
 - 1. Subsubsubstep
 - a Subsubsubsubstep

A step or substep may be written as an "if" predicate that conditions its substeps. In this case, the substeps are only applied if the predicate is true. If a step or substep begins with the word "else", it is a predicate that is the negation of the preceding "if" predicate step at the same level.

A step may specify the iterative application of its substeps.

A step may assert an invariant condition of its algorithm. Such assertions are used to make explicit algorithmic invariants that would otherwise be implicit. Such assertions add no additional semantic requirements and hence need not be checked by an implementation. They are used simply to clarify algorithms.

Mathematical operations such as addition, subtraction, negation, multiplication, division, and the mathematical functions defined later in this clause should always be understood as computing exact mathematical results on mathematical real numbers, which do not include infinities and do not include a negative zero that is distinguished from positive zero. Algorithms in this standard that model floating-point arithmetic include explicit steps, where necessary, to handle infinities and signed zero and to perform rounding. If a mathematical operation or function is applied to a floating-point number, it should be understood as being applied to the exact mathematical value represented by that floating-point number; such a floating-point number must be finite, and if it is $+0$ or -0 then the corresponding mathematical value is simply 0 .

The mathematical function $\text{abs}(x)$ yields the absolute value of x , which is $-x$ if x is negative (less than zero) and otherwise is x itself.

The mathematical function $\text{sign}(x)$ yields 1 if x is positive and -1 if x is negative. The sign function is not used in this standard for cases when x is zero.

The mathematical function $\text{min}(x_1, x_2, \dots, x_n)$ yields the mathematically smallest of x_1 through x_n .

The notation " x modulo y " (y must be finite and nonzero) computes a value k of the same sign as y (or zero) such that $\text{abs}(k) < \text{abs}(y)$ and $x-k = q \times y$ for some integer q .

The mathematical function $\text{floor}(x)$ yields the largest integer (closest to positive infinity) that is not larger than x .

NOTE $\text{floor}(x) = x - (x \text{ modulo } 1)$.

If an algorithm is defined to "throw an exception", execution of the algorithm is terminated and no result is returned. The calling algorithms are also terminated, until an algorithm step is reached that explicitly deals with the exception, using terminology such as "If an exception was thrown...". Once such an algorithm step has been encountered the exception is no longer considered to have occurred.

5.3 Static Semantic Rules

Context-free grammars are not sufficiently powerful to express all the rules that define whether a stream of input elements make up a valid ECMAScript script that may be evaluated. In some situations additional rules are needed that may be expressed using either ECMAScript algorithm conventions or prose requirements. Such rules are always associated with a production of a grammar and are called the *static semantics* of the production.

Deleted: program

Static Semantic Rules have names and typically are defined using an algorithm. Named Static Semantic Rules are associated with grammar productions and a production that has multiple alternative definitions will typically have for each alternative a distinct algorithm for each applicable named static semantic rule.

Deleted: Such algorithms may be parameterized.

Unless otherwise specified every grammar production alternative in this specification implicitly has a definition for a static semantic rule named *Contains* which takes an argument named *symbol* whose value is a terminal or non-terminal of the grammar that includes the associated production. The default definition of *Contains* is:

1. For each terminal and non-terminal grammar symbol, *sym*, in the definition of this production do
 - a. If *sym* is the same grammar symbol as *symbol*, return **true**.
 - b. If *sym* is a non-terminal, then
 - i. Let *contained* be the result of *Contains* for *sym* with argument *symbol*.
 - ii. If *contained* is **true**, return **true**.
2. Return **false**.

The above definition is explicitly over-ridden for specific productions.

A special kind of static semantic rule is an Early Error Rule. Early error rules define early error conditions (see clause 16) that are associate with specific grammar productions. Evaluation of most early error rules are not explicitly invoked within the algorithms of this specification. A conforming implementation must, prior to the first evaluation of a *Script*, validate all of the early error rules of the productions used to parse that *Script*. If any of the early error rules are violated the *Script* is invalid and can not be evaluated.

6 Source Text

Syntax

SourceCharacter ::=
any Unicode character

The ECMAScript code is expressed using Unicode, version 5.1 or later. ECMAScript source text is a sequence of Unicode characters. The phrase "Unicode character" refers to the abstract linguistic or typographical unit represented by a single Unicode scalar value. The actual encodings used to store and interchange ECMAScript source text is not relevant to this specification. Any well-defined encoding such as UTF-32 or UTF-16 may be used. Source text might even be externally represented using a non-Unicode character encoding. Regardless of the external source text encoding, a conforming ECMAScript implementation processes the source text as if it was an equivalent sequence of *SourceCharacter* values. Each *SourceCharacter* being an abstract Unicode character with a corresponding Unicode scalar value. Conforming ECMAScript implementations are not required to perform any normalisation of text, or behave as though they were performing normalisation of text.

The phrase "code point" refers to such a Unicode scalar value. "Unicode character" only refers to entities represented by single Unicode scalar values: the components of a combining character sequence are still individual "Unicode characters," even though a user might think of the whole sequence as a single character.

In string literals, regular expression literals, template literals and identifiers, any Unicode characters may also be expressed as a Unicode escape sequence that explicitly express a code point's numeric value. Within a comment, such an escape sequence is effectively ignored as part of the comment. Within other contexts, such an escape sequence contextually contributes one Unicode character.

NOTE ECMAScript differs from the Java programming language in the behaviour of Unicode escape sequences. In a Java program, if the Unicode escape sequence \u000a, for example, occurs within a single-line comment, it is interpreted as a line terminator (Unicode character 000a is line feed) and therefore the next Unicode character is not part of the comment. Similarly, if the Unicode escape sequence \u000a occurs within a string literal in a Java program, it is likewise interpreted as a line terminator, which is not allowed within a string literal—one must write \n instead of \u000a to cause a line feed to be part of the string value of a string literal. In an ECMAScript program, a Unicode escape sequence occurring within a comment is never interpreted and therefore cannot contribute to termination of the comment. Similarly, a Unicode escape sequence occurring within a string literal in an ECMAScript program always contributes a Unicode character to the literal and is never interpreted as a line terminator or as a quote mark that might terminate the string literal.

ECMAScript String values (8.4) are computational sequences of 16-bit integer values called "code units". ECMAScript language constructs that generate string values from *SourceCharacter* sequences use UTF-16 encoding to generate the code unit values.

Deleted: grammer

Deleted:

Deleted: I

Deleted: An

Deleted: Program

Deleted: static semantic

Deleted: used to

Deleted: a

Deleted: Program

Deleted: prior to the first evaluation of that *Program*
Comment [AW2]: Perhaps this should be somewhere else. Currently we don't have a section that enumerates all the steps in loading and evaluating a program.

Deleted: static semantic

Deleted: Program

Deleted: Static semantic rule violations are early (see clause 16) and reported in the same manner as syntax errors.

Deleted: ECMAScript source text is represented as a sequence of characters in the Unicode character encoding, version 3.0 or later. The text is expected to have been normalised to Unicode Normalization Form (canonical composition), as described in Unicode Technical Report #15. Conforming ECMAScript implementations are not required to perform any normalisation of text, or behave as though they were performing normalisation of text, themselves.

ECMAScript source text is assumed to be a sequence 16-bit code units for the purposes of this specification. Such a source text may include sequences of 16-bit code units that are not valid UTF-16 character encodings. If actual source text is encoded in a form other than 16-bit code units it must be processed as if it was first converted to UTF-16.¶

Deleted: code unit

Deleted: well defined

Deleted: source character

Deleted: s

Deleted: Throughout the rest of this document, the phrase "code unit" and the word "character" will be used to refer to a 16-bit unsigned value used to represent a single 16-bit unit of text. The phrase "Unicode character" will be used to refer to the abstract linguistic or typographical unit represented by a single Unicode scalar value.

Deleted: quasi

Deleted: (code unit)

Deleted: consisting

Deleted: of six characters, namely \u plus four

Deleted: Within a string literal or regular expression

Deleted: the

Deleted: to the identifier

Deleted: ¶

Formatted: Note

Deleted: NOTE Although this document sometimes

Deleted: String value of the

Static Semantics: UTF-16 Encoding

The UTF-16 Encoding of a numeric code point value, *cp*, is determined as follows:

1. Assert: $0 \leq cp \leq 0x10FFFF$
2. If $cp < 65535$, then return *cp*.
3. Let *cu1* be $\text{floor}((cp - 65536) / 1024) + 55296$. NOTE 55296 is 0xD800.
4. Let *cu2* be $((cp - 65536) \bmod 1024) + 56320$. NOTE 56320 is 0xDC00.
5. Return the code unit sequence consisting of *cu1* followed by *cu2*.

7 Lexical Conventions

The source text of an ECMAScript script is first converted into a sequence of input elements, which are tokens, line terminators, comments, or white space. The source text is scanned from left to right, repeatedly taking the longest possible sequence of characters as the next input element.

There are several situations where the identification of lexical input elements is sensitive to the syntactic grammar context that is consuming the input elements. This requires multiple goal symbols for the lexical grammar. The *InputElementDiv* goal symbol is the default goal symbol and is used in those syntactic grammar contexts where a leading division (/) or division-assignment (/=) operator is permitted. The *InputElementRegExp* goal symbol is used in all syntactic grammar contexts where a *RegularExpressionLiteral* is permitted. The *InputElementTemplateTail* goal is used in syntactic grammar contexts where a *TemplateLiteral* logically continues after a substitution element.

NOTE There are no syntactic grammar contexts where both a leading division or division-assignment, and a leading *RegularExpressionLiteral* are permitted. This is not affected by semicolon insertion (see 7.9); in examples such as the following:

```
a = b
/hi/g.exec(c).map(d);
```

where the first non-whitespace, non-comment character after a *LineTerminator* is slash (/) and the syntactic context allows division or division-assignment, no semicolon is inserted at the *LineTerminator*. That is, the above example is interpreted in the same way as:

```
a = b / hi / g.exec(c).map(d);
```

Syntax

InputElementDiv ::
WhiteSpace
LineTerminator
Comment
Token
DivPunctuator
RightBracePunctuator

InputElementRegExp ::
WhiteSpace
LineTerminator
Comment
Token
RightBracePunctuator
RegularExpressionLiteral

Deleted: program

Deleted: o

Deleted: There

Deleted: are two

Deleted: other

Deleted: Quasi

Deleted: Quasi

Comment [AWB93]: May need to also say something about TemplateSubstitution tail. Also need to consider with there are any ASI issues concerning it.

InputElementTemplateTail ::

WhiteSpace
LineTerminator
Comment
Token
DivPunctuator
TemplateSubstitutionTail

Deleted: Quasi

Deleted: Quasi

7.1 Unicode Format-Control Characters

The Unicode format-control characters (i.e., the characters in category “Cf” in the Unicode Character Database such as LEFT-TO-RIGHT MARK or RIGHT-TO-LEFT MARK) are control codes used to control the formatting of a range of text in the absence of higher-level protocols for this (such as mark-up languages).

It is useful to allow format-control characters in source text to facilitate editing and display. All format control characters may be used within comments, and within string literals, template literals, and regular expression literals.

<ZWNJ> and <ZWJ> are format-control characters that are used to make necessary distinctions when forming words or phrases in certain languages. In ECMAScript source text, <ZWNJ> and <ZWJ> may also be used in an identifier after the first character.

<BOM> is a format-control character used primarily at the start of a text to mark it as Unicode and to allow detection of the text's encoding and byte order. <BOM> characters intended for this purpose can sometimes also appear after the start of a text, for example as a result of concatenating files. <BOM> characters are treated as white space characters (see 7.2).

The special treatment of certain format-control characters outside of comments, string literals, and regular expression literals is summarised in Table 1.

Table 1 — Format-Control Character Usage

<u>Code Point</u>	<u>Name</u>	<u>Formal Name</u>	<u>Usage</u>
U+200C	Zero width non-joiner	<ZWNJ>	<u>IdentifierPart</u>
U+200D	Zero width joiner	<ZWJ>	<u>IdentifierPart</u>
U+FEFF	Byte Order Mark	<BOM>	<u>Whitespace</u>

7.2 White Space

White space characters are used to improve source text readability and to separate tokens (indivisible lexical units) from each other, but are otherwise insignificant. White space characters may occur between any two tokens and at the start or end of input. White space characters may occur within a StringLiteral, a RegularExpressionLiteral, a Template, or a TemplateSubstitutionTail where they are considered significant characters forming part of a literal value. They may also occur within a Comment, but cannot appear within any other kind of token.

The ECMAScript white space characters are listed in Table 2.

Table 2 — Whitespace Characters

<u>Code Point</u>	<u>Name</u>	<u>Formal Name</u>
U+0009	Tab	<TAB>
U+000B	Vertical Tab	<VT>
U+000C	Form Feed	<FF>
U+0020	Space	<SP>
U+00A0	No-break space	<NBSP>
U+FEFF	Byte Order Mark	<BOM>
Other category “Zs”	Any other Unicode	<USP>

Deleted: Unit

Deleted: Value

Deleted: \u

Deleted: \u

Deleted: \u

Deleted: also

Deleted: or

Deleted:

Deleted: Quasi

Deleted: Quasi

Deleted: (

Deleted: the

Deleted:)

Deleted: or

Deleted: Unit

Deleted: Value

Deleted: \u

Deleted: \u

Deleted: \u

Deleted: \u

Deleted: \u

Deleted: \u

“space separator”

ECMAScript implementations must recognise all of the white space characters defined in Unicode 5.1. Later editions of the Unicode Standard may define other white space characters. ECMAScript implementations may recognise white space characters from later editions of the Unicode Standard.

Deleted: 3

Deleted: 0

Syntax

WhiteSpace ::

- <TAB>
- <VT>
- <FF>
- <SP>
- <NBSP>
- <BOM>
- <USP>

7.3 Line Terminators

Like white space characters, line terminator characters are used to improve source text readability and to separate tokens (indivisible lexical units) from each other. However, unlike white space characters, line terminators have some influence over the behaviour of the syntactic grammar. In general, line terminators may occur between any two tokens, but there are a few places where they are forbidden by the syntactic grammar. Line terminators also affect the process of automatic semicolon insertion (7.9). A line terminator cannot occur within any token except a *StringLiteral*, *Template*, or *TemplateSubstitutionTail*. Line terminators may only occur within a *StringLiteral* token as part of a *LineContinuation*.

Comment [AWB94]: Need to talk about line terminators in Templates

A line terminator can occur within a *MultiLineComment* (7.4) but cannot occur within a *SingleLineComment*.

Line terminators are included in the set of white space characters that are matched by the \s class in regular expressions.

The ECMAScript line terminator characters are listed in Table 3.

Table 3 — Line Terminator Characters

Code Point	Name	Formal Name
U+000A	Line Feed	<LF>
U+000D	Carriage Return	<CR>
U+2028	Line separator	<LS>
U+2029	Paragraph separator	<PS>

Only the *Unicode* characters in Table 3 are treated as line terminators. Other new line or line breaking *Unicode* characters are treated as white space but not as line terminators. The sequence <CR><LF> is commonly used as a line terminator. It should be considered a single *SourceCharacter* for the purpose of reporting line numbers.

Deleted: Unit

Deleted: Value

Deleted: \u

Deleted: \u

Deleted: \u

Deleted: \u

Deleted: character

Deleted: character

Syntax

LineTerminator ::

- <LF>
- <CR>
- <LS>
- <PS>

LineTerminatorSequence ::

```
<LF>
<CR> [lookahead ∉ <LF> ]
<LS>
<PS>
<CR> <LF>
```

7.4 Comments

Comments can be either single or multi-line. Multi-line comments cannot nest.

Because a single-line comment can contain any Unicode character except a *LineTerminator* character, and because of the general rule that a token is always as long as possible, a single-line comment always consists of all characters from the // marker to the end of the line. However, the *LineTerminator* at the end of the line is not considered to be part of the single-line comment; it is recognised separately by the lexical grammar and becomes part of the stream of input elements for the syntactic grammar. This point is very important, because it implies that the presence or absence of single-line comments does not affect the process of automatic semicolon insertion (see 7.9).

Comments behave like white space and are discarded except that, if a *MultiLineComment* contains a line terminator character, then the entire comment is considered to be a *LineTerminator* for purposes of parsing by the syntactic grammar.

Syntax

Comment ::

```
MultiLineComment
SingleLineComment
```

MultiLineComment ::

```
/* MultiLineCommentCharsopt */
```

MultiLineCommentChars ::

```
MultiLineNotAsteriskChar MultiLineCommentCharsopt
* PostAsteriskCommentCharsopt
```

PostAsteriskCommentChars ::

```
MultiLineNotForwardSlashOrAsteriskChar MultiLineCommentCharsopt
* PostAsteriskCommentCharsopt
```

MultiLineNotAsteriskChar ::

```
SourceCharacter but not *
```

MultiLineNotForwardSlashOrAsteriskChar ::

```
SourceCharacter but not one of / or *
```

SingleLineComment ::

```
// SingleLineCommentCharsopt
```

SingleLineCommentChars ::

```
SingleLineCommentChar SingleLineCommentCharsopt
```

SingleLineCommentChar ::

```
SourceCharacter but not LineTerminator
```

7.5 Tokens

Syntax

Token ::
IdentifierName
Punctuator
NumericLiteral
StringLiteral
Template

NOTE The *DivPunctuator*, *RegularExpressionLiteral*, *RightBracePunctuator*, and *TemplateSubstitutionTail* productions define tokens, but are not included in the *Token* production.

7.6 Identifier Names and Identifiers

IdentifierName, *Identifier*, and *ReservedWord* are tokens that are interpreted according to the Default Identifier Syntax given in Unicode Standard Annex #31, Identifier and Pattern Syntax, with some small modifications. *ReservedWord* is an enumerated subset of *IdentifierName* and *Identifier* is an *IdentifierName* that is not a *ReservedWord* (see 7.6.1). The Unicode identifier grammar is based on character properties specified by the Unicode Standard. The Unicode characters in the specified categories in version 5.1.0 of the Unicode standard must be treated as in those categories by all conforming ECMAScript implementations. ECMAScript implementations may recognise identifier characters defined in later editions of the Unicode Standard.

NOTE 1 This standard specifies specific character additions: The dollar sign (u+0024) and the underscore (u+005f) are permitted anywhere in an *IdentifierName*, and the characters zero width non-joiner (U+200C) and zero width joiner (U+200D) are permitted anywhere after the first character of an *IdentifierName*.

Unicode escape sequences are permitted in an *IdentifierName*, where they contribute a single Unicode character to the *IdentifierName*. The code point of the contributed character is expressed by the HexDigits of the *UnicodeEscapeSequence* (see 7.8.4). The \ preceding the *UnicodeEscapeSequence* and the u and f characters, if they appear, do not contribute characters to the *IdentifierName*. A *UnicodeEscapeSequence* cannot be used to put a character into an *IdentifierName* that would otherwise be illegal. In other words, if a \ *UnicodeEscapeSequence* sequence were replaced by the Unicode character it contributes, the result must still be a valid *IdentifierName* that has the exact same sequence of characters as the original *IdentifierName*. All interpretations of *IdentifierName* within this specification are based upon their actual characters regardless of whether or not an escape sequence was used to contribute any particular characters.

Two *IdentifierName* that are canonically equivalent according to the Unicode standard are not equal unless they are represented by the exact same sequence of code units (in other words, conforming ECMAScript implementations are only required to do bitwise comparison on *IdentifierName* values).

NOTE 2 If maximal portability is a concern, programmers should only employ the identifier characters that were defined in Unicode 3.0.

Syntax

Identifier ::
IdentifierName **but not** *ReservedWord*

IdentifierName ::
IdentifierStart
IdentifierName IdentifierPart

IdentifierStart ::
UnicodeIDStart
\$
\ *UnicodeEscapeSequence*

Deleted: Quasi

Deleted: and

Deleted: Quasi

Deleted: Identifier,

Deleted: Identifier Names

Deleted: grammar given in the “Identifiers” section of chapter 5 of the Unicode standard

Deleted: An

Deleted: both normative and informative

Deleted: categories

Deleted: 3

Formatted: Note

Deleted: (\$)

Deleted: ()

Deleted: also

Deleted: ,

Deleted: as computed by the CV of the

Deleted: es

Deleted: a

Deleted: its

Deleted: *UnicodeEscapeSequence*'s CV

Deleted: identifiers

Deleted: The intent is that the incoming source text has been converted to normalised form before it reaches the compiler.

Formatted: Note

Deleted: ECMAScript implementations may recognise identifier characters defined in later editions of the Unicode Standard.

Comment [AWB95]: Norbert suggests changing this to 5.1.0. Would be really be better for “portability”?

Deleted: *UnicodeLetter*

IdentifierPart ::

 UnicodeIDContinue
 \$
 └ UnicodeEscapeSequence
 <ZWNJ>
 <ZWJ>

Deleted: IdentifierStart
Deleted: Identifier
Deleted: UnicodeCombiningMark .
 UnicodeDigit
 UnicodeConnectorPunctuation

UnicodeIDStart ::

any Unicode character with the Unicode property "ID_Start"

Deleted: UnicodeLetter

Deleted: in

Deleted: categories

Deleted: Uppercase letter (Lu)

Deleted: , "Lowercase letter (Ll)", "Titlecase letter (Lt)"
 "Modifier letter (Lm)", "Other letter (Lo)", or "Letter number (Ni)"

Deleted: Start

Deleted: UnicodeCombiningMark

Deleted: in

Deleted: categories

Deleted: Non-spacing mark (Mn)

Deleted: or "Combining spacing mark (Mc)"

Deleted: UnicodeDigit ::¶

any character in the Unicode category "Decimal number (Nd)"¶

Deleted: UnicodeConnectorPunctuation ::¶

any character in the Unicode category "Connector punctuation (Pc)"¶

Deleted:

Deleted: Semantics¶

The String value of the production

Deleted: is determined as follows:

Deleted:

Deleted: v

Deleted: consisting

Deleted: The String value of IdentifierName is determined follows:

Deleted: characters

Deleted: a

The definitions of the nonterminal *UnicodeEscapeSequence* is given in 7.8.4

Static Semantics: StringValue

Identifier :: IdentifierName but not ReservedWord

1. Return the StringValue of *IdentifierName*.

IdentifierName ::

 IdentifierStart
 IdentifierName IdentifierPart

1. Return the String value consisting of the sequence of code units corresponding to *IdentifierName*. In determining the sequence any occurrences of \ *UnicodeEscapeSequence* are first replaced with the code point represented by the *UnicodeEscapeSequence* and and then the code points of the entire *IdentifierName* are converted to code units by UTF-16 Encoding (clause 6) each code point.

7.6.1 Reserved Words

A reserved word is an *IdentifierName* that cannot be used as an *Identifier*.

Syntax

ReservedWord ::

 Keyword
 FutureReservedWord
 NullLiteral
 BooleanLiteral

The *ReservedWord* definitions are specified as literal sequences of Unicode characters. However, any Unicode character in a *ReservedWord* can also be expressed by a \ *UnicodeEscapeSequence* that expresses that same Unicode character's code point. Use of such escape sequences does not change the meaning of the *ReservedWord*.

7.6.1.1 Keywords

The following tokens are ECMAScript keywords and may not be used as *Identifiers* in ECMAScript programs.

Syntax

Keyword :: one of

break	delete	<u>import</u>	this
case	do	in	throw
catch	<u>else</u>	instanceof	try
<u>class</u>	<u>export</u>	<u>let</u>	typeof
<u>continue</u>	finally	new	var
<u>const</u>	for	return	void
debugger	function	<u>super</u>	while
default	if	switch	with

7.6.1.2 Future Reserved Words

The following words are used as keywords in proposed extensions and are therefore reserved to allow for the possibility of future adoption of those extensions.

Syntax

FutureReservedWord :: one of

enum	<u>extends</u>

The following tokens are also considered to be *FutureReservedWords* when they occur within strict mode code (see 10.1.1). The occurrence of any of these tokens within strict mode code in any context where the occurrence of a *FutureReservedWord* would produce an error must also produce an equivalent error:

implements	private	public	yield
interface	package	protected	static

Comment [AWB86]: It isn't clear that *extends* actually needs to be reserved. It's only usage is highly contextual.

Deleted: class

Deleted: super

Deleted: const

Deleted: export

Deleted: import

Comment [AWB87]: Move to keywords

Deleted: let

7.7 Punctuators

Syntax

Punctuator :: one of

{	}	[]	<	>	<=
.	;	,		<=		
>=	==	!=	==	!==		
+	-	*	%	++	--	
<<	>>	>>>	&		^	
!	~	&&		?	:	
=	+=	-=	*=	%=	<<=	
>>=	>>>=	&=	=	^=	=>	

Deleted: }

DivPunctuator :: one of

/	/=
---	----

RightBracePunctuator ::

}

7.8 Literals

7.8.1 Null Literals

Syntax

NullLiteral ::
 null

7.8.2 Boolean Literals

Syntax

BooleanLiteral ::
 true
 false

7.8.3 Numeric Literals

Syntax

NumericLiteral ::
 DecimalLiteral
 BinaryIntegerLiteral
 OctalIntegerLiteral
 HexIntegerLiteral

DecimalLiteral ::
 DecimalIntegerLiteral . *DecimalDigits*_{opt} *ExponentPart*_{opt}
 . *DecimalDigits* *ExponentPart*_{opt}
 DecimalIntegerLiteral *ExponentPart*_{opt}

DecimalIntegerLiteral ::
 0
 NonZeroDigit *DecimalDigits*_{opt}

DecimalDigits ::
 DecimalDigit
 DecimalDigits *DecimalDigit*

DecimalDigit :: one of
 0 1 2 3 4 5 6 7 8 9

NonZeroDigit :: one of
 1 2 3 4 5 6 7 8 9

ExponentPart ::
 ExponentIndicator *SignedInteger*

ExponentIndicator :: one of
 e E

SignedInteger ::
 DecimalDigits
 + *DecimalDigits*
 - *DecimalDigits*

BinaryIntegerLiteral ::
 0b *BinaryDigit*
 0B *BinaryDigit*
 BinaryIntegerLiteral *BinaryDigit*

Deleted: Syntax

Literal ::||
 NullLiteral
 ValueLiteral .||
 ValueLiteral ::||
 BooleanLiteral
 NumericLiteral
 StringLiteral
 RegularExpressionLiteral||

Deleted: Semantics

The value of the null literal *null* is the sole value of the Null type, namely *null*.||

Deleted: Semantics

The value of the Boolean literal *true* is a value of the Boolean type, namely *true*.||
The value of the Boolean literal *false* is a value of the Boolean type, namely *false*.||

Comment [AWB78]: From March 29 meeting notes:
Hex floating point literals:
Waldemar: Other languages include these things.
They're rarely used but when you want one, you really want one. Use cases are similar to that of hex literals.
Will explore adding them.
MarkM: 0x3.p1 currently evaluates to undefined. This would be a breaking change.
Waldemar: Not clear anyone would notice. How did other languages deal with this?

Comment [AWB79]: The various Digit productions could be refactored to have less redundancy

BinaryDigit :: one of

0 1

OctalIntegerLiteral ::

0o OctalDigit

0O OctalDigit

OctalIntegerLiteral OctalDigit

OctalDigit :: one of

0 1 2 3 4 5 6 7

HexIntegerLiteral ::

0x HexDigits

0X HexDigits

HexDigits ::

HexDigit

HexDigits HexDigit

HexDigit :: one of

0 1 2 3 4 5 6 7 8 9 a b c d e f A B C D E F

The SourceCharacter, immediately following a NumericLiteral must not be an IdentifierStart or DecimalDigit.

NOTE For example:

3in

is an error and not the two input elements 3 and in.

A conforming implementation, when processing strict mode code (see 10.1.1), must not extend the syntax of NumericLiteral to include OctalIntegerLiteral as described in B.1.1.

Static Semantics: MV's

A numeric literal stands for a value of the Number type. This value is determined in two steps: first, a mathematical value (MV) is derived from the literal; second, this mathematical value is rounded as described below.

- The MV of NumericLiteral :: DecimalLiteral is the MV of DecimalLiteral.
- The MV of NumericLiteral :: BinaryIntegerLiteral is the MV of BinaryIntegerLiteral.
- The MV of NumericLiteral :: OctalIntegerLiteral is the MV of OctalIntegerLiteral.
- The MV of NumericLiteral :: HexIntegerLiteral is the MV of HexIntegerLiteral.
- The MV of DecimalLiteral :: DecimalIntegerLiteral . is the MV of DecimalIntegerLiteral.
- The MV of DecimalLiteral :: DecimalIntegerLiteral . DecimalDigits is the MV of DecimalIntegerLiteral plus (the MV of DecimalDigits times 10^{-n}), where n is the number of characters in DecimalDigits.
- The MV of DecimalLiteral :: DecimalIntegerLiteral . ExponentPart is the MV of DecimalIntegerLiteral times 10^e , where e is the MV of ExponentPart.
- The MV of DecimalLiteral :: DecimalIntegerLiteral . DecimalDigits ExponentPart is (the MV of DecimalIntegerLiteral plus (the MV of DecimalDigits times 10^{-n})) times 10^e , where n is the number of characters in DecimalDigits and e is the MV of ExponentPart.
- The MV of DecimalLiteral :: . DecimalDigits is the MV of DecimalDigits times 10^{-n} , where n is the number of characters in DecimalDigits.
- The MV of DecimalLiteral :: . DecimalDigits ExponentPart is the MV of DecimalDigits times 10^{e-n} , where n is the number of characters in DecimalDigits and e is the MV of ExponentPart.
- The MV of DecimalLiteral :: DecimalIntegerLiteral is the MV of DecimalIntegerLiteral.
- The MV of DecimalLiteral :: DecimalIntegerLiteral ExponentPart is the MV of DecimalIntegerLiteral times 10^e , where e is the MV of ExponentPart.
- The MV of DecimalIntegerLiteral :: 0 is 0.

Deleted:

Deleted: IntegerLiteral

Deleted: source character

- The MV of *DecimalIntegerLiteral :: NonZeroDigit* is the MV of *NonZeroDigit*.
- The MV of *DecimalIntegerLiteral :: NonZeroDigit DecimalDigits* is (the MV of *NonZeroDigit* times 10^n) plus the MV of *DecimalDigits*, where n is the number of characters in *DecimalDigits*.
- The MV of *DecimalDigits :: DecimalDigit* is the MV of *DecimalDigit*.
- The MV of *DecimalDigits :: DecimalDigits DecimalDigit* is (the MV of *DecimalDigits* times 10) plus the MV of *DecimalDigit*.
- The MV of *ExponentPart :: ExponentIndicator SignedInteger* is the MV of *SignedInteger*.
- The MV of *SignedInteger :: DecimalDigits* is the MV of *DecimalDigits*.
- The MV of *SignedInteger :: + DecimalDigits* is the MV of *DecimalDigits*.
- The MV of *SignedInteger :: - DecimalDigits* is the negative of the MV of *DecimalDigits*.
- The MV of *DecimalDigit :: 0 or of HexDigit :: 0 or of OctalDigit :: 0 or of BinaryDigit :: 0* is 0.
- The MV of *DecimalDigit :: 1 or of NonZeroDigit :: 1 or of HexDigit :: 1 or of OctalDigit :: 1 or of BinaryDigit :: 1* is 1.
- The MV of *DecimalDigit :: 2 or of NonZeroDigit :: 2 or of HexDigit :: 2 or of OctalDigit :: 2* is 2.
- The MV of *DecimalDigit :: 3 or of NonZeroDigit :: 3 or of HexDigit :: 3 or of OctalDigit :: 3* is 3.
- The MV of *DecimalDigit :: 4 or of NonZeroDigit :: 4 or of HexDigit :: 4 or of OctalDigit :: 4* is 4.
- The MV of *DecimalDigit :: 5 or of NonZeroDigit :: 5 or of HexDigit :: 5 or of OctalDigit :: 5* is 5.
- The MV of *DecimalDigit :: 6 or of NonZeroDigit :: 6 or of HexDigit :: 6 or of OctalDigit :: 6* is 6.
- The MV of *DecimalDigit :: 7 or of NonZeroDigit :: 7 or of HexDigit :: 7 or of OctalDigit :: 7* is 7.
- The MV of *DecimalDigit :: 8 or of NonZeroDigit :: 8 or of HexDigit :: 8* is 8.
- The MV of *DecimalDigit :: 9 or of NonZeroDigit :: 9 or of HexDigit :: 9* is 9.
- The MV of *HexDigit :: a or of HexDigit :: A* is 10.
- The MV of *HexDigit :: b or of HexDigit :: B* is 11.
- The MV of *HexDigit :: c or of HexDigit :: C* is 12.
- The MV of *HexDigit :: d or of HexDigit :: D* is 13.
- The MV of *HexDigit :: e or of HexDigit :: E* is 14.
- The MV of *HexDigit :: f or of HexDigit :: F* is 15.
- The MV of *BinaryIntegerLiteral :: 0b BinaryDigit* is the MV of *BinaryDigit*.
- The MV of *BinaryIntegerLiteral :: 0B BinaryDigit* is the MV of *BinaryDigit*.
- The MV of *BinaryIntegerLiteral :: BinaryIntegerLiteral BinaryDigit* is (the MV of *BinaryIntegerLiteral* times 2) plus the MV of *BinaryDigit*.
- The MV of *OctalIntegerLiteral :: 0o OctalDigit* is the MV of *OctalDigit*.
- The MV of *OctalIntegerLiteral :: 0O OctalDigit* is the MV of *OctalDigit*.
- The MV of *OctalIntegerLiteral :: OctalIntegerLiteral OctalDigit* is (the MV of *OctalIntegerLiteral* times 8) plus the MV of *OctalDigit*.
- The MV of *HexIntegerLiteral :: 0x HexDigits* is the MV of *HexDigits*.
- The MV of *HexIntegerLiteral :: 0X HexDigits* is the MV of *HexDigits*.
- The MV of *HexDigits :: HexDigit* is the MV of *HexDigit*.
- The MV of *HexDigits :: HexDigits HexDigit* is (the MV of *HexDigits* times 16) plus the MV of *HexDigit*.

Once the exact MV for a numeric literal has been determined, it is then rounded to a value of the Number type. If the MV is 0, then the rounded value is +0; otherwise, the rounded value must be the Number value for the MV (as specified in 8.5), unless the literal is a *DecimalLiteral* and the literal has more than 20 significant digits, in which case the Number value may be either the Number value for the MV of a literal produced by replacing each significant digit after the 20th with a 0 digit or the Number value for the MV of a literal produced by replacing each significant digit after the 20th with a 0 digit and then incrementing the literal at the 20th significant digit position. A digit is *significant* if it is not part of an *ExponentPart* and

- it is not 0; or
- there is a nonzero digit to its left and there is a nonzero digit, not in the *ExponentPart*, to its right.

Deleted:

Deleted: <#>The MV of *NumericLiteral :: BinaryIntegerLiteral* is the MV of *BinaryIntegerLiteral*.
 <#>The MV of *BinaryDigit :: 0* is 0.
 <#>The MV of *BinaryDigit :: 1* is 1.
 <#>The MV of *BinaryIntegerLiteral :: 0ob BinaryDigit* is the MV of *BinaryDigit*.
 <#>The MV of *BinaryIntegerLiteral :: 0OB BinaryDigit* is the MV of *BinaryDigit*.
 <#>The MV of *BinaryIntegerLiteral :: BinaryIntegerLiteral BinaryDigit* is (the MV of *BinaryIntegerLiteral* times 2) plus the MV of *BinaryDigit*.
 <#>The MV of *NumericLiteral :: OctalIntegerLiteral* is the MV of *OctalIntegerLiteral*.
 <#>The MV of *OctalDigit :: 0* is 0.
 <#>The MV of *OctalDigit :: 1* is 1.
 <#>The MV of *OctalDigit :: 2* is 2.
 <#>The MV of *OctalDigit :: 3* is 3.
 <#>The MV of *OctalDigit :: 4* is 4.
 <#>The MV of *OctalDigit :: 5* is 5.
 <#>The MV of *OctalDigit :: 6* is 6.
 <#>The MV of *OctalDigit :: 7* is 7.
 <#>The MV of *OctalIntegerLiteral :: 0o OctalDigit* is the MV of *OctalDigit*.
 <#>The MV of *OctalIntegerLiteral :: 0O OctalDigit* is the MV of *OctalDigit*.
 <#>The MV of *OctalIntegerLiteral :: OctalIntegerLiteral OctalDigit* is (the MV of *OctalIntegerLiteral* times 8) plus the MV of *OctalDigit*.
Deleted: *HexIntegerLiteral*
Deleted: *HexIntegerLiteral*
Deleted: *HexIntegerLiteral*

7.8.4 String Literals

NOTE A string literal is zero or more Unicode code points enclosed in single or double quotes. Unicode code points may also be represented by an escape sequence. All characters may appear literally in a string literal except for the closing quote character, backslash, carriage return, line separator, paragraph separator, and line feed. Any character may appear in the form of an escape sequence. String literals evaluate to ECAMScript String values. When generating these string values Unicode code points are UTF-16 encoded as defined in clause 6. Code points belonging to Basic Multilingual Plane are encoded as a single code unit element of the string. All other code points are encoded as two code unit elements of the string.

Syntax

```
StringLiteral ::  
  " DoubleStringCharactersopt "  
  ' SingleStringCharactersopt '
```

```
DoubleStringCharacters ::  
  DoubleStringCharacter DoubleStringCharactersopt
```

```
SingleStringCharacters ::  
  SingleStringCharacter SingleStringCharactersopt
```

```
DoubleStringCharacter ::  
  SourceCharacter but not one of " or \ or LineTerminator  
  \ EscapeSequence  
  LineContinuation
```

```
SingleStringCharacter ::  
  SourceCharacter but not one of ' or \ or LineTerminator  
  \ EscapeSequence  
  LineContinuation
```

```
LineContinuation ::  
  \ LineTerminatorSequence
```

```
EscapeSequence ::  
  CharacterEscapeSequence  
  0 [lookahead  $\notin$  DecimalDigit]  
  HexEscapeSequence  
  UnicodeEscapeSequence
```

A conforming implementation, when processing strict mode code (see 10.1.1), must not extend the syntax of EscapeSequence to include OctalEscapeSequence as described in B.1.2.

```
CharacterEscapeSequence ::  
  SingleEscapeCharacter  
  NonEscapeCharacter
```

```
SingleEscapeCharacter :: one of  
  ' " \ b f n r t v
```

```
NonEscapeCharacter ::  
  SourceCharacter but not one of EscapeCharacter or LineTerminator
```

```
EscapeCharacter ::  
  SingleEscapeCharacter  
  DecimalDigit  
  x  
  u
```

Deleted: A conforming implementation, when processing strict mode code (see 10.1.1), must not extend the syntax of <u>NumericLiteral</u> to include <u>OctalIntegerLiteral</u> described in B.1.1.¶
Deleted: Each
Formatted: Note
Deleted: characters
Deleted: characters
Deleted: characters
Deleted: d
Deleted: Unicode characters
Deleted: d
Deleted: using UTF-16

HexEscapeSequence ::
 x *HexDigit HexDigit*

UnicodeEscapeSequence ::
 u *HexDigit HexDigit HexDigit HexDigit*
 u{ *HexDigits* }

The definition of the nonterminal *HexDigit* is given in 7.8.3. *SourceCharacter* is defined in clause 6.

NOTE A line terminator character cannot appear in a string literal, except as part of a *LineContinuation* to produce the empty character sequence. The correct way to cause a line terminator character to be part of the String value of a string literal is to use an escape sequence such as \n or \u000A.

Deleted: A conforming implementation, when processing strict mode code (see 10.1.1), may not extend the syntax of *EscapeSequence* to include *OctalEscapeSequence* as described in B.1.2.¶

Static Semantics

Static Semantics: Early Errors

UnicodeEscapeSequence :: u{ *HexDigits* }

- It is a Syntax Error if the MV of *HexDigits* > 1114111.

Static Semantics: SV's and CV's

A string literal stands for a value of the String type. The String value (SV) of the literal is described in terms of code unit values (CV) contributed by the various parts of the string literal. As part of this process, some Unicode characters within the string literal are interpreted as having a mathematical value (MV), as described below or in 7.8.3.

Deleted: character

- The SV of *StringLiteral* :: "" is the empty code unit sequence.
- The SV of *StringLiteral* :: '' is the empty code unit sequence.
- The SV of *StringLiteral* :: " *DoubleStringCharacters* " is the SV of *DoubleStringCharacters*.
- The SV of *StringLiteral* :: ' *SingleStringCharacters* ' is the SV of *SingleStringCharacters*.
- The SV of *DoubleStringCharacters* :: *DoubleStringCharacter DoubleStringCharacters* is a sequence of one or two code units that is the CV of *DoubleStringCharacter*.
- The SV of *DoubleStringCharacters* :: *DoubleStringCharacter DoubleStringCharacters* is a sequence of one or two code units that is the CV of *DoubleStringCharacter* followed by all the code units in the SV of *DoubleStringCharacters* in order.
- The SV of *SingleStringCharacters* :: *SingleStringCharacter SingleStringCharacters* is a sequence of one or two code units that is the CV of *SingleStringCharacter*.
- The SV of *SingleStringCharacters* :: *SingleStringCharacter SingleStringCharacters* is a sequence of one or two code units that is the CV of *SingleStringCharacter* followed by all the code units in the SV of *SingleStringCharacters* in order.
- The SV of *LineContinuation* :: \ *LineTerminatorSequence* is the empty code unit sequence.
- The CV of *DoubleStringCharacter* :: *SourceCharacter but not one of " or \ or LineTerminator* is the UTF-16 Encoding (clause 6) of the code point value of *SourceCharacter*.
- The CV of *DoubleStringCharacter* :: \ *EscapeSequence* is the CV of the *EscapeSequence*.
- The CV of *DoubleStringCharacter* :: *LineContinuation* is the empty character sequence.
- The CV of *SingleStringCharacter* :: *SourceCharacter but not one of " or \ or LineTerminator* is the UTF-16 Encoding (clause 6) of the code point value of *SourceCharacter*.
- The CV of *SingleStringCharacter* :: \ *EscapeSequence* is the CV of the *EscapeSequence*.
- The CV of *SingleStringCharacter* :: *LineContinuation* is the empty character sequence.
- The CV of *EscapeSequence* :: *CharacterEscapeSequence* is the CV of the *CharacterEscapeSequence*.
- The CV of *EscapeSequence* :: 0 [lookahead \notin *DecimalDigit*] is the code unit value 0.
- The CV of *EscapeSequence* :: *HexEscapeSequence* is the CV of the *HexEscapeSequence*.
- The CV of *EscapeSequence* :: *UnicodeEscapeSequence* is the CV of the *UnicodeEscapeSequence*.

Deleted: character

Deleted: character

Deleted: character

Deleted: ,

Deleted: characters

Deleted: character,

Deleted: characters

Deleted: *SourceCharacter character itself*.

Deleted: *character itself*

Deleted: a <NUL> character

Deleted: (Unicode value 0000).

RegularExpressionFirstChar ::

RegularExpressionNonTerminator **but not one of** * or \ or / or [

RegularExpressionBackslashSequence

RegularExpressionClass

RegularExpressionChar ::

RegularExpressionNonTerminator **but not one of** \ or / or [

RegularExpressionBackslashSequence

RegularExpressionClass

RegularExpressionBackslashSequence ::

 \ *RegularExpressionNonTerminator*

RegularExpressionNonTerminator ::

SourceCharacter **but not** *LineTerminator*

RegularExpressionClass ::

 [*RegularExpressionClassChars*]

RegularExpressionClassChars ::

 [empty]

RegularExpressionClassChars *RegularExpressionClassChar*

RegularExpressionClassChar ::

RegularExpressionNonTerminator **but not one of**] or \

RegularExpressionBackslashSequence

RegularExpressionFlags ::

 [empty]

RegularExpressionFlags IdentifierPart

NOTE Regular expression literals may not be empty; instead of representing an empty regular expression literal, the characters // start a single-line comment. To specify an empty regular expression, use: /(?:)/.

Static Semantics: BodyText

RegularExpressionLiteral :: / *RegularExpressionBody* / *RegularExpressionFlags*

1. Return the source code that was recognized as *RegularExpressionBody*.

Static Semantics: FlagText

RegularExpressionLiteral :: / *RegularExpressionBody* / *RegularExpressionFlags*

1. Return the source code that was recognized as *RegularExpressionFlags*.

7.8.6 Template Literal Lexical Components

Syntax

Template ::

NoSubstitutionTemplate

TemplateHead

NoSubstitutionTemplate ::

 ` *TemplateCharacters_{opt}* `

TemplateHead ::

 ` *TemplateCharacters_{opt}* \$ {

Deleted: Semantics

A regular expression literal evaluates to a value of Object type that is an instance of the standard built-in constructor RegExp. This value is determined in two steps: first, the characters comprising the regular expression's *RegularExpressionBody* and *RegularExpressionFlags* production expansions are collected uninterpreted into two Strings Pattern and Flags, respectively. Then each time the literal is evaluated, a new object is created as if by the expression new RegExp(Pattern, Flags) where RegExp is the standard built-in constructor with the name. The newly constructed object becomes the value of the *RegularExpressionLiteral*. If the call to new RegExp would generate an error as specified in 15.10.4.1, the error must be treated as an early error (Clause 16).||

Deleted: Quasi

Deleted:

Deleted: 7.9

Deleted: Quasi

Deleted: FullQuasi

Deleted: Quasi

Deleted: FullQuasi

Deleted: Quasi

Deleted: Quasi

Deleted: Quasi

TemplateSubstitutionTail ::

TemplateMiddle
TemplateTail

Deleted: Quasi

Deleted: Quasi...emplateMiddle

TemplateMiddle ::

\ TemplateCharacters_{opt} \$ t

Deleted: Quasi

Deleted: Quasi

TemplateTail ::

\ TemplateCharacters_{opt}

Deleted: Quasi

Deleted: Quasi

TemplateCharacters ::

TemplateCharacter TemplateCharacters_{opt}

Deleted: Quasi

Deleted: Quasi...emplateCharacter Quasi

TemplateCharacter ::

SourceCharacter but not one of ` or \ or \$
\$ [lookahead ∈ {`}]
\ EscapeSequence
LineContinuation

Deleted: Quasi

Comment [AWB910]: Note that the original proposal allowed \$IdentifierName to be used a substitution without {} around the name..

Line terminations characters are simply handled as literal SourceCharacters. I find this troublesome. Shouldn't we have some sort of normalizations of line terminators. Otherwise the actual characters in a multi-line template at the mercy of the authors editor/OS.

Deleted: QV...V's and RQV

Deleted: quasi...emplate literal component

Static Semantics: TV's and TRV's

A template literal component is interpreted as a sequence of Unicode characters. The Template Value (TV) of a literal component is described in terms of code unit values (CV, 7.8.4) contributed by the various parts of the template literal component. As part of this process, some Unicode characters within the template component are interpreted as having a mathematical value (MV, 7.8.3). In determining a TV, escape sequences are replaced by the code unit of the Unicode characters represented by the escape sequence. The Template Raw Value (TRV) is similar to a Template Value with the difference that in TRVs escape sequences are interpreted literally.

Deleted: QV...V and QRV...RV of FullQuasi

Deleted: QV...V and QRV...RV of Quasi

Deleted: QV...V and QRV...RV of Quasi

Deleted: r

Deleted: QV...V and QRV...RV of Quasi

Deleted: QV...V of

Deleted: QV...V of Quasi...emplateHead :: `

Deleted: QV...V of Quasi...emplateMiddle :: }

Deleted: QV...V of Quasi...emplateTail :: }

Deleted: QV...V of Quasi...emplateCharacter

Deleted: QV...V of Quasi...emplateCharacter

Deleted: QV...V of Quasi

Deleted: QV...V of Quasi

Deleted: QV...V of Quasi...emplateCharacter

Deleted: QV

Deleted: QRV...RV of

Deleted: QRV...RV of Quasi...emplateHead :: `

Deleted: QRV...RV of Quasi...emplateMiddle :: }

Deleted: QRV...RV of Quasi...emplateTail :: }

Deleted: QRV...RV of Quasi...emplateTail :: }

Deleted: QRV...RV of

Deleted: QRV...RV of

- The TV and TRV of NoSubstitutionTemplate :: `` is the empty code unit sequence.
- The TV and TRV of TemplateHead :: \${`} is the empty code unit sequence.
- The TV and TRV of TemplateMiddle :: \${`}` is the empty code unit sequence.
- The TV and TRV of TemplateTail :: \${`}` is the empty code unit sequence.
- The TV of NoSubstitutionTemplate :: `` TemplateCharacters `` is the TV of TemplateCharacters.
- The TV of TemplateHead :: `` TemplateCharacters \${`}` is the TV of TemplateCharacters.
- The TV of TemplateMiddle :: \${`}` TemplateCharacters \${`}` is the TV of TemplateCharacters.
- The TV of TemplateTail :: \${`}` TemplateCharacters `` is the TV of TemplateCharacters.
- The TV of TemplateCharacters :: TemplateCharacter is the TV of TemplateCharacter.
- The TV of TemplateCharacters :: TemplateCharacter TemplateCharacters is a sequence consisting of the code units in the TV of TemplateCharacter followed by all the code units in the TV of TemplateCharacters in order.
- The TV of TemplateCharacter :: SourceCharacter but not one of ` or \ or \$ is the UTF-16 Encoding (clause 6) of the code point value of SourceCharacter.
- The TV of TemplateCharacter :: \${`} [lookahead ∈ {`}] is the code unit value 0x0024.
- The TV of TemplateCharacter :: \\ EscapeSequence is the CV of EscapeSequence.
- The TV of TemplateCharacter :: LineContinuation is the TV of LineContinuation.
- The TV of LineContinuation :: \\ LineTerminatorSequence is the empty code unit sequence.
- The TRV of NoSubstitutionTemplate :: `` TemplateCharacters `` is the TRV of TemplateCharacters.
- The TRV of TemplateHead :: `` TemplateCharacters \${`}` is the TRV of TemplateCharacters.
- The TRV of TemplateMiddle :: \${`}` TemplateCharacters \${`}` is the TRV of TemplateCharacters.
- The TRV of TemplateTail :: \${`}` TemplateCharacters `` is the TRV of TemplateCharacters.
- The TRV of TemplateCharacters :: TemplateCharacter is the TRV of TemplateCharacter.
- The TRV of TemplateCharacters :: TemplateCharacter TemplateCharacters is a sequence consisting of the code units in the TRV of TemplateCharacter followed by all the code units in the TRV of TemplateCharacters, in order.

- The TRV of *TemplateCharacter :: SourceCharacter but not one of ` or \ or \$* is the UTF-16 Encoding (clause 6) of the code point value of *SourceCharacter*. Deleted: QRV...RV of Quasi
- The TRV of *TemplateCharacter :: \$* [lookahead \notin $\{ \}$] is the code unit value 0x0024. Deleted: QRV...RV of Quasi
- The TRV of *TemplateCharacter :: \ EscapeSequence* is the sequence consisting of the code unit value 0x005C followed by the code units of TRV of *EscapeSequence*. Deleted: QRV...RV of Quasi...templateCharacter :: \
- The TRV of *TemplateCharacter:: LineContinuation* is the TRV of *LineContinuation*. Deleted: QRV...RV of Quasi...templateCharacter::
- The TRV of *EscapeSequence :: CharacterEscapeSequence* is the TRV of the *CharacterEscapeSequence*. Deleted: QRV...RV of Quasi...templateCharacter::
- The TRV of *EscapeSequence :: 0* [lookahead \notin *DecimalDigit*] is the code unit value 0x0030. Deleted: QRV
- The TRV of *EscapeSequence :: HexEscapeSequence* is the TRV of the *HexEscapeSequence*. Deleted: QRV...RV of EscapeSequence ::
- The TRV of *EscapeSequence :: UnicodeEscapeSequence* is the TRV of the *UnicodeEscapeSequence*. Deleted: QRV...RV of EscapeSequence ::
- The TRV of *CharacterEscapeSequence :: SingleEscapeCharacter* is the TRV of the *SingleEscapeCharacter*. Deleted: C...RV of EscapeSequence ::
- The TRV of *CharacterEscapeSequence :: NonEscapeCharacter* is the CV of the *NonEscapeCharacter*. Deleted: QRV...RV of CharacterEscapeSequence ::
- The TRV of *SingleEscapeCharacter :: one of ' " \ b f n r t v* is the CV of the *SourceCharacter* that is that single character. Deleted: QRV
- The TRV of *HexEscapeSequence :: x HexDigit HexDigit* is the sequence consisting of code unit value 0x0078 followed by TRV of the first *HexDigit* followed by the TRV of the second *HexDigit*. Deleted: QRV...RV of HexEscapeSequence :: x HexDigit
- The TRV of *UnicodeEscapeSequence :: u HexDigit HexDigit HexDigit HexDigit* is the sequence consisting of code unit value 0x0075 followed by TRV of the first *HexDigit* followed by the TRV of the second *HexDigit* followed by TRV of the third *HexDigit* followed by the TRV of the fourth *HexDigit*. Deleted: QRV...RV of UnicodeEscapeSequence :: u
- The TRV of *UnicodeEscapeSequence :: u{ HexDigits }* is the sequence consisting of code unit value 0x0075 followed by code unit value 0x007B followed by TRV of *HexDigits* followed by code unit value 0x007D. Deleted: QRV...RV of UnicodeEscapeSequence :: u{
- The TRV of *HexDigits :: HexDigit* is the TRV of *HexDigit*. Deleted: QRV...RV of HexDigits :: HexDigit is the QRV
- The TRV of *HexDigits :: HexDigits HexDigit* is the sequence consisting of TRV of *HexDigits* followed by TRV of *HexDigit*. Deleted: QRV...RV of HexDigits :: HexDigits HexDigit
- The TRV of a *HexDigit* is the CV of the *SourceCharacter* that is that *HexDigit*. Deleted: QRV
- The TRV of *LineContinuation :: \ LineTerminatorSequence* is the sequence consisting of the code unit value 0x005C followed by the code units of TRV of *LineTerminatorSequence*. Deleted: QRV...RV of LineContinuation :: \
- The TRV of *LineTerminatorSequence :: <LF>* is the code unit value 0x000A. Deleted: QRV
- The TRV of *LineTerminatorSequence :: <CR> [lookahead \notin <LF>]* is the code unit value 0x000D. Deleted: QRV
- The TRV of *LineTerminatorSequence :: <LS>* is the code unit value 0x2028. Deleted: QRV
- The TRV of *LineTerminatorSequence :: <PS>* is the code unit value 0x2029. Deleted: QRV
- The TRV of *LineTerminatorSequence :: <CR><LF>* is the sequence consisting of the code unit value 0x000D followed by the code unit value 0x000A. Deleted: QRV

NOTE TV excludes the code units of *LineContinuation* while TRV includes them.

7.9 Automatic Semicolon Insertion

Certain ECMAScript statements (empty statement, variable statement, expression statement, `do-while` statement, `continue` statement, `break` statement, `return` statement, and `throw` statement) must be terminated with semicolons. Such semicolons may always appear explicitly in the source text. For convenience, however, such semicolons may be omitted from the source text in certain situations. These situations are described by saying that semicolons are automatically inserted into the source code token stream in those situations.

7.9.1 Rules of Automatic Semicolon Insertion

There are three basic rules of semicolon insertion:

1. When, as the script is parsed from left to right, a token (called the *offending token*) is encountered that is not allowed by any production of the grammar, then a semicolon is automatically inserted before the offending token if one or more of the following conditions is true:
 - The offending token is separated from the previous token by at least one *LineTerminator*.
 - The offending token is `}``.Deleted: program

2. When, as the `script` is parsed from left to right, the end of the input stream of tokens is encountered and the parser is unable to parse the input token stream as a single complete ECMAScript `script`, then a semicolon is automatically inserted at the end of the input stream.
3. When, as the `script` is parsed from left to right, a token is encountered that is allowed by some production of the grammar, but the production is a *restricted production* and the token would be the first token for a terminal or nonterminal immediately following the annotation “[no *LineTerminator* here]” within the restricted production (and therefore such a token is called a restricted token), and the restricted token is separated from the previous token by at least one *LineTerminator*, then a semicolon is automatically inserted before the restricted token.

Deleted: program

Deleted: Program

Deleted: program

However, there is an additional overriding condition on the preceding rules: a semicolon is never inserted automatically if the semicolon would then be parsed as an empty statement or if that semicolon would become one of the two semicolons in the header of a `for` statement (see 12.6.3).

NOTE The following are the only restricted productions in the grammar:

```
PostfixExpression :
  LeftHandSideExpression [no LineTerminator here] ++
  LeftHandSideExpression [no LineTerminator here] --
```

```
ContinueStatement :
  continue [no LineTerminator here] Identifier ;
```

```
BreakStatement :
  break [no LineTerminator here] Identifier ;
```

```
ReturnStatement :
  return [no LineTerminator here] Expression ;
```

```
ThrowStatement :
  throw [no LineTerminator here] Expression ;
```

The practical effect of these restricted productions is as follows:

When a `++` or `--` token is encountered where the parser would treat it as a postfix operator, and at least one *LineTerminator* occurred between the preceding token and the `++` or `--` token, then a semicolon is automatically inserted before the `++` or `--` token.

When a `continue`, `break`, `return`, or `throw` token is encountered and a *LineTerminator* is encountered before the next token, a semicolon is automatically inserted after the `continue`, `break`, `return`, or `throw` token.

The resulting practical advice to ECMAScript programmers is:

A postfix `++` or `--` operator should appear on the same line as its operand.

An *Expression* in a `return` or `throw` statement should start on the same line as the `return` or `throw` token.

An *Identifier* in a `break` or `continue` statement should be on the same line as the `break` or `continue` token.

7.9.2 Examples of Automatic Semicolon Insertion

The source

```
{ 1 2 } 3
```

is not a valid sentence in the ECMAScript grammar, even with the automatic semicolon insertion rules. In contrast, the source

```
{ 1
  2 } 3
```

is also not a valid ECMAScript sentence, but is transformed by automatic semicolon insertion into the following:

```
{ 1  
;2 ;} 3;
```

which is a valid ECMAScript sentence.

The source

```
for (a; b  
)
```

is not a valid ECMAScript sentence and is not altered by automatic semicolon insertion because the semicolon is needed for the header of a `for` statement. Automatic semicolon insertion never inserts one of the two semicolons in the header of a `for` statement.

The source

```
return  
a + b
```

is transformed by automatic semicolon insertion into the following:

```
return;  
a + b;
```

NOTE The expression `a + b` is not treated as a value to be returned by the `return` statement, because a *LineTerminator* separates it from the token `return`.

The source

```
a = b  
++c
```

is transformed by automatic semicolon insertion into the following:

```
a = b;  
++c;
```

NOTE The token `++` is not treated as a postfix operator applying to the variable `b`, because a *LineTerminator* occurs between `b` and `++`.

The source

```
if (a > b)  
else c = d
```

is not a valid ECMAScript sentence and is not altered by automatic semicolon insertion before the `else` token, even though no production of the grammar applies at that point, because an automatically inserted semicolon would then be parsed as an empty statement.

The source

```
a = b + c  
(d + e).print()
```

is *not* transformed by automatic semicolon insertion, because the parenthesised expression that begins the second line can be interpreted as an argument list for a function call:

```
a = b + c(d + e).print()
```

In the circumstance that an assignment statement must begin with a left parenthesis, it is a good idea for the programmer to provide an explicit semicolon at the end of the preceding statement rather than to rely on automatic semicolon insertion.

8 Types

Algorithms within this specification manipulate values each of which has an associated type. The possible value types are exactly those defined in this clause. Types are further subclassified into ECMAScript language types and specification types.

Within this specification, the notation “Type(x)” is used as shorthand for “the type of x ” where “type” refers to the ECMAScript language and specification types defined in this clause.

8.1 ECMAScript Language Types

An ECMAScript language type corresponds to values that are directly manipulated by an ECMAScript programmer using the ECMAScript language. The ECMAScript language types are Undefined, Null, Boolean, String, Number, and Object. An ECMAScript language value is a value that is characterized by an ECMAScript language type.

8.1.1 The Undefined Type

The Undefined type has exactly one value, called **undefined**. Any variable that has not been assigned a value has the value **undefined**.

8.1.2 The Null Type

The Null type has exactly one value, called **null**.

8.1.3 The Boolean Type

The Boolean type represents a logical entity having two values, called **true** and **false**.

8.1.4 The String Type

The String type is the set of all finite ordered sequences of zero or more 16-bit unsigned integer values (“elements”). The String type is generally used to represent textual data in a running ECMAScript program, in which case each element in the String is treated as a UTF-16 code unit value. Each element is regarded as occupying a position within the sequence. These positions are indexed with nonnegative integers. The first element (if any) is at index 0, the next element (if any) at index 1, and so on. The length of a String is the number of elements (i.e., 16-bit values) within it. The empty String has length zero and therefore contains no elements.

Where ECMAScript operations interpret String values, each element is interpreted as a single UTF-16 code unit. However, ECMAScript does not place any restrictions or requirements on the sequence of code units in a String value, so they may be ill-formed when interpreted as UTF-16 code unit sequences. Operations that do not interpret String contents treat them as sequences of undifferentiated 16-bit unsigned integers. No operations ensure that Strings are in a normalized form. Only operations that are explicitly specified to be language or locale sensitive produce language-sensitive results

NOTE The rationale behind this design was to keep the implementation of Strings as simple and high-performing as possible. If ECMAScript source code is in Normalised Form C, string literals are guaranteed to also be normalised, as long as they do not contain any Unicode escape sequences.

Some operations interpret String contents as UTF-16 encoded Unicode code points. In that case the interpretation is:

- A code unit in the range 0 to 0xD7FF or in the range 0xE000 to 0xFFFF is interpreted as a code point with the same value.
- A sequence of two code units, where the first code unit c_1 is in the range 0xD800 to 0xDBFF and the second code unit c_2 is in the range 0xDC00 to 0xFFFF, is a surrogate pair and is interpreted as a code point with the value $(c_1 - 0xD800) \times 0x400 + (c_2 - 0xDC00) + 0x10000$.
- A code unit that is in the range 0xD800 to 0xFFFF, but is not part of a surrogate pair, is interpreted as a code point with the same value.

8.1.5 The Number Type

The Number type has exactly 18437736874454810627 (that is, $2^{64} - 2^{53} + 3$) values, representing the double-precision 64-bit format IEEE 754 values as specified in the IEEE Standard for Binary Floating-Point Arithmetic, except that the 9007199254740990 (that is, $2^{53} - 2$) distinct “Not-a-Number” values of the IEEE Standard are

Deleted: An ECMAScript language type corresponds to values that are directly manipulated by an ECMAScript programmer using the ECMAScript language. The ECMAScript language types are Undefined, Null, Boolean, String, Number, and Object.[¶]
A specification type corresponds to meta-values that are used within algorithms to describe the semantics of ECMAScript language constructs and ECMAScript language types. The specification types are Reference, List, Completion, Property Descriptor, Property Identifier, Lexical Environment, and Environment Record, and Data Block. Specification type values are specification artefacts that do not necessarily correspond to any specific entity within an ECMAScript implementation. Specification type values may be used to describe intermediate results of ECMAScript expression evaluation but such values cannot be stored as properties of objects or values of ECMAScript language variables.

Deleted: Unicode

Deleted: (see Clause 6)

Deleted: position

Deleted: position

Deleted: <#>When a String contains actual textual data, each element is considered to be a single UTF-16 code unit. Whether or not this is the actual storage format of a String, the characters within a String are numbered by their initial code unit element position as though they were represented using UTF-16. All operations on Strings (except as otherwise stated) treat them as sequences of undifferentiated 16-bit unsigned integers; they do not ensure the resulting String is in normalised form, nor do they ensure language-sensitive results.[¶]

Deleted: The intent is that textual data coming into the execution environment from outside (e.g., user input, text read from a file or received over the network, etc.) be converted to Unicode Normalised Form C before the running program sees it. Usually this would occur at the same time incoming text is converted from its original character encoding to Unicode (and would impose no additional overhead). Since it is recommended that

Deleted: be

Deleted: (if source text is guaranteed to be normalised)

represented in ECMAScript as a single special **NaN** value. (Note that the **NaN** value is produced by the program expression **NaN**.) In some implementations, external code might be able to detect a difference between various Not-a-Number values, but such behaviour is implementation-dependent; to ECMAScript code, all **NaN** values are indistinguishable from each other.

There are two other special values, called **positive Infinity** and **negative Infinity**. For brevity, these values are also referred to for expository purposes by the symbols $+\infty$ and $-\infty$, respectively. (Note that these two infinite Number values are produced by the program expressions **+Infinity** (or simply **Infinity**) and **-Infinity**.)

The other 18437736874454810624 (that is, $2^{64}-2^{53}$) values are called the finite numbers. Half of these are positive numbers and half are negative numbers; for every finite positive Number value there is a corresponding negative value having the same magnitude.

Note that there is both a **positive zero** and a **negative zero**. For brevity, these values are also referred to for expository purposes by the symbols **+0** and **-0**, respectively. (Note that these two different zero Number values are produced by the program expressions **+0** (or simply **0**) and **-0**.)

The 18437736874454810622 (that is, $2^{64}-2^{53}-2$) finite nonzero values are of two kinds:

18428729675200069632 (that is, $2^{64}-2^{54}$) of them are normalised, having the form

$$s \times m \times 2^e$$

where s is $+1$ or -1 , m is a positive integer less than 2^{53} but not less than 2^{52} , and e is an integer ranging from -1074 to 971 , inclusive.

The remaining 9007199254740990 (that is, $2^{53}-2$) values are denormalised, having the form

$$s \times m \times 2^e$$

where s is $+1$ or -1 , m is a positive integer less than 2^{52} , and e is -1074 .

Note that all the positive and negative integers whose magnitude is no greater than 2^{53} are representable in the Number type (indeed, the integer 0 has two representations, $+0$ and -0).

A finite number has an *odd significand* if it is nonzero and the integer m used to express it (in one of the two forms shown above) is odd. Otherwise, it has an *even significand*.

In this specification, the phrase “the Number value for x ” where x represents an exact nonzero real mathematical quantity (which might even be an irrational number such as π) means a Number value chosen in the following manner. Consider the set of all finite values of the Number type, with -0 removed and with two additional values added to it that are not representable in the Number type, namely 2^{1024} (which is $+1 \times 2^{53} \times 2^{971}$) and -2^{1024} (which is $-1 \times 2^{53} \times 2^{971}$). Choose the member of this set that is closest in value to x . If two values of the set are equally close, then the one with an even significand is chosen; for this purpose, the two extra values 2^{1024} and -2^{1024} are considered to have even significands. Finally, if 2^{1024} was chosen, replace it with $+\infty$; if -2^{1024} was chosen, replace it with $-\infty$; if $+0$ was chosen, replace it with -0 if and only if x is less than zero; any other chosen value is used unchanged. The result is the Number value for x . (This procedure corresponds exactly to the behaviour of the IEEE 754 “round to nearest” mode.)

Some ECMAScript operators deal only with integers in the range -2^{31} through $2^{31}-1$, inclusive, or in the range 0 through $2^{32}-1$, inclusive. These operators accept any value of the Number type but first convert each such value to one of 2^{32} integer values. See the descriptions of the `ToInt32` and `ToUInt32` operators in 9.5 and 9.6, respectively.

8.1.6 The Object Type

An Object is logically a collection of properties. Each property is either a data property, or an accessor property.

Deleted: named

Deleted: named

Deleted: , or an internal property

- A *data property* associates a *key value* with an ECMAScript language value and a set of Boolean attributes.
- A *accessor property* associates a *key value* with one or two accessor functions, and a set of Boolean attributes. The accessor functions are used to store or retrieve an ECMAScript language value that is associated with the property.

~~Deleted: named~~~~Deleted: name~~~~Deleted: named~~~~Deleted: name~~

Properties are identified using key values. A key value is either an ECMAScript String value or an Exotic Symbol object (8.4.3).

~~Deleted: y~~~~Deleted: ECMAScript~~~~Comment [AWB1211]: TODO, section reference~~~~Deleted: ????~~~~Deleted: An internal property has no name and is not directly accessible via ECMAScript language operators. Internal properties exist purely for specification purposes. ¶~~~~Deleted: named (non-internal)~~~~Deleted: put~~~~Deleted: accessible~~~~Deleted: properites~~~~Deleted: objects~~~~Deleted: semanjtis~~~~Deleted: object are~~~~Deleted: ,~~~~Deleted: named~~~~Deleted: named~~~~Deleted: name~~~~Deleted: Named~~~~Deleted: reading~~~~Deleted: Put~~

Property keys are used to access properties and their values. There are two kinds of access for properties: *get* and *set*, corresponding to value retrieval and assignment, respectively. The properties accessible via *get* and *set* access includes both *own properties* that are a direct part of an object and *inherited properties* which are provided by another associated object via a property inheritance relationship. Inherited properties may be either own or inherited properties of the associated object.

All objects are logically collections of properties, but there are multiple forms of objects that differ in their semantics for accessing and manipulating their properties. *Ordinary objects* are the most common form of objects and have the default object semantics. An *exotic object* is any form of object whose property semantics differ in any way from the default semantics.

8.1.6.1 Property Attributes

Attributes are used in this specification to define and explain the state of *Object* properties. A *data property* associates a *key value* with the attributes listed in Table 5.

Table 5 — Attributes of a Data Property

Attribute Name	Value Domain	Description
<code>[[Value]]</code>	Any ECMAScript language type	The value retrieved by a <i>get</i> access of the property.
<code>[[Writable]]</code>	Boolean	If <i>false</i> , attempts by ECMAScript code to change the property's <code>[[Value]]</code> attribute using <code>[[SetP]]</code> or <code>[[DefineOwnProperty]]</code> will not succeed.
<code>[[Enumerable]]</code>	Boolean	If <i>true</i> , the property will be enumerated by a <i>for-in</i> enumeration (see 12.6.4). Otherwise, the property is said to be non-enumerable.
<code>[[Configurable]]</code>	Boolean	If <i>false</i> , attempts to delete the property, change the property to be an accessor property, or change its attributes (other than <code>[[Value]]</code> , for changing <code>[[Writable]]</code> to <i>false</i>) will fail.

An *accessor property* associates a *key value* with the attributes listed in Table 6.

~~Deleted: named~~~~Deleted: name~~

Table 6 — Attributes of an Accessor Property

Attribute Name	Value Domain	Description
[[Get]]	Object or Undefined	If the value is an Object it must be a function Object. The function's [[Call]] internal method (8.6.2) is called with an empty arguments list to retrieve the property value each time a get access of the property is performed.
[[Set]]	Object or Undefined	If the value is an Object it must be a function Object. The function's [[Call]] internal method (8.6.2) is called with an arguments list containing the assigned value as its sole argument each time a set access of the property is performed. The effect of a property's [[SetP]] internal method may, but is not required to, have an effect on the value returned by subsequent calls to the property's [[GetP]] internal method.
[[Enumerable]]	Boolean	If true, the property is to be enumerated by a for-in enumeration (see 12.6.4). Otherwise, the property is said to be non-enumerable.
[[Configurable]]	Boolean	If false, attempts to delete the property, change the property to be a data property, or change its attributes will fail.

If the initial values of a property's attributes are not explicitly specified by this specification, the default value defined in Table 7 is used.

Table 7 — Default Attribute Values

Attribute Name	Default Value
[[Value]]	undefined
[[Get]]	undefined
[[Set]]	undefined
[[Writable]]	false
[[Enumerable]]	false
[[Configurable]]	false

8.1.6.2 Object Internal Methods and Internal Data Properties

The actual semantics of ECMAScript objects are specified via algorithms called *internal methods*. Each object in an ECMAScript engine is associated with a set of internal methods that defines its runtime behaviour. These internal methods are not part of the ECMAScript language. They are defined by this specification purely for expository purposes. However, each object within an implementation of ECMAScript must behave as specified by the internal methods associated with it. The exact manner in which this is accomplished is determined by the implementation.

Internal methods are identified within this specification using names enclosed in double square brackets [[]]. Internal method names are polymorphic. This means that different ECMAScript object values may perform different algorithms when a common internal method name is invoke upon them. If, at runtime, the implementation of an algorithm attempts to use an internal method of an object that the object does not support, a **TypeError** exception is thrown.

Internal data properties correspond to internal state that is associated with objects and used by various ECMAScript specification algorithms. Depending upon the specific internal data property such state may consist of values of any ECMAScript language type or of specific ECMA specification type values. Unless explicitly specified otherwise, internal data properties may be dynamically added to ECMAScript objects.

Deleted: Named

Deleted: return

Deleted: n

Deleted: is

Deleted: for a named property

Deleted: Properties and

Deleted: This specification uses various internal properties to define the semantics of object values.

Deleted: properties

Deleted: An

Deleted: as if it produced and operated upon internal properties in the manner described here

Deleted: .

Deleted: The names of i

Deleted: properties

Deleted: are

Deleted: When

Deleted: uses an

Deleted: property

Deleted: and the object does not implement the indicated internal property

Table 8 summarises the essential internal methods used by this specification that are applicable to all ECMAScript objects. Every object must have algorithms for all of the essential internal methods. However, all objects do not necessarily use the same algorithms for those methods.

The "Signature" column of Table 8 and other similar tables describes the invocation pattern for each internal method. The invocation pattern always includes a parenthesised list of descriptive parameter names. If a parameter name is the same as an ECMAScript type name then the name describes the required type of the parameter value. If an internal method explicitly returns a value, its parameter list is followed by the symbol " \rightarrow " and the type name of the returned value. The type names used in signatures refer to the types defined in Clause 8 augmented by the following additional names. "any" means the value may be any ECMAScript language type. "primitive" means Undefined, Null, Boolean, String, or Number. An internal method implicitly returns a Completion Record as described in 8.8. In addition to its parameters, an internal method always has access to the object upon which it is invoked as a method.

- Deleted:** The
- Deleted:** properties
- Field Code Changed**
- Deleted:**
- Deleted:** Value Type Domain
- Deleted:** s
- Deleted:** the following
- Deleted:** define
- Deleted:** the types of values associated with internal properties
- Deleted:** The type names refer to the types defined in Clause 8 augmented by the following additional names. "any" means the value may be any ECMAScript language type. "primitive" means Undefined, Null, Boolean, String, or Number. "SpecOp" means the internal operation provided procedure defined by an abstract operation specification. "SpecOp" is followed a
- Deleted:** "SpecOp"

DRAFT

Table 8 — Essential Internal Methods

Internal Method	Signature	Description
<code>[[GetInheritance]]</code>	<code>()→Object or Null</code>	Determine the object that provides inherited properties for this object. A <code>null</code> value indicates that there are no inherited properties. an object.
<code>[[SetInheritance]]</code>	<code>(Object or Null)→Boolean</code>	Associate with an object another object that provides inherited properties. Passing <code>null</code> indicates that there are no inherited properties. Returns <code>true</code> indicating that the operation was completed successfully or <code>false</code> indicating that the operation was not successful.
<code>[[IsExtensible]]</code>	<code>()→Boolean</code>	Determine whether it is permitted to add additional properties to an object.
<code>[[PreventExtensions]]</code>	<code>()</code>	Control whether new properties may be added to an object.
<code>[[HasOwnProperty]]</code>	<code>(propertyKey) → Boolean</code>	Returns a Boolean value indicating whether the object already has an own property whose key is <code>propertyKey</code> .
<code>[[GetOwnProperty]]</code>	<code>(propertyKey) → Undefined or Property Descriptor</code>	Returns a Property Descriptor for the own property of this object whose key is <code>propertyKey</code> , or <code>undefined</code> if no such property exists.
<code>[[GetP]]</code>	<code>(propertyKey, Receiver) → any</code>	Retrieve the value of an object's property using the <code>propertyKey</code> parameter. If any ECMAScript code must be executed to retrieve the property value, <code>Receiver</code> is used as the <code>this</code> value when evaluating the code.
<code>[[SetP]]</code>	<code>(propertyKey, value, Receiver) → Boolean</code>	Try to set the value of an object's property identified by <code>propertyKey</code> to <code>value</code> . If any ECMAScript code must be executed to set the property value, <code>Receiver</code> is used as the <code>this</code> value when evaluating the code. Returns <code>true</code> indicating that the property value was set or <code>false</code> indicating that it could not be set.
<code>[[Delete]]</code>	<code>(propertyKey) → Boolean</code>	Removes the own property indentified by the <code>propertyKey</code> parameter from the object. Return <code>false</code> is the property was not deleted because its <code>[[Configurable]]</code> attribute is <code>false</code> . Otherwise return <code>true</code> .
<code>[[DefineOwnProperty]]</code>	<code>(propertyKey,PropertyDescriptor) → Boolean</code>	Creates or alters the named own property to have the state described by a Property Descriptor. Returns <code>true</code> indicating that the property was successfully created/updated or <code>false</code> indicating that the property could not be created or updated.
<code>[[Enumerate]]</code>	<code>()→Object</code>	Returns an iterator object that over the string values of the keys of the enumerable properties of the object.
<code>[[Keys]]</code>	<code>()→List of String</code>	Returns an Array containing all of the enumerable own property keys for the object that are Strings.
<code>[[OwnPropertyKeys]]</code>	<code>()→List of (String or Symbol)</code>	Returns an Array containing all of the own property keys for the object except those that are private Symbols.
<code>[[Freeze]]</code>	<code>() → Boolean</code>	
<code>[[Seal]]</code>	<code>() → Boolean</code>	
<code>[[IsFrozen]]</code>	<code>() → Boolean</code>	
<code>[[IsSealed]]</code>	<code>() → Boolean</code>	

Deleted: p

Comment [AWB1212]: This are probably unnecessary and hopefully will be eliminated

Table 9 summarises additional essential internal methods that must be supported by all objects that may be called as functions.

Table 9 — Additional Essential Internal Methods of Function Objects

Internal Method	Signature	Description
[[Call]]	(any, a List of any) → any or Reference	Executes code associated with the object. Invoked via a function call expression. The arguments to the internal method are a this value and a list containing the arguments passed to the function by a call expression. Objects that implement this internal method are callable . Only callable objects that are host objects may return Reference values.
[[Construct]]	(a List of any) → Object	Creates an object. Invoked via the new operator. The arguments to the internal are the arguments passed to the new operator. Objects that implement this internal method are called constructors .

Deleted:
Deleted: The
Deleted: Table 9
Deleted: the
Deleted: properties
Deleted: used by this specification that are only applicable to some ECMAScript objects
Deleted: .
Deleted: **Value Type Domain**
Comment [AWB913]: Hopefully we can eliminate functions returning References

8.1.6.3 Invariants of the Essential Internal Methods

Current this section is just a bunch of material merged together from the ES5 spec. and from the wiki Proxy pages. It need to be completely reworked.

The intent is that it lists all invariants of the Essential Internal Methods. This includes both invariants that are enforced for Proxy objects and other invariants that may not be enforced.

Deleted: ¶
Deleted: 2

Definitions:

- The **target** of an internal method is the object the internal method is called upon.
- A **sealed** property is a non-configurable own property of a target.
- A **frozen** property is a non-configurable non-writable own property of a target.
- A **new** property is a property that does not exist on a non-extensible target.
- Two property descriptors **desc1** and **desc2** for a property key value are incompatible if:
 - desc1** is produced by calling [[GetOwnPropertyDescriptor]] of **target** with **key**, and
 - Calling [[DefineOwnProperty]] of **target** with arguments **key** and **desc2** would throw a **TypeError** exception.

Exotic objects may define additional constraints upon their [[SetP]] internal method behavior. If possible, exotic objects should not allow [[SetP]] operations in situations where this definition of [[CanPut]] returns **false**.

Comment [AWB1214]: Need to decide what replaces this when CanPut goes away

[[GetInheritance]]

Every [[Prototype]] chain must have finite length (that is, starting from any object, recursively accessing the [[Prototype]] internal **data** property must eventually lead to a **null** value).

getOwnPropertyDescriptor

Non-configurability invariant: cannot return incompatible descriptors for sealed properties

Non-extensibility invariant: must return **undefined** for new properties

Invariant checks:

- if trap returns **undefined**, check if the property is configurable
- if property exists on target, check if the returned descriptor is compatible

if returned descriptor is non-configurable, check if the property exists on the target and is also non-configurable

defineProperty

Non-configurability invariant: cannot succeed (return true) for incompatible changes to sealed properties

Non-extensibility invariant: must reject (return **false**) for new properties

Invariant checks:

on success, if property exists on target, check if existing descriptor is compatible with argument descriptor

on success, if argument descriptor is non-configurable, check if the property exists on the target and is also non-configurable

getOwnPropertyNames

Non-configurability invariant: must report all sealed properties

Non-extensibility invariant: must not list new property names

Invariant checks:

check whether all sealed target properties are present in the trap result

If the target is non-extensible, check that no new properties are listed in the trap result

deleteProperty

Non-configurability invariant: cannot succeed (return true) for sealed properties

Invariant checks:

on success, check if the target property is configurable

getPrototypeOf

Invariant check: check whether the target's prototype and the trap result are identical (according to the `egal` operator)

freeze | seal | preventExtensions

Invariant checks:

on success, check if `isFrozen(target)`, `isSealed(target)` or `!isExtensible(target)`

isFrozen | isSealed | isExtensible

Invariant check: check whether the boolean trap result is equal to `isFrozen(target)`, `isSealed(target)` or `isExtensible(target)`

hasOwn

Non-configurability invariant: cannot return **false** for sealed properties

Non-extensibility invariant: must return **false** for new properties

Invariant checks:

if **false** is returned, check if the target property is configurable

if **false** is returned, the property does not exist on target, and the target is non-extensible, throw a `TypeError`

has

Non-configurability invariant: cannot return **false** for sealed properties

Invariant checks:

if **false** is returned, check if the target property is configurable

get

Non-configurability invariant: cannot return inconsistent values for frozen data properties, and must return **undefined** for sealed accessors with an **undefined** getter

Invariant checks:

if property exists on target as a data property, check whether the target property's value and the trap result are identical (according to the `egal` operator)

if property exists on target as an accessor, and the accessor's `get` attribute is **undefined**, check whether the trap result is also **undefined**.

set

Non-configurability invariant: cannot succeed (return `true`) for frozen data properties or sealed accessors with an **undefined** setter

Invariant checks:

on success, if property exists on target as a data property, check whether the target property's value and the update value are identical (according to the `egal` operator)

on success, if property exists on target as an accessor, check whether the accessor's `set` attribute is not **undefined**

keys

Non-configurability invariant: must report all enumerable sealed properties

Non-extensibility invariant: must not list new property names

Invariant checks:

Check whether all enumerable sealed target properties are listed in the trap result

If the target is non-extensible, check that no new properties are listed in the trap result

enumerate

Non-configurability invariant: must report all enumerable sealed properties

Invariant checks:

Check whether all enumerable sealed target properties are listed in the trap result

NOTE This specification defines no ECMAScript language operators or built-in functions that permit a program to modify an object's `[[Prototype]]` internal properties or to change the value of `[[Extensible]]` from `false` to `true`. Implementation specific extensions that modify `[[Prototype]]` or `[[Extensible]]` must not violate the invariants defined in the preceding paragraph.

Unless otherwise specified, the standard ECMAScript objects are ordinary objects and behave as described in 8.3. Some standard objects are exotic objects and have behaviour defined in 8.4.

Exotic objects may implement internal methods in any manner unless specified otherwise; for example, one possibility is that `[[GetP]]` and `[[SetP]]` for a particular exotic object indeed fetch and store property values but `[[HasOwnProperty]]` always generates `false`. However, if any specified manipulation of an exotic object's internal properties is not supported by an implementation, that manipulation must throw a `TypeError` exception when attempted.

Comment [AWB1215]: These are placeholders based upon the proxy trap invariants. We need to provide new versions all the the essential internal methods.

Deleted: Clause 8.12 provides the algorithm that defined the default behaviour for the internal methods in Table 8. An *ordinary object* is an object that uses all of these default algorithms. An *exotic object* is an object that uses some other algorithm to provide alternative behaviour for one or more of these internal methods. The descriptions in these tables indicate their behaviour for native ECMAScript objects, unless stated otherwise in this document for particular kinds of native ECMAScript objects. ¶

Deleted: Host objects may support these internal properties with any implementation-dependent behaviour as long as it is consistent with the specific host object restrictions stated in this document. ¶

Deleted: The "Value Type Domain" columns in the following tables define the types of values associated with internal properties. The type names refer to the types defined in Clause 8 augmented by the following additional names: "any" means the value may be any ECMAScript language type. "primitive" means `Undefined`, `Null`, `Boolean`, `String`, or `Number`. "SpecOp" means the internal property is an internal method, an implementation provided procedure defined by an abstract operation specification. "SpecOp" is followed by a list of descriptive parameter names. If a parameter name is the same as a type name then the name describes the type of the parameter. If a "SpecOp" returns a value, its parameter list is followed by the symbol " \rightarrow " and the type of the returned value.

Comment [AWB1216]: No longer true because of Proxies.

Deleted: Every object (including host objects) must implement all of the internal properties listed in Table 8. However, the `[[DefaultValue]]`

Formatted: Strikethrough

Formatted: Strikethrough

Deleted: `[[Class]]` or

Deleted: `[[Class]]`,

Deleted: The value of the `[[Class]]` internal property is defined by this specification for every kind of built-in object. The value of the `[[Class]]`

Deleted: common internal methods of native

Deleted: 12

Deleted: Array objects have a slightly different implementation of the `[[DefineOwnProperty]]` internal method (see 15.4.5.1) and `String`

Deleted:]

Deleted: Host

Deleted: these

Deleted: Put

Deleted: host

Deleted: host

The `[[GetOwnProperty]]` internal method of all objects must conform to the following invariants for each property of the object:

- If a property is described as a data property and it may return different values over time, then either or both of the `[[Writable]]` and `[[Configurable]]` attributes must be `true` even if no mechanism to change the value is exposed via the other internal methods.
- If a property is described as a data property and its `[[Writable]]` and `[[Configurable]]` are both `false`, then the `SameValue` (according to 9.12) must be returned for the `[[Value]]` attribute of the property on all calls to `[[GetOwnProperty]]`.
- If the attributes other than `[[Writable]]` may change over time or if the property might disappear, then the `[[Configurable]]` attribute must be `true`.
- If the `[[Writable]]` attribute may change from `false` to `true`, then the `[[Configurable]]` attribute must be `true`.
- If the result of calling an object's `[[IsExtensible]]` internal method has been observed by ECMAScript code to be `false`, then if a call to `[[GetOwnProperty]]` describes a property as non-existent all subsequent calls must also describe that property as non-existent.

Deleted: host

Deleted: host

The `[[DefineOwnProperty]]` internal method of all objects must not permit the addition of a new property to an object if the `[[Extensible]]` internal method of that object has been observed by ECMAScript code to be `false`.

If the result of calling the `[[IsExtensible]]` internal method of an object has been observed by ECMAScript code to be `false` then it must not subsequently become `true`.

8.1.6.3 Well-Known Symbols and Intrinsics

Well-known symbols are built-in exotic symbol objects (8.4.4) that are explicitly referenced by algorithms of this specification. They are typically used as the keys of properties whose values serve as extension points of a specification algorithm. Unless otherwise specified, well-known symbols values are shared by all Code Realms (10.3) and the value of their `[[Private]]` internal data property (forward ref) is `false`.

Within this specification a well-known symbol is referred to by using a notation of the form `@@@name`, where "name" is one of the values listed in Table 10.

Table 10—Well-known Symbols

Specification Name	Value and Purpose
<code>@@@create</code>	A method used to allocate an object. Called from the <code>[[Construct]]</code> internal method.
<code>@@@hasInstance</code>	A method that determines if a constructor object recognizes an object as one of the constructor's instances. Called by the semantics of the <code>instanceof</code> operator.
<code>@@@iterator</code>	A method that returns the default iterator for an object. Called by the semantics of the <code>for-of</code> statement.
<code>@@@ToPrimitive</code>	A method that converts an object to a corresponding primitive value. Called by the <code>ToPrimitive</code> abstract operation.
<code>@@@toStringTag</code>	A string value that is used in the creation of the default string description of an object. Called by the built-in method <code>Object.prototype.toString</code> .

Deleted: value

Deleted: of

Deleted: the

Deleted: host

Deleted: property

Deleted: host

Deleted: host

Deleted: that

Deleted: property

Deleted: host

Deleted: property

Deleted: that

Deleted: host

Deleted: Table 11

Deleted: 10

Deleted: 11

Well-known intransics are built-in objects that are explicitly referenced by the algorithms of this specification and which usually have Code Realm specific identities. Unless otherwise specific each intrinsic object actually corresponds to a set of similar objects, one per Code Realm.

Within this specification a reference such as %name% means the intrinsic object, associated with the current Code Realm, corresponding to the name. Determine of the current Code Realmand its intransics is described in 10.3. The well-known intrincs are listed in Table 11.

Table 11 — Well-known Intrinsic Objects

Deleted: 25

<u>Intrinsic Name</u>	<u>ECMAScript Language Association</u>
%Object%	The initial value of the global object property named "Object".
%ObjectPrototype%	The initial value of the "prototype" data property of the intrinsic %Object%.
%ObjProto_toString%	The initial value of the "toString" data property of the intrinsic %ObjectPrototype%.
%Function%	The initial value of the global object property named "Function".
%FunctionPrototype%	The initial value of the "prototype" data property of the intrinsic %Function%.
%Array%	The initial value of the global object property named "Array".
%ArrayPrototype%	The initial value of the "prototype" data property of the intrinsic %Array%.
%ArrayIteratorPrototype%	The prototype object used for interator objects created by the CreateArrayIterator abstract operation.
%Map%	The initial value of the global object property named "Map".
%MapPrototype%	The initial value of the "prototype" data property of the intrinsic %Map%.
%MapIteratorPrototype%	The prototype object used for interator objects created by the CreateMapIterator abstract operation
%WeakMap%	The initial value of the global object property named "WeakMap".
%WeakMapPrototype%	The initial value of the "prototype" data property of the intrinsic %WeakMap%.
%Set%	The initial value of the global object property named "Set".
%SetPrototype%	The initial value of the "prototype" data property of the intrinsic %Set%.
%SetIteratorPrototype%	The prototype object used for interator objects created by the CreateSetterator abstract operation
%StopIteration%	
???	

Comment [AWB1217]: This needs to be per engine, not per Realm. Also, perhaps it can be a Symbol.

Comment [AWB1218]: TODO more to comeTODO

8.2 ECMAScript Specification Types

A specification type corresponds to meta-values that are used within algorithms to describe the semantics of ECMAScript language constructs and ECMAScript language types. The specification types are Reference, List, Completion, Property Descriptor, Lexical Environment, Environment Record, and Data Block. Specification type values are specification artefacts that do not necessarily correspond to any specific entity within an ECMAScript implementation. Specification type values may be used to describe intermediate results of ECMAScript expression evaluation but such values cannot be stored as properties of objects or values of ECMAScript language variables.

Deleted: Table — Internal Properties Only Defined for Some Objects
Internal Property

Comment [AWB919]: Hopefully we can eliminate functions returning References

Deleted: Property Identifier,

Deleted: ¶

8.2.1 Data Blocks

This section is a placeholder for describing the Data Block internal type. The following material is verbatim from the the Binary Data ES wiki proposal. The material has not yet been reviewed or integrated with the rest of this spec.

This spec introduces a new, spec-internal block datatype, intuitively representing a contiguously allocated block of binary data. Blocks are not ECMAScript language values and appear only in the program store (aka heap).

A block is one of:

- a number-block
- an array-block[t, n]
- a struct-block[t1, ..., tn]

A number-block is one of:

- an unsigned-integer; i.e., one of uint8, uint16, uint32, or uint64
- a signed-integer; i.e., one of int8, int16, int32, or int64
- a floating-point; i.e., one of float32 or float64

A uintk is an integer in the range [0, 2k). An intk is an integer in the range [-2k-1, 2k-1). A floatk is a floating-point number representable as a k-bit IEE754 value.

An array-block[t, n] is an ordered sequence of n blocks of homogeneous block type t. Each element of the array is stored at an independently addressable location in the program store, and multiple Data objects may contain references to the element.

A struct-block[t1, ..., tn] is an ordered sequence of n blocks of heterogeneous types t1 to tn, respectively. Each field of the struct is stored at an independently addressable location in the program store, and multiple Data objects may contain references to the field.

The spec also introduces a datatype of Data objects, which are ECMAScript objects that encapsulate references to block data in the program store. Every Data object has the following properties:

- [[Class]] = "Data"
- [[Value]] : reference[block] – a reference to a block in the program store
- [[DataType]] : reference[Type] – a reference to a Type object describing this object's data block

8.2.2 The List and Record Specification Type

The List type is used to explain the evaluation of argument lists (see 11.2.4) in `new` expressions, in function calls, and in other algorithms where a simple list of values is needed. Values of the List type are simply ordered sequences of values. These sequences may be of any length.

The Record type is used to describe data aggregations within the algorithms of this specification. A Record type value consists of one or more named fields. The value of each field is either an ECMAScript value or an abstract value represented by a name associated with the Record type. Field names are always enclosed in double brackets, for example `[[value]]`.

For notational convenience within this specification, an object literal-like syntax can be used to express a Record value. For example, `{[[field1]]: 42, [[field2]]: false, [[field3]]: empty}` defines a Record value that has three fields each of which is initialized to a specific value. Field name order is not significant. Any fields that are not explicitly listed are considered to be absent.

In specification text and algorithms, dot notation may be used to refer to a specific field of a Record value. For example, if `R` is the record shown in the previous paragraph then `R.[[field2]]` is shorthand for "the field of `R` named `[[field2]]`".

Schema for commonly used Record field combinations may be named, and that name may be used as a prefix to a literal Record value to identify the specific kind of aggregations that is being described. For example: Property Descriptor `{[[Value]]: 42, [[Writable]]: false, [[Configurable]]: true}`.

8.2.3 The Completion Record Specification Type

The Completion type is a Record used to explain the runtime propagation of values and control flow such as the behaviour of statements (`break`, `continue`, `return` and `throw`) that perform nonlocal transfers of control.

Values of the Completion type are Record values whose fields are defined as by Table 12.

Table 12 — Completion Record Fields

Field Name	Value	Meaning
<code>[[type]]</code>	One of <code>normal</code> , <code>break</code> , <code>continue</code> , <code>return</code> , or <code>throw</code>	The type of completion that occurred.
<code>[[value]]</code>	any ECMAScript language value or <code>empty</code>	The value that was produced.
<code>[[target]]</code>	any ECMAScript identifier or <code>empty</code>	The target label for directed control transfers.

The term "abrupt completion" refers to any completion with a `[[type]]` value other than `normal`.

8.2.3.1 NormalCompletion

The abstract operation `NormalCompletion` with a single *argument*, such as:

1. Return `NormalCompletion(argument)`.

Is a short hand that is defined as follows:

1. Return `Completion{[[type]]: normal, [[value]]: argument, [[target]]: empty}`.

8.2.3.2 Implicit Completion Values

The algorithms of this specification often implicitly return Completion Records whose `[[type]]` is `normal`. Unless it is otherwise obvious from the context, an algorithm statement that returns a value that is not a Completion Record, such as:

Deleted: 7

Deleted: aggregations

Deleted: the

Deleted: type

Deleted: a

Deleted: at

Deleted: .

Deleted: F

Deleted: ,

Deleted: fields

Deleted: why

Deleted: D

Deleted: D

Deleted: D

Deleted: F

Deleted: aggregations

Deleted: 8

Deleted: ie

Deleted: Table 10Table 11

Deleted: 10

Deleted: .8

Deleted: 1

Deleted: I

Deleted: y

1. Return **"Infinity"**.

Deleted: the String

Generally means the same thing as:

Deleted: s

1. Return NormalCompletion(**"Infinity"**).

Deleted: {[[type]]: normal, {[value]]: String}

A "return" statement without a value in an algorithm step means the same thing as:

Deleted: , {[target]]:empty}

1. Return NormalCompletion(**undefined**).

Deleted: }

Similarly, any reference to a Completion Record value that is in a context that does not explicitly require a complete Completion Record value is equivalent to an explicit reference to the {[value]] field of the Completion Record value unless the Completion Record is an abrupt completion.

Deleted: argument

8.2.3.3 Throw an Exception

Algorithms steps that say to throw an exception, such as

Deleted: 8.8.2 NormalCompletion¶
The abstract operation NormalCompletion with a single argument, such as:¶
The abstraction operation NormalValue with a single argument is a short hand that is defined as follows:¶
<#>If argument is not a Completion Record, return argument.¶
<#>If argument is an abrupt completion, return argument.¶
<#>Return argument.[value].¶

1. Throw a **TypeError** exception.

The abstraction operation abstract operation NormalCompletion with a single argument, such as:¶
<#>Return NormalCompletion(argument).¶
Is a short hand that is defined as follows:¶
<#>Return Completion {[[type]]: normal, {[value]]: argument, {[target]]:empty}}.¶

8.2.3.4 ReturnIfAbrupt

Algorithms steps that say

Deleted: 8

1. ReturnIfAbrupt(**argument**).

Deleted: 8

mean the same things as:

Deleted:

1. If **argument** is an abrupt completion, then return **argument**.

Deleted:,

2. Else if **argument** is a Completion Record, then let **argument** be **argument.[value]**.

Deleted:,

8.2.4 The Reference Specification Type

NOTE The Reference type is used to explain the behaviour of such operators as **delete**, **typeof**, the assignment operators, the **super** keyword and other language features. For example, the left-hand operand of an assignment is expected to produce a reference.

Deleted: .¶

A **Reference** is a resolved name binding. A Reference consists of three components, the *base* value, the *referenced name* and the Boolean valued *strict reference* flag. The *base* value is either **undefined**, an Object, a Boolean, a String, a Number, or an environment record (10.2.1). A *base* value of **undefined** indicates that the Reference could not be resolved to a binding. The *referenced name* is a String.

Deleted: 7

A Super Reference is a Reference that is used to represents a name binding that was expressed using the **super** keyword. A Super Reference has an additional *thisValue* component and its *base* value will never be an environment record.

Deleted: 9

The following abstract operations are used in this specification to access the components of references:

Deleted: and

- **GetBase(V)**. Returns the base value component of the reference V.
- **GetReferencedName(V)**. Returns the referenced name component of the reference V.
- **IsStrictReference(V)**. Returns the strict reference component of the reference V.
- **HasPrimitiveBase(V)**. Returns **true** if the base value is a Boolean, String, or Number.
- **IsPropertyReference(V)**. Returns **true** if either the base value is an object or HasPrimitiveBase(V) is **true**; otherwise returns **false**.
- **IsUnresolvableReference(V)**. Returns **true** if the base value is **undefined** and **false** otherwise.

Deleted: .

- IsSuperReference(V). Returns **true** if this reference has a *thisValue* component.

The following abstract operations are used in this specification to operate on references:

8.2.4.1 GetValue (V)

1. ReturnIfAbrupt(V).
2. If Type(V) is not Reference, return V.
3. Let *base* be the result of calling GetBase(V).
4. If IsUnresolvableReference(V), throw a **ReferenceError** exception.
5. If IsPropertyReference(V), then
 - a. If HasPrimitiveBase(V) is **true**, then
 - i. Assert: In this case, *base* will never be **null** or **undefined**.
 - ii. Set *base* to ToObject(*base*).
 - b. Return the result of calling the [[GetP]] internal method of *base* passing GetReferencedName(V) and GetThisValue(V) as the arguments.
6. Else *base* must be an environment record.
 - a. Return the result of calling the GetBindingValue (see 10.2.1) concrete method of *base* passing GetReferencedName(V) and IsStrictReference(V) as arguments.

NOTE The object that may be created in step 5.a.ii is not accessible outside of the above method. An implementation might choose to avoid the actual creation of the object.

8.2.4.2 PutValue (V, W)

1. ReturnIfAbrupt(V).
2. ReturnIfAbrupt(W).
3. If Type(V) is not Reference, throw a **ReferenceError** exception.
4. Let *base* be the result of calling GetBase(V).
5. If IsUnresolvableReference(V), then
 - a. If IsStrictReference(V) is **true**, then
 - i. Throw **ReferenceError** exception.
 - b. Let *globalObj* be the result of the abstraction operation GetGlobalObject.
 - c. Return the result of calling Put(*globalObj*, GetReferencedName(V), W, false).
6. Else if IsPropertyReference(V), then
 - a. If HasPrimitiveBase(V) is **true**, then
 - i. Assert: In this case, *base* will never be **null** or **undefined**.
 - ii. Set *base* to ToObject(*base*).
 - b. Let *succeeded* be the result of calling the [[SetP]] internal method of *base* passing GetReferencedName(V), W, and GetThisValue(V) as arguments.
 - c. ReturnIfAbrupt(succeeded).
 - d. If *succeeded* is **false** and IsStrictReference(V) is **true**, then throw a **TypeError** exception.
 - e. Return.
7. Else *base* must be a reference whose base is an environment record. So,
 - a. Return the result of calling the SetMutableBinding (10.2.1) concrete method of *base*, passing GetReferencedName(V), W, and IsStrictReference(V) as arguments.
8. Return.

NOTE The object that may be created in step 6.a.ii is not accessible outside of the above algorithm. An implementation might choose to avoid the actual creation of that transient object.

8.2.4.3 GetThisValue (V)

1. ReturnIfAbrupt(V).
2. If Type(V) is not Reference, return V.
3. If IsUnresolvableReference(V), throw a **ReferenceError** exception.
4. If IsSuperReference(V), then
 - a. Return the value of the *thisValue* component of the reference V.
5. Return GetBase(V).

Deleted: 7

Deleted: 9

Deleted: <#>Let *V* be NormalValue(*V*).¶

Deleted: false...rue, then

Deleted: Let *get* be the [[Get]] internal method of *base*, otherwise let...to ToObject(*base*)*get* be the

Deleted: <#>If IsSuperReference(*V*) is **false**, then
<#>Return the result of calling the *get* as an internal method using *base* as its **this** value, and passing GetReferencedName(*V*) for the argument.¶
<#>Else, ¶

Deleted: *get* as an

Deleted: ...*base* must be an environment record

Deleted: The following [[Get]](P[, accessorThisValue]) internal method is used to GetValue when *V* is a property reference with primitive base value. It is called using *base* as the value the internal method is called upon it **this** value and with property name *P* as its argument. The following steps are taken.¶
<#>Let *O* be ToObject(*base*).¶
<#>Let *desc* be the result of calling the [[GetProperty]] internal method of *O* with property name *P*.¶

<#>If *desc* is **undefined**, return **undefined**.¶
<#>If IsDataDescriptor(*desc*) is **true**, return *desc*.[[Value]].¶
<#>Otherwise, IsAccessorDescriptor(*desc*) must be **true** so, let *getter* be *desc*.[[Get]] (see 8.10).¶
<#>If *getter* is **undefined**, return **undefined**.¶
<#>If the *accessorThisValue* argument is not present, let *accessorThisValue* be *base*.¶
<#>Return the result of calling the [[Call]] internal method of *getter* providing *accessorThisValue* as *thisArgument* the **this** value and providing an empty List no as *argumentsList*.¶

Deleted: 7

Deleted: 9

Deleted: <#>Let *V* be NormalValue(*V*).¶
<#>Let *W* be NormalValue(*W*).¶

Deleted: Call

Deleted: the [[...ut]] internal method of...

Deleted: false

Deleted: <#> let *put* be the [[Put]] internal method of *base*, otherwise let *put* be the special

Deleted: Call

Deleted: the

Deleted: *put*...the [[SetP]] as an

Deleted: using ...*f* *base* as its **this** value, and

Deleted: for the property name... *W* for the val

Deleted:)

Deleted: for the Throw flag

Deleted: Call

Deleted: The following [[Put]] internal method is used by PutValue when *V* is a property

Deleted: 9

8.2.5 The Property Descriptor Specification Type

The Property Descriptor type is used to explain the manipulation and reification of Object property attributes. Values of the Property Descriptor type are Records composed of named fields where each field's name is an attribute name and its value is a corresponding attribute value as specified in 8.1.6.1. In addition, any field may be present or absent.

Property Descriptor values may be further classified as data property descriptors and accessor property descriptors based upon the existence or use of certain fields. A data property descriptor is one that includes any fields named either [[Value]] or [[Writable]]. An accessor property descriptor is one that includes any fields named either [[Get]] or [[Set]]. Any property descriptor may have fields named [[Enumerable]] and [[Configurable]]. A Property Descriptor value may not be both a data property descriptor and an accessor property descriptor; however, it may be neither. A generic property descriptor is a Property Descriptor value that is neither a data property descriptor nor an accessor property descriptor. A fully populated property descriptor is one that is either an accessor property descriptor or a data property descriptor and that has all of the fields that correspond to the property attributes defined in either 8.1.6.1 Table 5 or Table 6.

A Property Descriptor may be derived from an ECMAScript object that has properties that directly correspond to the fields of a Property Descriptor. Such a derived Property Descriptor has an additional field named [[Origin]] whose value is the object from which the Property Descriptor was derived.

The following abstract operations are used in this specification to operate upon Property Descriptor values:

8.2.5.1 IsAccessorDescriptor (Desc)

When the abstract operation IsAccessorDescriptor is called with property descriptor Desc, the following steps are taken:

2. If Desc is **undefined**, then return **false**.
3. If both Desc.[[Get]] and Desc.[[Set]] are absent, then return **false**.
4. Return **true**.

8.2.5.2 IsDataDescriptor (Desc)

When the abstract operation IsDataDescriptor is called with property descriptor Desc, the following steps are taken:

1. If Desc is **undefined**, then return **false**.
2. If both Desc.[[Value]] and Desc.[[Writable]] are absent, then return **false**.
3. Return **true**.

8.2.5.3 IsGenericDescriptor (Desc)

When the abstract operation IsGenericDescriptor is called with property descriptor Desc, the following steps are taken:

1. If Desc is **undefined**, then return **false**.
2. If IsAccessorDescriptor(Desc) and IsDataDescriptor(Desc) are both **false**, then return **true**.
3. Return **false**.

8.2.5.4 FromPropertyDescriptor (Desc)

When the abstract operation FromPropertyDescriptor is called with property descriptor Desc, the following steps are taken:

The following algorithm assumes that Desc is a fully populated Property Descriptor, such as that returned from [[GetOwnProperty]] (see 8.12.1).

1. If Desc is **undefined**, then return **undefined**.
2. If Desc has an [[Origin]] field, then return Desc.[[Origin]].
3. Let obj be the result of the abstract operation ObjectCreate.

Deleted: 8.8 The List Specification Type
 The List type is used to explain the evaluation of argument lists (see 11.2.4) in new expressions, in function calls, and in other algorithms where a simple list of values is needed. Values of the List type are simply ordered sequences of values. These sequences may be of any length.

8.9 The Completion Specification Type
 The Completion type is used to explain the behavior of statements (break, continue, return and throw) that perform nonlocal transfers of control. Values of the Completion type are triples of the form (type, value, target), where type is one of normal, break, continue, return, or throw, value is any ECMAScript language value or empty, and target is any ECMAScript identifier or empty. If cv.type is a completion value then cv.type, cv.value, and cv.target may be used to directly refer to its constituent values.
 The term "abrupt completion" refers to any completion with a type other than normal.

Deleted: 10

Deleted: and Property Identifier

Deleted: s

Deleted: named

Deleted: records

Deleted: For notational convenience within this specification, an object literal-like syntax can be used to define a property descriptor value. For example, Property Descriptor {[[Value]]: 42, [[Writable]]: false, [[Configurable]]: true} defines a data property descriptor. Field name order is not significant. Any fields that are not explicitly listed are considered to be absent.
 In specification text and algorithms, dot notation may be used to refer to a specific field of a Property Descriptor. For example, if D is a property descriptor then D.[[Value]] is shorthand for "the field of D named [[Value]]".
 The Property Identifier type is used to associate a property name with a Property Descriptor. Values of the Property Identifier type are pairs of the form (name, descriptor), where name is a String and descriptor is a Property Descriptor value.

Deleted: 10

Deleted: 10

Deleted: 10

Deleted: 10

Deleted: ion

Deleted: (15.2)

Deleted: creating a new object as if by the expression new Object() where Object is the standard built-in constructor with that name

4. Assert: *obj* is an extensible ordinary object with no own properties.

5. If *Desc* has a **[[Value]]** field, then

- a. Call OrdinaryDefineOwnProperty with arguments *obj*, **"value"**, and Property Descriptor **[[Value]]**: *Desc*.**[[Value]]**, **[[Writable]]**: **true**, **[[Enumerable]]**: **true**, **[[Configurable]]**: **true**,

6. If *Desc* has a **[[Writable]]** field, then

- a. Call OrdinaryDefineOwnProperty with arguments *obj*, **"writable"**, and Property Descriptor **[[Value]]**: *Desc*.**[[Writable]]**, **[[Writable]]**: **true**, **[[Enumerable]]**: **true**, **[[Configurable]]**: **true**,

7. If *Desc* has a **[[Get]]** field, then

- a. Call OrdinaryDefineOwnProperty with arguments *obj*, **"get"**, and Property Descriptor **[[Value]]**: *Desc*.**[[Set]]**, **[[Writable]]**: **true**, **[[Enumerable]]**: **true**, **[[Configurable]]**: **true**,

8. If *Desc* has a **[[Set]]** field, then

- a. Call OrdinaryDefineOwnProperty with arguments *obj*, **"set"**, and Property Descriptor **[[Value]]**: *Desc*.**[[Set]]**, **[[Writable]]**: **true**, **[[Enumerable]]**: **true**, **[[Configurable]]**: **true**,

9. If *Desc* has a **[[Enumerable]]** field, then

- a. Call OrdinaryDefineOwnProperty with arguments *obj*, **"enumerable"**, and Property Descriptor **[[Value]]**: *Desc*.**[[Enumerable]]**, **[[Writable]]**: **true**, **[[Enumerable]]**: **true**, **[[Configurable]]**: **true**,

10. If *Desc* has a **[[Configurable]]** field, then

- a. Call OrdinaryDefineOwnProperty with arguments *obj*, **"configurable"**, and Property Descriptor **[[Value]]**: *Desc*.**[[Configurable]]**, **[[Writable]]**: **true**, **[[Enumerable]]**: **true**, **[[Configurable]]**: **true**,

11. Return *obj*.

8.2.5.5 ToPropertyDescriptor (*Obj*)

When the abstract operation ToPropertyDescriptor is called with object *Obj*, the following steps are taken:

1. ReturnIfAbrupt(*Obj*).

2. If Type(*Obj*) is not Object throw a **TypeError** exception.

3. Let *desc* be the result of creating a new Property Descriptor that initially has no fields.

4. If the result of HasProperty(*Obj*, **"enumerable"**) is **true**, then

- a. Let *enum* be the result of Get(*Obj*, **"enumerable"**).
- b. ReturnIfAbrupt(*enum*).
- c. Set the **[[Enumerable]]** field of *desc* to ToBoolean(*enum*).

5. If the result of HasProperty(*Obj*, **"configurable"**) is **true**, then

- a. Let *conf* be the result of Get(*Obj*, **"configurable"**).
- b. ReturnIfAbrupt(*conf*).
- c. Set the **[[Configurable]]** field of *desc* to ToBoolean(*conf*).

6. If the result of HasProperty(*Obj*, **"value"**) is **true**, then

- a. Let *value* be the result of Get(*Obj*, **"value"**).
- b. ReturnIfAbrupt(*value*).
- c. Set the **[[Value]]** field of *desc* to *value*.

7. If the result of HasProperty(*Obj*, **"writable"**) is **true**, then

- a. Let *writable* be the result of Get(*Obj*, **"writable"**).
- b. ReturnIfAbrupt(*writable*).
- c. Set the **[[Writable]]** field of *desc* to ToBoolean(*writable*).

8. If the result of HasProperty(*Obj*, **"get"**) is **true**, then

- a. Let *getter* be the result of Get(*Obj*, **"get"**).
- b. ReturnIfAbrupt(*getter*).
- c. If IsCallable(*getter*) is **false** and *getter* is not **undefined**, then throw a **TypeError** exception.
- d. Set the **[[Get]]** field of *desc* to *getter*.

9. If the result of HasProperty(*Obj*, **"set"**) is **true**, then

- a. Let *setter* be the result of Get(*Obj*, **"set"**).
- b. ReturnIfAbrupt(*setter*).
- c. If IsCallable(*setter*) is **false** and *setter* is not **undefined**, then throw a **TypeError** exception.
- d. Set the **[[Set]]** field of *desc* to *setter*.

10. If either *desc*.**[[Get]]** or *desc*.**[[Set]]** are present, then

- a. If either *desc*.**[[Value]]** or *desc*.**[[Writable]]** are present, then throw a **TypeError** exception.

11. Set the **[[Origin]]** field of *desc* to *Obj*.

12. Return *desc*.

Deleted: If IsDataDescriptor(*Desc*) is **true**

Deleted: the **[[...rldyDefineOwnProperty]]**

Deleted: the **[[...efineOwnProperty with**

Deleted: Else, IsAccessorDescriptor(*Desc*) must be **true**,

Deleted: so

Deleted: the **[[...efineOwnProperty with**

Deleted: the **[[...efineOwnProperty with**

Deleted: the **[[...efineOwnProperty with**

Deleted: the **[[...efineOwnProperty with**

Deleted: 10

When the abstract operation ToPropertyDescriptor is called with object *Obj*, the following steps are taken:

1. ReturnIfAbrupt(*Obj*).

2. If Type(*Obj*) is not Object throw a **TypeError** exception.

3. Let *desc* be the result of creating a new Property Descriptor that initially has no fields.

4. If the result of HasProperty(*Obj*, **"enumerable"**) is **true**, then

- a. Let *enum* be the result of Get(*Obj*, **"enumerable"**).
- b. ReturnIfAbrupt(*enum*).
- c. Set the **[[Enumerable]]** field of *desc* to ToBoolean(*enum*).

Deleted: calling the **[[HasProperty]]** internal method of ...bj with argument

Deleted: calling the **[[...et]]** internal method of...

Deleted: calling the **[[HasProperty]]** internal method of *Obj* with argument

Deleted: calling the **[[...et]]** internal method of...

Deleted: g

Deleted: calling the **[[HasProperty]]** internal method of *Obj* with argument

Deleted: calling the **[[...et]]** internal method of...

Deleted: calling the **[[HasProperty]]** internal method of *Obj* with argument

Deleted: calling the **[[...et]]** internal method of...

Deleted: calling the **[[HasProperty]]** internal method of *Obj* with argument

Deleted: calling the **[[...et]]** internal method of...

Deleted: calling the **[[HasProperty]]** internal method of *Obj* with argument

Deleted: calling the **[[...et]]** internal method of...

Deleted: calling the **[[HasProperty]]** internal method of *Obj* with argument

Deleted: calling the **[[...et]]** internal method of...

11. Set the **[[Origin]]** field of *desc* to *Obj*.

12. Return *desc*.

8.2.5.6 CompletePropertyDescriptor (Desc, LikeDesc)

When the abstract operation CompletePropertyDescriptor is called with Property Descriptor *Desc*, the following steps are taken:

1. Assert: *LikeDesc* is either a Property Descriptor or **undefined**.
2. ReturnIfAbrupt(*Desc*).
3. Assert: *Desc* is a Property Descriptor.
4. If *LikeDesc* is **undefined**, then set *LikeDesc* to Record{[[Value]]: **undefined**, [[Writable]]: **false**, [[Get]]: **undefined**, [[Set]]: **undefined**, [[Enumerable]]: **false**, [[Configurable]]: **false**}.
5. If either IsGenericDescriptor(*Desc*) or IsDataDescriptor(*Desc*) is **true**, then
 - a. If *Desc* does not have a [[Value]] field, then set *Desc*.[[Value]] to *LikeDesc*.[[Value]].
 - b. If *Desc* does not have a [[Writable]] field, then set *Desc*.[[Writable]] to *LikeDesc*.[[Writable]].
6. Else
 - a. If *Desc* does not have a [[Get]] field, then set *Desc*.[[Get]] to *LikeDesc*.[[Get]].
 - b. If *Desc* does not have a [[Set]] field, then set *Desc*.[[Set]] to *LikeDesc*.[[Set]].
7. If *Desc* does not have a [[Enumerable]] field, then set *Desc*.[[Enumerable]] to *LikeDesc*.[[Enumerable]].
8. If *Desc* does not have a [[Configurable]] field, then set *Desc*.[[Configurable]] to *LikeDesc*.[[Configurable]].
9. Return *Desc*.

8.2.6 The Lexical Environment and Environment Record Specification Types

The Lexical Environment and Environment Record types are used to explain the behaviour of name resolution in nested functions and blocks. These types and the operations upon them are defined in Clause 10.

8.3 Ordinary Object Internal Methods and Internal Data Properties

Sections 8.3-8.5 will eventually be subsectons of a new toplevel section that follow the current section 10

All ordinary objects have an internal data_property called **[[Prototype]]**. The value of this property is either **null** or an object and is used for implementing inheritance. Data properties of the **[[Prototype]]** object are inherited (are visible as properties of the child object) for the purposes of get access, but not for set access. Accessor properties are inherited for both get access and set access.

Every ordinary ECMAScript object has a Boolean-valued **[[Extensible]]** internal data_property that controls whether or not properties may be added to the object. If the value of the **[[Extensible]]** internal data_property is **false** then additional properties may not be added to the object. In addition, if **[[Extensible]]** is **false** the value of **[[Prototype]]** internal data_properties of the object may not be modified. Once the value of an object's **[[Extensible]]** internal data_property has been set to **false** it may not be subsequently changed to **true**.

In the following algorithm descriptions, assume *O* is an ordinary ECMAScript object, *P* is a property key value, *V* is any ECMAScript language value, *Desc* is a Property Description record, and *B* is a Boolean flag.

8.3.1 [[GetInheritance]]()

When the **[[GetInheritance]]** internal method of *O* is called the following steps are taken:

1. Return the value of the **[[Prototype]]** internal data property of *O*.

8.3.2 [[SetInheritance]](V)

When the **[[SetInheritance]]** internal method of *O* is called with argument *V* the following steps are taken:

1. Assert: Either **Type(V)** is **Object** or **Type(V)** is **Null**.
2. Let *extensible* be the value of the **[[Extensible]]** internal data property of *O*.
3. If *extensible* is **false**, then return **false**.
4. Set the value of the **[[Prototype]]** internal data property of *O* to *V*.
5. Return **true**.

Deleted: Record

Deleted: Record

Deleted: Record

Deleted:)

Deleted: d

Deleted: 11

Deleted: 12

Deleted: Algorithms for

Comment [AWB1220]: TODO

Deleted: Whether or not an object can have an object its **[[Prototype]]** depends on the implementation. Every **[[Prototype]]** chain must have finite length (that is, starting from any object, recursively accessing the **[[Prototype]]** internal property must eventually lead to a **null** value).

Deleted: Named d

Deleted: put

Deleted: Named a

Deleted: put

Deleted: named

Deleted: named

Deleted: ¶

Deleted: native

Deleted: String

Deleted: Throw

8.3.3 [[IsExtensible]] ()

When the `[[IsExtensible]]` internal method of O is called the following steps are taken:

1. Return the value of the `[[Extensible]]` internal data property of O .

8.3.4 [[PreventExtensions]] ()

When the `[[PreventExtensions]]` internal method of O is called the following steps are taken:

1. Set the value of the `[[Extensible]]` internal data property of O to `false`.
2. Return `NormalCompletion(empty)`.

Deleted: <#>Assert: Type(B) is Boolean.¶

8.3.5 [[HasOwnProperty]] (P)

When the `[[HasOwnProperty]]` internal method of O is called with property key P , the following steps are taken:

1. Assert: `IsPropertyKey(P)` is `true`.
2. If O does not have an own property with key P , return `false`.
3. Return `true`.

Deleted: P is a valid property key, either a String or a Symbol Object

8.3.6 [[GetOwnProperty]] (P)

When the `[[GetOwnProperty]]` internal method of O is called with property key P , the following steps are taken:

1. Return the result of `OrdinaryGetOwnProperty` with arguments O and P .

Deleted: 12

Deleted: 1

Deleted: name

8.3.6.1 OrdinaryGetOwnProperty (O, P)

When the abstract operation `OrdinaryGetOwnProperty` is called with Object O and with property key P , the following steps are taken:

1. Assert: `IsPropertyKey(P)` is `true`.
2. If O does not have an own property with key P , return `undefined`.
3. Let D be a newly created Property Descriptor with no fields.
4. Let X be O 's own property whose key is P .
5. If X is a data property, then
 - a. Set $D.[[Value]]$ to the value of X 's `[[Value]]` attribute.
 - b. Set $D.[[Writable]]$ to the value of X 's `[[Writable]]` attribute
6. Else X is an accessor property, so
 - a. Set $D.[[Get]]$ to the value of X 's `[[Get]]` attribute.
 - b. Set $D.[[Set]]$ to the value of X 's `[[Set]]` attribute.
7. Set $D.[[Enumerable]]$ to the value of X 's `[[Enumerable]]` attribute.
8. Set $D.[[Configurable]]$ to the value of X 's `[[Configurable]]` attribute.
9. Return D .

Deleted: P is a valid property key, either a String or a Symbol Object

Deleted: <#>ReturnIfAbrupt(O).¶

Deleted: n't

Deleted: name

Deleted: named

8.3.7 [[DefineOwnProperty]] ($P, Desc$)

When the `[[DefineOwnProperty]]` internal method of O is called with property key P and property descriptor $Desc$, the following steps are taken:

Deleted: However, if O is a String object it has a more elaborate `[[GetOwnProperty]]` internal method defined in 15.5.5.2.¶

1. Return the result of `OrdinaryDefineOwnProperty` with arguments O, P , and $Desc$.

8.3.7.1 OrdinaryDefineOwnProperty ($O, P, Desc$)

When the abstract operation `OrdinaryDefineOwnProperty` is called with Object O , property key P , and property descriptors $Desc$ the following steps are taken:

1. Let $current$ be the result of calling `OrdinaryGetOwnProperty` with arguments O and P .
2. Let $extensible$ be the value of the `[[Extensible]]` internal data property of O .

3. Return the result of `ValidateAndApplyPropertyDescriptor` with arguments `O, P, extensible, Desc, and current`.

8.3.7.2 IsCompatiblePropertyDescriptor (Extensible, Desc, Current)

When the abstract operation `IsCompatiblePropertyDescriptor` is called with Boolean value `Extensible`, and property descriptors `Desc`, and `Current` the following steps are taken:

1. Return the result of `ValidateAndApplyPropertyDescriptor` with arguments `undefined, undefined, Extensible, Desc, and Current`.

8.3.7.3 ValidateAndApplyPropertyDescriptor (O, P, extensible, Desc, current)

When the abstract operation `ValidateAndApplyPropertyDescriptor` is called with Object `O`, property key `P`, Boolean value `extensible`, and property descriptors `Desc`, and `current` the following steps are taken:

This algorithm contains steps that test various fields of the Property Descriptor `Desc` for specific values. The fields that are tested in this manner need not actually exist in `Desc`. If a field is absent then its value is considered to be `false`.

NOTE If `undefined` is passed as the `O` argument only validation is performed and not object updates are preformed.

1. **Assert:** If `O` is not `undefined` then `P` is a valid property key.
2. If `current` is `undefined`, then
 - a. If `extensible` is `false`, then return `false`.
 - b. **Assert:** `extensible` is `true`.
 - c. If `IsGenericDescriptor(Desc)` or `IsDataDescriptor(Desc)` is `true`, then
 - i. If `O` is not `undefined`, then create an own data property named `P` of object `O` whose `[[Value]]`, `[[Writable]]`, `[[Enumerable]]` and `[[Configurable]]` attribute values are described by `Desc`. If the value of an attribute field of `Desc` is absent, the attribute of the newly created property is set to its default value.
 - d. Else `Desc` must be an accessor Property Descriptor.
 - i. If `O` is not `undefined`, then create an own accessor property named `P` of object `O` whose `[[Get]]`, `[[Set]]`, `[[Enumerable]]` and `[[Configurable]]` attribute values are described by `Desc`. If the value of an attribute field of `Desc` is absent, the attribute of the newly created property is set to its default value.
 - e. Return `true`.
 3. Return `true`, if every field in `Desc` is absent.
 4. Return `true`, if every field in `Desc` also occurs in `current` and the value of every field in `Desc` is the same value as the corresponding field in `current` when compared using the `SameValue` algorithm (9.12).
 5. If the `[[Configurable]]` field of `current` is `false` then
 - a. Return `false`, if the `[[Configurable]]` field of `Desc` is `true`.
 - b. Return `false`, if the `[[Enumerable]]` field of `Desc` is present and the `[[Enumerable]]` fields of `current` and `Desc` are the Boolean negation of each other.
 6. If `IsGenericDescriptor(Desc)` is `true`, then no further validation is required.
 7. Else if `IsDataDescriptor(current)` and `IsDataDescriptor(Desc)` have different results, then
 - a. Return `false`, if the `[[Configurable]]` field of `current` is `false`.
 - b. If `IsDataDescriptor(current)` is `true`, then
 - i. If `O` is not `undefined`, then convert the property named `P` of object `O` from a data property to an accessor property. Preserve the existing values of the converted property's `[[Configurable]]` and `[[Enumerable]]` attributes and set the rest of the property's attributes to their default values.
 - c. Else,
 - i. If `O` is not `undefined`, then convert the property named `P` of object `O` from an accessor property to a data property. Preserve the existing values of the converted property's `[[Configurable]]` and `[[Enumerable]]` attributes and set the rest of the property's attributes to their default values.
 8. Else if `IsDataDescriptor(current)` and `IsDataDescriptor(Desc)` are both `true`, then
 - a. If the `[[Configurable]]` field of `current` is `false`, then
 - i. Return `false`, if the `[[Writable]]` field of `current` is `false` and the `[[Writable]]` field of `Desc` is `true`.

- ii. If the `[[Writable]]` field of `current` is `false`, then
 - 1. Return `false`, if the `[[Value]]` field of `Desc` is present and `SameValue(Desc.[[Value]], current.[[Value]])` is `false`.
 - b. else the `[[Configurable]]` field of `current` is `true`, so any change is acceptable.
9. Else `IsAccessorDescriptor(current)` and `IsAccessorDescriptor(Desc)` are both `true`.
- a. If the `[[Configurable]]` field of `current` is `false`, then
 - i. Return `false`, if the `[[Set]]` field of `Desc` is present and `SameValue(Desc.[[Set]], current.[[Set]])` is `false`.
 - ii. Return `false`, if the `[[Get]]` field of `Desc` is present and `SameValue(Desc.[[Get]], current.[[Get]])` is `false`.
10. If `O` is not `undefined`, then
- a. For each attribute field of `Desc` that is present, set the correspondingly named attribute of the property named `P` of object `O` to the value of the field.
11. Return `true`.

However, if `O` has an `[[BuiltInBrand]]` internal data property whose value is `BuiltinArray` `O` also has a more elaborate `[[DefineOwnProperty]]` internal method defined in 15.4.5.1.

NOTE Step 10.b allows any field of `Desc` to be different from the corresponding field of `current` if `current`'s `[[Configurable]]` field is `true`. This even permits changing the `[[Value]]` of a property whose `[[Writable]]` attribute is `false`. This is allowed because a `true` `[[Configurable]]` attribute would permit an equivalent sequence of calls where `[[Writable]]` is first set to `true`, a new `[[Value]]` is set, and then `[[Writable]]` is set to `false`.

8.3.11 `[[DefaultValue]]` (hint)

When the `[[DefaultValue]]` internal method of `O` is called with `hint String`, the following steps are taken:

1. Let `toString` be the result of `Get(O, "toString")`.
2. ReturnIfAbrupt(`toString`).
3. If `IsCallable(toString)` is `true` then
 - a. Let `str` be the result of calling the `[[Call]]` internal method of `toString`, with `O` as `thisArgument` and an empty List as `argumentsList`.
 - b. ReturnIfAbrupt(`str`).
 - c. If `str` is a primitive value, return `str`.
4. Let `valueOf` be the result of `Get(O, "valueOf")`.
5. ReturnIfAbrupt(`valueOf`).
6. If `IsCallable(valueOf)` is `true` then
 - a. Let `val` be the result of calling the `[[Call]]` internal method of `valueOf`, with `O` as `thisArgument` and an empty argument list.
 - b. ReturnIfAbrupt(`val`).
 - c. If `val` is a primitive value, return `val`.
7. Throw a `TypeError` exception.

Comment [AWB1221]: Replaced with ToPrimitive changes and possible call to @@ToPrimitive method

When the `[[DefaultValue]]` internal method of `O` is called with `hint Number`, the following steps are taken:

1. Let `valueOf` be the result of `Get(O, "valueOf")`.
2. ReturnIfAbrupt(`valueOf`).
3. If `IsCallable(valueOf)` is `true` then
 - a. Let `val` be the result of calling the `[[Call]]` internal method of `valueOf`, with `O` as `thisArgument` and an empty List as `argumentsList`.
 - b. ReturnIfAbrupt(`val`).
 - c. If `val` is a primitive value, return `val`.
4. Let `toString` be the result of `Get(O, "toString")`.
5. ReturnIfAbrupt(`toString`).
6. If `IsCallable(toString)` is `true` then
 - a. Let `str` be the result of calling the `[[Call]]` internal method of `toString`, with `O` as `thisArgument` and an empty List as `argumentsList`.
 - b. ReturnIfAbrupt(`str`).
 - c. If `str` is a primitive value, return `str`.
7. Throw a `TypeError` exception.

~~When the `DefaultValue` internal method of `O` is called with no hint, then it behaves as if the hint were `Number`, unless `O` is a `Date` object (see 15.9.6), in which case it behaves as if the hint were `String`.~~

The above specification of `[[DefaultValue]]` for ordinary objects can return only primitive values. If an exotic object implements its own `[[DefaultValue]]` internal method, it must ensure that its `[[DefaultValue]]` internal method can return only primitive values.

8.7.8 [[HasProperty]](P)

When the [[GetProperty]] internal method of O is called with property key P , the following steps are taken:

1. Assert: IsPropertyKey(P) is true.
 2. Let $desc$ be the result of calling $\text{[[HasOwnProperty]]}$ internal method of O with argument P .
 3. ReturnIfAbrupt($desc$).
 4. If $desc$ is undefined, then
 - a. Let $parent$ be the result of calling $\text{[[GetInheritance]]}$ internal method of O .
 - b. ReturnIfAbrupt($parent$).
 - c. If $parent$ is not null, then
 - i. Return the result of calling the [[HasProperty]] internal method of $parent$ with argument P .
 5. Return false.

8.3.9 [[GetP]] (P, Receiver)

When the `[[GetP]]` internal method of O is called with property key P and ECMAScript language value $Receiver$, the following steps are taken:

1. **Assert: IsPropertyKey(P) is true.**
 2. Let $desc$ be the result of calling the `[[GetOwnProperty]]` internal method of O with argument P .
 3. **ReturnIfAbrupt($desc$).**
 4. If $desc$ is **undefined**, then
 - a. Let $parent$ be the result of calling the `[[GetInheritance]]` internal method of O .
 - b. **ReturnIfAbrupt($parent$).**
 - c. If $parent$ is `null`, then return **undefined**.
 - d. Return the result of calling the `[[GetProperty]]` internal method of $parent$ with arguments P and $Receiver$.
 5. If $\text{IsDataDescriptor}(desc)$ is **true**, return $desc.[[Value]]$.
 6. Otherwise, $\text{IsAccessorDescriptor}(desc)$ must be **true** so, let $getter$ be $desc.[[Get]]$.
 7. If $getter$ is **undefined**, return **undefined**.
 8. Return the result of calling the `[[Call]]` internal method of $getter$ with $Receiver$ as the $thisArgument$ and an empty $List$ as $argumentsList$.

8.3.10 [[SetP]] (P, V, Receiver)

When the `[[SetP]]` internal method of O is called with property `key P`, value `V`, and ECMAScript language value `Receiver`, the following steps are taken:

1. Assert: IsPropertyKey(P) is true.
 2. Let $ownDesc$ be the result of calling the `[[GetOwnProperty]]` internal method of O with argument P .
 3. ReturnIfAbrupt($ownDesc$).
 4. If $ownDesc$ is undefined, then
 - a. Let $parent$ be the result of calling the `[[GetInheritance]]` internal method of O .
 - b. ReturnIfAbrupt($parent$).
 - c. If $parent$ is not null, then
 - i. Return the result of calling the `[[SetP]]` internal method of $parent$ with arguments P, V , and $Receiver$.
 - d. Else,
 - i. If $\text{Type}(Receiver)$ is not Object, return false.
 - ii. Return the result of performing `CreateOwnDataProperty(Receiver, P, V)`.
 5. If $\text{IsDataDescriptor}(ownDesc)$ is true, then
 - a. If $ownDesc.[[Writable]]$ is false, return false.
 - b. If $\text{Type}(Receiver)$ is not Object, return false.

Deleted: 7
Deleted: name
Deleted: P
Deleted: ,
Deleted: <i>P</i> is a valid property key, either a String or a Symbol Object
Deleted: the [[
Deleted: OrdinaryGetOwnProperty
Deleted:]] internal method of
Deleted: s
Deleted: <i>O</i> with property name and
Deleted: return undefined .
Deleted: s
Deleted: <i>targetThis</i>
Deleted: 8
Deleted: Put]
Deleted: Throw
Deleted: Put
Deleted: and Boolean flag Throw
Deleted: <i>P</i> is a valid property key, either a String or a Symbol Object
Deleted: <#>If the result of calling the [[CanPut]] internal method of <i>O</i> with argument <i>P</i> is false , then¶ <#>If Throw is true , then throw a TypeError exception.¶ <#>Else return undefined .¶
Deleted: the
Deleted: Ordinary[[GetProperty]
Deleted:]] internal method of
Deleted: s
Deleted: <i>O</i> with argument and
Deleted: <i>desc</i>
Deleted: s
Deleted: <#>Let <i>newDesc</i> be the Property Descriptor {[[Value]]: <i>V</i> , [[Writable]]: true , [[Enumerable]]: true , [[Configurable]]: true }.¶
Deleted: calling the [[DefineOwnProperty]] internal method of
Deleted: <i>O</i>
Deleted:
Deleted: passing
Deleted: <i>newDesc</i>
Deleted: and Throw as arguments

- c. Let *existingDescriptor* be the result of calling the **[[GetOwnProperty]]** internal method of *Receiver* with argument *P*.
 - d. ReturnIfAbrupt(*existingDescriptor*).
 - e. If *existingDescriptor* is not **undefined**, then
 - i. Let *valueDesc* be the Property Descriptor $\{[[Value]]: V\}$.
 - ii. Return the result of calling the **[[DefineOwnProperty]]** internal method of *Receiver* with arguments *P* and *valueDesc*.
 - f. Else *Receiver* does not currently have a property *P*.
 - i. Return the result of performing **CreateOwnProperty**(*Receiver*, *P*, *V*).
6. If **IsAccessorDescriptor**(*ownDesc*) is **true**, then
 - a. Let *setter* be *ownDesc***[[Set]]**.
 - b. If *setter* is **undefined**, return **false**.
 - c. Let *setterResult* be the result of calling the **[[Call]]** internal method of *setter* providing *Receiver* as *thisArgument* and a new List containing *V* as *argumentsList*.
 - d. ReturnIfAbrupt(*setterResult*).
 - e. Return **true**.

8.3.9 **[[HasProperty]] (P)**

When the **[[HasProperty]]** internal method of *O* is called with property key *P*, the following steps are taken:

1. Assert: **IsPropertyKey**(*P*) is **true**.
2. Let *has* be the result of calling the **[[HasOwnProperty]]** internal method of *O* with property key *P*.
3. ReturnIfAbrupt(*proto*).
4. If *has* is **true**, return *has*.
5. Let *proto* be the result of calling the **[[GetInheritance]]** internal method of *O*.
6. ReturnIfAbrupt(*proto*).
7. If *proto* is **null**, then return **false**.
8. Return the result of calling the **[[HasProperty]]** internal method of *proto* with argument *P*.

8.3.4 **[[CanPut]] (P)**

When the **[[CanPut]]** internal method of *O* is called with property name *P*, the following steps are taken:

1. Let *desc* be the result of calling the **[[GetOwnProperty]]** internal method of *O* with argument *P*.
2. If *desc* is not **undefined**, then
 - a. If **IsAccessorDescriptor**(*desc*) is **true**, then
 - i. If *desc***[[Set]]** is **undefined**, then return **false**.
 - ii. Else return **true**.
 - b. Else *desc* must be a DataDescriptor.
 - i. Return the value of *desc***[[Writable]]**.
3. Let *proto* be the **[[Prototype]]** internal property of *O*.
4. If *proto* is **null**, then return the value of the **[[Extensible]]** internal property of *O*.
5. Let *inherited* be the result of calling the **[[GetProperty]]** internal method of *proto* with property name *P*.
6. If *inherited* is **undefined**, return the value of the **[[Extensible]]** internal property of *O*.
7. If **IsAccessorDescriptor**(*inherited*) is **true**, then
 - a. If *inherited***[[Set]]** is **undefined**, then return **false**.
 - b. Else return **true**.
8. Else *inherited* must be a DataDescriptor.
 - a. If the **[[Extensible]]** internal property of *O* is **false**, return **false**.
 - b. Else return the value of *inherited***[[Writable]]**.

Exotic objects may define additional constraints upon their **[[SetP]]** internal method behavior. If possible, exotic objects should not allow **[[SetP]]** operations in situations where this definition of **[[CanPut]]** returns **false**.

8.3.11 **[[Delete]] (P)**

When the **[[Delete]]** internal method of *O* is called with property key *P*, the following steps are taken:

1. Assert: **IsPropertyKey**(*P*) is **true**.

- Deleted:** SameValue(*O*, *Receiver*)...is not true
- Deleted:** the **[[**
- Deleted:** Ordinary
- Deleted:** **]]** internal method of
- Deleted:** *O* passing , ...
- Deleted:** ...*valueDesc*, and Throw as argument
- Deleted:** *O* and ...*receiver* are different values
- Deleted:** <#>If **Type**(*Receiver*) is not Object, return **false**.
- Deleted:** <#>Let *desc* be the result of calling the **[[GetProperty]]** internal method of *O* with argument *P*.
- Deleted:** *desc*
- Deleted:** *desc*
- Deleted:** which cannot be **undefined**
- Deleted:** <#>If **accessorThisValue** is not present
- Deleted:** Else create a named data property named *P*.
- Deleted:** Let *newDesc* be the **Property**
- Deleted:** Formatted
- Deleted:** *name*
- Deleted:** *P* is a valid property key, either a String or a Symbol
- Deleted:** <#>Let *desc* be the result of calling the **[[GetProperty]]** internal method of *O* with argument *P*.
- Deleted:** <#>ReturnIfAbrupt(*O*).**¶**
- Deleted:** *prop* ...as be the result of calling the **[[Get]]** internal method of *O*.
- Deleted:** *prop* ...as is not **undefined**...true, return **true**.
- Deleted:** <#>Let *proto* be the value of the **[[Prototype]]** internal property of *O*.
- Deleted:** GetProperty
- Deleted:** 8.12.3 **[[Get]] (P)****¶**
- Deleted:** 12
- Deleted:** <#>ReturnIfAbrupt(*O*).**¶**
- Deleted:** ...*desc* must be a DataDescriptor
- Deleted:** *soF*
- Deleted:** *z*
- Deleted:** Host
- Deleted:** Put...etP]] operations
- Comment [AWB1222]:** Need to decide what to do with *soF* and *z*.
- Deleted:** host
- Deleted:** Put
- Comment [AWB1223]:** TODO replace with *soF* and *z*.
- Deleted:** 8.12.5 **[[Put]] (P, V, Throw, ...)****¶**
- Deleted:** Return.**¶**
- Deleted:** 8.12.6 **[[HasProperty]] (P)****¶**
- Deleted:** 12....7
- Deleted:** 9
- Deleted:** , Throw
- Deleted:** name ...key *P* and the Boolean flag
- Deleted:** *P* is a valid property key, either a String or a Symbol

2. Let *desc* be the result of calling the `[[GetOwnProperty]]` internal method of *O* with argument *P*.
3. If *desc* is `undefined`, then return `true`.
4. If *desc*.`[[Configurable]]` is `true`, then
 - a. Remove the own property with name *P* from *O*.
 - b. Return `true`.
5. Return `false`.

8.3.12 `[[Enumerate]]()`

When the `[[Enumerate]]` internal method of *O* is called the following steps are taken:

1. Return an Iterator object (reference *xxxx*) whose next method iterates over all the keys of enumerable property keys of *O*. The mechanics and order of enumerating the properties is not specified but must conform to the rules specified below.

Enumerated properties do not include properties whose property key is a Symbol. Properties of the object being enumerated may be deleted during enumeration. If a property that has not yet been visited during enumeration is deleted, then it will not be visited. If new properties are added to the object being enumerated during enumeration, the newly added properties are not guaranteed to be visited in the active enumeration. A property name must not be visited more than once in any enumeration.

Enumerating the properties of an object includes enumerating properties of its prototype, and the prototype of the prototype, and so on, recursively; but a property of a prototype is not enumerated if it is “shadowed” because some previous object in the prototype chain has a property with the same name. The values of `[[Enumerable]]` attributes are not considered when determining if a property of a prototype object is shadowed by a previous object on the prototype chain.

The following is an informative algorithm that conforms to these rules

1. Let *obj* be *O*.
2. Let *proto* be the result of calling the `[[GetInheritance]]` internal method of *O* with no arguments.
3. ReturnIfAbrupt(*proto*).
4. If *proto* is the value `null`, then
 - a. Let *propList* be a new empty List.
5. Else
 - a. Let *propList* be the result of calling the `[[Enumerate]]` internal method of *proto*.
6. ReturnIfAbrupt(*propList*).
7. For each *name* that is the property key of an own property of *O*
 - a. If `Type(name)` is `String`, then
 - i. Let *desc* be the result of calling `OrdinaryGetOwnProperty` with arguments *O* and *name*.
 - ii. If *name* is an element of *propList*, then remove *name* as an element of *propList*.
 - iii. If *desc*.`[[Enumerable]]` is `true`, then add *name* as an element of *propList*.
8. Order the elements of *propList* in an implementation defined order.
9. Return *propList*.

8.3.13 `[[OwnPropertyKeys]]()`

When the `[[OwnPropertyKeys]]` internal method of *O* is called the following steps are taken:

1. Let *keys* be a new empty List.
2. For each own property key *P* of *O*
 - a. If *P* is not a private Symbol, then
 - i. Add *P* as the last element of *keys*.
3. Return `MakeListIterator(keys)`.

8.3.14 `[[Freeze]]()`

When the `[[Freeze]]` internal method of *O* is called the following steps are taken:

1. Return the result of `MakeObjectSecure(O, true)`.

Deleted: <#>`ReturnIfAbrupt(O)`¶

Deleted: the `[[`

Deleted: `OrdinaryGetOwnProperty`

Deleted: `]]` internal method of

Deleted: *s*

Deleted: *O* with property name and

Deleted: <#>`If Throw, then throw a TypeError exception.`¶

Comment [AWB1224]: Replaced with `ToPrimitive` changes and possible call to `@@ToPrimitive` method

Comment [AWB625]: This is an experiment to see if we can use this internal method to define `Object.keys`, `Object.getOwnPropertyNames`, and perhaps some other things

Comment [AWB626]: TODO

Comment [AWB627]: TODO: Finish this up, and turn into iterator definition include a next method

Deleted: 8.3.910 `[[DefineOwnProperty]](P, Desc, Throw)`¶

When the `[[DefineOwnProperty]]` internal method of *O* is called with property key *P* and property descriptor *Desc*, the following steps are taken:¶

<#>`Return the result of OrdinaryDefineOwnProperty with arguments O, P, and Desc.`¶

8.3.10.1 OrdinaryDefineOwnProperty (O, P, Desc)¶

When the abstract operation `OrdinaryDefineOwnProperty` is called with Object *O*, property key *P*, and property descriptors *Desc* the following steps are taken:¶

<#>`Let current be the result of calling OrdinaryGetOwnProperty with arguments O and P.`¶

<#>`Let extensible be the value of the [[Extensible]] internal data property of O.`¶

<#>`Return the result of ValidateAndApplyPropertyDescriptor with arguments O, P, extensible, Desc, and current.`¶

8.3.10.2 IsComitableDescriptor (Extensible, Desc, Current)¶

When the abstract operation `IsComitablePropertyDescriptor` is called with Boolean value *Extensible*, and property descriptors *Desc*, and *Current* the following steps are taken:¶

<#>`Return the result of ValidateAndApplyPropertyDescriptor with arguments undefined, undefined, Extensible, Desc, and Current.`¶

8.3.10.3 ValidateAndApplyPropertyDescriptor (O, P, Extensible, Desc, Current)¶

When the abstract operation `ValidateAndApplyPropertyDescriptor` is called with Object property key *P*, Boolean value *extensible*, and property

Deleted: 1

Comment [AWB628]: TODO

Comment [AWB629]: TODO: Finish this up, and turn into iterator definition include a next method.

Deleted: 8.123.112 `[[IterateKeys]]()`¶

Deleted: *result*

Deleted: <#>`If Type(O) is not Object, return result.`¶

Deleted: *result*

Comment [AWB1330]: TODO: need to define, return an iterator object over the elements of an internal list.

Deleted: *result*

Comment [AWB1231]: Possibly unnecessary

8.3.15 [[Seal]] ()

When the [[Seal]] internal method of *O* is called the following steps are taken:

1. Return the result of `MakeObjectSecure(O, false)`.

Comment [AWB1232]: Possibly unnecessary

8.3.16 [[IsFrozen]] ()

When the [[IsFrozen]] internal method of *O* is called the following steps are taken:

1. Return the result of `TestIfSecureObject(O, true)`.

Comment [AWB1233]: Possibly unnecessary

8.3.17 [[IsSealed]] ()

When the [[IsSealed]] internal method of *O* is called the following steps are taken:

1. Return the result of `TestIfSecureObject(O, false)`.

Comment [AWB1234]: Possibly unnecessary

8.3.18 ObjectCreate Abstract Operation

The abstract operation `ObjectCreate` with optional argument *proto* (an object or null) is used to specify the runtime creation of new ordinary objects. It performs the following steps:

1. If *proto* was not provided, let *proto* be the intrinsic %ObjectPrototype%.
2. Let *obj* be a newly created ECMAScript object.
3. Set *obj*'s essential internal methods to the default ordinary object definitions specified in 8.3.
4. Set the [[Prototype]] internal data property of *obj* to *proto*.
5. Set the [[Extensible]] internal data property of *obj* to **true**.
6. Return *obj*.

8.3.19 Ordinary Function Objects

Ordinary function objects encapsulate parameterized ECMAScript code closed over a lexical environment and support the dynamic evaluation of that code. An ordinary function object is an ordinary object and has the same internal data properties and (except as noted below) the same internal methods as other ordinary objects.

Ordinary function objects have the additional internal data properties listed in Table 13. They also have a [[BuiltinBrand]] internal data property whose value is **BuiltinFunction**.

Ordinary function objects provide alternative definitions for the [[GetP]] and [[GetOwnProperty]] internal methods. These alternatives prevent the value of strict mode function from being revealed as the value of a function object property named "caller". These alternative definitions exist sole to preclude a non-standard legacy feature of some ECMAScript implementations from revealing information about strict mode callers. If an implementation does not provide such a feature, it need not implement these alternative internal methods for ordinary function objects.

Table 13 -- Internal Data Properties of Ordinary Function Objects

Internal Data Property	Type	Description
<code>[[Scope]]</code>	<u>Lexical Environment</u>	The Lexical Environment that the function was closed over. Is used as the outer environment when evaluating the code of the function.
<code>[[FormalParameters]]</code>	<u>Parse Node</u>	The root parse node of the source code that defines the function's formal parameter list.
<code>[[Code]]</code>	<u>Parse Node</u>	The root parse node of the source code that defines the function's body.
<code>[[Realm]]</code>	<u>Realm Record</u>	The Code Realm in which the function was created and which provides any intrinsic objects that are accessed when evaluating the function.
<code>[[ThisMode]]</code>	<u>(lexical, strict, global)</u>	Defines how <code>this</code> references are interpreted within the formal parameters and code body of the function. lexical means that <code>this</code> refers to the <code>this</code> value of a lexically enclosing function. strict means that the <code>this</code> value is used exactly as provided by an invocation of the function. global means that a <code>this</code> value of <code>undefined</code> is interpreted as a reference to the global object.
<code>[[Strict]]</code>	<u>Boolean</u>	<code>true</code> if this is a strict mode function, <code>false</code> this is not a strict mode function.
<code>[[Home]]</code>	<u>Object</u>	If the function uses <code>super</code> , this is the object whose <code>[[Inheritance]]</code> provides the object where <code>super</code> property lookups begin. Not present for functions that don't reference <code>super</code> .
<code>[[MethodName]]</code>	<u>String or Symbol</u>	If the function uses <code>super</code> , this is the property keys that is used for unqualified references to <code>super</code> . Not present for functions that don't reference <code>super</code> .

Ordinary function objects all have the `[[Call]]`, `[[GetP]]` and `[[GetOwnProperty]]` internal methods defined here. Ordinary functions that are also constructors in addition have the `[[Construct]]` internal method.

8.3.19.1 `[[Call]]` Internal Method

The `[[Call]]` internal method for an ordinary Function object *F* is called with parameters *thisArgument* and *argumentsList*, a List of ECMAScript language values. The following steps are taken:

1. Let *callerContext* be the running execution context.
2. If *callerContext* is not already suspended, then Suspend *callerContext*.
3. Let *calleeContext* be a new ECMAScript Code execution context.
4. Let *calleeRealm* be the value of *F*'s `[[Realm]]` internal data property.
5. Set *calleeContext*'s Realm *calleeRealm*.
6. Let *thisMode* be the value of *F*'s `[[ThisMode]]` internal data property.
7. If *thisMode* is **lexical**, then
 - a. Let *localEnv* be the result of calling `NewDeclarativeEnvironment` passing the value of the `[[Scope]]` internal data property of *F* as the argument.
8. Else,
 - a. If *thisMode* is **strict**, set *thisValue* to *thisArgument*.
 - b. Else
 - i. if *thisArgument* is **null** or **undefined**, then
 1. Set *thisValue* to *calleeRealm*.`[[globalThis]]`.
 - ii. Else if `Type(thisArgument)` is not `Object`, set the *thisValue* to `ToObject(thisArgument)`.
 - iii. Else set the *thisValue* to *thisArgument*.
 - c. Let *localEnv* be the result of calling `NewFunctionEnvironment` passing *F* and *thisValue* as the arguments.
 9. Set the `LexicalEnvironment` of *calleeContext* to *localEnv*.
 10. Set the `VariableEnvironment` of *calleeContext* to *localEnv*.

11. Push calleeContext on to the execution context stack; *calleeContext* is now the running execution context.
12. Let *status* be the result of performing Function Declaration Instantiation using the function *F*, *argumentsList* and *localEnv* as described in 10.5.3.
13. If *status* is an abrupt completion, then
 - a. Remove calleeContext from the execution context stack and restore *callerContext* as the running execution context.
 - b. Return *status*.
14. Let *result* be the result of evaluating the *FunctionBody* that is the value of *F*'s [[Code]] internal data property.
15. Remove calleeContext from the execution context stack and restore *callerContext* as the running execution context.
16. Return *result*.

NOTE Most ordinary functions use a Function Environment Record as their LexicalEnvironment. Ordinary functions that are arrow functions use a Declarative Environment Record as their LexicalEnvironment.

Comment [AWB 335]: May need to update section number

8.3.19.2 [[Construct]] Internal Method

The [[Construct]] internal method for an ordinary Function object *F* is called with a single parameter *argumentsList* which is a possibly empty List of ECMAScript language values. The following steps are taken:

1. Return the result of OrdinaryConstruct with arguments *F* and *argumentsList*.

8.3.19.2.1 OrdinaryConstruct (*F*, *argumentsList*, *fallBackProto*)

When the abstract operation OrdinaryConstruct is called with Object *F* and List *argumentsList* the following steps are taken:

1. Let *creator* be the result of Get(*F*, @@create).
2. ReturnIfAbrupt(*creator*).
3. If *creator* is not undefined, then
 - a. Let *obj* be the result of calling the [[Call]] internal method of *creator* with arguments *F* and an empty List.
4. Else *creator* is undefined so fall back to object creation defaults
 - a. Let *obj* be the result of calling OrdinaryCreateFromConstructor(*F*, "%ObjectPrototype%").
5. ReturnIfAbrupt(*obj*).
6. Let *result* be the result of calling the [[Call]] internal method of *F*, providing *obj* and *argumentsList* as the arguments.
7. ReturnIfAbrupt(*result*).
8. If Type(*result*) is Object then return *result*.
9. Return *obj*.

Deleted: <#>If *result.type* is return then return NormalCompletion(*result*.[[value]]).¶

8.3.19.3 [[GetP]] (*P*, *Receiver*)

When the [[GetP]] internal method of ordinary function object *F* is called with property key *P* and ECMAScript language value *Receiver* the following steps are taken:

1. Let *v* be the result of calling the default ordinary object [[GetP]] internal method (8.3.7) on *F* passing *P* and *Receiver* as arguments.
2. ReturnIfAbrupt(*v*).
3. If *P* is "caller" and *v* is a strict mode Function object, return null.
4. Return *v*.

Deleted: <#>Let *proto* be the result of Get(*F*, "prototype").¶
<#>ReturnIfAbrupt(*proto*).¶
<#>If Type(*proto*) is Object, let *obj* be the result of the abstract operation ObjectCreate with argument *proto*.¶
<#>Else, let *obj* be the result of the abstract operation ObjectCreate.¶

Deleted: NormalCompletion(

Deleted:)

Deleted: undefined

8.3.19.4 [[GetOwnProperty]] (*P*)

When the [[GetOwnProperty]] internal method of ordinary function object *F* is called with property key *P*, the following steps are taken:

1. Let *v* be the result of calling the default ordinary object [[GetOwnProperty]] internal method (8.3.6) on *F* passing *P* as the argument.
2. ReturnIfAbrupt(*v*).
3. If IsDataDescriptor(*v*) is true, then

- a. If P is "caller" and $v.[[Value]]$ is a strict mode Function object, then
 i. Set $v.[[Value]]$ to null.

4. Return v .

Deleted: undefined

Deleted: $v.[[Value]]$

8.4 Built-in Exotic Object Internal Methods and Data Fields

This specification define several kinds of built-in exotic objects. These objects generally behave similar to ordinary objects except for a few specific situations. The following exotic objects use the ordinary object internal methods except where it is explicitly specified wise below:

8.4.1 Bound Function Exotic Objects

A *bound function* is an exotic object that wrappers another function object. A bound function is callable (it has $[[Call]]$ and $[[Construct]]$ internal methods). Calling a bound function generally results in a call of its wrapped function.

Bound function objects do not have the internal data properties of ordinary function objects defined in Table 13. Instead they have the internal data properties defined in Table 14. They also have a $[[BuiltInBrand]]$ internal data property whose value is **BuiltinFunction**.

Table 14 -- Internal Data Properties of Exotic Bound Function Objects

Deleted: 12

Internal Data Property	Type	Description
$[[BoundTargetFunction]]$	Callable Object	The wrapped function object.
$[[BoundThis]]$	Any	The value that is always passed as the this value when calling the wrapped function.
$[[BoundArguments]]$	List of Any	A list of values that whose elements are used as the first arguments to any call to the wrapped function.

Unlike ordinary function objects, bound function objects do not use alternative definitions of the $[[GetP]]$ and $[[GetOwnProperty]]$ internal methods. Bound function objects provide all of the essential internal methods as specified in 8.3. However, they use the following definitions for the essential internal methods of function objects.

8.4.1.1 $[[Call]]$

When the $[[Call]]$ internal method of an exotic bound function object, F , which was created using the bind function is called with parameters $thisArgument$ and $argumentsList$, a List of ECMAScript language values, the following steps are taken:

1. Let $boundArgs$ be the value of F 's $[[BoundArguments]]$ internal data property.
2. Let $boundThis$ be the value of F 's $[[BoundThis]]$ internal data property.
3. Let $target$ be the value of F 's $[[BoundTargetFunction]]$ internal data property.
4. Let $args$ be a new list containing the same values as the list $boundArgs$ in the same order followed by the same values as the list $argumentsList$ in the same order.
5. Return the result of calling the $[[Call]]$ internal method of $target$ providing $boundThis$ as $thisArgument$ and providing $args$ as $argumentsList$.

8.4.1.2 $[[Construct]]$

When the $[[Construct]]$ internal method of an exotic bound function object, F that was created using the bind function is called with a list of arguments $ExtraArgs$, the following steps are taken:

1. Let $target$ be the value of F 's $[[BoundTargetFunction]]$ internal data property.
2. If $target$ has no $[[Construct]]$ internal method, a **TypeError** exception is thrown.
3. Let $boundArgs$ be the value of F 's $[[BoundArguments]]$ internal data property.
4. Let $args$ be a new list containing the same values as the list $boundArgs$ in the same order followed by the same values as the list $ExtraArgs$ in the same order.
5. Return the result of calling the $[[Construct]]$ internal method of $target$ providing $args$ as the arguments.

8.4.1.3 BoundFunctionCreate Abstract Operation

The abstract operation `BoundFunctionCreate` with arguments `targetFunction`, `boundThis` and `boundArgs` is used to specify the creation of new Object objects. It performs the following steps:

1. Let `proto` be the intrinsic `%FunctionPrototype%`.
2. Let `obj` be a newly created ECMAScript object.
3. Set `obj`'s essential internal methods to the default ordinary object definitions specified in 8.3.
4. Set the `[[Call]]` internal method of `obj` as described in 8.4.1.1.
5. Set the `[[Construct]]` internal method of `obj` as described in 8.4.1.2.
6. Set the `[[Prototype]]` internal data property of `obj` to `proto`.
7. Set the `[[Extensible]]` internal data property of `obj` to `true`.
8. Set the `[[BoundTargetFunction]]` internal data property of `obj` to `targetFunction`.
9. Set the `[[BoundThis]]` internal data property of `obj` to the value of `boundThis`.
10. Set the `[[BoundArguments]]` internal data property of `obj` to `boundArgs`.
11. Add the `[[BuiltinBrand]]` internal data property with value `BuiltinFunction` to `obj`.
12. Return `obj`.

8.4.2 Array Exotic Objects

An `Array object` is an exotic object that gives special treatment to a certain class of property names. A property name `P` (in the form of a String value) is an `array index` if and only if `ToString(ToUint32(P))` is equal to `P` and `ToUint32(P)` is not equal to $2^{32}-1$. A property whose property name is an array index is also called an `element`. Every Array object has a `length` property whose value is always a nonnegative integer less than 2^{32} . The value of the `length` property is numerically greater than the name of every property whose name is an array index; whenever a property of an Array object is created or changed, other properties are adjusted as necessary to maintain this invariant. Specifically, whenever a property is added whose name is an array index, the `length` property is changed, if necessary, to be one more than the numeric value of that array index; and whenever the `length` property is changed, every property whose name is an array index whose value is not smaller than the new length is automatically deleted. This constraint applies only to own properties of an Array object and is unaffected by `length` or array index properties that may be inherited from its prototypes.

Exotic Array objects always have a non-configurable property named "`length`".

Exotic Array objects have the same internal data properties as ordinary objects. They also have a `[[BuiltinBrand]]` internal data property whose value is `BuiltinArray`.

Exotic Array objects provide alternative definitions for the `[[SetP]]` and `[[DefineOwnProperty]]` internal methods. Except for these two internal methods, exotic Array objects provide all of the other essential internal methods as specified in 8.3.

8.4.2.1 `[[DefineOwnProperty]] (P, Desc)`

When the `[[DefineOwnProperty]]` internal method of an exotic Array object `A` is called with property `P`, and Property Descriptor `Desc` the following steps are taken:

1. Assert: `IsPropertyKey(P)` is true.
2. If `P` is "`length`", then
 - a. Return the result of calling `ArraySetLength` with arguments `A`, and `Desc`.
3. Else if `P` is an array index, then
 - a. Let `oldLenDesc` be the result of calling the `[[GetOwnProperty]]` internal method of `A` passing "`length`" as the argument. The result will never be `undefined` or an accessor descriptor because Array objects are created with a `length` data property that cannot be deleted or reconfigured.
 - b. Let `oldLen` be `oldLenDesc.[[Value]]`.
 - c. Let `index` be `ToUint32(P)`.
 - d. ReturnIfAbrupt(`index`).
 - e. If `index > oldLen` and `oldLenDesc.[[Writable]]` is `false`, then return `false`.
 - f. Let `succeeded` be the result of calling `OrdinaryDefineOwnProperty` passing `A`, `P`, and `Desc` as arguments.

Deleted: the

Deleted: `P`

Deleted: Array objects

Deleted: 8.4.2.1 `[[SetP]] (P, V, Receiver)`

When the `[[SetP]]` internal method of an exotic Array object `O` is called with property key `P`, value `V`, and ECMAScript language value `Receiver`, the following steps are taken:

```
<#>Assert: P is a valid property key, either a String or a Symbol Object.  
<#>Let ownDesc be the result of calling OrdinaryGetOwnProperty with arguments O and P.  
<#>ReturnIfAbrupt(ownDesc).  
<#>If desc is undefined, then  
<#>Let parent be the result of calling the [[GetInheritance]] internal method of O.  
<#>ReturnIfAbrupt(parent).  
<#>If parent is not null, then  
<#>Return the result of calling the [[SetP]] internal methods of parent with arguments P, V, and Receiver.  
<#>Else,  
<#>If Type(Receiver) is not Object, return false.  
<#>Return the result of performing CreateOwnProperty(Receiver, P, V).  
<#>If IsDataDescriptor(ownDesc) is true, then  
<#>If ownDesc.[[Writable]] is false, return false.  
<#>If SameValue(O, Receiver) is true, then  
<#>Let valueDesc be the Property Descriptor {[[Value]]: V}.  
<#>If P is "length", then  
<#>Return the result of calling ArraySetLength with arguments O, and valueDesc.  
<#>Else, ¶  
<#>Return the result of calling OrdinaryDefineOwnProperty with arguments O, and valueDesc.  
<#>Else O and Receiver are different values.  
<#>If Type(Receiver) is not Object, return false.  
<#>Return the result of performing CreateOwnProperty(Receiver, P, V).  
<#>If IsAccessorDescriptor(desc) is true, then  
<#>Let setter be desc.[[Set]].  
<#>If setter is undefined, return false.  
<#>Let setterResult be the result of calling the [[Call]] internal method of setter providing Receiver as thisArgument and a new List containing V as argumentsList.  
<#>ReturnIfAbrupt(setterResult).  
<#>Return true.  
NOTE This algorithm differs from the ordinary object [[SetP]] algorithm only in the handling of properties with the name "length" in step 5.b.ii.1.
```

Deleted: 2

Deleted: `P` is a valid property key, either a String or a Symbol Object

Deleted: Reject i

- g. ReturnIfAbrupt(succeeded).
 - h. If succeeded is false, then return false.
 - i. If index > oldLen
 - i. Set oldLenDesc.[[Value]] to index + 1.
 - ii. Let succeeded be the result of calling OrdinaryDefineOwnProperty passing A, "length", and oldLenDesc as arguments.
 - iii. ReturnIfAbrupt(succeeded).
 - j. Return true.
4. Return the result of calling OrdinaryDefineOwnProperty passing A, P, and Desc as arguments.

8.4.2.3 ArrayCreate Abstract Operation

The abstract operation **ArrayCreate** with argument *length* (a positive integer) is used to specify the creation of new exotic Array objects. It performs the following steps:

1. Let A be a newly created ECMAScript object.
2. Set A's essential internal methods to the default ordinary object definitions specified in 8.3.
3. Set the [[SetP]] internal method of A as specified in 8.4.2.1.
4. Set the [[DefineOwnProperty]] internal method of A as specified in 8.4.2.2.
5. Set the [[Prototype]] internal data property of A to the intrinsic object %ArrayPrototype%.
6. Set the [[BuiltinBrand]] internal data property of A to the value **BuiltinArray**.
7. Set the [[Extensible]] internal data property of A to **true**.
8. Call OrdinaryDefineOwnProperty with arguments A, "length" and Property Descriptor {[[Value]]: length, [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: false}.
9. Return A.

Deleted: 0

8.4.2.4 ArraySetLength Abstract Operation

When the abstract operation **ArraySetLength** is called with an exotic Array object A, and Property Descriptor Desc the following steps are taken:

1. Let oldLenDesc be the result of calling the [[GetOwnProperty]] internal method of A passing "length" as the argument. The result will never be **undefined** or an accessor descriptor because Array objects are created with a length data property that cannot be deleted or reconfigured.
2. Let oldLen be oldLenDesc.[[Value]].
3. If the [[Value]] field of Desc is absent, then
 - a. Return the result of calling OrdinaryDefineOwnProperty passing A, "length", and Desc as arguments.
4. Let newLenDesc be a copy of Desc.
5. Let newLen be ToUint32(Desc.[[Value]]).
6. If newLen is not equal to ToNumber(Desc.[[Value]]), throw a **RangeError** exception.
7. Set newLenDesc.[[Value]] to newLen.
8. If newLen > oldLen, then
 - a. Return the result of calling OrdinaryDefineOwnProperty passing A, "length", and newLenDesc as arguments.
9. If oldLenDesc.[[Writable]] is false, then return false.
10. If newLenDesc.[[Writable]] is absent or has the value **true**, let newWritable be **true**.
11. Else,
 - a. Need to defer setting the [[Writable]] attribute to **false** in case any elements cannot be deleted.
 - b. Let newWritable be **false**.
 - c. Set newLenDesc.[[Writable]] to **true**.
12. Let succeeded be the result of calling OrdinaryDefineOwnProperty passing A, "length", and newLenDesc as arguments.
13. ReturnIfAbrupt(succeeded).
14. If succeeded is false, return false.
15. While newLen < oldLen repeat,
 - a. Set oldLen to oldLen - 1.
 - b. Let deleteSucceeded be the result of calling the [[Delete]] internal method of A passing ToString(oldLen).
 - c. ReturnIfAbrupt(succeeded).

Deleted: 3

- d. If `deleteSucceeded` is `false`, then
 - i. Set `newLenDesc.[[Value]]` to `oldLen+1`.
 - ii. If `newWritable` is `false`, set `newLenDesc.[[Writable]]` to `false`.
 - iii. Let `succeeded` be the result of calling `OrdinaryDefineOwnProperty` passing `A`, `"length"`, and `newLenDesc` as arguments.
 - iv. ReturnIfAbrupt(`succeeded`).
 - v. Return `false`.
16. If `newWritable` is `false`, then
 - a. Call `OrdinaryDefineOwnProperty` passing `A`, `"length"`, and `Property Descriptor{[[Writable]]: false}` as arguments. This call will always return `true`.
17. Return `true`.

8.4.3 String Exotic Objects

A `String` object is an exotic object that encapsulates a `String` value and exposes virtual array index data properties corresponding to the individual code unit elements of the string value. Exotic `String` objects always have a data property named `"length"` whose value is the number of code unit elements in the encapsulated `String` value. Both the code unit data properties and the `"length"` property are non-writable and non-configurable.

Exotic `String` objects have the same internal data properties as ordinary objects. They also have a `[[StringData]]` internal data property and a `[[BuiltInBrand]]` internal data property whose value is `BuiltinStringWrapper`.

Exotic `String` objects provide alternative definitions for the following internal methods. All of the other exotic `String` object essential internal methods that are not defined below are as specified in 8.3.

8.4.3.1 [[HasOwnProperty]] (P)

When the `[[HasOwnProperty]]` internal method of exotic `String` object `O` is called with property key `P`, the following steps are taken:

1. Assert: `IsPropertyKey(P)` is `true`.
2. Let `has` be the result of calling the ordinary object `[[HasOwnProperty]]` internal method (8.3.5) on `O` with argument `P`.
3. ReturnIfAbrupt(`has`).
4. If `has` is `true`, then return `true`.
5. Let `index` be `ToInteger(P)`.
6. ReturnIfAbrupt(`index`).
7. Let `absIntIndex` be `ToString(abs(index))`.
8. ReturnIfAbrupt(`absIntIndex`).
9. If `SameValue(absIntIndex, P)` is `false` return `false`.
10. Let `str` be the `String` value of the `[[StringData]]` internal property of `O`.
11. Let `len` be the number of elements in `str`.
12. If `len < index`, return `false`.
13. Return `true`.

Deleted: Assert: `P` is a valid property key, either a `String` or a `Symbol` Object.

8.4.3.2 [[GetOwnProperty]] (P)

When the `[[GetOwnProperty]]` internal method of an exotic `String` object `S` is called with property key `P` the following steps are taken:

1. Assert: `IsPropertyKey(P)` is `true`.
2. Let `desc` be the result of `OrdinaryGetOwnProperty(S, P)`.
3. ReturnIfAbrupt(`desc`).
4. If `desc` is not `undefined` return `desc`.
5. Let `index` be `ToInteger(P)`.
6. ReturnIfAbrupt(`index`).
7. Let `absIntIndex` be `ToString(abs(index))`.

Deleted: `P` is a valid property key, either a `String` or a `Symbol` Object

Deleted: calling the default `[[GetOwnProperty]]` internal method (8.12.1) on

Deleted: with argument

8. ReturnIfAbrupt(*absIntIndex*).
9. If SameValue(*absIntIndex*, *P*) is false return undefined.
10. Let *str* be the String value of the ***[[StringData]]*** internal *data* property of *S*.
11. Let *len* be the number of *elements* in *str*.
12. If *len* ≤ *index*, return **undefined**.
13. Let *resultStr* be a String value of length 1, containing one **code unit** from *str*, specifically the **code unit** at position *index*, where the first (leftmost) **element** in *str* is considered to be at position 0, the next one at position 1, and so on.
14. Return a Property Descriptor { ***[[Value]]***: *resultStr*, ***[[Enumerable]]***: **true**, ***[[Writable]]***: **false**, ***[[Configurable]]***: **false** }.

8.4.3.3 *[[DefineOwnProperty]]*** (*P*, *Desc*)**

When the ***[[DefineOwnProperty]]*** internal method of an exotic String object *O* is called with property *P*, and Property Descriptor *Desc* the following steps are taken:

1. Let *current* be the result of calling the ***[[GetOwnProperty]]*** internal method of *O* with argument *P*.
2. Let *extensible* be the result of calling the ***[[IsExtensible]]*** internal method of *O*.
3. Return the result of *ValidateAndApplyPropertyDescriptor* with arguments *O*, *P*, *extensible*, *Desc*, and *current*.

NOTE This algorithm differs from the ordinary object **OrdinaryDefineOwnProperty** abstract operation algorithm only in invocation of ***[[GetOwnProperty]]*** in step 1 and ***[[IsExtensible]]*** in step 2.

8.4.3.4 *[[Enumerate]]*** ()**

When the ***[[Enumerate]]*** internal method of an exotic String object *O* is called the following steps are taken:

8.4.3.5 *[[OwnPropertyKeys]]*** ()**

When the ***[[OwnPropertyKeys]]*** internal method of an exotic String object *O* is called the following steps are taken:

8.4.4 Exotic Symbol Objects

An **Symbol object** is an exotic object that may be used as a property key. Symbol exotic objects are unique in that they are always immutable and never observably reference any other object.

Exotic String objects have the a single internal data properties named ***[[Private]]*** that is set when the object is created and never modified.

Exotic Symbol objects provide alternative definitions for all of the essential internal methods.

8.4.4.1 *[[GetInheritance]]*** ()**

When the ***[[GetInheritance]]*** internal method of an exotic Symbol object *O* is called the following steps are taken:

1. Return **null**.

8.4.4.2 *[[SetInheritance]]*** (*V*)**

When the ***[[SetInheritance]]*** internal method of an exotic Symbol object *O* is called with argument *V* the following steps are taken:

1. Assert: Either *Type(V)* is Object or *Type(V)* is Null.
2. Return **false**.

Deleted: *ToString(abs(ToInteger(*P*)))* is not the same value as
Deleted: ,
Deleted: <#>Let *index* be *ToInteger(*P*)*.

Deleted: ¶
<#>8.4.3.3 ***[[GetP]]*** (*P*, *Receiver*)¶
When the ***[[GetP]]*** internal method of exotic String object *O* called with property key *P* and ECMAScript language value *Receiver* the following steps are taken:¶
Assert: *P* is a valid property key, either a String or a Symbol Object.¶
Let *desc* be the result of calling the ***[[GetOwnProperty]]*** internal method of *O* with argument *P*.¶
ReturnIfAbrupt(*desc*).¶
If *desc* is **undefined**, then¶
Let *parent* be the result of calling the ***[[GetInheritance]]*** internal method of *O*.¶
ReturnIfAbrupt(*parent*).¶
If *parent* is **null**, then return **undefined**.¶
Return the result of calling the ***[[GetP]]*** internal methods of *parent* with arguments *P* and *Receiver*.¶
If *IsDataDescriptor(*desc*)* is **true**, return *desc.[[Value]]*.¶
Otherwise, *IsAccessorDescriptor(*desc*)* must be **true** so, let *getter* be *desc.[[Get]]*.¶
If *getter* is **undefined**, return **undefined**.¶
Return the result of calling the ***[[Call]]*** internal method of *getter* with *targetThis* as the *thisArgument* and an empty *argumentsList*.¶
NOTE . This algorithm differs from the ordinary object ***[[SetP]]*** algorithm only in invocation of ***[[GetOwnProperty]]*** in step 2.

Deleted: **8.4.3.4 ***[[Delete]]*** (*P*)**
When the ***[[Delete]]*** internal method of exotic String object *O* is called with property name *P* the following steps are taken:¶
<#>Assert: *P* is a valid property key, either a String or a Symbol Object.¶
<#>Let *desc* be the result of calling the ***[[GetOwnProperty]]*** internal method of *O* with argument *P*.¶
<#>If *desc* is **undefined**, then return **true**.¶
<#>If *desc.[[Configurable]]* is **true**, then¶
<#>Remove the own property with name *P* from *O*.¶
<#>Return **true**.¶
<#>Return **false**.¶
NOTE . This algorithm differs from the ordinary object ***[[Delete]]*** algorithm only in invocation of ***[[GetOwnProperty]]*** in step 2.

Deleted: 5
Deleted: Get
Comment [AWB1236]: TODO
Deleted: 6
Deleted: ¶
8.4.3.7 ***[[Keys]]*** ()
Comment [AWB1237]: TODO
Deleted: When the ***[[Keys]]*** internal method of an exotic String object *O* is called the following steps are taken:
Deleted: 8
Comment [AWB1338]: TODO

8.4.4.3 [[IsExtensible]] ()

When the `[[IsExtensible]]` internal method of an exotic Symbol object O is called the following steps are taken:

1. Return `false`.

8.4.4.4 [[PreventExtensions]] ()

When the `[[PreventExtensions]]` internal method of an exotic Symbol object O is called the following steps are taken:

1. Return `NormalCompletion(empty)`.

8.4.4.5 [[HasOwnProperty]] (P)

When the `[[HasOwnProperty]]` internal method of an exotic Symbol object O is called with property key P , the following steps are taken:

1. Return `false`.

8.4.4.6 [[GetOwnProperty]] (P)

When the `[[GetOwnProperty]]` internal method of an exotic Symbol object O is called with property key P , the following steps are taken:

1. Return `undefined`.

8.4.4.7 [[DefineOwnProperty]] (P, Desc)

When the `[[DefineOwnProperty]]` internal method of an exotic Symbol object O is called with property key P and property descriptor $Desc$, the following steps are taken:

1. Return `false`.

8.4.4.8 [[HasProperty]] (P)

When the `[[HasProperty]]` internal method of an exotic Symbol object O is called with property key P , the following steps are taken:

1. Return `false`.

8.4.4.9 [[GetP]] (P, Receiver)

When the `[[GetP]]` internal method of an exotic Symbol object O is called with property key P and ECMAScript language value $Receiver$ the following steps are taken:

1. Assert: `IsPropertyKey(P)` is `true`.
2. If P is `"toString"`, then
 - a. Let ctx be the running execution context.
 - b. Let $ctxRealm$ be ctx 's Realm component.
 - c. Return $ctxRealm.[[intrinsic]]%.ObjProto_toString%$.
3. Return `undefined`.

8.4.4.10 [[SetP]] (P, V, Receiver)

When the `[[SetP]]` internal method of an exotic Symbol object O is called with property key P , value V , and ECMAScript language value $Receiver$, the following steps are taken:

1. Return `false`.

Deleted: ,

Deleted: 7

Deleted: P is a valid property key, either a String or a Symbol Object

Deleted: 8

8.4.4.11 [[Delete]] (P)

When the `[[Delete]]` internal method of an exotic Symbol object O is called with property key P the following steps are taken:

1. Assert: `IsPropertyKey(P)` is `true`.
2. Return `true`.

Deleted: 9

8.4.4.12 [[Enumerate]] ()

When the `[[Enumerate]]` internal method of an exotic Symbol object O is called the following steps are taken:

1. Return an Iterator object (reference `xxxx`) whose next method immediately throws `%StopIteration%` and forms no other action.

8.4.4.13 [[OwnPropertyKeys]] ()

When the `[[OwnPropertyKeys]]` internal method of an exotic Symbol object O is called the following steps are taken:

1. Return an Iterator object (reference `xxxx`) whose next method immediately throws `%StopIteration%` and forms no other action.

8.4.4.14 [[Freeze]] ()

When the `[[Freeze]]` internal method of an exotic Symbol object O is called the following steps are taken:

1. Return `true`.

Deleted: P is a valid property key, either a String or a Symbol Object

Deleted: 8.4.4.10 [[DefineOwnProperty]] (P, Desc)
When the `[[DefineOwnProperty]]` internal method of an exotic Symbol object O is called with property key P and property descriptor $Desc$, the following steps are taken:
`<#>Return false.`

Deleted: 1

Comment [AWB639]: TODO

Deleted: 8.4.4.12 [[Keys]] ()
When the `[[Keys]]` internal method of an exotic Symbol object O is called the following steps are taken:
`<#>Return a new empty List.`

Comment [AWB640]: TODO

Deleted: Return a new empty List.

Comment [AWB1241]: Possibly unnecessary

8.4.4.15 [[Seal]] ()

When the `[[Seal]]` internal method of an exotic Symbol object O is called the following steps are taken:

2. Return `true`.

Comment [AWB1242]: Possibly unnecessary

Deleted: 4

8.4.4.16 [[IsFrozen]] ()

When the `[[IsFrozen]]` internal method of an exotic Symbol object O is called the following steps are taken:

1. Return `true`.

8.4.4.17 [[IsSealed]] ()

When the `[[IsSealed]]` internal method of an exotic Symbol object O is called the following steps are taken:

1. Return `true`.

8.4.5 Exotic Arguments Objects

An `arguments object` is an exotic object whose array index properties map to the formal parameters of a non-strict function invocation.

Exotic arguments objects have the same internal data properties as ordinary objects. They also have a `[[ParameterMap]]` internal data property and a `[[BuiltInBrand]]` internal data property whose value is `BuiltinArguments`.

Exotic arguments objects provide alternative definitions for the following internal methods. All of the other exotic arguments object essential internal methods that are not defined below are as specified in 8.3.

Comment [AWB1243]: Possibly unnecessary

Comment [AWB1244]: Possibly unnecessary

Comment [AWB1245]: TODO move arguments internal methods here.

8.4.6 Indexed Delegation Exotic Objects

A Indexed Delegation object is an exotic object that delegates [[GetP]] and [[SetP]] handling of array index property keys to methods of the object.

Indexed Delegation objects initially have the same internal data properties as ordinary objects.

Exotic Indexed Delegation objects provide alternative definitions for the following internal methods. All of the other exotic Indexed Delegation object essential internal methods that are not defined below are as specified in 8.3.

8.4.6.1 [[GetP]] (P, Receiver)

When the [[GetP]] internal method of an exotic indexed delegation object O is called with property key P and ECMAScript language value Receiver the following steps are taken:

1. If SameValue(O, Receiver) is true and P is an array index, then
 - a. Let args be a new List containing index.
 - b. Return the result of Invoke(O, @@elementGet, args).
2. Return the result of calling the default ordinary object [[GetP]] internal method (8.3.7) on O passing P and Receiver as arguments.

8.4.6.2 [[SetP]] (P, V, Receiver)

When the [[SetP]] internal method of an exotic indexed delegation object O is called with property key P, value V, and ECMAScript language value Receiver, the following steps are taken:

1. If SameValue(O, Receiver) is true and P is an array index, then
 - a. Let args be a new List containing index and V.
 - b. Return the result of Invoke(O, @@elementSet, args).
2. Return the result of calling the default ordinary object [[SetP]] internal method (8.3.7) on O passing P, V, and Receiver as arguments.

8.4.6.3 IndexedDelegatorCreate Abstract Operation

The abstract operation IndexedDelegatorCreate with argument prototype (is used to specify the creation of new exotic Indexed Delegation objects. It performs the following steps:

1. Let A be a newly created ECMAScript object.
2. Set A's essential internal methods to the default ordinary object definitions specified in 8.3.
3. Set the [[GetP]] internal method of A as specified in 8.4.6.1.
4. Set the [[SetP]] internal method of A as specified in 8.4.6.2.
5. Set the [[Prototype]] internal data property of A to prototype.
6. Set the [[Extensible]] internal data property of A to true.
7. Return A.

8.4.7 Built-in Function Objects

The function objects specified in Clause 15 may be implemented as either ordinary function objects whose behaviour is provided using ECMAScript code or as implementation provided exotic function objects whose behaviour is provided in some other manner. In either case, the effect of calling such functions must be that specified for each one in Clause 15.

If an implementation provided exotic object is used, the object must have the ordinary object behaviour specified in 8.3 except for [[GetP]] and [[GetOwnProperty]] which must be as specified in 8.3.19. All such exotic function objects also have [[Prototype]] and [[Extensible]] internal data properties and a [[BuiltInBrand]] internal data property whose value is BuiltinFunction.

[[Call]] and [[Construct]]

Deleted: 5

Deleted: Typed

Deleted: Array

Comment [AWB1346]: Issue: does the TypedArray spec./WEBIDL specs require that such indexed properties show up using [[GetOwnProperty]], keys, etc? If so, some more internal method over-rides will be needed

Comment [AWB1347]: If we make this a private symbol that is not exposed, then it is just a specification device. If we make it an exposed symbol (whether private or not) it becomes a ES programmer extension point.

Comment [AWB1348]: If we make this a private symbol that is not exposed, then it is just a specification device. If we make it an exposed symbol (whether private or not) it becomes a ES programmer extension point.

Deleted: 6

Deleted: s

Deleted: non-function

Comment [AWB1249]: TODO: need to talk about [[Call]] and [[Construct]] behaviour of chapter 15 native functions.

8.5 Proxy Object Internal Methods and Internal Data Properties

A proxy object is an exotic object whose essential internal methods are partially implemented using ECMAScript code. Every proxy objects has an internal data property called `[[ProxyHandler]]`. The value of `[[ProxyHandler]]` is always an object, called the proxy's *handler object*. Methods of a handler object may be used to augment the implementation for one or more of the proxy object's internal methods. Every proxy object also has an internal data property called `[[ProxyTarget]]` whose value is usually an object. This object is called the proxy's *target object*.

When a handler method is called to provide the implementation of a proxy object internal method, the handler method is passed the proxy's target object as a parameter. A proxy's handler object does not necessarily have a method corresponding to every essential internal method. Invoking an internal method on the proxy results in the invocation of the corresponding internal method on the proxy's target object if the handler object does not have a method corresponding to the internal trap.

The `[[ProxyHandler]]` and `[[ProxyTarget]]` internal data properties of a proxy object are always initialized when the object is created and typically may not be modified. Some proxy objects are created in a manner that permits them to be subsequent revoked. When a proxy is revoked, its `[[ProxyHandler]]` internal data property is set to a special revoked proxy handler object and its `[[ProxyTarget]]` internal data property is set to `null`.

Because proxy permit arbitrary ECMAScript code to be used to in the implementation of internal methods, it is possible to define a proxy object that violates the invariants defined in 8.1.6.2. An ECMAScript implementation must be robust in the presence of such violations. Some of the internal method invariants defined in 8.1.6.2 are essential integrity invariants. These invariants are explicitly enforced by the proxy internal methods specified in this section.

In the following algorithm descriptions, assume *O* is an ECMAScript proxy object, *P* is a property key value, *V* is any ECMAScript language value, *Desc* is a Property Description record, and *B* is a Boolean flag.

8.5.1 [[GetInheritance]] ()

When the `[[GetInheritance]]` internal method of an exotic Proxy object *O* is called the following steps are taken:

1. Let *handler* be the value of the `[[ProxyHandler]]` internal data property of *O*.
2. Let *target* be the value of the `[[ProxyTarget]]` internal data property of *O*.
3. Let *trap* be the result of `GetMethod(handler, "getPrototypeOf")`.
4. `ReturnIfAbrupt(trap)`.
5. If *trap* is `undefined`, then
 - a. Return the result of calling the `[[GetInheritance]]` internal method of *target*.
6. Let *handlerProto* be the result of calling the `[[Call]]` internal method of *trap* with *handler* as the `this` value and a new List containing *target*.
7. `ReturnIfAbrupt(handlerProto)`.
8. Let *targetProto* be the result of calling the `[[GetInheritance]]` internal method of *target*.
9. `ReturnIfAbrupt(targetProto)`.
10. If `SameValue(handlerProto, targetProto)` is `false`, then throw a `TypeError` exception.
11. Return *handlerProto*.

Deleted: proxy

NOTE `[[GetInheritance]]` for proxy objects enforces the following invariant:
 • `[[GetInheritance]]` applied to the proxy object must return the same value as `[[GetInheritance]]` applied to the proxy object's handler object.

Deleted: trapResult

8.5.2 [[SetInheritance]] (V)

When the `[[SetInheritance]]` internal method of an exotic Proxy object *O* is called with argument *V* the following steps are taken:

1. Assert: Either `Type(V)` is `Object` or `Type(V)` is `Null`.
2. Let *handler* be the value of the `[[ProxyHandler]]` internal data property of *O*.
3. Let *target* be the value of the `[[ProxyTarget]]` internal data property of *O*.

Deleted: proxy

4. Let `trap` be the result of `GetMethod(handler, "setPrototypeOf")`.
5. `ReturnIfAbrupt(trap)`.
6. If `trap` is `undefined`, then
 - a. Return the result of calling the `[[SetInheritance]]` internal method of `target` with argument `V`.
7. Let `trapResult` be the result of calling the `[[Call]]` internal method of `trap` with `handler` as the `this` value and a new List containing `target` and `V`.
8. `ReturnIfAbrupt(trapResult)`.
9. Let `trapResult` be `ToBoolean(trapResult)`.
10. Let `getProtoTrap` be the result of `GetMethod(handler, "getPrototypeOf")`.
11. `ReturnIfAbrupt(getProtoTrap)`.
12. If `getProtoTrap` is `undefined`, then
 - a. Return `trapResult`.
13. Let `getProtoResult` be the result of calling `getProtoTrap` with `handler` as the `this` value and a new List containing `target`.
14. `ReturnIfAbrupt(getProtoResult)`.
15. Let `targetProto` be the result of calling the `[[GetInheritance]]` internal method of `target`.
16. `ReturnIfAbrupt(targetProto)`.
17. If `SameValue(getProtoResult, targetProto)` is `false`, then throw a `TypeError` exception.
18. Return `trapResult`.

NOTE `[[SetInheritance]]` for proxy objects enforces the following invariant:

- After a `[[SetInheritance]]` call, `[[GetInheritance]]` applied to the proxy object must return the same value as `[[GetInheritance]]` applied to the proxy object's handler object.

Deleted:

Comment [AWB1250]: This is essentially the same invariant as for `[[GetInheritance]]`. I isn't clear to me why it is essential for either of these internal methods.

8.5.3 `[[IsExtensible]]()`

When the `[[IsExtensible]]` internal method of an exotic Proxy object `O` is called the following steps are taken:

1. Let `handler` be the value of the `[[ProxyHandler]]` internal data property of `O`.
2. Let `target` be the value of the `[[ProxyTarget]]` internal data property of `O`.
3. Let `trap` be the result of `GetMethod(handler, "isExtensible")`.
4. `ReturnIfAbrupt(trap)`.
5. If `trap` is `undefined`, then
 - a. Return the result of calling the `[[IsExtensible]]` internal method of `target`.
6. Let `trapResult` be the result of calling the `[[Call]]` internal method of `trap` with `handler` as the `this` value and a new List containing `target`.
7. `ReturnIfAbrupt(trapResult)`.
8. Let `proxyIsExtensible` be `ToBoolean(trapResult)`.
9. Let `targetIsExtensible` be the result of calling the `[[IsExtensible]]` internal method of `target`.
10. `ReturnIfAbrupt(targetIsExtensible)`.
11. If `SameValue(proxyIsExtensible, targetIsExtensible)` is `false`, then throw a `TypeError` exception.
12. Return `proxyIsExtensible`.

Deleted: proxy

NOTE `[[IsExtensible]]` for proxy objects enforces the following invariant:

- `[[IsExtensible]]` applied to the proxy object must return the same value as `[[IsExtensible]]` applied to the proxy object's handler object.

Deleted: proxy

8.5.4 `[[PreventExtensions]]()`

When the `[[PreventExtensions]]` internal method of an exotic Proxy object `O` is the following steps are taken:

1. Let `handler` be the value of the `[[ProxyHandler]]` internal data property of `O`.
2. Let `target` be the value of the `[[ProxyTarget]]` internal data property of `O`.
3. Let `trap` be the result of `GetMethod(handler, "preventExtensions")`.
4. `ReturnIfAbrupt(trap)`.
5. If `trap` is `undefined`, then
 - a. Return the result of calling the `[[PreventExtensions]]` internal method of `target`.
6. Let `trapResult` be the result of calling the `[[Call]]` internal method of `trap` with `handler` as the `this` value and a new List containing `target`.
7. `ReturnIfAbrupt(trapResult)`.

8. Let `isTrap` be the result of `GetMethod(handler, "isExtensible")`.
9. `ReturnIfAbrupt(isTrap)`.
10. If `isTrap` is `undefined`, then
 - a. `Return NormalCompletion(empty)`.
11. Let `isTrapResult` be the result of calling `isTrap` with `handler` as the `this` value and a new List containing `target`.
12. `ReturnIfAbrupt(isTrapResult)`.
13. Let `proxyIsExtensible` be `ToBoolean(isTrapResult)`.
14. Let `targetIsExtensible` be the result of calling the `[[IsExtensible]]` internal method of `target`.
15. `ReturnIfAbrupt(targetIsExtensible)`.
16. If `SameValue(proxyIsExtensible, targetIsExtensible)` is `false`, then throw a `TypeError` exception.
17. `Return NormalCompletion(empty)`.

NOTE `[[PreventExtensions]]` for proxy objects enforces the following invariant:

- After a `[[PreventExtensions]]` call, `[[IsExtensible]]` applied to the proxy object must return the same value as `[[IsExtensible]]` applied to the proxy object's handler object.

8.5.5 `[[HasOwnProperty]](P)`

When the `[[HasOwnProperty]]` internal method of an exotic Proxy object `O` is called with property key `P`, the following steps are taken:

1. Assert: `IsPropertyKey(P)` is `true`.
2. Let `handler` be the value of the `[[ProxyHandler]]` internal data property of `O`.
3. Let `target` be the value of the `[[ProxyTarget]]` internal data property of `O`.
4. Let `trap` be the result of `GetMethod(handler, "hasOwn")`.
5. `ReturnIfAbrupt(trap)`.
6. If `trap` is `undefined`, then
 - a. Return the result of calling the `[[HasOwnProperty]]` internal method of `target` with argument `P`.
7. Let `trapResult` be the result of calling the `[[Call]]` internal method of `trap` with `handler` as the `this` value and a new List containing `target` and `P`.
8. `ReturnIfAbrupt(trapResult)`.
9. Let `success` be `ToBoolean(trapResult)`.
10. If `success` is `false`, then
 - a. Let `targetDesc` be the result of calling the `[[GetOwnProperty]]` internal method of `target` with argument `P`.
 - b. `ReturnIfAbrupt(targetDesc)`.
 - c. If `targetDesc` is not `undefined`, then
 - i. If `targetDesc.[[Configurable]]` is `false`, then throw a `TypeError` exception.
 - ii. Let `extensibleTarget` be the result of calling the `[[IsExtensible]]` internal method of `target`.
 - iii. `ReturnIfAbrupt(extensibleTarget)`.
 - iv. If `ToBoolean(extensibleTarget)` is `false`, then throw a `TypeError` exception.
11. Else `success` is `true`.
 - a. Let `extensibleTarget` be the result of calling the `[[IsExtensible]]` internal method of `target`.
 - b. `ReturnIfAbrupt(extensibleTarget)`.
 - c. If `ToBoolean(extensibleTarget)` is `true`, then return `success`.
 - d. Let `targetDesc` be the result of calling the `[[GetOwnProperty]]` internal method of `target` with argument `P`.
 - e. `ReturnIfAbrupt(targetDesc)`.
 - f. If `targetDesc` is `undefined`, then throw a `TypeError` exception.
12. `Return success`.

NOTE `[[HasOwnProperty]]` for proxy objects enforces the following invariants:

- A property cannot be reported as non-existent, if it exists as a non-configurable own property of the target object.
- A property cannot be reported as non-existent, if it exists as a own property of the target object and the target object is not extensible.
- A property cannot be reported as existent, if it does not exists as a own property of the target object and the target object is not extensible.

Deleted: proxy

Deleted: `P` is a valid property key, either a String or a Symbol Object

Deleted: <#> If `targetDesc` is `undefined`, then

Deleted: `false`

Deleted: throw a `TypeError` exception

8.5.6 [[GetOwnProperty]] (P)

When the [[GetOwnProperty]] internal method of an exotic Proxy object O is called with property key P , the following steps are taken:

1. Assert: IsPropertyKey(P) is true.
2. Let $handler$ be the value of the [[ProxyHandler]] internal data property of O .
3. Let $target$ be the value of the [[ProxyTarget]] internal data property of O .
4. Let $trap$ be the result of GetMethod($handler$, "getOwnPropertyDescriptor").
5. ReturnIfAbrupt($trap$).
6. If $trap$ is undefined, then
 - a. Return the result of calling the [[GetOwnProperty]] internal method of $target$ with argument P .
7. Let $trapResultObj$ be the result of calling the [[Call]] internal method of $trap$ with $handler$ as the this value and a new List containing $target$ and P .
8. ReturnIfAbrupt($trapResultObj$).
9. If Type($trapResultObj$) is neither Object or Undefined, then throw a **TypeError** exception.
10. Let $targetDesc$ be the result of calling the [[GetOwnProperty]] internal method of $target$ with argument P .
11. ReturnIfAbrupt($targetDesc$).
12. If $trapResultObj$ is undefined, then
 - a. If $targetDesc$ is undefined, then return undefined.
 - b. If $targetDesc$.[[Configurable]] is false, then throw a **TypeError** exception.
 - c. Let $extensibleTarget$ be the result of calling the [[IsExtensible]] internal method of $target$.
 - d. ReturnIfAbrupt($extensibleTarget$).
 - e. If ToBoolean($extensibleTarget$) is false, then throw a **TypeError** exception.
 - f. Return undefined.
13. Let $extensibleTarget$ be the result of calling the [[IsExtensible]] internal method of $target$.
14. ReturnIfAbrupt($extensibleTarget$).
15. Set $extensibleTarget$ to ToBoolean($extensibleTarget$).
16. Let $resultDesc$ be ToPropertyDescriptor($trapResultObj$).
17. ReturnIfAbrupt($resultDesc$).
18. Call CompletePropertyDescriptor($resultDesc$, $targetDesc$).
19. Let $valid$ be the result of IsCompatiblePropertyDescriptor ($extensibleTarget$, $resultDesc$, $targetDesc$).
20. If $valid$ is false, then throw a **TypeError** exception.
21. If $resultDesc$.[[Configurable]] is false, then
 - a. If $targetDesc$ is not undefined and $targetDesc$.[[Configurable]] is true, then
 - i. Throw a **TypeError** exception.
22. Return $resultDesc$.

NOTE [[GetOwnProperty]] for proxy objects enforces the following invariants:

- The result of [[GetOwnProperty]] must be either an Object or undefined.
- A property cannot be reported as non-existent, if it exists as a non-configurable own property of the target object.
- A property cannot be reported as non-existent, if it exists as a own property of the target object and the target object is not extensible.
- A property cannot be reported as existent, if it does not exists as a own property of the target object and the target object is not extensible.
- A property cannot be reported as non-configurable, if it does not exists as a own property of the target object or if it exists as a configurable own property of the target object.
- The result of [[GetOwnProperty]] can be applied to the target object using [[DefineOwnProperty]] and will not throw an exception.

Deleted: proxy

Deleted: Assert: P is a valid property key, either String or a Symbol Object.

Deleted: u

Comment [AWB1251]: Note the result descriptor defaults are set to the values in the targetDesc (if there is one) rather than the normal defaults. This is a change from the wiki spec.

Deleted: a

Comment [AWB1252]: The resultDesc carries a reference to the original descriptor returned by the trap. A copy is not made and missing attribute properties are not added to

This is a change from the wiki spec.

8.5.7 [[DefineOwnProperty]] (P, Desc)

When the [[DefineOwnProperty]] internal method of an exotic Proxy object O is called with property key P and property descriptor $Desc$, the following steps are taken:

1. Assert: IsPropertyKey(P) is true.
2. Let $handler$ be the value of the [[ProxyHandler]] internal data property of O .
3. Let $target$ be the value of the [[ProxyTarget]] internal data property of O .
4. Let $trap$ be the result of GetMethod($handler$, "defineProperty").
5. ReturnIfAbrupt($trap$).
6. If $trap$ is undefined, then

- a. Return the result of calling the `[[DefineOwnProperty]]` internal method of `target` with arguments `P` and `Desc`.
7. Let `descObj` be `FromPropertyDescriptor(Desc)`.
8. NOTE If `Desc` was originally generated from an object using `ToPropertyDescriptor`, then `descObj` will be that original object.
9. Let `trapResult` be the result of calling the `[[Call]]` internal method of `trap` with `handler` as the `this` value and a new List containing `target`, `P`, and `descObj`.
10. `ReturnIfAbrupt(trapResult)`.
11. If `ToBoolean(trapResult)` is `false`, then return `false`.
12. Let `targetDesc` be the result of calling the `[[GetOwnProperty]]` internal method of `target` with argument `P`.
13. `ReturnIfAbrupt(targetDesc)`.
14. Let `extensibleTarget` be the result of calling the `[[IsExtensible]]` internal method of `target`.
15. `ReturnIfAbrupt(extensibleTarget)`.
16. Set `extensibleTarget` to `ToBoolean(extensibleTarget)`.
17. If `targetDesc` is `undefined`, then
 - a. If `extensibleTarget` is `false`, then throw a `TypeError` exception.
 - b. If `Desc.[[Configurable]]` is `false`, then throw a `TypeError` exception.
18. Else `targetDesc` is not `undefined`,
 - a. If `IsCompatiblePropertyDescriptor(extensibleTarget, Desc, targetDesc)` is `false`, then throw a `TypeError` exception.
 - b. If `Desc.[[Configurable]]` is `false` and `targetDesc.[[Configurable]]` is `true`, then throw a `TypeError` exception.
19. Return `true`.

NOTE `[[GetProperty]]` for proxy objects enforces the following invariants:

- A property cannot be added, if the target object is not extensible.
- A property cannot be added as or modified to be non-configurable, if it does not exists as a non-configurable own property of the target object.
- A property may not be non-configurable, if its corresponding configurable property of the target object exists.
- If a property has a corresponding target object property then apply the property descriptor of the property to the target object using `[[DefineOwnProperty]]` will not throw an exception.

8.5.8 `[[HasProperty]](P)`

When the `[[HasProperty]]` internal method of an exotic Proxy object `O` is called with property key `P`, the following steps are taken:

13. Assert: `IsPropertyKey(P)` is `true`.
14. Let `handler` be the value of the `[[ProxyHandler]]` internal data property of `O`.
15. Let `target` be the value of the `[[ProxyTarget]]` internal data property of `O`.
16. Let `trap` be the result of `GetMethod(handler, "has")`.
17. `ReturnIfAbrupt(trap)`.
18. If `trap` is `undefined`, then
 - a. Return the result of calling the `[[HasProperty]]` internal method of `target` with argument `P`.
19. Let `trapResult` be the result of calling the `[[Call]]` internal method of `trap` with `handler` as the `this` value and a new List containing `target` and `P`.
20. `ReturnIfAbrupt(trapResult)`.
21. Let `success` be `ToBoolean(trapResult)`.
22. If `success` is `false`, then
 - a. Let `targetDesc` be the result of calling the `[[GetOwnProperty]]` internal method of `target` with argument `P`.
 - b. `ReturnIfAbrupt(targetDesc)`.
 - c. If `targetDesc` is not `undefined`, then
 - i. If `targetDesc.[[Configurable]]` is `false`, then throw a `TypeError` exception.
 - ii. Let `extensibleTarget` be the result of calling the `[[IsExtensible]]` internal method of `target`.
 - iii. `ReturnIfAbrupt(extensibleTarget)`.
 - iv. If `ToBoolean(extensibleTarget)` is `false`, then throw a `TypeError` exception.
23. Return `success`.

NOTE `[[HasProperty]]` for proxy objects enforces the following invariants:

- A property cannot be reported as non-existent, if it exists as a non-configurable own property of the target object.

- A property cannot be reported as non-existent, if it exists as a own property of the target object and the target object is not extensible.

8.5.9 [[GetP]] (P, Receiver)

When the [[GetP]] internal method of an exotic Proxy object O is called with property key P and ECMAScript language value $Receiver$ the following steps are taken:

1. Assert: IsPropertyKey(P) is true.
2. Let $handler$ be the value of the [[ProxyHandler]] internal data property of O .
3. Let $target$ be the value of the [[ProxyTarget]] internal data property of O .
4. Let $trap$ be the result of GetMethod($handler$, "get").
5. ReturnIfAbrupt($trap$).
6. If $trap$ is undefined, then
 - a. Return the result of calling the [[GetP]] internal method of $target$ with arguments P and $Receiver$.
7. Let $trapResult$ be the result of calling the [[Call]] internal method of $trap$ with $handler$ as the this value and a new List containing $target$, P , and $Receiver$.
8. ReturnIfAbrupt($trapResult$).
9. Let $targetDesc$ be the result of calling the [[GetOwnProperty]] internal method of $target$ with argument P .
10. ReturnIfAbrupt($targetDesc$).
11. If $targetDesc$ is not undefined, then
 - a. If IsDataDescriptor($targetDesc$) and $targetDesc$.[[Configurable]] is false and $targetDesc$.[[Writable]] is false, then
 - i. If SameValue($trapResult$, $targetDesc$.[[Value]]) is false, then throw a **TypeError** exception.
 - b. If IsAccessorDescriptor($targetDesc$) and $targetDesc$.[[Configurable]] is false and $targetDesc$.[[Get]] is undefined, then
 - i. If $trapResult$ is not undefined, then throw a **TypeError** exception.
12. Return $trapResult$.

NOTE [[GetP]] for proxy objects enforces the following invariants:

- The value reported for a property must be the same as the value of the corresponding target object property if the target object property is a non-writable, non-configurable data property.
- The value reported for a property must be undefined if the corresponding corresponding target object property is non-configurable accessor property that has undefined as its [[Get]] attribute.

Deleted: 7

Deleted: proxy

Deleted: Assert: P is a valid property key, either String or a Symbol Object

8.5.10 [[SetP]] (P, V, Receiver)

When the [[SetP]] internal method of an exotic Proxy object O is called with property key P , value V , and ECMAScript language value $Receiver$, the following steps are taken:

1. Assert: IsPropertyKey(P) is true.
2. Let $handler$ be the value of the [[ProxyHandler]] internal data property of O .
3. Let $target$ be the value of the [[ProxyTarget]] internal data property of O .
4. Let $trap$ be the result of GetMethod($handler$, "set").
5. ReturnIfAbrupt($trap$).
6. If $trap$ is undefined, then
 - a. Return the result of calling the [[SetP]] internal method of $target$ with arguments P , V , and $Receiver$.
7. Let $trapResult$ be the result of calling the [[Call]] internal method of $trap$ with $handler$ as the this value and a new List containing $target$, P , V , and $Receiver$.
8. ReturnIfAbrupt($trapResult$).
9. If ToBoolean($trapResult$) is false, then return false.
10. Let $targetDesc$ be the result of calling the [[GetOwnProperty]] internal method of $target$ with argument P .
11. ReturnIfAbrupt($targetDesc$).
12. If $targetDesc$ is not undefined, then
 - a. If IsDataDescriptor($targetDesc$) and $targetDesc$.[[Configurable]] is false and $targetDesc$.[[Writable]] is false, then
 - i. If SameValue(V , $targetDesc$.[[Value]]) is false, then throw a **TypeError** exception.
 - b. If IsAccessorDescriptor($targetDesc$) and $targetDesc$.[[Configurable]] is false, then
 - i. If $targetDesc$.[[Set]] is undefined, then throw a **TypeError** exception.

Deleted: .

Deleted: 8

Deleted: proxy

Deleted: Assert: P is a valid property key, either String or a Symbol Object.

13. Return **true**.

NOTE `[[SetP]]` for proxy objects enforces the following invariants:

- Cannot change the value of a property to be different from the value of the corresponding target object property if the corresponding target object property is a non-writable, non-configurable data property.
- Cannot set the value of a property if the corresponding target object property is a non-configurable accessor property that has `undefined` as its `[[Set]]` attribute.

8.5.11 `[[Delete]](P)`

When the `[[Delete]]` internal method of an exotic Proxy object O is called with property name P the following steps are taken:

1. Assert: `IsPropertyKey(P)` is **true**.
2. Let `handler` be the value of the `[[ProxyHandler]]` internal data property of O .
3. Let `target` be the value of the `[[ProxyTarget]]` internal data property of O .
4. Let `trap` be the result of `GetMethod(handler, "deleteProperty")`.
5. `ReturnIfAbrupt(trap)`.
6. If `trap` is `undefined`, then
 - a. Return the result of calling the `[[Delete]]` internal method of `target` with argument P .
7. Let `trapResult` be the result of calling the `[[Call]]` internal method of `trap` with `handler` as the `this` value and a new List containing `target` and P .
8. `ReturnIfAbrupt(trapResult)`.
9. If `ToBoolean(trapResult)` is **false**, then return **false**.
10. Let `targetDesc` be the result of calling the `[[GetOwnProperty]]` internal method of `target` with argument P .
11. `ReturnIfAbrupt(targetDesc)`.
12. If `targetDesc` is `undefined`, then return **true**.
13. If `targetDesc.[[Configurable]]` is **false**, then throw a **TypeError** exception.
14. Return **true**.

NOTE `[[Delete]]` for proxy objects enforces the following invariant:

- A property cannot be deleted, if it exists as a non-configurable own property of the target object.

8.5.12 `[[Enumerate]]()`

When the `[[Enumerate]]` internal method of an exotic Proxy object O is called the following steps are taken:

1. Let `handler` be the value of the `[[ProxyHandler]]` internal data property of O .
2. Let `target` be the value of the `[[ProxyTarget]]` internal data property of O .
3. Let `trap` be the result of `GetMethod(handler, "enumerate")`.
4. `ReturnIfAbrupt(trap)`.
5. If `trap` is `undefined`, then
 - a. Return the result of calling the `[[Enumerate]]` internal method of `target`.
6. Let `trapResult` be the result of calling the `[[Call]]` internal method of `trap` with `handler` as the `this` value and a new List containing `target`.
7. `ReturnIfAbrupt(trapResult)`.
8. If `Type(trapResult)` is not `Object`, then throw a **TypeError** exception.
9. **TODO**: we may need to add a lot of additional invariant checking here according to the wiki spec. But maybe it really isn't necessary.
10. Return `trapResult`.

NOTE `[[Enumerate]]` for proxy objects enforces the following invariants:

- The result of `[[Enumerate]]` must be an `Object`.

8.5.13 `[[OwnPropertyKeys]]()`

When the `[[OwnPropertyKeys]]` internal method of an exotic Proxy object O is called the following steps are taken:

1. Let `handler` be the value of the `[[ProxyHandler]]` internal data property of O .
2. Let `target` be the value of the `[[ProxyTarget]]` internal data property of O .

Deleted: 9

Deleted: proxy

Deleted: Assert: P is a valid property key, either a String or a Symbol Object.

Deleted: d

Deleted: 8.5.10 `[[DefineOwnProperty]](P, Desc)`

When the `[[DefineOwnProperty]]` internal method of proxy object O is called with property key P and property descriptor $Desc$, the following steps are taken:
 ↪ Assert: P is a valid property key, either a String or a Symbol Object.

↪ Let `handler` the value of the `[[ProxyHandler]]` internal data property of O .

↪ Let `target` the value of the `[[ProxyTarget]]` internal data property of O .

↪ Let `trap` be the result of `GetMethod(handler, "defineProperty")`.

↪ `ReturnIfAbrupt(trap)`.

↪ If `trap` is `undefined`, then

↪ Return the result of calling the `[[DefineOwnProperty]]` internal method of `target` with arguments P and $Desc$.

↪ Let `descObj` be `FromPropertyDescriptor(Desc)`.

↪ **NOTE** If $Desc$ was originally generated from an object using `ToPropertyDescriptor`, then `descObj` will be the original object.

↪ Let `trapResult` be the result of calling `trap` with `handler` as the `this` value and a new List containing `target`, P , and `descObj`.

↪ `ReturnIfAbrupt(trapResult)`.

↪ If `ToBoolean(trapResult)` is **false**, then return **false**.

↪ Let `targetDesc` be the result of calling the `[[GetOwnProperty]]` internal method of `target` with argument P .

↪ `ReturnIfAbrupt(targetDesc)`.

↪ Let `extensibleTarget` be the result of calling the `[[IsExtensible]]` internal method of `target`.

↪ `ReturnIfAbrupt(extensibleTarget)`.

↪ Set `extensibleTarget` to `ToBoolean(extensibleTarget)`.

↪ If `targetDesc` is `undefined`, then

↪ If `extensibleTarget` is `false`, then throw a **TypeError** exception.

↪ If `Desc.[[Configurable]]` is **false**, then throw a **TypeError** exception.

↪ Else `targetDesc` is not `undefined`,

↪ If `IsComptableDescriptor(extensibleTarget, Desc, targetDesc)` is **false**, then throw a **TypeError** exception.

↪ If `Desc.[[Configurable]]` is **false** and `targetDesc.[[Configurable]]` is **true**, then throw a **TypeError** exception.

↪ `Return true`.

NOTE `[[GetOwnProperty]]` for proxy objects enforces the following invariants:

↪ A property cannot be added, if the target object is extensible.

Deleted: 1

Deleted: of

Deleted: proxy

Comment [AWB1253]: TODO

Comment [AWB1254]: TODO

Deleted: 8.5.12 `[[Keys]]()`

When the `[[Keys]]` internal method of proxy object O is called the following steps are taken:

↪ Let `handler` the value of the `[[ProxyHandler]]` internal data property of O .

Deleted: proxy

3. Let *trap* be the result of *GetMethod(handler, "ownPropertyKeys")*.
4. ReturnIfAbrupt(*trap*).
5. If *trap* is **undefined**, then
 - a. Return the result of calling the **[[OwnPropertyKeys]]** internal method of *target*.
6. Let *trapResult* be the result of calling the **[[Call]]** internal method of *trap* with *handler* as the **this** value and a new List containing *target*.
7. ReturnIfAbrupt(*trapResult*).
8. If *Type(trapResult)* is not Object, then throw a **TypeError** exception.
9. **TODO:** we may need to add a lot of additional invariant checking here according to the wiki spec. But maybe it really isn't necessary
10. Return *trapResult*.

NOTE **[[OwnPropertyKeys]]** for proxy objects enforces the following invariants:
 • The result of **[[OwnPropertyKeys]]** must be an Object.

8.5.14 [[Freeze]]()

When the **[[Freeze]]** internal method of an exotic Proxy object *O* is called the following steps are taken:

1. Return the result of *MakeObjectSecure(O, false)*.

8.5.15 [[Seal]]()

When the **[[Seal]]** internal method of an exotic Proxy object *O* is called the following steps are taken:

1. Return the result of *MakeObjectSecure(O, false)*.

8.5.16 [[IsFrozen]]()

When the **[[IsFrozen]]** internal method of an exotic Proxy object *O* is called the following steps are taken:

1. Return the result of *TestIfSecureObject(O, true)*.

8.5.17 [[IsSealed]]()

When the **[[IsSealed]]** internal method of an exotic Proxy object *O* is called the following steps are taken:

1. Return the result of *TestIfSecureObject(O, false)*.

8.5.18 [[Call]](thisArgument, argumentsList)

The **[[Call]]** internal method of an exotic Proxy object *O* is called with parameters *thisArgument* and *argumentsList*, a List of ECMAScript language values. The following steps are taken:

1. Let *handler* be the value of the **[[ProxyHandler]]** internal data property of *O*.
2. Let *target* be the value of the **[[ProxyTarget]]** internal data property of *O*.
3. Let *trap* be the result of *GetMethod(handler, "apply")*.
4. ReturnIfAbrupt(*trap*).
5. If *trap* is **undefined**, then
 - a. Return the result of calling the **[[Call]]** internal method of *target* with arguments *thisArgument* and *argumentsList*.
6. Let *argArray* be the result of *CreateArrayFromList(argumentsList)*.
7. Return the result of calling the **[[Call]]** internal method of *trap* with *handler* as the **this** value and a new List containing *target*, *thisArgument*, and *argArray*.

NOTE An Proxy exotic object only has a **[[Call]]** internal method if the initial value of its **[[ProxyTarget]]** internal data property is an object that has a **[[Call]]** internal method.

Deleted: *getTo*

Deleted: Names

Comment [AWB1255]: TODO

Comment [AWB1256]: Possibly unnecessary
If we keep it as an internal method we may need to add a lot of additional invariant checking here according to the wiki spec.

Deleted: *of*

Deleted: proxy

Comment [AWB1257]: Possibly unnecessary
If we keep it as an internal method we may need to add a lot of additional invariant checking here according to the wiki spec.

Comment [AWB1258]: Possibly unnecessary
If we keep it as an internal method we may need to add a lot of additional invariant checking here according to the wiki spec.

Comment [AWB1259]: Possibly unnecessary
If we keep it as an internal method we may need to add a lot of additional invariant checking here according to the wiki spec.

8.5.19 [[Construct]] Internal Method

The [[Construct]] internal method of an exotic Proxy object O is called with a single parameter $argumentsList$ which is a possibly empty List of ECMAScript language values. The following steps are taken:

1. Let $handler$ be the value of the [[ProxyHandler]] internal data property of O .
2. Let $target$ be the value of the [[ProxyTarget]] internal data property of O .
3. Let $trap$ be the result of GetMethod($handler$, "construct").
4. ReturnIfAbrupt($trap$).
5. If $trap$ is **undefined**, then
 - a. Return the result of calling the [[Construct]] internal method of $target$ with argument $argumentsList$.
6. Let $argArray$ be the result of CreateArrayFromList($argumentsList$).
7. Return the result of calling $trap$ with $handler$ as the **this** value and a new List containing $target$ and $argArray$.

NOTE An Proxy exotic object only has a [[Construct]] internal method if the initial value of its [[ProxyTarget]] internal data property is an object that has a [[Construct]] internal method.

9 Abstract Operations

These operations are not a part of the ECMAScript language; they are defined here to solely to aid the specification of the semantics of the ECMAScript Language. Other, more specialized abstract operations are defined throughout this specification.

9.1 Type Conversion and Testing

The ECMAScript language implicitly performs automatic type conversion as needed. To clarify the semantics of certain constructs it is useful to define a set of conversion abstract operations. The conversion abstract operations are polymorphic; that is, they can accept a value of any ECMAScript language type, but not of specification types.

9.1.1 ToPrimitive

The abstract operation ToPrimitive takes an input $argument$ and an optional argument $PreferredType$. The abstract operation ToPrimitive converts its $input$ argument to a non-Object type. If an object is capable of converting to more than one primitive type, it may use the optional hint $PreferredType$ to favour that type. Conversion occurs according to Table 15:

Table 15 — ToPrimitive Conversions

Input Type	Result
Completion Record	If $argument$ is an abrupt completion, return $argument$. Otherwise return ToPrimitive($argument$.[[value]]) also passing the optional hint $PreferredType$.
Undefined	Return $argument$ (no conversion).
Null	Return $argument$ (no conversion).
Boolean	Return $argument$ (no conversion).
Number	Return $argument$ (no conversion).
String	Return $argument$ (no conversion).
Object	Perform the steps following this table.

When the $InputType$ is Object, the following steps are taken:

1. If $PreferredType$ was not passed, let $hint$ be "**default**".
2. Else if $PreferredType$ is **String**, let $hint$ be "**string**".
3. Else $PreferredType$ is **Number**, let $hint$ be "**number**".

Deleted: runtime system

Deleted: These abstract operations are not a part of the language; they are defined here to aid the specification of the semantics of the language

Deleted:

Deleted: Table 13Table 12

Deleted: 1312

Deleted: The result equals

Deleted:

Deleted: the $input$ argumen

Deleted: t

Deleted: The result equals

Deleted: the $input$ argument

Deleted: The result equals

Deleted: the $input$ argument

Deleted: The result equals

Deleted: the $input$ argument

Deleted: following

Deleted: given

Deleted: :||

<#>Let $default$ be the result of calling the [[DefaultValue]] internal method of $argument$, passing the optional hint $PreferredType$.
<#>Return ToPrimitive($default$).¶

Return a default value for the Object. The default value of an object is retrieved by calling the [[DefaultValue]] internal method of the object, passing the optional hint $PreferredType$. The behaviour of the [[DefaultValue]] internal method is defined by this specification for all native ECMAScript objects in 8.12.8.

4. Let *exoticToPrim* be the result of Get(*argument*, @@ToPrimitive).
5. ReturnIfAbrupt(*exoticToPrim*).
6. If *exoticToPrim* is not **undefined**, then
 - a. If IsCallable(*exoticToPrim*) is **false**, then throw a **TypeError** exception.
 - b. Let *result* be the result of calling the [[Call]] internal method of *exoticToPrim*, with *argument* as *thisArgument* and a List containing *hint* as *argumentsList*.
 - c. ReturnIfAbrupt(*result*).
 - d. If *result* is an ECMAScript language value and Type(*result*) is not Object, then return *result*.
 - e. Else, throw a **TypeError** exception.
7. If *hint* is "default" then, let *hint* be "number".
8. Return the result of OrdinaryToPrimitive(*argument.hint*).

Deleted: O**Deleted:** *toString***Deleted:** O**Deleted:** be**Deleted:** O**Deleted:** s**Deleted:** First

When the OrdinaryToPrimitive is called with arguments *O* and *hint*, the following steps are taken:

1. Assert: Type(*O*) is Object
2. Assert: Type(*hint*) is String and its value is either "string" or "number".
3. If *hint* is "string", then
 - a. Let *tryFirst* be "toString".
 - b. Let *trySecond* be "valueOf".
4. Else,
 - a. Let *tryFirst* be "valueOf".
 - b. Let *trySecond* be "toString".
5. Let *first* be the result of Get(*O*, *tryFirst*).
6. ReturnIfAbrupt(*first*).
7. If IsCallable(*first*) is true then,
 - a. Let *result* be the result of calling the [[Call]] internal method of *first*, with *O* as *thisArgument* and an empty List as *argumentsList*.
 - b. ReturnIfAbrupt(*result*).
 - c. If *result* is an ECMAScript language value and Type(*result*) is not Object, then return *result*.
 - d. Else, throw a **TypeError** exception.
8. Let *second* be the result of Get(*O*, *trySecond*).
9. ReturnIfAbrupt(*second*).
10. If IsCallable(*second*) is true then,
 - a. Let *result* be the result of calling the [[Call]] internal method of *second*, with *O* as *thisArgument* and an empty argument list.
 - b. ReturnIfAbrupt(*result*).
 - c. If *result* is an ECMAScript language value and Type(*result*) is not Object, then return *result*.
11. Throw a **TypeError** exception.

NOTE When ToPrimitive is called with no hint, then it generally behaves as if the hint were Number. However, objects may over-ride this behaviour by defining a @@ToPrimitive method. Of the objects defined in this specification only Date objects (see 15.9.6) over-ride the default ToPrimitive behaviour. Date objects treat no hint as if the hint were String.

9.1.2 ToBoolean

The abstract operation ToBoolean converts its *argument* to a value of type Boolean according to Table 16:

Table 16.— ToBoolean Conversions

Argument Type	Result
Completion Record	If <i>argument</i> is an abrupt completion, return the argument. Otherwise return <code>ToBoolean(argument.[value])</code>
Undefined	Return <code>false</code>
Null	Return <code>false</code>
Boolean	Return the input argument (no conversion).
Number	Return <code>false</code> if the argument is <code>+0</code> , <code>-0</code> , or <code>NaN</code> ; otherwise return <code>true</code> .
String	Return <code>false</code> if the argument is the empty String (its length is zero); otherwise return <code>true</code> .
Object	Return <code>true</code>

Deleted: 1413

Deleted: The result equals
Deleted: The result is
Deleted: the result is
Deleted: The result is
Deleted: the result is

9.1.3 ToNumber

The abstract operation `ToNumber` converts its *argument* to a value of type Number according to Table 17.

Table 17.— ToNumber Conversions

Argument Type	Result
Completion Record	If <i>argument</i> is an abrupt completion, return <i>argument</i> . Otherwise return <code>ToNumber(argument.[value])</code>
Undefined	Return <code>NaN</code>
Null	Return <code>+0</code>
Boolean	Return <code>1</code> if <i>argument</i> is <code>true</code> . Return <code>+0</code> if <i>argument</i> is <code>false</code> .
Number	Return <i>argument</i> (no conversion).
String	See grammar and note below.
Object	Apply the following steps: 1. Let <i>primValue</i> be <code>ToPrimitive(argument, hint Number)</code> . 2. Return <code>ToNumber(primValue)</code> .

Deleted: Table 15Table 14

Deleted: 1514
Deleted:

Deleted: The result is
Deleted: the
Deleted: The result is
Deleted: the
Deleted: The result equals
Deleted: the input
Deleted: input

9.1.3.1 ToNumber Applied to the String Type

`ToNumber` applied to Strings applies the following grammar to the input String. If the grammar cannot interpret the String as an expansion of `StringNumericLiteral`, then the result of `ToNumber` is `NaN`.

Syntax

`StringNumericLiteral` ::=
`StrWhiteSpaceopt`
`StrWhiteSpaceopt StrNumericLiteral StrWhiteSpaceopt`

`StrWhiteSpace` ::=
`StrWhiteSpaceChar StrWhiteSpaceopt`

`StrWhiteSpaceChar` ::=
`WhiteSpace`
`LineTerminator`

`StrNumericLiteral` ::=
`StrDecimalLiteral`
`HexIntegerLiteral`

StrDecimalLiteral :::

- + *StrUnsignedDecimalLiteral*
- *StrUnsignedDecimalLiteral*

StrUnsignedDecimalLiteral :::

- infinity**
- DecimalDigits* . *DecimalDigits*_{opt} *ExponentPart*_{opt}
- . *DecimalDigits* *ExponentPart*_{opt}
- DecimalDigits* *ExponentPart*_{opt}

DecimalDigits :::

- DecimalDigit*
- DecimalDigits* *DecimalDigit*

DecimalDigit :: **one of**

0 1 2 3 4 5 6 7 8 9

ExponentPart :::

- ExponentIndicator* *SignedInteger*

ExponentIndicator :: **one of**

e E

SignedInteger :::

- DecimalDigits*
- + *DecimalDigits*
- *DecimalDigits*

HexIntegerLiteral :::

- 0x *HexDigit*
- 0X *HexDigit*
- HexIntegerLiteral* *HexDigit*

HexDigit :: **one of**

0 1 2 3 4 5 6 7 8 9 a b c d e f A B C D E F

NOTE Some differences should be noted between the syntax of a *StringNumericLiteral* and a *NumericLiteral* (see 7.8.3):

- A *StringNumericLiteral* may be preceded and/or followed by white space and/or line terminators.
- A *StringNumericLiteral* that is decimal may have any number of leading 0 digits.
- A *StringNumericLiteral* that is decimal may be preceded by + or - to indicate its sign.
- A *StringNumericLiteral* that is empty or contains only white space is converted to +0.
- **infinity** and **-infinity** are recognized as a *StringNumericLiteral* but not as a *NumericLiteral*.

Runtime Semantics

The conversion of a String to a Number value is similar overall to the determination of the Number value for a numeric literal (see 7.8.3), but some of the details are different, so the process for converting a String numeric literal to a value of Number type is given here in full. This value is determined in two steps: first, a mathematical value (MV) is derived from the String numeric literal; second, this mathematical value is rounded as described below.

- The MV of *StringNumericLiteral* :: [empty] is 0.
- The MV of *StringNumericLiteral* :: *StrWhiteSpace* is 0.
- The MV of *StringNumericLiteral* :: *StrWhiteSpace*_{opt} *StrNumericLiteral* *StrWhiteSpace*_{opt} is the MV of *StrNumericLiteral*, no matter whether white space is present or not.
- The MV of *StrNumericLiteral* :: *StrDecimalLiteral* is the MV of *StrDecimalLiteral*.
- The MV of *StrNumericLiteral* :: *HexIntegerLiteral* is the MV of *HexIntegerLiteral*.

- The MV of *StrDecimalLiteral* :::: *StrUnsignedDecimalLiteral* is the MV of *StrUnsignedDecimalLiteral*.
- The MV of *StrDecimalLiteral* :::: + *StrUnsignedDecimalLiteral* is the MV of *StrUnsignedDecimalLiteral*.
- The MV of *StrDecimalLiteral* :::: - *StrUnsignedDecimalLiteral* is the negative of the MV of *StrUnsignedDecimalLiteral*. (Note that if the MV of *StrUnsignedDecimalLiteral* is 0, the negative of this MV is also 0. The rounding rule described below handles the conversion of this signless mathematical zero to a floating-point **+0** or **-0** as appropriate.)
- The MV of *StrUnsignedDecimalLiteral*:::: **Infinity** is 10^{1000} (a value so large that it will round to $+\infty$).
- The MV of *StrUnsignedDecimalLiteral*:::: *DecimalDigits* . is the MV of *DecimalDigits*.
- The MV of *StrUnsignedDecimalLiteral*:::: *DecimalDigits* . *DecimalDigits* is the MV of the first *DecimalDigits* plus (the MV of the second *DecimalDigits* times 10^{-n}), where *n* is the number of characters in the second *DecimalDigits*.
- The MV of *StrUnsignedDecimalLiteral*:::: *DecimalDigits* . *ExponentPart* is the MV of *DecimalDigits* times 10^e , where *e* is the MV of *ExponentPart*.
- The MV of *StrUnsignedDecimalLiteral*:::: *DecimalDigits* . *DecimalDigits* *ExponentPart* is (the MV of the first *DecimalDigits* plus (the MV of the second *DecimalDigits* times 10^{-n})) times 10^e , where *n* is the number of characters in the second *DecimalDigits* and *e* is the MV of *ExponentPart*.
- The MV of *StrUnsignedDecimalLiteral*:::: . *DecimalDigits* is the MV of *DecimalDigits* times 10^{-n} , where *n* is the number of characters in *DecimalDigits*.
- The MV of *StrUnsignedDecimalLiteral*:::: . *DecimalDigits* *ExponentPart* is the MV of *DecimalDigits* times 10^{e-n} , where *n* is the number of characters in *DecimalDigits* and *e* is the MV of *ExponentPart*.
- The MV of *StrUnsignedDecimalLiteral*:::: *DecimalDigits* is the MV of *DecimalDigits*.
- The MV of *StrUnsignedDecimalLiteral*:::: *DecimalDigits* *ExponentPart* is the MV of *DecimalDigits* times 10^e , where *e* is the MV of *ExponentPart*.
- The MV of *DecimalDigits* :::: *DecimalDigit* is the MV of *DecimalDigit*.
- The MV of *DecimalDigits* :::: *DecimalDigits* *DecimalDigit* is (the MV of *DecimalDigits* times 10) plus the MV of *DecimalDigit*.
- The MV of *ExponentPart* :::: *ExponentIndicator* *SignedInteger* is the MV of *SignedInteger*.
- The MV of *SignedInteger* :::: *DecimalDigits* is the MV of *DecimalDigits*.
- The MV of *SignedInteger* :::: + *DecimalDigits* is the MV of *DecimalDigits*.
- The MV of *SignedInteger* :::: - *DecimalDigits* is the negative of the MV of *DecimalDigits*.
- The MV of *DecimalDigit* :::: 0 or of *HexDigit* :::: 0 is 0.
- The MV of *DecimalDigit* :::: 1 or of *HexDigit* :::: 1 is 1.
- The MV of *DecimalDigit* :::: 2 or of *HexDigit* :::: 2 is 2.
- The MV of *DecimalDigit* :::: 3 or of *HexDigit* :::: 3 is 3.
- The MV of *DecimalDigit* :::: 4 or of *HexDigit* :::: 4 is 4.
- The MV of *DecimalDigit* :::: 5 or of *HexDigit* :::: 5 is 5.
- The MV of *DecimalDigit* :::: 6 or of *HexDigit* :::: 6 is 6.
- The MV of *DecimalDigit* :::: 7 or of *HexDigit* :::: 7 is 7.
- The MV of *DecimalDigit* :::: 8 or of *HexDigit* :::: 8 is 8.
- The MV of *DecimalDigit* :::: 9 or of *HexDigit* :::: 9 is 9.
- The MV of *HexDigit* :::: a or of *HexDigit* :::: A is 10.
- The MV of *HexDigit* :::: b or of *HexDigit* :::: B is 11.
- The MV of *HexDigit* :::: c or of *HexDigit* :::: C is 12.
- The MV of *HexDigit* :::: d or of *HexDigit* :::: D is 13.
- The MV of *HexDigit* :::: e or of *HexDigit* :::: E is 14.
- The MV of *HexDigit* :::: f or of *HexDigit* :::: F is 15.
- The MV of *HexIntegerLiteral* :::: 0x *HexDigit* is the MV of *HexDigit*.
- The MV of *HexIntegerLiteral* :::: 0X *HexDigit* is the MV of *HexDigit*.
- The MV of *HexIntegerLiteral* :::: *HexIntegerLiteral* *HexDigit* is (the MV of *HexIntegerLiteral* times 16) plus the MV of *HexDigit*.

Once the exact MV for a String numeric literal has been determined, it is then rounded to a value of the Number type. If the MV is 0, then the rounded value is +0 unless the first non white space character in the

String numeric literal is ‘-’, in which case the rounded value is -0 . Otherwise, the rounded value must be the Number value for the MV (in the sense defined in 8.5), unless the literal includes a *StrUnsignedDecimalLiteral* and the literal has more than 20 significant digits, in which case the Number value may be either the Number value for the MV of a literal produced by replacing each significant digit after the 20th with a 0 digit or the Number value for the MV of a literal produced by replacing each significant digit after the 20th with a 0 digit and then incrementing the literal at the 20th digit position. A digit is *significant* if it is not part of an *ExponentPart* and

- it is not **0**; or
- there is a nonzero digit to its left and there is a nonzero digit, not in the *ExponentPart*, to its right.

9.1.4 ToInteger

The abstract operation *ToInteger* converts its argument to an integral numeric value. This abstract operation functions as follows:

1. Let *number* be the result of calling *ToNumber* on the input argument.
2. ReturnIfAbrupt(*number*).
3. If *number* is **NAN**, return **+0**.
4. If *number* is **+0**, **-0**, **$+\infty$** , or **$-\infty$** , return *number*.
5. Return the result of computing $\text{sign}(\text{number}) \times \text{floor}(\text{abs}(\text{number}))$.

9.1.5ToInt32: (Signed 32 Bit Integer)

The abstract operation *ToInt32* converts its argument to one of 2^{32} integer values in the range -2^{31} through $2^{31}-1$, inclusive. This abstract operation functions as follows:

1. Let *number* be the result of calling *ToNumber* on the input argument.
2. ReturnIfAbrupt(*number*).
3. If *number* is **NAN**, **+0**, **-0**, **$+\infty$** , or **$-\infty$** , return **+0**.
4. Let *int* be $\text{sign}(\text{number}) \times \text{floor}(\text{abs}(\text{number}))$.
5. Let *int32bit* be *int* modulo 2^{32} ; that is, a finite integer value *k* of Number type with positive sign and less than 2^{32} in magnitude such that the mathematical difference of *int* and *k* is mathematically an integer multiple of 2^{32} .
6. If *int32bit* is greater than or equal to 2^{31} , return *int32bit* $- 2^{32}$, otherwise return *int32bit*.

NOTE Given the above definition of *ToInt32*:

- The *ToInt32* abstract operation is idempotent: if applied to a result that it produced, the second application leaves that value unchanged.
- *ToInt32*(*ToUint32(x)*) is equal to *ToInt32(x)* for all values of *x*. (It is to preserve this latter property that **$+\infty$** and **$-\infty$** are mapped to **+0**.)
- *ToInt32* maps **-0** to **+0**.

Deleted: posInt

Deleted: *

Deleted: posInt

Deleted: posInt

9.1.6 ToUint32: (Unsigned 32 Bit Integer)

The abstract operation *ToUint32* converts its argument to one of 2^{32} integer values in the range 0 through $2^{32}-1$, inclusive. This abstract operation functions as follows:

Deleted: ion

1. Let *number* be the result of calling *ToNumber* on the input argument.
2. ReturnIfAbrupt(*number*).
3. If *number* is **NAN**, **+0**, **-0**, **$+\infty$** , or **$-\infty$** , return **+0**.
4. Let *int* be $\text{sign}(\text{number}) \times \text{floor}(\text{abs}(\text{number}))$.
5. Let *int32bit* be *int* modulo 2^{32} ; that is, a finite integer value *k* of Number type with positive sign and less than 2^{32} in magnitude such that the mathematical difference of *int* and *k* is mathematically an integer multiple of 2^{32} .
6. Return *int32bit*.

Deleted: posInt

Deleted: posInt

Deleted: posInt

NOTE Given the above definition of *ToUint32*:

- Step 5 is the only difference between *ToUint32* and *ToInt32*.

- The ToUint32 abstract operation is idempotent: if applied to a result that it produced, the second application leaves that value unchanged.
- ToUint32(ToInt32(x)) is equal to ToUint32(x) for all values of x . (It is to preserve this latter property that $+\infty$ and $-\infty$ are mapped to $+0$.)
- ToUint32 maps -0 to $+0$.

9.1.7 ToUint16: (Unsigned 16 Bit Integer)

The abstract operation ToUint16 converts its argument to one of 2^{16} integer values in the range 0 through $2^{16}-1$, inclusive. This abstract operation functions as follows:

- Let *number* be the result of calling ToNumber on the input argument.
- ReturnIfAbrupt(*number*)
- If *number* is NaN, +0, -0, $+\infty$, or $-\infty$, return $+0$.
- Let *int* be sign(*number*) \times floor(abs(*number*)).
- Let *int16bit* be posInt modulo 2^{16} ; that is, a finite integer value *k* of Number type with positive sign and less than 2^{16} in magnitude such that the mathematical difference of *int* and *k* is mathematically an integer multiple of 2^{16} .
- Return *int16bit*.

NOTE Given the above definition of ToUint16:

- The substitution of 2^{16} for 2^{32} in step 4 is the only difference between ToUint32 and ToUint16.
- ToUint16 maps -0 to $+0$.

9.1.8 ToString

The abstract operation ToString converts its *argument* to a value of type String according to [Table 18](#):

[Table 18 — ToString Conversions](#)

Deleted: posInt

Deleted: posInt

Deleted: Table 16Table 15

Deleted: 1615

Deleted: the
Deleted: the result is
Deleted: the
Deleted: the result is
Deleted: the input
Deleted: input

Argument Type	Result
Completion Record	If <i>argument</i> is an abrupt completion, return <i>argument</i> . Otherwise return ToString(<i>argument</i> .[[value]])
Undefined	"undefined"
Null	"null"
Boolean	If <i>argument</i> is true, then return "true". If <i>argument</i> is false, then return "false".
Number	See 9.8.1.
String	Return <i>argument</i> (no conversion)
Object	Apply the following steps: 1. Let <i>primValue</i> be ToPrimitive(<i>argument</i> , hint String). 2. Return ToString(<i>primValue</i>).

9.1.8.1 ToString Applied to the Number Type

The abstract operation ToString converts a Number *m* to String format as follows:

- If *m* is NaN, return the String "NaN".
- If *m* is +0 or -0, return the String "0".
- If *m* is less than zero, return the String concatenation of the String "-" and ToString($-m$).
- If *m* is $+\infty$, return the String "Infinity".
- Otherwise, let *n*, *k*, and *s* be integers such that $k \geq 1$, $10^{k-1} \leq s < 10^k$, the Number value for $s \times 10^{n-k}$ is *m*, and *k* is as small as possible. Note that *k* is the number of digits in the decimal representation of *s*, that *s* is not divisible by 10, and that the least significant digit of *s* is not necessarily uniquely determined by these criteria.
- If $k \leq n \leq 21$, return the String consisting of the *k* digits of the decimal representation of *s* (in order, with no leading zeroes), followed by $n-k$ occurrences of the character '0'.

Deleted: infinity

7. If $0 < n \leq 21$, return the String consisting of the most significant n digits of the decimal representation of s , followed by a decimal point ‘.’, followed by the remaining $k-n$ digits of the decimal representation of s .
8. If $-6 < n \leq 0$, return the String consisting of the character ‘0’, followed by a decimal point ‘.’, followed by $-n$ occurrences of the character ‘0’, followed by the k digits of the decimal representation of s .
9. Otherwise, if $k = 1$, return the String consisting of the single digit of s , followed by lowercase character ‘e’, followed by a plus sign ‘+’ or minus sign ‘-’ according to whether $n-1$ is positive or negative, followed by the decimal representation of the integer $\text{abs}(n-1)$ (with no leading zeroes).
10. Return the String consisting of the most significant digit of the decimal representation of s , followed by a decimal point ‘.’, followed by the remaining $k-1$ digits of the decimal representation of s , followed by the lowercase character ‘e’, followed by a plus sign ‘+’ or minus sign ‘-’ according to whether $n-1$ is positive or negative, followed by the decimal representation of the integer $\text{abs}(n-1)$ (with no leading zeroes).

NOTE 1 The following observations may be useful as guidelines for implementations, but are not part of the normative requirements of this Standard:

- If x is any Number value other than -0 , then $\text{ToNumber}(\text{ToString}(x))$ is exactly the same Number value as x .
- The least significant digit of s is not always uniquely determined by the requirements listed in step 5.

NOTE 2 For implementations that provide more accurate conversions than required by the rules above, it is recommended that the following alternative version of step 5 be used as a guideline:

Otherwise, let n , k , and s be integers such that $k \geq 1$, $10^{k-1} \leq s < 10^k$, the Number value for $s \times 10^{n-k}$ is m , and k is as small as possible. If there are multiple possibilities for s , choose the value of s for which $s \times 10^{n-k}$ is closest in value to m . If there are two such possible values of s , choose the one that is even. Note that k is the number of digits in the decimal representation of s and that s is not divisible by 10.

NOTE 3 Implementers of ECMAScript may find useful the paper and code written by David M. Gay for binary-to-decimal conversion of floating-point numbers:

Gay, David M. Correctly Rounded Binary-Decimal and Decimal-Binary Conversions. Numerical Analysis, Manuscript 90-10. AT&T Bell Laboratories (Murray Hill, New Jersey). November 30, 1990. Available as <http://cm.bell-labs.com/cm/cs/doc/90/4-10.ps.gz>. Associated code available as <http://cm.bell-labs.com/netlib/fp/dtoa.c.gz> and as http://cm.bell-labs.com/netlib/fp/g_fmt.c.gz and may also be found at the various **netlib** mirror sites.

9.1.9 ToObject

The abstract operation **ToObject** converts its *argument* to a value of type Object according to [Table 19](#):

Table 19 — ToObject Conversions

Argument Type	Result
Completion Record	If <i>argument</i> is an abrupt completion, return <i>argument</i> . Otherwise return ToObject (<i>argument</i> .[[value]])
Undefined	Throw a TypeError exception.
Null	Throw a TypeError exception.
Boolean	Return a new Boolean object whose [[BooleanData]] internal data property is set to the value of <i>argument</i> . See 15.6 for a description of Boolean objects.
Number	Return a new Number object whose [[NumberData]] internal data property is set to the value of <i>argument</i> . See 15.7 for a description of Number objects.
String	Return a new String object whose [[StringData]] internal data property is set to the value of <i>argument</i> . See 15.5 for a description of String objects.
Object	Return <i>argument</i> (no conversion).

Deleted: Table 17Table 16

Deleted: 1716

Deleted: Create

Deleted: PrimitiveValue

Deleted: the

Deleted: Create

Deleted: PrimitiveValue

Deleted: the

Deleted: Create

Deleted: PrimitiveValue

Deleted: the

Deleted: The result is

Deleted: the input

9.1.10 ToPropertyKey

The abstract operation **ToPropertyKey** converts its *argument* to a value that can be used as a property key by performing the following steps:

1. ReturnIfAbrupt(*argument*).
2. If Type(*argument*) is Object, then
 - a. If *argument* is an exotic String object, then
 - i. Return *argument*.
3. Return ToString(*argument*).

Deleted: has a [[NativeBrand]] internal property whose value is NativePrivateName

9.2 Testing and Comparison Operations

9.2.1 CheckObjectCoercible

The abstract operation **CheckObjectCoercible** throws an error if its argument is a value that cannot be converted to an Object using **ToObject**. It is defined by [Table 20](#):

Table 20 — CheckObjectCoercible Results

Argument Type	Result
Completion Record	If <i>argument</i> is an abrupt completion, return <i>argument</i> . Otherwise return CheckObjectCoercible(<i>argument</i>.[[value]])
Undefined	Throw a TypeError exception.
Null	Throw a TypeError exception.
Boolean	Return <u><i>argument</i></u>
Number	Return <u><i>argument</i></u>
String	Return <u><i>argument</i></u>
Object	Return <u><i>argument</i></u>

Deleted: i

Deleted: 0

Deleted: Table 18Table 17

Deleted: 1817

9.2.2 IsCallable

The abstract operation **IsCallable** determines if its *argument*, which must be an ECMAScript language value or a Completion Record, is a callable function Object according to [Table 21](#):

Table 21 — IsCallable Results

Argument Type	Result
Completion Record	If <i>argument</i> is an abrupt completion, return <i>argument</i> . Otherwise return IsCallable(<i>argument</i>.[[value]])
Undefined	Return false .
Null	Return false .
Boolean	Return false .
Number	Return false .
String	Return false .
Object	If <i>argument</i> has a [[Call]] internal method, then return true , otherwise return false .

Deleted: Table 19Table 18

Deleted: *argument*

Deleted: *argument*

Deleted: *the*

Deleted: *object*

Deleted: 12

9.2.3 The SameValue Algorithm

The internal comparison abstract operation **SameValue(*x*, *y*)**, where *x* and *y* are ECMAScript language values, produces **true** or **false**. Such a comparison is performed as follows:

1. ReturnIfAbrupt(*x*).
2. ReturnIfAbrupt(*y*).
3. If Type(*x*) is different from Type(*y*), return **false**.
4. If Type(*x*) is Undefined, return **true**.
5. If Type(*x*) is Null, return **true**.
6. If Type(*x*) is Number, then
 - a. If *x* is NaN and *y* is NaN, return **true**.
 - b. If *x* is +0 and *y* is -0, return **false**.
 - c. If *x* is -0 and *y* is +0, return **false**.

Deleted: <#>If *x* is an Completion Record, let *x* be *x*.[[value]]. ¶

<#>If *y* is an Completion Record, let *y* be *y*.[[value]]. ¶

Deleted: .

- d. If x is the same Number value as y , return **true**.
 - e. Return **false**.
7. If $\text{Type}(x)$ is String, then
- a. If x and y are exactly the same sequence of characters (same length and same characters in corresponding positions) return **true**; otherwise, return **false**.
8. If $\text{Type}(x)$ is Boolean, then
- a. If x and y are both **true** or both **false**, then return **true**; otherwise, return **false**.
9. Return **true** if x and y are the same Object value. Otherwise, return **false**.

Deleted: return **true** i

Deleted: return **true** i

Deleted: refer to

Deleted: object

Deleted: Callable

Deleted: value

9.2.4 IsConstructor

The abstract operation **IsConstructor** determines if its *argument*, which must be an ECMAScript language value or a Completion Record, is a function object with a **[[Construct]]** internal method.

1. ReturnIfAbrupt(argument).
2. If $\text{Type}(\text{argument})$ is not Object, return **false**.
3. If argument has a **[[Construct]]** internal method, return **true**.
4. Return **false**.

9.2.5 IsPropertyKey

The abstract operation **IsPropertyKey** determine if its *argument*, which must be an ECMAScript language value or a Completion Record, is a value that may be used as a property key.

1. ReturnIfAbrupt(argument).
2. If $\text{Type}(\text{argument})$ is String, return **true**.
3. If $\text{Type}(\text{argument})$ is Object and argument is an exotic Symbol object, return **true**.
4. Return **false**.

Deleted: Property Access

9.3 Operations on Objects

9.3.1 Get (O, P)

The abstract operation **Get** is used to retrieve the value of an specific property of an object. The operation is called with arguments O and P where O is the object and P is the property key. This abstract operation performs the following steps:

1. Assert: $\text{Type}(O)$ is Object.
2. Assert: $\text{IsPropertyKey}(P)$ is **true**.
3. Return the result of calling the **[[GetP]]** internal method of O passing P and O as the arguments.

Deleted: ,

Deleted: Either

Deleted: Type

Deleted: String

Deleted: or $\text{Type}(O)$ is Object and O is a Symbol object.

Deleted: n

Deleted: ,

Deleted: Either $\text{Type}(P)$ is String or $\text{Type}(O)$ is Object and O is a Symbol object

9.3.2 Put (O, P, V, Throw)

The abstract operation **Put** is used to set the value of a specific property of an object. The operation is called with arguments O , P , V , and Throw where O is the object, P is the property key, V is the new value for the property and Throw is a Boolean flag. This abstract operation performs the following steps:

1. Assert: $\text{Type}(O)$ is Object.
2. Assert: $\text{IsPropertyKey}(P)$ is **true**.
3. Assert: $\text{Type}(\text{Throw})$ is Boolean.
4. Let success be the result of calling the **[[SetP]]** internal method of O passing P , V , and O as the arguments.
5. ReturnIfAbrupt(success).
6. If success is **false** and Throw is **true**, then throw a **TypeError** exception.
7. Return success .

Deleted: ,

9.3.3 CreateOwnProperty (O, P, V)

The abstract operation **CreateOwnProperty** is used to create a new own property of an object. The operation is called with arguments O , P , and V where O is the object, P is the property key, and V is the new value for the property. This abstract operation performs the following steps:

Deleted: ,

1. Assert: Type(O) is Object.
2. Assert: IsPropertyKey(P) is true.
3. Assert: O does not have an own property whose key is P .
4. Let $extensible$ be the result of calling the [[IsExtensible]] internal method of O .
5. ReturnIfAbrupt($extensible$).
6. If $extensible$ is false, then return false.
7. Let $newDesc$ be the Property Descriptor.
 $\{\text{[[Value]]}: V, \text{[[Writable]]}: \text{true}, \text{[[Enumerable]]}: \text{true}, \text{[[Configurable]]}: \text{true}\}$.
8. Return the result of calling the $\text{[[DefineOwnProperty]]}$ internal method of O passing P and $newDesc$ as arguments.

Deleted: Either Type(P) is String or Type(O) is Object and is a Symbol object

Deleted: Get

9.3.4 DefinePropertyOrThrow ($O, P, desc$)

The abstract operation `DefinePropertyOrThrow` is used to call the $\text{[[DefineOwnProperty]]}$ internal method of an object in a manner that will throw a `TypeError` exception if the requested property update can not be performed. The operation is called with arguments O, P , and $desc$ where O is the object, P is the property key, and $desc$ is the Property Descriptor for the property. This abstract operation performs the following steps:

1. Assert: Type(O) is Object.
2. Assert: IsPropertyKey(P) is true.
3. Let $success$ be the result of calling the $\text{[[DefineOwnProperty]]}$ internal method of O passing P and $desc$ as arguments.
4. ReturnIfAbrupt($success$).
5. If $success$ is false, then throw a `TypeError` exception.
6. Return $success$.

Deleted: record

Deleted: s

Deleted: Either Type(P) is String or Type(O) is Object and is a Symbol object

9.3.5 DeletePropertyOrThrow (O, P)

The abstract operation `Put` is used to remove a specific own property of an object. It throws an exception if the property is not configurable. The operation is called with arguments O and P where O is the object and P is the property key. This abstract operation performs the following steps:

1. Assert: Type(O) is Object.
2. Assert: IsPropertyKey(P) is true.
3. Let $success$ be the result of calling the [[Delete]] internal method of O passing P as the argument.
4. ReturnIfAbrupt($success$).
5. If $success$ is false, then throw a `TypeError` exception.
6. Return $success$.

Deleted:,

Deleted: Either Type(P) is String or Type(O) is Object and is a Symbol object

9.3.6 HasProperty (O, P)

The abstract operation `HasProperty` is used to determine whether an object has a property with the specified property key. The property may be either an own or inherited. A Boolean value is returned. The operation is called with arguments O and P where O is the object and P is the property key. This abstract operation performs the following steps:

1. Assert: Type(O) is Object.
2. Assert: IsPropertyKey(P) is true.
3. Return the result of calling the [[HasProperty]] internal method of O argument P .

Deleted:,

Deleted: Either Type(P) is String or Type(O) is Object and is a Symbol object

Deleted: <#>Let obj be O .<#>

<#>Repeat,<#>

<#>If obj is null, then return false.<#>

<#>If Type(obj) is not Object, then throw a `TypeError` exception.<#>

<#>Let has be the result of calling the $\text{[[HasOwnProperty]]}$ internal method of obj argument P .<#>

<#>ReturnIfAbrupt(has).<#>

<#>If has is true, return has .<#>

<#>Set obj to the result of calling the $\text{[[GetInheritance]]}$ internal method of obj .<#>

Deleted: IfAbrupt(obj).

Deleted:,

Deleted: Either Type(P) is String or Type(O) is Object and is a Symbol object

Deleted:

Deleted: V

5. If *func* is **undefined**, then return **undefined**.
6. If *IsCallable(func)* is **false**, then throw a **TypeError** exception.
7. Return *func*.

9.3.8 **Invoke(O,P,[args])**

The **abstract operation** *Invoke* is used to call a method property of an object. The operation is called with arguments *P*, *O*, and optionally *args* where *P* is the property key, *O* serves as both the lookup point for the property and the **this** value of the call, and *args* is the list of arguments values passed to the method. If *args* is not present, an empty List is used as its value. This abstract operation performs the following steps:

1. Assert: *P* is a valid property key.
2. If *args* was not passed, then let *args* be a new empty List.
3. Let *obj* be *ToObject(O)*.
4. ReturnIfAbrupt(*obj*).
5. Let *func* be the result of *GetMethod(obj,P)*.
6. ReturnIfAbrupt(*func*).
7. If *func* is **undefined**, throw a **TypeError** exception.
8. Return the result of calling the **[[Call]]** internal method of *func* passing *O* as *thisArgument* and *args* as *argumentsList*.

9.3.9 **MakeObjectSecure (O, immutable)**

The abstract operation *MakeObjectSecure* is used to fix the set of own properties of an object. If the Boolean argument *immutable* is **true** all own data properties are also made non-writable. This abstract operation performs the following steps:

1. Assert: *Type(O)* is **Object**.
2. Assert: *Type(immutable)* is **Boolean**.
3. Let *keys* be the result of calling **[[OwnPropertyKeys]]** internal method of *O*.
4. ReturnIfAbrupt(*keys*).
5. Let *pendingException* be **undefined**.
6. If *immutable* is **false**, then
 - a. Repeat for each element *k* of *keys*.
 - i. Let *status* be the result of *DefinePropertyOrThrow(O, k,PropertyDescriptor{[[Configurable]]: false})*.
 - ii. If *status* is an Abrupt Completion, then
 1. If *pendingException* is **undefined**, then set *pendingException* to *status*.
7. Else,
 - a. Repeat for each element *k* of *keys*.
 - i. Let *status* be the result of calling the **[[GetOwnProperty]]** internal method of *O* with *k*.
 - ii. If *status* is an Abrupt Completion, then
 1. If *pendingException* is **undefined**, then set *pendingException* to *status*.
 - iii. Else,
 1. Let *currentDesc* be *status.[[value]]*.
 2. If *currentDesc* is not **undefined**, then
 - a. If *IsAccessorDescriptor(currentDesc)* is **true**, then
 - i. Let *desc* be *PropertyDescriptor{[[Configurable]]: false}*.
 - b. Else,
 - i. Let *desc* be *PropertyDescriptor{[[Configurable]]: false, [[Writable]]: false}*.
 - c. Let *status* be the result of *DefinePropertyOrThrow(O, k, desc)*.
 - d. If *status* is an Abrupt Completion, then
 - i. If *pendingException* is **undefined**, then set *pendingException* to *status*.
8. If *pendingException* is not **undefined**, then return *pendingException*.
9. Return the result of calling the **[[PreventExtensions]]** internal method of *O*.

Deleted: 1

Deleted: *Invoke*

Deleted: *ion*

Deleted: *abstract*

Deleted: ,

Deleted: calling the **[[**

Deleted: **]]** internal method of

Deleted:

Deleted: passing

Deleted: as

Deleted: the argument

Deleted: *IsCallable()*

Deleted: **)**

Deleted: **false**

Deleted: the **this** value

Deleted: argument list

Deleted: ,

9.3.10 TestIfSecureObject (O, immutable)

The abstract operation `TestIfSecureObject` is used to determine the set of own properties of an object are fixed. If the Boolean argument `immutable` is `true` a check is also made to determine whether all own data properties are non-writable. This abstract operation performs the following steps:

1. Assert: `Type(O)` is `Object`.
2. Assert: `Type(immutable)` is `Boolean`.
3. Let `status` be the result of calling `[[IsExtensible]]` internal method of `O`.
4. ReturnIfAbrupt(`status`).
5. If `status` is `true`, then return `false`.
6. NOTE If the object is extensible, none of its properties are examined.
7. Let `keys` be the result of calling `[[OwnPropertyKeys]]` internal method of `O`.
8. ReturnIfAbrupt(`keys`).
9. Let `pendingException` be `undefined`.
10. If `immutable` is `false`, then
11. Let `configurable` be `false`.
12. Let `writable` be `false`.
13. Repeat for each element `k` of `keys`.
 - a. Let `status` be the result of calling the `[[GetOwnProperty]]` internal method of `O` with `k`.
 - b. If `status` is an Abrupt Completion, then
 - i. If `pendingException` is `undefined`, then set `pendingException` to `status`.
 - ii. Let `configurable` be `true`.
 - c. Else,
 - i. Let `currentDesc` be `status.[[value]]`.
 - ii. If `currentDesc` is not `undefined`, then
 1. Set `configurable` to `configurable` logically ored with `currentDesc.[[Configurable]]`.
 2. If `IsDataDescriptor(currentDesc)` is `true`, then
 - a. Set `writable` to `writable` logically ored with `currentDesc.[[Writable]]`.
14. If `pendingException` is not `undefined`, then return `pendingException`.
15. If `immutable` is `true` and `writable` is `true`, then return `false`.
16. If `configurable` is `true`, then return `false`.
17. Return `true`.

9.3.11 CreateArrayFromList (elements)

The abstract operation `CreateArrayFromList` is used to create an `Array` object whose elements are provided by an internal List. This abstract operation performs the following steps:

1. Assert: `elements` is a List whose elements are all ECMAScript language values.
2. Let `array` be the result of the abstract operation `ArrayCreate` with argument `0`.
3. Let `n` be `0`.
4. For each element `e` of `elements`
 - a. Call `CreateOwnProperty(array, ToString(n), e)`.
 - b. Assert: the call in step 4.a will never result in an abrupt completion.
 - c. Increment `n` by 1.
5. Return `array`.

9.3.12 OrdinaryHasInstance (C, O)

The abstract operation `OrdinaryHasInstance` implements the default algorithm for determining if an object `O` inherits from the inheritance path used by constructor `C`. This abstract operation performs the following steps:

1. If `IsCallable(C)` is `false`, return `false`.
2. If `C` has a `[[BoundTargetFunction]]` internal data property, then
 - a. Let `BC` be the value of `C`'s `[[BoundTargetFunction]]` internal data property.
 - b. Return the result of `instanceofOperator(O, BC)` (see 11.8).
3. If `Type(O)` is not `Object`, return `false`.
4. Let `P` be the result of `Get(C, "prototype")`.

Deleted: ,

Deleted: Get

Deleted: ,

Deleted: ,

Deleted: the

Deleted: O

Deleted: abstract operation

Deleted:) with `C` and `O` as arguments

Deleted: an

5. ReturnIfAbrupt(*P*).
6. If Type(*P*) is not Object, throw a **TypeError** exception.
7. Repeat
 - a. Set *O* to the result of calling the [[GetInheritance]] internal method of *O* with no arguments.
 - b. ReturnIfAbrupt(*O*).
 - c. If *O* is null, return false.
 - d. If SameValue(*P*, *O*) is true, return true.

9.3.13 OrdinaryCreateFromConstructor (*constructor*, *intrinsicDefaultProto*)

The abstract operation OrdinaryCreateFromConstructor creates an ordinary object whose [[Prototype]] value is retrieved from a constructor's prototype property, if it exists. Otherwise the supplied default is used for [[Prototype]]. This abstract operation performs the following steps:

1. Assert: *intrinsicProto* is a string value that is this specification's name of an intrinsic object. The corresponding object must be an intrinsic that is intended to be used as the [[Prototype]] value of an object.
2. If Type(*constructor*) is not Object, then throw a **TypeError** exception.
3. Let *proto* be the result of Get(*constructor*, "prototype").
4. ReturnIfAbrupt(*proto*).
5. If Type(*proto*) is not Object, then
 - a. If *constructor* has a [[Realm]] internal data property, let *realm* be *F*'s [[Realm]].
 - b. Else,
 - i. Let *ctx* be the running execution context.
 - ii. Let *realm* be *ctx*'s Realm.
 - c. Let *proto* be *realm*'s intrinsic object named *intrinsicDefaultProto*.
6. Return the result of the abstract operation ObjectCreate with argument *proto*.

NOTE If *constructor* does not supply a [[Prototype]] value, the default value that is used is obtained from the Code Realm of the *constructor* function rather than from the running execution context. This accounts for the possibility that a built-in @@create method from a different Code Realm might be installed on *constructor*.

Deleted: ¶

10 Executable Code and Execution Contexts

10.1 Types of Executable Code

There are three types of ECMAScript executable code:

- Global code is source text that is treated as an ECMAScript Script. The global code of a particular Script does not include any source text that is parsed as part of a FunctionBody, ConciseBody, ClassBody, or ModuleBody.
- Eval code is the source text supplied to the built-in eval function. More precisely, if the parameter to the built-in eval function is a String, it is treated as an ECMAScript Script. The eval code for a particular invocation of eval is the global code portion of that Script.
 - Function code is source text that is parsed to supply the value of the [[Code]] internal data property (see 13.6) of function and generator objects. The function code of a particular function or generator does not include any source text that is parsed as the function code of a nested FunctionBody, ConciseBody, or ClassBody.
 - Generator code is source text that is parsed to supply the value of the [[Code]] internal data property (see 13.5) of generator objects. The generator code of a particular generator does not include any source text that is parsed as the function code of a nested FunctionBody, ConciseBody, or ClassBody. All generator code is also considered to be function code, but only function code that is defined within a generator is generator code.
- Module code is source text that is parse code that is provided as a ModuleBody. It is the code that is directly evaluated when a module is initialized. The module code of a particular module does not

Deleted: Program

Deleted: Program

Deleted: Program

Deleted: Program

Comment [AWB760]: TODO: may need an additional reference to the [[Code]] of a generator.

Deleted: 5

Deleted: as part of a FunctionBody.

Deleted: FunctionBody

Deleted: part

Deleted: function or generator

Deleted: FunctionBody

include any source text that is parsed as part of a nested *FunctionBody*, *ConciseBody*, *ClassBody*, or *ModuleBody*..

NOTE Function code is generally provided as the bodies of Function Definitions (13.1), Arrow Function Definitions (13.2), Method Definitions (13.3) and Generator Definitions (13.4). Function code is also derived from the last argument to the Function constructor (15.3). Generator code is provided as the bodies of Generator Definitions 13.4 and Generator Expressions (11.????).

10.1.1 Strict Mode Code

An ECMAScript *Script* syntactic unit may be processed using either unrestricted or strict mode syntax and semantics. When processed using strict mode the three types of ECMAScript code are referred to as strict global code, strict eval code, and strict function code. Code is interpreted as strict mode code in the following situations:

- Global code is strict global code if it begins with a Directive Prologue that contains a Use Strict Directive (see 14.1).
- Module code is always strict code.
- Eval code is strict eval code if it begins with a Directive Prologue that contains a Use Strict Directive or if the call to eval is a direct call (see 15.1.2.1.1) to the eval function that is contained in strict mode code.
- Function code that is part of a *FunctionDeclaration*, *FunctionExpression*, or accessor *PropertyDefinition* is strict function code if its *FunctionDeclaration*, *FunctionExpression*, or *PropertyDefinition* is contained in strict mode code or if the function code begins with a Directive Prologue that contains a Use Strict Directive.
- Function code that is supplied as the last argument to the built-in Function constructor is strict function code if the last argument is a String that when processed as a *FunctionBody* begins with a Directive Prologue that contains a Use Strict Directive.

10.1.2 Non-ECMAScript Functions

An ECMAScript implementation may support the evaluation of function objects whose evaluative behaviour is expressed in some implementation defined form of executable code other than via ECMAScript code. Whether a function object is an ECMAScript code function or a non-ECMAScript function is not semantically observable from the perspective of an ECMAScript code function that calls or is called by such a non-ECMAScript function.

10.2 Lexical Environments

A *Lexical Environment* is a specification type used to define the association of *Identifiers* to specific variables and functions based upon the lexical nesting structure of ECMAScript code. A Lexical Environment consists of an Environment Record and a possibly null reference to an outer Lexical Environment. Usually a Lexical Environment is associated with some specific syntactic structure of ECMAScript code such as a *FunctionDeclaration*, a *BlockStatement*, or a *Catch* clause of a *TryStatement* and a new Lexical Environment is created each time such code is evaluated.

An *Environment Record* records the identifier bindings that are created within the scope of its associated Lexical Environment.

The outer environment reference is used to model the logical nesting of Lexical Environment values. The outer reference of a (inner) Lexical Environment is a reference to the Lexical Environment that logically surrounds the inner Lexical Environment. An outer Lexical Environment may, of course, have its own outer Lexical Environment. A Lexical Environment may serve as the outer environment for multiple inner Lexical Environments. For example, if a *FunctionDeclaration* contains two nested *FunctionDeclarations* then the Lexical Environments of each of the nested functions will have as their outer Lexical Environment the Lexical Environment of the current evaluation of the surrounding function.

Deleted: Function code also denotes the source text supplied when using the built-in *Function* object as a constructor. More precisely, the last parameter provided to the *Function* constructor is converted to a String and treated as the *FunctionBody*. If more than one parameter is provided to the *Function* constructor, all parameters except the last one are converted to Strings and concatenated together, separated by commas. The resulting String is interpreted as the *FormalParameterList* for the *FunctionBody* defined by the last parameter. The function code for a particular instantiation of a *Function* does not include any source text that is parsed as part of a nested *FunctionBody*.

Comment [AWB1161]: TODO

Deleted: Program

Deleted: *PropertyAssignment*

Deleted: *PropertyAssignment*

Deleted: ¶

Deleted: <#>Unless specified otherwise, extended code (10.21.12) is also considered strict mode code.¶

Deleted: 10.1.2 Extended Code¶

Extended code is any code contained in an ECMAScript *Program* syntactic unit that contains occurrences of lexical or syntactic productions defined subsequent to the Fifth Edition of the ECMAScript specification. Code is interpreted as extended code in the following situations:¶

<#>Global code is extended global code if it is contained in an ECMAScript *Program* syntactic unit that has been designated as an extended *Program* unit in an implementation defined manner or if ???¶

<#>Eval code is extended eval code if the call to eval is a direct call (see 15.1.2.1.1) to the eval function that is contained in extended mode code or if it begins with ???¶

<#>Function code that is part of a *FunctionDeclaration*, *FunctionExpression*, or accessor *PropertyAssignment* is extended function code if its *FunctionDeclaration*, *FunctionExpression*, or *PropertyAssignment* is contained in extended mode code or if the function code begins with ???¶

<#>Function code that is supplied as the last argument to the built-in Function constructor is strict function code if the last argument is a String that when processed as a *FunctionBody* begins with ???¶

The term "strict code" includes code used to designate both actual strict mode code and extended code while the term "extended code" is used only to mean actual extended code.

Deleted: *WithStatement*

Deleted: execution

A global environment is a Lexical Environment which does not have an outer environment. The global environment's outer environment reference is **null**. A global environment's environment record may be prepopulated with identifier bindings and includes an associated *global object* whose properties provide some of the global environment's identifier bindings. This global object is the value of a global environment's **this** binding. As ECMAScript code is executed, additional properties may be added to the global object and the initial properties may be modified.

A method environment is a Lexical Environment that corresponds to the invocation of an ECMAScript function object that establishes a new **this** binding. A method environment also captures the state necessary to support **super** method invocations.

Deleted: the

Lexical Environments and Environment Record values are purely specification mechanisms and need not correspond to any specific artefact of an ECMAScript implementation. It is impossible for an ECMAScript program to directly access or manipulate such values.

10.2.1 Environment Records

There are two primary kinds of Environment Record values used in this specification: *declarative environment records* and *object environment records*. Declarative environment records are used to define the effect of ECMAScript language syntactic elements such as *FunctionDeclarations*, *VariableDeclarations*, and *Catch clauses* that directly associate identifier bindings with ECMAScript language values. Object environment records are used to define the effect of ECMAScript elements such as *WithStatement* that associate identifier bindings with the properties of some object. Global Environment Records and Function Environment Records are specializations that are used for specifically for *Script* global declarations and for top-level declarations within funtions.

Deleted: Program and

For specification purposes Environment Record values can be thought of as existing in a simple object-oriented hierarchy where Environment Record is an abstract class with three concrete subclasses, declarative environment record, object environment record, and global environment record. Function environment records are a subclass of declarative environment record. The abstract class includes the abstract specification methods defined in Table 22. These abstract methods have distinct concrete algorithms for each of the concrete subclasses.

Deleted: two

Deleted: and

Deleted: Table 20Table 19

Table 22— Abstract Methods of Environment Records

Deleted: 2019

Method	Purpose
HasBinding(N)	Determine if an environment record has a binding for an identifier. Return true if it does and false if it does not. The String value <i>N</i> is the text of the identifier.
CreateMutableBinding(N, D)	Create a new <u>but uninitialised</u> mutable binding in an environment record. The String value <i>N</i> is the text of the bound name. If the optional Boolean argument <i>D</i> is true the binding is may be subsequently deleted.
<u>CreateImmutableBinding(N)</u>	<u>Create a new but uninitialised immutable binding in an environment record. The String value N is the text of the bound name.</u>
<u>InitializeBinding(N,V)</u>	<u>Set the value of an already existing but uninitialised binding in an environment record. The String value N is the text of the bound name. V is the value for the binding and is a value of any ECMAScript language type.</u>
SetMutableBinding(N,V, S)	Set the value of an already existing mutable binding in an environment record. The String value <i>N</i> is the text of the bound name. <i>V</i> is the value for the binding and may be a value of any ECMAScript language type. <i>S</i> is a Boolean flag. If <i>S</i> is true and the binding cannot be set throw a TypeError exception. <i>S</i> is used to identify strict mode references.
GetBindingValue(N,S)	Returns the value of an already existing binding from an environment record. The String value <i>N</i> is the text of the bound name. <i>S</i> is used to identify strict mode references. If <i>S</i> is true and the binding does not exist or is uninitialised throw a ReferenceError exception.
DeleteBinding(N)	Delete a binding from an environment record. The String value <i>N</i> is the text of the bound name. If a binding for <i>N</i> exists, remove the binding and return true . If the binding exists but cannot be removed return false . If the binding does not exist return true .
<u>HasThisBinding()</u>	<u>Determine if an environment record establishes a this binding. Return true if it does and false if it does not.</u>
<u>HasSuperBinding()</u>	<u>Determine if an environment record establishes a super method binding. Return true if it does and false if it does not.</u>
<u>WithBaseObject ()</u>	<u>If this environment record is associated with a with statement, return the with object. Otherwise, return undefined.</u>

Deleted: CreateVarBinding(N, D)

Deleted: ImplicitThisValue

Deleted: Returns the value to use as the **this** value or calls to function objects that are obtained as binding values from this environment record.

10.2.1.1 Declarative Environment Records

Each declarative environment record is associated with an ECMAScript program scope containing variable, constant, let, class, module, import, and/or function declarations. A declarative environment record binds the set of identifiers defined by the declarations contained within its scope.

The behaviour of the concrete specification methods for Declarative Environment Records is defined by the following algorithms.

10.2.1.1.1 HasBinding(N)

The concrete environment record method HasBinding for declarative environment records simply determines if the argument identifier is one of the identifiers bound by the record:

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. If *envRec* has a binding for the name that is the value of *N*, return **true**.

3. If it does not have such a binding, return **false**.

10.2.1.1.2 CreateMutableBinding (N, D)

The concrete Environment Record method `CreateMutableBinding` for declarative environment records creates a new mutable binding for the name *N* that is uninitialised. A binding must not already exist in this Environment Record for *N*. If Boolean argument *D* is provided and has the value **true** the new binding is marked as being subject to deletion.

Deleted: to the value **undefined**
Deleted:

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. Assert: *envRec* does not already have a binding for *N*.
3. Create a mutable binding in *envRec* for *N* and and record that it is uninitialised. If *D* is **true** record that the newly created binding may be deleted by a subsequent `DeleteBinding` call.
4. Return `NormalCompletion(empty)`

Deleted: set its bound value to **undefined**

10.2.1.1.3 CreateImmutableBinding (N)

The concrete Environment Record method `CreateImmutableBinding` for declarative environment records creates a new immutable binding for the name *N* that is uninitialised. A binding must not already exist in this environment record for *N*.

Comment [AWB62]: This probably needs a option argument, just like `createMutableEnvironment`

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. Assert: *envRec* does not already have a binding for *N*.
3. Create an immutable binding in *envRec* for *N* and record that it is uninitialised.

10.2.1.1.4 InitializeBinding (N,V)

The concrete Environment Record method `InitializeBinding` for declarative environment records is used to set the bound value of the current binding of the identifier whose name is the value of the argument *N* to the value of argument *V*. An uninitialised binding for *N* must already exist.

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. Assert: *envRec* must have an uninitialised binding for *N*.
3. Set the bound value for *N* in *envRec* to *V*.
4. Record that the binding for *N* in *envRec* has been initialised.

Deleted: 3

10.2.1.1.5 SetMutableBinding (N,V,S)

The concrete Environment Record method `SetMutableBinding` for declarative environment records attempts to change the bound value of the current binding of the identifier whose name is the value of the argument *N* to the value of argument *V*. A binding for *N* must already exist. If the binding is an immutable binding, a **TypeError** is thrown if *S* is **true**.

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. Assert: *envRec* must have a binding for *N*.
3. If the binding for *N* in *envRec* is a mutable binding, change its bound value to *V*.
4. Else if binding for *N* in *envRec* has not yet been initialized throw a **ReferenceError** exception.
5. Else this must be an attempt to change the value of an immutable binding so if *S* is **true** throw a **TypeError** exception.
6. Return `NormalCompletion(empty)`.

Deleted: if

Deleted: **undefined**

Deleted: 4

10.2.1.1.6 GetBindingValue(N,S)

The concrete Environment Record method `GetBindingValue` for declarative environment records simply returns the value of its bound identifier whose name is the value of the argument *N*. The binding must already exist. If *S* is **true** and the binding is an uninitialised immutable binding throw a **ReferenceError** exception.

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. Assert: *envRec* has a binding for *N*.
3. If the binding for *N* in *envRec* is an uninitialised binding, then
 - a. If *S* is **false**, return the value **undefined**, otherwise throw a **ReferenceError** exception.

Deleted: immutable

4. Else
 a. Return the value currently bound to N in $envRec$.

10.2.1.1.7 DeleteBinding (N)

The concrete Environment Record method `DeleteBinding` for declarative environment records can only delete bindings that have been explicitly designated as being subject to deletion.

1. Let $envRec$ be the declarative environment record for which the method was invoked.
2. If $envRec$ does not have a binding for the name that is the value of N , return **true**.
3. If the binding for N in $envRec$ cannot be deleted, return **false**.
4. Remove the binding for N from $envRec$.
5. Return **true**.

10.2.1.1.8 HasThisBinding ()

Regular Declarative Environment Records do not provide a `this` binding.

1. Return **false**.

10.2.1.1.9 HasSuperBinding ()

Regular Declarative Environment Records do not provide a `super` binding.

1. Return **false**.

10.2.1.1.10 WithBaseObject()

Declarative Environment Records always return `undefined` as their `WithBaseObject`.

1. Return `undefined`.

10.2.1.2 Object Environment Records

Each object environment record is associated with an object called its *binding object*. An object environment record binds the set of identifier names that directly correspond to the property names of its binding object. Property names that are not an *IdentifierName* are not included in the set of bound identifiers. Both own and inherited properties are included in the set regardless of the setting of their `[[Enumerable]]` attribute. Because properties can be dynamically added and deleted from objects, the set of identifiers bound by an object environment record may potentially change as a side-effect of any operation that adds or deletes properties. Any bindings that are created as a result of such a side-effect are considered to be a mutable binding even if the `Writable` attribute of the corresponding property has the value **false**. Immutable bindings do not exist for object environment records.

Object environment records created for `with` statements (12.10) can provide their binding object as an implicit this value for use in function calls. The capability is controlled by a `withEnvironment` Boolean value that is associated with each object environment record. By default, the value of `withEnvironment` is **false** for any object environment record.

The behaviour of the concrete specification methods for Object Environment Records is defined by the following algorithms.

10.2.1.2.1 HasBinding(N)

The concrete Environment Record method `HasBinding` for object environment records determines if its associated binding object has a property whose name is the value of the argument N :

1. Let $envRec$ be the object environment record for which the method was invoked.
2. Let $bindings$ be the binding object for $envRec$.
3. Return the result of `HasProperty`($bindings$, N).

Deleted:,

Deleted: `return`

Deleted: 5

Deleted: is

Deleted: 10.2.1.1.6 CreateVarBinding (N , D)
 The concrete Environment Record method `CreateVarBinding` for declarative environment records performs the same action as the `CreateMutableBinding` concrete method of the same environment Record.||
 Let $envRec$ be the declarative environment record for which the method was invoked.||
 Return the result of calling $envRec$'s `CreateMutableBinding` concrete method with arguments N and D .||

Deleted: 7

Deleted: 8

Deleted: 6

Deleted: 9

Deleted: `ImplicitThisValue`

Deleted: `ImplicitThisValue`

Comment [AWB63]: This probably needs a D option argument, just like `createMutableEnvironment`

Deleted: 10.2.1.1.710 CreateImmutableBinding (N)
 The concrete Environment Record method `CreateImmutableBinding` for declarative environment records creates a new immutable binding for the name N that is initialised to the value `undefined`. A binding must not already exist in this environment record for N .||
 Let $envRec$ be the declarative environment record for which the method was invoked.||

Assert: $envRec$ does not already have a binding for N .||
 Create an immutable binding in $envRec$ for N and record that it is uninitialised.||

10.2.1.1.811 InitializeImmutableBinding (N , V)
 The concrete Environment Record method `InitializeImmutableBinding` for declarative environment records is used to set the bound value of the current binding of the identifier whose name is the value of the argument N to the value of argument V . An uninitialised immutable binding for N must already exist.||
 Let $envRec$ be the declarative environment record for which the method was invoked.||

Assert: $envRec$ must have an uninitialised immutable binding for N .||
 Set the bound value for N in $envRec$ to V .||
 Record that the immutable binding for N in $envRec$ has been initialised.||

Deleted: be configured to

Deleted: This capability is used to specify the behavior of With Statement (12.10) induced bindings.

Deleted: `provideThis`

Deleted: `provideThis`

Deleted: calling

Deleted: the `[[HasProperty]]` internal method of

Deleted:, passing

Deleted: as the property name

10.2.1.2.2 CreateMutableBinding (N, D)

The concrete Environment Record method `CreateMutableBinding` for object environment records creates in an environment record's associated binding object a property whose name is the String value and initialises it to the value `undefined`. A property named *N* must not already exist in the binding object. If Boolean argument *D* is provided and has the value `true` the new property's `[[Configurable]]` attribute is set to `true`, otherwise it is set to `false`.

1. Let *envRec* be the object environment record for which the method was invoked.
2. Let *bindings* be the binding object for *envRec*.
3. Assert: The result of `HasProperty(bindings, N)` is `false`.
4. If *D* is `true` then let *configValue* be `true` otherwise let *configValue* be `false`.
5. Return the result of `DefinePropertyOrThrow(bindings, N, Property Descriptor {[[Value]]: undefined, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: configValue})`.

10.2.1.2.3 CreateImmutableBinding (N)

The concrete Environment Record method `CreateImmutableBinding` is never used within this specification in association with Object environment records.

10.2.1.2.4 InitializeBinding (N,V)

The concrete Environment Record method `InitializeBinding` for object environment records is used to set the bound value of the current binding of the identifier whose name is the value of the argument *N* to the value of argument *V*. An uninitialised binding for *N* must already exist.

1. Let *envRec* be the object environment record for which the method was invoked.
2. Assert: *envRec* must have an uninitialised binding for *N*.
3. Record that the binding for *N* in *envRec* has been initialised.
4. Call the `SetMutableBinding` concrete method of *envRec* with *N*, *V*, and `false` as arguments.

10.2.1.2.5 SetMutableBinding (N,V,S)

The concrete Environment Record method `SetMutableBinding` for object environment records attempts to set the value of the environment record's associated binding object's property whose name is the value of the argument *N* to the value of argument *V*. A property named *N* normally already exists but if it does not or is not currently writable, error handling is determined by the value of the Boolean argument *S*.

1. Let *envRec* be the object environment record for which the method was invoked.
2. Let *bindings* be the binding object for *envRec*.
3. Return the result of `Put(bindings, N, V, and S)`.

10.2.1.2.6 GetBindingValue(N,S)

The concrete Environment Record method `GetBindingValue` for object environment records returns the value of its associated binding object's property whose name is the String value of the argument identifier *N*. The property should already exist but if it does not the result depends upon the value of the *S* argument:

1. Let *envRec* be the object environment record for which the method was invoked.
2. Let *bindings* be the binding object for *envRec*.
3. Let *value* be the result of `HasProperty(bindings, N)`.
4. ReturnIfAbrupt(*value*).
5. If *value* is `false`, then
 - a. If *S* is `false`, return the value `undefined`, otherwise throw a `ReferenceError` exception.
6. Return the result of `Get(bindings, N)`.

Deleted: calling the `[[HasProperty]]` internal method of

Deleted: passing

Deleted: as the property name

Deleted: ,

Deleted: Call

Deleted: the

Deleted: `[[DefineOwnProperty]]` internal method of

Deleted: passing

Deleted: ,

Deleted: , and `true` as arguments

Comment [AWB64]: This probably needs a option argument, just like `createMutableEnvironment`

Deleted: 1

Deleted: 1

Deleted: 3

Deleted: should

Deleted: Call

Deleted: calling the `[[`

Deleted: `]]` internal method of

Deleted:

Deleted: with arguments

Deleted: 4

Deleted: calling the `[[HasProperty]]` internal method of

Deleted: passing

Deleted: as the property name

Deleted: calling the `[[`

Deleted: `]]` internal method of

Deleted: passing

Deleted: for the argument

10.2.1.2.7 DeleteBinding (N)

The concrete Environment Record method `DeleteBinding` for object environment records can only delete bindings that correspond to properties of the environment object whose `[[Configurable]]` attribute have the value `true`.

1. Let `envRec` be the object environment record for which the method was invoked.
2. Let `bindings` be the binding object for `envRec`.
3. Return the result of calling the `[[Delete]]` internal method of `bindings`, passing `N` as the argument.

Deleted: 5

10.2.1.2.8 HasThisBinding ()

Regular Object Environment Records do not provide a `this` binding.

1. Return `false`.

Deleted:

Deleted: and `false`

Deleted: s

Deleted: 10.2.1.12.6 CreateVarBinding (N, D)¶
The concrete Environment Record method `CreateVarBinding` for object environment records performs the same action as the `CreateMutableBinding` concrete method of the same environment Record.¶
Let `envRec` be the declarative environment record for which the method was invoked.¶
Return the result of calling `envRec`'s `CreateMutableBinding` concrete method with arguments `N` and `D`.¶

Deleted: 7

Deleted: 8

Deleted: 6

Deleted: 9

Deleted: ImplicitThisValue

Deleted: ImplicitThisValue

Deleted: provideThis

Deleted: provideThis

Deleted: 4

Deleted: Method

Deleted: method

Deleted: method

Deleted: method

Deleted: Method

10.2.1.2.9 HasSuperBinding ()

Regular Object Environment Records do not provide a `super` binding.

1. Return `false`.

10.2.1.2.10 WithBaseObject()

Object Environment Records return `undefined` as their `WithBaseObject` unless their `withEnvironment` flag is `true`.

1. Let `envRec` be the object environment record for which the method was invoked.
2. If the `withEnvironment` flag of `envRec` is `true`, return the binding object for `envRec`.
3. Otherwise, return `undefined`.

10.2.1.3 Function Environment Records

A function environment record is a declarative environment record that is used to represent the outermost scope of a function that provides a `this` binding. In addition to its identifier bindings, a function environment record contains the `this` value used within its scope. If such a function references `super`, its function environment record also contains the state that is used to perform `super` method invocations from within the function.

Function environment records store their `this` binding as the value of their `thisValue`. If the associated function references `super`, the environment record stores in `HomeObject` the object that the function is bound to as a method and in `MethodName` the property key used for unqualified `super` invocations from within the function. The default value for `HomeObject` and `MethodName` is `undefined`.

Methods environment records support all of Declarative Environment Record methods listed in Table 22 and share the same specifications for all of those methods except for `HasThisBinding` and `HasSuperBinding`. In addition, declarative environment records support the methods listed in Table 23.

Table 23.— Additional Methods of Function Environment Records

Method	Purpose
<code>GetThisBinding()</code>	Return the value of this environment record's <code>this</code> binding.
<code>GetSuperBase()</code>	Return the object that is the base for <code>super</code> property accesses bound in this environment record. The object is derived from this environment record's <code>HomeObject</code> binding. If the value is <code>Empty</code> , return <code>undefined</code> .
<code>GetMethodName()</code>	Return the value of this environment record's <code>MethodName</code> binding.

Deleted: Table 20Table 19

Deleted: and Table 20

Deleted: those

Deleted: j

Deleted:

Deleted: Table 21Table 20

Deleted: Table 21

Deleted: 21202021

Deleted: Method

Deleted: Home

Deleted: Object

Deleted: value

Deleted: of

The behaviour of the additional concrete specification methods for Function Environment Records is defined by the following algorithms:

10.2.1.3.1 HasThisBinding ()

Function Environment Records always provide a `this` binding.

1. Return `true`.

10.2.1.3.2 HasSuperBinding ()

1. If this environment record's `HomeObject` has the value `Empty`, then return `false`. Otherwise, return `true`.

10.2.1.3.3 GetThisBinding ()

1. Return the value of this environment record's `thisValue`.

10.2.1.3.4 GetSuperBase ()

1. Let `home` be the value of this environment record's `HomeObject`.
2. If `home` has the value `Empty`, then return `undefined`.
3. Assert `Type(home)` is Object.
4. Return the result of calling `home`'s `[[GetInheritance]]` internal method.

10.2.1.3.5 GetMethodName ()

1. Return the value of this environment record's `MethodName`.

10.2.1.4 Global Environment Records

A global environment record is used to represent the outer most scope that is shared by all of the ECMAScript `Script` elements that are processed in a common Realm (10.3). A global environment provides the bindings for built-in globals (15.1), properties of the global object, and for all declarations that are not function code and that occur within `Script` productions.

A global environment record is logically a single record but it is specified as a composite encapsulating an object environment record and a declarative environment record. The object environment record has as its base object the global object of the associated Realm. This global object is also the value of the global environment record's `thisValue`. The object environment record component of a global environment record contains the bindings for all built-in globals (15.1) and all bindings introduced by a `FunctionDeclaration` or `VariableStatement` contained in global code. The bindings for all other ECMAScript declarations in global code are contained in the declarative environment record component of the global environment record.

Properties may be created directly on a global object. Hence, the object environment record component of a global environment record may contain both bindings created explicitly by `FunctionDeclaration` or `VariableStatement` declarations and binding created implicitly as properties of the global object. In order to identify which bindings were explicitly created using declarations, a global environment record maintains a list of the names bound using its `CreateGlobalVarBindings` and `CreateGlobalFunctionBindings` concrete methods.

Global environment records have the additional state components listed in Table 24 and the additional methods listed in Table 25.

Deleted: Method

Deleted: Regular

Deleted: Method

Deleted: HomeObject

Deleted: this environment record's `HomeObject`

Deleted:

Deleted: Otherwise, r

Deleted: value

Deleted: of

Deleted: Prototype

Deleted: property

Deleted: `HomeObject` value

Deleted: is

Deleted: of a

Deleted: Program

Deleted: If such a function references `super`

Deleted: Program

Deleted: . All ECMAScript `Program` products that are processed in a specific Realm (10.3) share the same global environment record..

Deleted: composit

Deleted: Table 22Table 21

Deleted: Table 23Table 22

Table 24 -- Components of Global Environment Records

Component	Purpose
ObjectEnvironment	A Object Environment Record whose base object is the global object. Contains global built-in bindings as well as bindings for <i>FunctionDeclaration</i> or <i>VariableStatement</i> declarations in global code for the associated Realm.
DeclarativeEnvironment	A Declarative Environment Record that contains bindings for all declarations in global for the associated Realm code except for <i>FunctionDeclaration</i> and <i>VariableStatement</i> declarations.
VarNames	A List containing the string names bound by <i>FunctionDeclaration</i> or <i>VariableStatement</i> declarations in global code for the associated Realm.

Deleted: 2221

Deleted: o

Deleted: r

Table 25 — Additional Methods of Global Environment Records

Method	Purpose
GetThisBinding()	Return the value of this environment record's <i>this</i> binding.
HasVarDeclaration (N)	Determines if the argument identifier has a binding in this environment record that was created using a <i>VariableStatement</i> or a <i>FunctionDeclaration</i> .
HasLexicalDeclaration (N)	Determines if the argument identifier has a binding in this environment record that was created using a lexical declaration such as a <i>LexicalDeclaration</i> or a <i>ClassDeclaration</i> .
CanDeclareGlobalVar (N)	Determines if a corresponding <i>CreateGlobalVarBinding</i> call would succeed if called for the same argument <i>N</i> .
CanDeclareGlobalFunction (N)	Determines if a corresponding <i>CreateGlobalFunctionBinding</i> call would succeed if called for the same argument <i>N</i> .
CreateGlobalVarBinding(N, D)	Used to create global <i>var</i> bindings in the ObjectEnvironmentComponent of the environment record. The binding will be a mutable binding. The corresponding global object property will have attribute values appropriate for a <i>var</i> . The String value <i>N</i> is the text of the bound name. <i>V</i> is the initial value of the binding. If the optional Boolean argument <i>D</i> is <i>true</i> the binding may be subsequently deleted. This is logically equivalent to <i>CreateMutableBinding</i> but it allows <i>var</i> declarations to receive special treatment.
CreateGlobalFunctionBinding(N, V, D)	Used to create and initialize global <i>function</i> bindings in the ObjectEnvironmentComponent of the environment record. The binding will be a mutable binding. The corresponding global object property will have attribute values appropriate for a <i>function</i> . The String value <i>N</i> is the text of the bound name. If the optional Boolean argument <i>D</i> is <i>true</i> the binding may be subsequently deleted. This is logically equivalent to <i>CreateMutableBinding</i> followed by a <i>SetMutableBinding</i> but it allows function declarations to receive special treatment.

Deleted: 2322

Deleted: or

Deleted: or

The behaviour of the concrete specification methods for Global Environment Records is defined by the following algorithms.

10.2.1.4.1 HasBinding(N)

The concrete environment record method *HasBinding* for global environment records simply determines if the argument identifier is one of the identifiers bound by the record:

1. Let *envRec* be the global environment record for which the method was invoked.
2. Let *DclRec* be *envRec*'s DeclarativeEnvironment.
3. If the result of calling *DclRec*'s HasBinding concrete method with argument *N* is true, return true.
4. Let *ObjRec* be *envRec*'s ObjectEnvironment.
5. Return the result of calling *ObjRec*'s HasBinding concrete method with argument *N*.

Deleted: n**Deleted:** n

10.2.1.4.2 CreateMutableBinding (N, D)

The concrete environment record method CreateMutableBinding for global environment records creates a new mutable binding for the name *N* that is initialised. The binding is created in the associated DeclarativeEnvironment. A binding for *N* must not already exist in the DeclarativeEnvironment. If Boolean argument *D* is provided and has the value true the new binding is marked as being subject to deletion.

1. Let *envRec* be the global environment record for which the method was invoked.
2. Let *DclRec* be *envRec*'s DeclarativeEnvironment.
3. Assert: *DclRec* does not already have a binding for *N*.
4. Create a mutable binding in *DclRec* for *N* and record that it is initialised. If *D* is true record that the newly created binding may be deleted by a subsequent DeleteBinding call.
5. Return NormalCompletion(empty)

Deleted: or

10.2.1.4.3 CreateImmutableBinding (N)

The concrete Environment Record method CreateImmutableBinding for declarative environment records creates a new immutable binding for the name *N* that is initialised. A binding must not already exist in this environment record for *N*.

Comment [AWB65]: This probably needs a option argument, just like createMutableEnvironment

1. Let *envRec* be the global environment record for which the method was invoked.
2. Assert: *envRec* does not already have a binding for *N*.
3. Create an immutable binding in *envRec* for *N* and record that it is initialised.

10.2.1.4.4 InitializeBinding (N,V)

The concrete Environment Record method InitializeBinding for global environment records is used to set the bound value of the current binding of the identifier whose name is the value of the argument *N* to the value of argument *V*. An initialised binding for *N* must already exist.

1. Let *envRec* be the global environment record for which the method was invoked.
2. Let *DclRec* be *envRec*'s DeclarativeEnvironment.
3. If the result of calling *DclRec*'s HasBinding concrete method with argument *N* is true, then
 - a. Return the result of calling *DclRec*'s InitializeBinding concrete method with arguments *N* and *V*.
4. Let *ObjRec* be *envRec*'s ObjectEnvironment.
5. If the result of calling *ObjRec*'s HasBinding concrete method with argument *N* is true, then
 - a. Set the bound value for *N* in *envRec* to *V*.
 - b. Record that the binding for *N* in *envRec* has been initialised.

Deleted: n**Deleted:** the**Deleted:** Declarative**Deleted:** n

10.2.1.4.5 SetMutableBinding (N,V,S)

The concrete Environment Record method SetMutableBinding for global environment records attempts to change the bound value of the current binding of the identifier whose name is the value of the argument *N* to the value of argument *V*. If the binding is an immutable binding, a **TypeError** is thrown if *S* is true. A property named *N* normally already exists but if it does not or is not currently writable, error handling is determined by the value of the Boolean argument *S*.

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. Let *DclRec* be *envRec*'s DeclarativeEnvironment.
3. If the result of calling *DclRec*'s HasBinding concrete method with argument *N* is true, then
 - a. Return the result of calling the SetMutableBinding concrete method of *DclRec* with arguments *N*, *V*, and *S*.
4. Let *ObjRec* be *envRec*'s ObjectEnvironment.
5. Return the result of calling the SetMutableBinding concrete method of *ObjRec* with arguments *N*, *V*, and *S*.

Deleted: n**Deleted:** Declarative

10.2.1.4.6 GetBindingValue(N,S)

The concrete Environment Record method `GetBindingValue` for global environment records simply returns the value of its bound identifier whose name is the value of the argument `N`. If `S` is `true` and the binding is an uninitialized binding throw a `ReferenceError` exception. A property named `N` normally already exists but if it does not or is not currently writable, error handling is determined by the value of the Boolean argument `S`.

1. Let `envRec` be the declarative environment record for which the method was invoked.
2. Let `DclRec` be `envRec`'s `DeclarativeEnvironment`.
3. If the result of calling `DclRec`'s `HasBinding` concrete method with argument `N` is `true`, then
 - a. Return the result of calling the `GetBindingValue` concrete method of `DclRec` with arguments `N`, and `S`.
4. Let `ObjRec` be `envRec`'s `ObjectEnvironment`.
5. Return the result of calling the `GetBindingValue` concrete method of `ObjRec` with arguments `N`, and `S`.

Deleted: n
Deleted: *V*,
Deleted: Declarative
Deleted: *V*,

10.2.1.4.7 DeleteBinding (N)

The concrete Environment Record method `DeleteBinding` for global environment records can only delete bindings that have been explicitly designated as being subject to deletion.

1. Let `envRec` be the declarative environment record for which the method was invoked.
2. Let `DclRec` be `envRec`'s `DeclarativeEnvironment`.
3. If the result of calling `DclRec`'s `HasBinding` concrete method with argument `N` is `true`, then
 - a. Return the result of calling the `DeleteBinding` concrete method of `DclRec` with argument `N`.
4. Let `ObjRec` be `envRec`'s `ObjectEnvironment`.
5. If the result of calling `ObjRec`'s `HasBinding` concrete method with argument `N` is `true`, then
 - a. Let `status` be the result of calling the `DeleteBinding` concrete method of `DclRec` with argument `N`.
 - b. `ReturnIfAbrupt(status)`.
 - c. If `status` is `true`, then
 - i. Let `varNames` be `envRec`'s `VarNames` List.
 - ii. If `N` is an element of `varNames`, then remove that element from the `varNames`.
 - d. `Return status`.
6. Return `true`.

Deleted: n
Deleted: n

10.2.1.4.8 HasThisBinding ()

Global Environment Records always provide a `this` binding whose value is the associated global object.

1. Return `true`.

10.2.1.4.9 HasSuperBinding ()

1. Return `false`.

10.2.1.4.10 WithBaseObject()

Global Environment Records always return `undefined` as their `WithBaseObject`.

1. Return `undefined`.

10.2.1.4.11 GetThisBinding ()

2. Let `envRec` be the global environment record for which the method was invoked.
3. Let `ObjRec` be `envRec`'s `ObjectEnvironment`.
4. Let `bindings` be the binding object for `ObjRec`.
5. Return `bindings`.

10.2.1.4.12 HasVarDeclaration (N)

The concrete environment record method `HasVarDeclaration` for global environment records determines if the argument identifier has a binding in this record that was created using a `VariableStatement` or a `FunctionDeclaration`:

1. Let `envRec` be the global environment record for which the method was invoked.
2. Let `varDeclaredNames` be `envRec`'s `VarNames` List.
3. If `varDeclaredNames` contains the value of `N`, return `true`.
4. Return `false`.

10.2.1.4.13 HasLexicalDeclaration (N)

The concrete environment record method `HasLexicalDeclaration` for global environment records determines if the argument identifier has a binding in this record that was created using a lexical declaration such as a `LexicalDeclaration` or a `ClassDeclaration`:

1. Let `envRec` be the global environment record for which the method was invoked.
2. Let `DclRec` be `envRec`'s `DeclarativeEnvironment`.
3. Return the result of calling `DclRec`'s `HasBinding` concrete method with argument `N`.

10.2.1.4.14 CanDeclareGlobalVar (N)

The concrete environment record method `CanDeclareGlobalVar` for global environment records determines if a corresponding `CreateGlobalVarBinding` call would succeed if called for the same argument `N`. Redundant var declarations and var declarations for pre-existing global object properties are allowed.

1. Let `envRec` be the global environment record for which the method was invoked.
2. Let `ObjRec` be `envRec`'s `ObjectEnvironment`.
3. If the result of calling `ObjRec`'s `HasBinding` concrete method with argument `N` is `true`, return `true`.
4. Let `bindings` be the binding object for `ObjRec`.
5. If the result of calling the `[[IsExtensible]]` internal method of `bindings` is `true`, return `true`.
6. Return `false`.

Deleted: Ge
Deleted: t
Deleted: property

10.2.1.4.15 CanDeclareGlobalFunction (N)

The concrete environment record method `CanDeclareGlobalVar` for global environment records determines if a corresponding `CreateGlobalFunctionBinding` call would succeed if called for the same argument `N`.

1. Let `envRec` be the global environment record for which the method was invoked.
2. Let `ObjRec` be `envRec`'s `ObjectEnvironment`.
3. Let `globalObject` be the binding object for `ObjRec`.
4. Let `extensible` be the result of calling the `[[IsExtensible]]` internal method of `globalObject`.
5. If the result of calling `ObjRec`'s `HasBinding` concrete method with argument `N` is `false`, then return `extensible`.
6. Let `existingProp` be the result of calling the `[[GetOwnProperty]]` internal method of `globalObject` with argument `N`.
7. If `existingProp` is `undefined`, then return `extensible`.
8. If `existingProp.[[Configurable]]` is `true`, then return `true`.
9. If `IsDataDescriptor(existingProp)` is `true` and `existingProp` has attribute values `{[[Writable]]: true, [[Enumerable]]: true}`, then return `true`.
10. Return `false`.

Deleted: value
Deleted: of
Deleted: Get
Deleted: property

Comment [AWB1166]: Carry over from ES6
 but perhaps unnecessary

10.2.1.4.16 CreateGlobalVarBinding (N, D)

The concrete Environment Record method `CreateVarBinding` for global environment records creates a mutable binding in the associated object environment record and records the bound name in the associated `VarNames` List. If a binding already exists, it is reused.

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. Let *ObjRec* be *envRec*'s ObjectEnvironment.
3. Assert: The result of calling *envRec*'s *CanDeclareGlobalVar* concrete method with argument *N* is **true**.
4. If the result of calling *ObjRec*'s *HasBinding* concrete method with argument *N* is **false**, then
 - a. Call the *CreateMutableBinding* concrete method of *ObjRec* with arguments *N* and *D*.
5. Let *varDeclaredNames* be *envRec*'s VarNames List.
6. If *varDeclaredNames* does not contain the value of *N*, then
 - a. Append *N* to *varDeclaredNames*.
7. Return.

Deleted: n

Deleted: s

10.2.1.4.17 CreateGlobalFunctionBinding (N, V, D)

The concrete Environment Record method *CreateFunctionBinding* for global environment records creates a mutable binding in the associated object environment record and records the bound name in the associated VarNames List. If a binding already exists, it is replaced.

1. Let *envRec* be the declarative environment record for which the method was invoked.
2. Let *ObjRec* be *envRec*'s ObjectEnvironment.
3. Assert: The result of calling *envRec*'s *CanDeclareGlobalFunction* concrete method with argument *N* is **true**.
4. Let *globalObject* be the binding object for *ObjRec*.
5. Let *existingProp* be the result of calling the *[[GetOwnProperty]]* internal method of *globalObject* with argument *N*.
6. If *existingProp* is **undefined** or *existingProp.[[Configurable]]* is **true**, then
 - a. Call the *[[DefineOwnProperty]]* internal method of *globalObject* passing *N* and Property Descriptor *{[[Value]]:V, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: D}* as arguments.
7. Else,
 - a. Call the *[[DefineOwnProperty]]* internal method of *globalObject* passing *N* and Property Descriptor *{[[Value]]:V }* as arguments.
8. NOTE The assertion in step 3 means that the above *[[DefineOwnProperty]]* calls will never return an abrupt completion.
9. Let *varDeclaredNames* be *envRec*'s VarNames List.
10. If *varDeclaredNames* does not contain the value of *N*, then
 - a. Append *N* to *varDeclaredNames*.
11. Return.

Deleted: n

Deleted: ,

Deleted: , and false

Deleted: ,

Deleted: , and false

Comment [AWB1267]: TODO: need to reconsider this? May not be true if the global object can be a Proxy

Deleted: s

NOTE Global function declarations are always represented as a own property of the global object. If possible, an existing own property is reconfigured to have a standard set of attribute values.

10.2.2 Lexical Environment Operations

Deleted: ¶

The following abstract operations are used in this specification to operate upon lexical environments:

10.2.2.1 GetIdentifierReference (lex, name, strict)

The abstract operation *GetIdentifierReference* is called with a Lexical Environment *lex*, a String *name*, and a Boolean flag *strict*. The value of *lex* may be **null**. When called, the following steps are performed:

1. If *lex* is the value **null**, then
 - a. Return a value of type Reference whose base value is **undefined**, whose referenced name is *name*, and whose strict reference flag is *strict*.
2. Let *envRec* be *lex*'s environment record.
3. Let *exists* be the result of calling the *HasBinding(N)* concrete method of *envRec* passing *name* as the argument *N*.
4. If *exists* is **true**, then
 - a. Return a value of type Reference whose base value is *envRec*, whose referenced name is *name*, and whose strict reference flag is *strict*.
5. Else
 - a. Let *outer* be the value of *lex*'s outer environment reference.
 - b. Return the result of calling *GetIdentifierReference* passing *outer*, *name*, and *strict* as arguments.

Deleted: n

Deleted: identifier

Deleted: mode

Deleted: mode

10.2.2.2 NewDeclarativeEnvironment (E)

When the abstract operation `NewDeclarativeEnvironment` is called with either a Lexical Environment or `null` as argument E the following steps are performed:

1. Let env be a new Lexical Environment.
2. Let $envRec$ be a new declarative environment record containing no bindings.
3. Set env 's environment record to be $envRec$.
4. Set the outer lexical environment reference of env to E .
5. Return env .

10.2.2.3 NewObjectEnvironment (O, E)

When the abstract operation `NewObjectEnvironment` is called with an Object O and a Lexical Environment E (or `null`) as arguments, the following steps are performed:

1. Let env be a new Lexical Environment.
2. Let $envRec$ be a new object environment record containing O as the binding object.
3. Set env 's environment record to be $envRec$.
4. Set the outer lexical environment reference of env to E .
5. Return env .

10.2.2.4 NewFunctionEnvironment (F, T)

When the abstract operation `NewFunctionEnvironment` is called with an ECMAScript function Object F and a ECMAScript value T as arguments, the following steps are performed:

1. Let env be a new Lexical Environment.
2. Let $envRec$ be a new Function environment record containing containing no bindings.
3. Set $envRec$'s `thisValue` to T .
4. If F has a `[[HomeObject]]` internal data property, then
 - a. Set $envRec$'s `HomeObject` to the value of F 's `[[HomeObject]]` internal data property.
 - b. Set $envRec$'s `MethodName` to the value of F 's `[[MethodName]]` internal data property.
5. Else
 - a. If F 's `[[ThisMode]]` internal data property is `lexical`, then
 - b. Set $envRec$'s `HomeObject` to `Empty`.
6. Set env 's environment record to be $envRec$.
7. Set the outer lexical environment reference of env to the value of F 's `[[Scope]]` internal data property.
8. Return env .

10.3 Code Realms

Before it is evaluated, all ECMAScript code must be associated with a *Realm*. Conceptually, a realm consists as of an set of intrinsic objects, an ECMAScript global environment, all of the ECMAScript code that is loaded within the scope of that global environment, a Loader object that can associate new ECMAScript code with the realm, and other associated state and resources.

A Realm is specified as a Record with the fields specified in Table 26:

Table 26 — Realm Record Fields

<u>Field Name</u>	<u>Value</u>	<u>Meaning</u>
<code>[[intrinsic]]</code>	A record whose field names are intrinsic keys and whose values are objects	These are the intrinsic values used by code associated with this Realm
<code>[[globalThis]]</code>	An ECMAScript object	The global object for this Realm
<code>[[globalEnv]]</code>	A ECMAScript environment	The global environment for this Realm
<code>[[loader]]</code>	any ECMAScript identifier or <code>empty</code>	The Loader object that can associate ECMAScript code with this Realm

Deleted: Method

Deleted: Object

Deleted: method

Deleted:

Deleted: home

Comment [AWB868]: Other possible terms that have been discussed are "Home" and "Island". We still need to get final agreement terminology.

Deleted: following

Deleted: t

The intrinsic objects associated with a code Realm include the well-known intrinsics listed in Table 11 and additional intrinsics specified by Table 27.

Table 27.— Additional Intrinsic Objects with Realm Specific Bindings

Intrinsic Name	ECMAScript Language Association
???	???
???	???

10.4 Execution Contexts

An execution context is a specification device that is used to track the runtime evaluation of code by an ECMAScript implementation. At any point in time, there is at most one execution context that is actually executing code. This is known as the running execution context. A stack is used to track execution contexts. The running execution context is always the top element of this stack. A new execution context is created whenever control is transferred from the executable code associated with the currently running execution context to executable code that is not associated with that execution context. The newly created execution context is pushed onto the stack and becomes the running execution context.

An execution context contains whatever implementation specific state is necessary to track the execution progress of its associated code. Each execution context has the state components listed in Table 28.

Table 28.—State Components for All Execution Contexts

Component	Purpose
code evaluation state	Any state needed to perform, suspend, and resume evaluation of the code associated with this execution context.
Realm	The Realm from which associated code accesses ECMAScript resources.

Evaluation of code by the running execution context may be suspended at various points defined within this specification. Once the running execution context has been suspended a different execution context may become the running execution context and commence evaluating its code. At some latter time a suspended execution context may again become the running execution context and continue evaluating its code at the point where it had previously been suspended. Transition of the running execution context status among execution contexts usually occurs in stack-like last-in/first-out manner. However, some ECMAScript features require non-LIFO transitions of the running execution context.

Execution contexts for ECMAScript code have the additional state components listed in Table 29.

Table 29.—Additional State Components for ECMAScript Code Execution Contexts

Component	Purpose
LexicalEnvironment	Identifies the Lexical Environment used to resolve identifier references made by code within this execution context.
VariableEnvironment	Identifies the Lexical Environment whose environment record holds bindings created by VariableStatements within this execution context.

The LexicalEnvironment and VariableEnvironment components of an execution context are always Lexical Environments. When an execution context is created its LexicalEnvironment and VariableEnvironment components initially have the same value. The value of the VariableEnvironment component never changes while the value of the LexicalEnvironment component may change during execution of code within an execution context.

Deleted: are

Deleted: Within this specification a reference such as %name% means the value with this intrinsic name in the [[Intrinsics]] record of the Realm of the running execution context.

Deleted: 25

Deleted: %Object%

Deleted: The initial value of the global object property named "Object".

Comment [AWB1369]: This is where we should list the per realm intrinsics that don't have %names%.

Deleted: %ObjectPrototype%

Deleted: The initial value of the "prototype" data property of the intrinsic %Object%.

Deleted: %ObjProto_toString%

Deleted: 10.2.3 The Global Environment¶ The global environment is a unique Lexical Environment which is created before any ECMAScript code is evaluated.

Deleted: 3

Deleted: n

Deleted: When control is transferred to ECMAScript

Deleted: to

Deleted: At any point in time, there is at most one

Deleted: t

Deleted: and

Deleted: In addition, e

Deleted:

Deleted: Execution Context

Deleted: ECMAScript

Deleted: PreviousContext

Deleted: within which the associated

Deleted: code is evaluated

Deleted: LexicalEnvironment

Deleted: ThisBinding

Deleted: The code evaluation state corresponds to

Deleted: current

Deleted: current

Deleted: current

Deleted: ECMAScript

Deleted: current

Deleted: ECMAScript

Deleted: of

Deleted: current

Deleted: changes

Deleted: to

Deleted: current

Deleted: Table 27Table 25Table 24

Deleted: 27252624

In most situations only the running execution context (the top of the execution context stack) is directly manipulated by algorithms within this specification. Hence when the terms "LexicalEnvironment", and "VariableEnvironment" are used without qualification they are in reference to those components of the running execution context.

Deleted: and "ThisBinding"

An execution context is purely a specification mechanism and need not correspond to any particular artefact of an ECMAScript implementation. It is impossible for an ECMAScript program to directly access or observe an execution context.

10.4.1 Identifier Resolution

Identifier resolution is the process of determining the binding of an IdentifierName using the LexicalEnvironment of the running execution context. During execution of ECMAScript code, Identifier Resolution is performed using the following algorithm:

1. Let env be the running execution context's LexicalEnvironment.
2. If the syntactic production that is being evaluated is contained in strict mode code, then let strict be true, else let strict be false.
3. Return the result of calling GetIdentifierReference abstract operation passing env, the StringValue of IdentifierName, and strict as arguments.

The result of evaluating an identifier is always a value of type Reference with its referenced name component equal to the Identifier String.

Deleted: 3

Deleted: the syntactic production
PrimaryExpression : *Identifier* is evaluated

Deleted: a

Deleted: function

Deleted:

Deleted: v

Deleted: containing the same sequence of characters as

Deleted: *Identifier*

Deleted: 3

Deleted: It starts search with the LexicalEnvironment of the current execution context.

Deleted: current

10.4.2 GetThisEnvironment

The abstract operation GetThisEnviroment finds the lexical environment that currently supplies the binding of the keyword this. GetThisEnviroment performs the following steps:

1. Let lex be the running execution context's LexicalEnvironment.
2. Repeat
 - a. Let envRec be lex's environment record.
 - b. Let exists be the result of calling the HasThisBinding concrete method of envRec.
 - c. If exists is true, then return envRec.
 - d. Let outer be the value of lex's outer environment reference.
 - e. Let lex be outer.

NOTE The loop in step 4 will always terminate because the list of environment always end with the global environment which has a this binding.

Deleted: 3

Deleted: 4

Deleted: current

10.4.3 This Resolution

The abstract operation ThisResolution is the process of determining the binding of the keyword this using the LexicalEnvironment of the running execution context. ThisResolution performs the following steps:

1. Let env be the result of performing the GetThisEnvironment abstract operation.
2. Return the result of calling the GetThisBinding concrete method of env.

10.4.4 GetGlobalObject

The abstract operation GetGlobalObject returns the global object used by the currently running execution context. GetGlobalObject Performs the following steps:

1. Let ctx be the running execution context.
2. Let currentRealm be ctx's Realm.
3. Return currentRealm.[[globalThis]].

10.5 Declaration Binding Instantiation

10.5.1 Global Declaration Instantiation

NOTE When an execution context is established for evaluating scripts, declarations are instantiated in the current global environment. Each global binding declared in the code is instantiated.

Global Declaration Instantiation is performed as follows using arguments *script*, *env*, and *deletableBindings*. *script* is the *ScriptBody* that for which the execution context is being established. *env* is the global environment record in which bindings are to be created. *deletableBindings* is *true* if the bindings that are created should be deletable.

1. Let *strict* be *IsStrict* of *script*.
2. Let *lexNames* be the LexicallyDeclaredNames of *script*.
3. Let *varNames* be the VarDeclaredNames of *script*.
4. For each *name* in *lexNames*, do
 - a. If the result of calling *env*'s *HasVarDeclaration* concrete method passing *name* as the argument is *true*, throw a **SyntaxError** exception.
 - b. If the result of calling *env*'s *HasLexicalDeclaration* concrete method passing *name* as the argument is *true*, throw a **SyntaxError** exception.
5. For each *name* in *varNames*, do
 - a. If the result of calling *env*'s *HasLexicalDeclaration* concrete method passing *name* as the argument is *true*, throw a **SyntaxError** exception.
6. Let *varDeclarations* be the VarScopedeDeclarations of *script*.
7. Let *functionsToInitialize* be an empty List.
8. Let *declaredFunctionNames* be an empty List.
9. For each *d* in *varDeclarations*, in reverse list order do
 - a. If *d* is a *FunctionDeclaration* then
 - i. NOTE If there are multiple *FunctionDeclarations* for the same name, the last declaration is used.
 - ii. Let *fn* be the sole element of the *BoundNames* of *d*.
 - iii. If *fn* is not an element of *declaredFunctionNames*, then
 1. Let *fnDefinable* be the result of calling *env*'s *CanDeclareGlobalFunction* concrete method passing *fn* as the argument.
 2. If *fnDefinable* is *false*, throw **TypeError** exception.
 3. Append *fn* to *declaredFunctionNames*.
 4. Append *d* to *functionsToInitialize*.
10. Let *declaredVarNames* be an empty List.
11. For each *d* in *varDeclarations*, do
 - a. If *d* is a *VariableStatement* then
 - i. For each String *vn* in the *BoundNames* of *d*, do
 1. If *vn* is not an element of *declaredFunctionNames*, then
 - a. Let *vnDefinable* be the result of calling *env*'s *CanDeclareGlobalVar* concrete method passing *vn* and *deletableBindings* as the arguments.
 - b. If *vnDefinable* is *false*, throw **TypeError** exception.
 - c. If *vn* is not an element of *declaredVarNames*, then
 - i. Append *vn* to *declaredVarNames*.
 12. NOTE: No abnormal terminations occur after this algorithm step.
 13. For each *FunctionDeclaration* *f* in *functionsToInitialize*, do
 - a. Let *fn* be the sole element of the *BoundNames* of *f*.
 - b. Let *fo* be the result of performing *InstantiateFunctionObject* for *f* with argument *env*.
 - c. Call *env*'s *CreateGlobalFunctionBinding* concrete method passing *fn*, *fo*, and *deletableBindings* as the arguments.
 14. For each String *vn* in *declaredVarNames*, in list order do
 - a. Call *env*'s *CreateGlobalVarBinding* concrete method passing *vn* and *deletableBindings* as the arguments.
 15. Let *lexDeclarations* be the LexicallyScopedeDeclarations of *script*.
 16. For each element *d* in *lexDeclarations* do
 - a. NOTE Lexically declared names are only instantiated here but not initialized.
 - b. For each element *dn* of the *BoundNames* of *d* do

Deleted: 10.4 Establishing an Execution Context
 Evaluation of global code or code using the eval function (15.1.2.1) establishes and enters a new execution context. Every invocation of an ECMAScript code function (13.2.1) also establishes and enters a new execution context, even if a function is calling itself recursively. Every return exits an execution context. A thrown exception may also exit one or more execution contexts.¶
 When control enters an execution context, the execution context's ThisBinding is set, its VariableEnvironment and initial LexicalEnvironment are defined, and declaration binding instantiation (10.5) is performed. The exact manner in which the actions occur depend on the type of code being entered.¶

10.4.1 Entering Global Code¶
 The following steps are performed when control enters the execution context for global code:¶
 Initialise the execution context using the global code as described in 10.4.1.1.¶

Perform Declaration Binding Instantiation as described in 10.5 using the global code.¶
10.4.1.1 Initial Global Execution Context¶
 The following steps are performed to initialise a global execution context for ECMAScript code C:¶
 Set the VariableEnvironment to the Global Environment.¶

Set the LexicalEnvironment to the Global Environment.¶
 Set the ThisBinding to the global object.¶
10.4.2 Entering Eval Code¶
 The following steps are performed when control enters the execution context for eval code:¶
 If there is no calling context or if the eval code is not being evaluated by a direct call (15.1.2.1.1) to the eval function then,¶

Initialise the execution context as if it was a global execution context using the eval code as C as described in 10.4.1.1.¶

Else,¶
 Set the ThisBinding to the same value as the ThisBinding of the calling execution context.¶

Deleted: 10.5 Declaration Binding Instantiation¶
Comment [AWB70]: It may make sense to split eval code out into a separate subsection.

Deleted: Every execution context has an associated VariableEnvironment. Variables and functions declared in ECMAScript code evaluated in an

Deleted: Base Code

Deleted: Top-Level

Deleted: non-function code

Deleted: that is base code

Deleted: VariableEnvironment

Deleted: top-level

Deleted: level variable, constant, or function

Deleted: Top-level Declaration Instantiation for base code is performed as follows: ¶

Deleted: true else let strict be false

Deleted: code

Deleted: configurableBindings

Deleted: f

Deleted: Y

Deleted: code

- i. If IsConstantDeclaration of *d* is **true**, then
 1. Call *env*'s CreateImmutableBinding concrete method passing *dn* as the argument.
- ii. Else,
 1. Call *env*'s CreateMutableBinding concrete method passing *dn* and **false** as the arguments.

17. Return NormalCompletion(empty)

NOTE Early errors specified in 14.1 prevent name conflicts between function/var declarations and let/const/class/module declarations as well as redeclaration of let/const/class/module bindings for declaration contained within a single *Script*. However, such conflicts and redeclarations that span more than one *Script* are detected as runtime errors during Global Declaration Instantiation. If any such errors are detected, no bindings are instantiated for the script.

Unlike explicit var or function declarations, properties that are directly created on the global object result in global bindings that may be shadowed by let, const, class, and module declarations.

10.5.2 Module Declaration Instantiation

10.5.3 Function Declaration Instantiation

This version reflects the consensus as of the Sept. 2012 TC39 meeting. However, it now appears that the binding semantics of formal parameters is like to change again.

NOTE When an execution context is established for evaluating function code a new Declarative Environment Record is created and bindings for each formal parameter, and each function level variable, constant, or function declared in the function are instantiated in the environment record. Formal parameters and functions are initialized as part of this process. All other bindings are initialized during execution of the function code.

Function Declaration Instantiation is performed as follows using arguments *func*, *argumentsList*, and *env*. *func* is the function object that for which the execution context is being established. *env* is the declarative environment record in which bindings are to be created.

1. Let *code* be the value of the **[[Code]]** internal data property of *func*.
2. Let *strict* be the value of the **[[Strict]]** internal data property of *func*.
3. Let *formals* be the value of the **[[FormalParameters]]** internal data property of *func*.
4. Let *parameterNames* be the *BoundNames* of *formals*.
5. Let *varDeclarations* be the *VarScopedDeclarations* of *code*.
6. Let *functionsToInitialize* be an emptyList.
7. Let *argumentsObjectNotNeeded* be **false**.
8. For each *d* in *varDeclarations*, in reverse list order do
 - a. If *d* is a *FunctionDeclaration* then
 - i. NOTE If there are multiple *FunctionDeclarations* for the same name, the last declaration is used.
 - ii. Let *fn* be the sole element of the *BoundNames* of *d*.
 - iii. If *fn* is "**arguments**", then let *argumentsObjectNotNeeded* be **true**.
 - iv. Let *alreadyDeclared* be the result of calling *env*'s HasBinding concrete method passing *fn* as the argument.
 - v. If *alreadyDeclared* is **false**, then
 1. Let *status* be the result of calling *env*'s CreateMutableBinding concrete method passing *fn* as the argument.
 2. Assert: *status* is never an Abrupt Completion.
 3. Append *d* to *functionsToInitialize*.
9. For each String *paramName* in *parameterNames*, do

Comment [AWB71]: The exact details of declaration instantiation for module code still need to be worked out.

Deleted: If *code* is function code, then
 Let *func* be the function whose **[[Call]]** internal method initiated execution of *code*.
 Let *names* be the value of *func*'s **[[FormalParameters]]** internal property. ¶
 Let *argCount* be the number of elements in *args*.¶
 Let *n* be the number 0.¶
 For each String *argName* in *names*, in list order do¶
 Let *n* be the current value of *n* plus 1.¶
 If *n* is greater than *argCount*, let *v* be undefined otherwise let *v* be the value of the *n*'th element of *args*.¶
 Let *argAlreadyDeclared* be the result of calling *env*'s HasBinding concrete method passing *argName* as the argument.¶
 If *argAlreadyDeclared* is false, then ¶
 call Call *env*'s CreateMutableBinding concrete method passing *argName* as the argument.¶
 Call *env*'s InitializeBinding concrete method passing *argName*, and undefined as the arguments.¶
 Call *env*'s SetMutableBinding concrete method passing *argName*, *v*, and *strict* as the arguments.¶

Deleted: For each *FunctionDeclaration* *f* in *code*, in source text order do¶
 Let *fn* be the Identifier in *FunctionDeclaration* *f*.¶
 Let *fo* be the result of performing Instantiating Function Declaration for instantiating *FunctionDeclaration* *f* as described in Clause 13.¶
 Let *funcAlreadyDeclared* be the result of calling *env*'s HasBinding concrete method passing *fn* as the argument.¶
 If *funcAlreadyDeclared* is false, then ¶
 call Call *env*'s CreateMutableVarBinding concrete method passing *fn* and *configurableBindings* as the arguments.¶
 Call *env*'s InitializeBinding concrete method passing *fn*, and undefined as the arguments.¶
 Else if *env* is the environment record component of the global environment then
 Let *go* be the global object.¶
 Let *existingProp* be the resulting of calling the **[[GetOwnProperty]]** internal method of *go* with argument *fn*.¶
 If *existingProp* is undefined or *existingProp* **.[[Configurable]]** is true, then
 Call the **[[DefineOwnProperty]]** internal method of *go*, passing *fn*, *Property Descriptor* **{[[Value]]: undefined, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}**.

Deleted: Extended Code Top-Level

Deleted: ¶

Deleted: *be*

Deleted: *FormalParameterList*

Deleted: *List*

Deleted: *FormalParameterList*

Deleted: *arg*

Deleted: in list order

- a. Let `alreadyDeclared` be the result of calling `env`'s `HasBinding` concrete method passing `paramName` as the argument.
 - b. NOTE Duplicate parameter names can only occur in non-strict functions. Parameter names that are the same as function declaration names do not get initialized to `undefined`.
 - c. If `alreadyDeclared` is `false`, then
 - i. If `paramName` is "`arguments`", then let `argumentsObjectNotNeeded` be `true`.
 - ii. Let `status` be the result of calling `env`'s `CreateMutableBinding` concrete method passing `paramName` as the argument.
 - iii. Assert: `status` is never an Abrupt Completion
 - iv. Call `env`'s `InitializeBinding` concrete method passing `paramName`, and `undefined` as the arguments.
10. NOTE If there is a function declaration or formal parameter with the name "`arguments`" then an argument object is not created.
11. If `argumentsObjectNotNeeded` is `false`, then
 - a. If `strict` is `true`, then
 - i. Call `env`'s `CreateImmutableBinding` concrete method passing the String "`arguments`" as the argument.
 - b. Else,
 - i. Call `env`'s `CreateMutableBinding` concrete method passing the String "`arguments`" as the argument.
12. Let `varNames` be the `VarDeclaredNames` of `code`.
13. For each String `varName` in `varNames`, in list order do
 - a. Let `alreadyDeclared` be the result of calling `env`'s `HasBinding` concrete method passing `varName` as the argument.
 - b. NOTE A `VarDeclaredNames` is only instantiated and initialised here if it is not also the name of a formal parameter or a `FunctionDeclarations`.
 - c. If `alreadyDeclared` is `false`, then
 - i. Call `env`'s `CreateMutableBinding` concrete method passing `varName` as the argument.
14. Let `lexDeclarations` be the `LexicalDeclarations` of `code`.
15. For each element `d` in `lexDeclarations` do
 - a. NOTE A lexically declared name can not be the same as a function declaration, formal parameter, or a var name. Lexically declared names are only instantiated here but not initialized.
 - b. For each element `dn` of the `BoundNames` of `d` do
 - i. If `IsConstantDeclaration` of `d` is `true`, then
 1. Call `env`'s `CreateImmutableBinding` concrete method passing `dn` as the argument.
 - ii. Else,
 1. Call `env`'s `CreateMutableBinding` concrete method passing `dn` and `false` as the arguments.
16. For each `FunctionDeclaration` `f` in `functionsToInitialize`, do
 - a. Let `fn` be the sole element of the `BoundNames` of `f`.
 - b. Let `fo` be the result of performing `InstantiateFunctionObject` for `f` with argument `env`.
 - c. Call `env`'s `SetMutableBinding` concrete method passing `fn`, `fo`, and `false` as the arguments.
17. NOTE Function declarations are initialised prior to parameter initialisation so that default value expressions may reference them. It is not extended code. "`arguments`" is not initialized until after parameter initialisation.
18. Let `ao` be the result of `InstantiateArgumentsObject` with argument `argumentsList`.
19. NOTE If `argumentsObjectNotNeeded` is `true` then the value of `ao` is not directly observable to ECMAScript code and need not actually exist. In that case, its use in the above steps is strictly as a device for specifying formal parameter initialisation semantics.
20. Let `formalStatus` be the result of performing Binding Initialisation for `formals` with `ao` and `undefined` as arguments.
21. ReturnIfAbrupt(`formalStatus`).
22. If `argumentsObjectNotNeeded` is `false`, then
 - a. If `strict` is `true`, then
 - i. Perform the abstract operation `CompleteStrictArgumentsObject` with argument `ao`.
 - b. Else,
 - i. Perform the abstract operation `CompleteMappedArgumentsObject` with arguments `ao`, `func`, `formals`, and `env`.
 - c. Call `env`'s `InitializeBinding` concrete method passing "`arguments`" and `ao` as arguments.
23. Return `NormalCompletion(empty)`.

Deleted: `arg`

Deleted: Normal

Deleted: code

Deleted: Call

Deleted: `arg`

Deleted: `ReturnIfAbrupt(status)`.

Deleted: <#>If `strict` is `false`, then

Deleted: `arg`

Comment [AWB772]: TODO: don't create an arguments binding for arrow functions (and perhaps for concise methods)

Deleted: M

Comment [AWB673]: TODO This is no longer true needs to be taken into account

Deleted: <#>Let `declarations` be the `LexicalDeclarations` code.

<#>If `strict` is `true`, then

<#>Let `ao` be the result of `CreateStrictArgumentsObject`. `argumentsList`.

<#>Let `formalStatus` be the result of `PerformBindingInitialization` for `formals` with `ao` and `argumentsList`.

<#>Else,

<#>Let `names` be `BoundNames` of `formals`.

<#>NOTE Because `F` is a none strict function it is not extended code. Hence `formals` does not contain the names of any destructuring `BindingProperties`, rest parameters, or parameters with default value initialisers.

<#>Let `ao` be the result of performing the abstract operation `CreateMappedArgumentsObject` with `argumentsList`.

<#>Let `formalStatus` be the result of performing `PerformBindingInitialization` for `formals` with `ao` and `undefined` as arguments.

<#>NOTE Binding initialization for `formals` performed prior to instantiating any non-parameter declarations in order to ensure that any such local declarations are not visible to any parameter initialisation code that may be evaluated.

<#>`ReturnIfAbrupt(formalStatus)`.

Deleted: `argumentsAlreadyDeclared`

Deleted: initialization

Comment [AWB774]: TODO: don't create an arguments binding for arrow functions (and perhaps for concise methods)

Deleted: <#>Let `hasArgumentsObject` be the Boolean negation of `argumentsAlreadyDeclared`.

Deleted: `argumentsAlreadyDeclared`

Deleted: 0

Deleted: <#>Call `env`'s `CreateImmutableBinding` concrete method passing the String "`arguments`" as the argument.

Deleted: 0

Deleted: <#>Call `env`'s `CreateMutableBinding` concrete method passing the String "`arguments`" as the argument.

Deleted: <#>Let `varNames` be the `VarDeclaredNames` of `code`.

Deleted: .

Deleted: `hasArgumentsObject`

10.5.4 Block Declaration Instantiation

NOTE When a *Block* or *CaseBlock* production is evaluated a new Declarative Environment Record is created and bindings for each block scoped variable, constant, or function declared in the block are instantiated in the environment record.

Block Declaration Instantiation is performed as follows using arguments *code* and *env*. *code* is the grammar production corresponding to the body of the block. *env* is the declarative environment record in which bindings are to be created.

1. Let *declarations* be the LexicalDeclarations of *code*.
2. For each element *d* in *declarations* do
 - a. For each element *dn* of the BoundNames of *d* do
 - i. If IsConstantDeclaration of *d* is **true**, then
 1. Call *env*'s CreateImmutableBinding concrete method passing *dn* as the argument.
 - ii. Else,
 1. Call *env*'s CreateMutableBinding concrete method passing *dn* and **false** as the arguments.
 - b. For each *FunctionDeclaration* *f* in *declarations*, in list order do
 - a. Let *fn* be the sole element of the BoundNames of *f*.
 - b. Let *fo* be the result of performing *InstantiateFunctionObject* for *f* with argument *env*.
 - c. Call *env*'s InitializeBinding concrete method passing *fn*, and *fo* as the arguments.

10.5.5 Eval Declaration Instantiation

10.6 Arguments Object

When function code is evaluated, an arguments object is created unless (as specified in 10.5) the identifier **arguments** occurs as an *Identifier* in the function's *FormalParameterList* or occurs as the *BindingIdentifier* of a *FunctionDeclaration* contained in the outermost *StatementList* of the function code.

The abstract operation *InstantiateArgumentsObject* called with an argument *args* performs the following steps:

1. Let *len* be the number of elements in *args*.
2. Let *obj* be the result of the abstract operation *ObjectCreate*.
3. Add the **[[BuiltinBrand]]** internal data property to *obj* with value **BuiltinArguments**.
4. Call the **[[DefineOwnProperty]]** internal method on *obj* passing **"length"** and the Property Descriptor **{[[Value]]: len, [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: true}** as arguments.
5. Let *indx* = *len* - 1.
6. Repeat while *indx* > 0.
 - a. Let *val* be the element of *args* at 0-originated list position *indx*.
 - b. Call the **[[DefineOwnProperty]]** internal method on *obj* passing *ToString(indx)* and the Property Descriptor **{[[Value]]: val, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}** as arguments.
 - c. Let *indx* = *indx* - 1.
7. Return *obj*.

The abstract operation *CompleteStrictArgumentsObject* called with argument *obj* which must have been previously created by the abstraction operation *InstantiateArgumentsObject*. The following steps are performed:

1. Perform the *AddRestrictedFunctionProperties* abstract operation with argument *obj*.
2. Return.

The abstract operation *CompleteMappedArgumentsObject* is called with object *obj*, object *func*, grammar production *formals*, and environment record *env*. *obj* must have been previously created by the abstraction operation *InstantiateArgumentsObject*. The following steps are performed:

1. Let *len* be the result of *Get(obj, "length")*.
2. Let *mappedNames* be an empty List.
3. Let *numberOfNonRestFormals* be *NumberOfParameters* of *formals*.
4. Let *map* be the result of the abstract operation *ObjectCreate*.

Comment [AWB775]: Jan 19 meeting note
Current tentative decision is to support let, const, and local functions in nonstrict ES5 in same way as in strict ES6. Fallback to either specifying limited cases or doing the ES5 nonstrict status quo (i.e. syntax error + Clause 16) if experiments show this to not be

Deleted: contained in extended code

Deleted: <#>Assert: parameterNames has no

Deleted: a *ConstDeclaration*

Deleted: *FunctionDeclaration*

Deleted: Instantiate Function Declaration

Deleted: instantiating *FunctionDeclaration*

Deleted: as described in Clause 13

Deleted: <#>Call *env*'s *CreateMutableBinding*

Deleted: 1

Deleted: For each *LetDeclaration* and

Deleted: control enters an execution context

Comment [AWB 276]: Additional modification

Deleted: *VariableDeclaration* or

Deleted: *Function*

Deleted: *D*

Deleted: *NativeBrand*

Deleted: *NativeArguments*

Deleted: ,

Deleted: , and **false**

Deleted: ,

Deleted: , and **false**

Deleted: CreateStrictArgumentsObject

Deleted: *list args*

Deleted: performs t

Deleted: <#>Let *len* be the number of elements in

Deleted: or

Deleted: <#>Call the **[[DefineOwnProperty]]**

Deleted: *obj*

Deleted: Create

Deleted: List

Deleted: *names*

Deleted: , and argument list *args*

Deleted: performs the following steps

Deleted: number of elements in

Deleted: calling the **[[**

Deleted: **]]** internal method of

Deleted: with

Deleted: argument

Deleted: . *args*.

Deleted: <#>Let *obj* be the result of the

5. Let `idx = len - 1`.
6. Repeat while `idx >= 0`.
 - a. If `idx` is less than the `numberOfNonRestFormals`, then
 - i. Let `param` be `getParameter of formals with argument idx`.
 - ii. If `param` is a `BindingIdentifier`, then
 1. Let `name` be the sole element of `BoundNames of param`.
 2. If `name` is not an element of `mappedNames`, then
 - a. Add `name` as an element of the list `mappedNames`.
 - b. Let `g` be the result of calling the `MakeArgGetter` abstract operation with arguments `name` and `env`.
 - c. Let `p` be the result of calling the `MakeArgSetter` abstract operation with arguments `name` and `env`.
 - d. Call the `[[DefineOwnProperty]]` internal method of `map` passing `ToString(idx)` and the Property Descriptor `{[[Set]]: p, [[Get]]: g, [[Configurable]]: true}` as arguments.
 - b. Let `idx = idx - 1`.
 7. If `mappedNames` is not empty, then
 - a. Set the `[[ParameterMap]]` internal data property of `obj` to `map`.
 - b. Set the `[[GetP]]`, `[[GetOwnProperty]]`, `[[DefineOwnProperty]]`, and `[[Delete]]` internal methods of `obj` to the definitions provided below.
 8. Call the `[[DefineOwnProperty]]` internal method on `obj` passing `"callee"` and the Property Descriptor `{[[Value]]: func, [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: true}` as arguments.
 9. Return `obj`.

The abstract operation `MakeArgGetter` called with String `name` and environment record `env` creates a function object that when executed returns the value bound for `name` in `env`. It performs the following steps:

1. Let `bodyText` be the result of concatenating the Strings `"return "`, `name`, and `";"`.
2. Let `body` be the result of parsing `bodyText` using `FunctionBody` as the goal symbol.
3. Let `parameters` be a `FormalParameterList : [empty]` production.
4. Return the result of calling the abstract operation `FunctionCreate` using `Normal` as the kind, `parameters` as `FormalParameterList`, `body` for `FunctionBody`, `env` as `Scope`, and `true` for `Strict`.

The abstract operation `MakeArgSetter` called with String `name` and environment record `env` creates a function object that when executed sets the value bound for `name` in `env`. It performs the following steps:

1. Let `paramText` be the String `name` concatenated with the String `"_arg"`.
2. Let `parameters` be the result of parsing `paramText` using `FormalParameterList` as the goal symbol.
3. Let `bodyText` be the String `"<name> = <param>;"` with `<name>` replaced by the value of `name` and `<param>` replaced by the value of `paramText`.
4. Let `body` be the result of parsing `bodyText` using `FunctionBody` as the goal symbol.
5. Return the result of calling the abstract operation `FunctionCreate` using `Normal` as the kind, `parameters` as `FormalParameterList`, `body` for `FunctionBody`, `env` as `Scope`, and `true` for `Strict`.

The `[[Get]]` internal method of an arguments object for a non-strict mode function with formal parameters when called with a property name `P` performs the following steps:

1. Let `args` be the arguments object.
2. Let `map` be the value of the `[[ParameterMap]]` internal data property of the arguments object.
3. Let `isMapped` be the result of calling the `[[GetOwnProperty]]` internal method of `map` passing `P` as the argument.
4. If the value of `isMapped` is `undefined`, then
 - a. Let `v` be the result of calling the default ordinary object `[[GetP]]` internal method (8.12.3) on `args` passing `P` and `args` as the arguments.
 - b. If `P` is `"caller"` and `v` is a strict mode Function object, throw a `TypeError` exception.
 - c. Return `v`.
5. Else `map` contains a formal parameter mapping for `P`.
 - a. Return the result of calling `Get(map, P)`.

The `[[GetOwnProperty]]` internal method of an arguments object for a non-strict mode function with formal parameters when called with a property name `P` performs the following steps:

- Deleted:** >=
- Deleted:** <#>Let `val` be the element of `args` at 0-originated position `idx`.
 <#>Call the `[[DefineOwnProperty]]` internal method on `obj` passing `ToString(idx)`, the `pProperty` `dDescriptor` `{[[Value]]: val, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: false}` as arguments.
Deleted: number of elements in `names`
- Deleted:** `name`
- Deleted:** the element
- Deleted:** `names`
- Deleted:** at 0-originated list position
- Deleted:** ,
- Deleted:** , and `false`
- Deleted:** ,
- Deleted:** `p`
- Deleted:** `d`
- Deleted:** , and `false`
- Deleted:** The abstract operation `InstantiateArgumentsObject` called with an argument `len` performs the following steps:
 <#>Let `obj` be the result of creating a new ECMAScript object.
 <#>Set all the internal methods of `obj` as specified in 8.12.
 <#>Set Add the `[[ClassIsArgumentsNativeBrand]]` internal property of to `obj` with value `NativeArguments` to "Arguments".
 <#>Let `Object` be the standard built-in Object constructor (15.2.2).
 <#>Set the `[[Prototype]]` internal property of `obj` to the standard built-in Object prototype object (15.2.4).
 <#>Call the `[[DefineOwnProperty]]` internal method on `obj` passing "length", the Property Descriptor `{[[Value]]: len, [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: true}`, and `false` as arguments.
 <#>Let `idx = len - 1`.
 <#>Repeat while `idx >= 0`,
 <#>Let `val` be the element of `args` at 0-originated list position `idx`.
Deleted: creating a function object as described in 13.2.6
- Deleted:** no `FormalParameterList`
- Deleted:** creating a function object as described in 13.2.6
- Deleted:** a List containing the single String
- Deleted:** `param`
- Comment [AWB1277]:** TODO: keep reference up to date
- Deleted:**
- Deleted:** the arguments object
- Deleted:** ,
- Deleted:** so
- Deleted:** the [[
- Deleted:**]] internal method of
- Deleted:** passing
- Deleted:** as the argument

1. Let *desc* be the result of calling the default `[[GetOwnProperty]]` internal method (8.12.1) on the arguments object passing *P* as the argument.
2. If *desc* is **undefined** then return *desc*.
3. Let *map* be the value of the `[[ParameterMap]]` internal data property of the arguments object.
4. Let *isMapped* be the result of calling the `[[GetOwnProperty]]` internal method of *map* passing *P* as the argument.
5. If the value of *isMapped* is not **undefined**, then
 - a. Set *desc*.`[[Value]]` to the result of calling `Get(map, P)`.
6. Return *desc*.

The `[[DefineOwnProperty]]` internal method of an arguments object for a non-strict mode function with formal parameters when called with a property name *P* and Property Descriptor *Desc* performs the following steps:

1. Let *map* be the value of the `[[ParameterMap]]` internal data property of the arguments object.
2. Let *isMapped* be the result of calling the `[[GetOwnProperty]]` internal method of *map* passing *P* as the argument.
3. Let *allowed* be the result of calling the default `[[DefineOwnProperty]]` internal method (8.3.9) on the arguments object passing *P* and *Desc* as the arguments.
4. **ReturnIfAbrupt(*allowed*)**.
5. If *allowed* is **false**, then return **false**.
6. If the value of *isMapped* is not **undefined**, then
 - a. If `IsAccessorDescriptor(Desc)` is **true**, then
 - i. Call the `[[Delete]]` internal method of *map* passing *P* as the argument.
 - b. Else
 - i. If *Desc*.`[[Value]]` is present, then
 1. Assert: the follow Put call will always succeed because formal parameters mapped by argument objects are always writable.
 2. Call `Put(map, P, Desc.[[Value]], false)`.
 - ii. If *Desc*.`[[Writable]]` is present and its value is **false**, then
 1. Call the `[[Delete]]` internal method of *map* passing *P* as the argument.
7. Return **true**.

The `[[Delete]]` internal method of an arguments object for a non-strict mode function with formal parameters when called with a property *key*/*P* performs the following steps:

1. Let *map* be the value of the `[[ParameterMap]]` internal data property of the arguments object.
2. Let *isMapped* be the result of calling the `[[GetOwnProperty]]` internal method of *map* passing *P* as the argument.
3. Let *result* be the result of calling the default `[[Delete]]` internal method for ordinary objects (8.3.10) on the arguments object passing *P* as the argument.
4. If *result* is **true** and the value of *isMapped* is not **undefined**, then
 - a. Call the `[[Delete]]` internal method of *map* passing *P* as the argument.
5. Return *result*.

NOTE 1 For non-strict mode functions the array index (defined in 15.4) data properties of an arguments object whose numeric name values are less than the number of formal parameters of the corresponding function object initially share their values with the corresponding argument bindings in the function's execution context. This means that changing the property changes the corresponding value of the argument binding and vice-versa. This correspondence is broken if such a property is deleted and then redefined or if the property is changed into an accessor property. For strict mode functions, the values of the arguments object's properties are simply a copy of the arguments passed to the function and there is no dynamic linkage between the property values and the formal parameter values.

NOTE 2 The ParameterMap object and its property values are used as a device for specifying the arguments object correspondence to argument bindings. The ParameterMap object and the objects that are the values of its properties are not directly accessible from ECMAScript code. An ECMAScript implementation does not need to actually create or use such objects to implement the specified semantics.

NOTE 3 Arguments objects for strict mode functions define non-configurable accessor properties named "caller" and "callee" which throw a **TypeError** exception on access. The "callee" property has a more specific meaning for non-strict mode functions and a "caller" property has historically been provided as an implementation-defined extension by some ECMAScript implementations. The strict mode definition of these properties exists to ensure that neither of them is defined in any other manner by conforming ECMAScript implementations.

Deleted: the <code>[[</code>
Deleted: <code>]]</code> internal method of
Deleted: passing
Deleted: as the argument
Deleted: ,
Deleted: , and Boolean flag <i>Throw</i>
Deleted: 12
Deleted: ,
Deleted: , and <u>false</u>
Deleted: ¶ If <i>Throw</i> is <u>true</u> then throw a <u>TypeError</u> exception otherwise
Deleted: , and <u>false</u>
Deleted: s
Deleted: the <code>[[</code>
Deleted: <code>]]</code> internal method of
Deleted:
Deleted: passing
Deleted: and <i>Throw</i>
Deleted: as the arguments
Deleted: and <u>false</u>
Deleted: s
Deleted: name
Deleted: and Boolean flag <i>Throw</i>
Deleted: 12
Deleted: 7
Deleted: and <i>Throw</i>
Deleted: s
Deleted: , and <u>false</u>
Deleted: s
Deleted: named

11 Expressions

11.1 Primary Expressions

Syntax

PrimaryExpression :

- this
- Identifier Because
- Literal
- ArrayInitialiser
- ObjectLiteral
- FunctionExpression
- ClassExpression
- GeneratorExpression
- GeneratorComprehension
- RegularExpressionLiteral
- TemplateLiteral
- CoverParenthesizedExpressionAndArrowParameterList

CoverParenthesizedExpressionAndArrowParameterList:

- (Expression)
- ()
- (... Identifier)
- (Expression , ... Identifier)

Supplemental Syntax

When processing the production *PrimaryExpression : CoverParenthesizedExpressionAndArrowParameterList* the following grammar is used to refine the interpretation of *CoverParenthesizedExpressionAndArrowParameterList*.

ParenthesizedExpression :

- (Expression)

Static Semantics

Static Semantics: CoveredParenthesizedExpression

CoverParenthesizedExpressionAndArrowParameterList : (Expression)

1. Return the result of parsing the lexical token stream matched by *CoverParenthesizedExpressionAndArrowParameterList* using *ParenthesizedExpression* as the goal symbol.

Static Semantics: IsValidSimpleAssignmentTarget

PrimaryExpression :

- this
- Literal
- ArrayInitialiser
- ObjectLiteral
- FunctionExpression
- ClassExpression
- GeneratorExpression
- GeneratorComprehension
- RegularExpressionLiteral
- TemplateLiteral

1. Return **false**.

PrimaryExpression : Identifier

Deleted: *ArrayLiteral*

Deleted: [Lexical goal *InputElementRegExp*]

Deleted: *Quasi*

Deleted: (*Expression*)

Deleted: *FormalParameterList*

Deleted: Static Semantics: Early Errors¶

PrimaryExpression :
CoverParenthesizedExpressionAndArrowParameterList ¶
 <#> It is a Syntax Error if the lexical token sequence matched by *CoverParenthesizedExpressionAndArrowParameterList* cannot be parsed with no tokens left over using *ParenthesizedExpression* as the goal symbol.¶
 <#> All Early Errors rules for *ParenthesizedExpression* and its derived productions also apply to the *CoveredParenthesizedExpression* of *CoverParenthesizedExpressionAndArrowParameterList*.¶

1. If this *PrimaryExpression* is contained in strict code and StringValue of *Identifier* is "eval" or "arguments", then return **false**.
2. Return **true**.

PrimaryExpression : *CoverParenthesizedExpressionAndArrowParameterList*

1. Let *expr* be *CoveredParenthesizedExpression* of *CoverParenthesizedExpressionAndArrowParameterList*.
2. Return *IsValidSimpleAssignmentTarget* of *expr*.

11.1.1 The *this* Keyword

Runtime Semantics: Evaluation

PrimaryExpression : **this**

1. Return the result of calling the *ThisResolution* abstract operation.

11.1.2 Identifier Reference

Runtime Semantics: Evaluation

PrimaryExpression : *Identifier*

1. Let *ref* be the result of performing Identifier Resolution as specified in 10.4.1 using the *IdentifierName* corresponding to *Identifier*.
2. Return *ref*.

NOTE: The result of evaluating an *Identifier* is always a value of type Reference.

11.1.3 Literals

Syntax

Literal :

NullLiteral
ValueLiteral

ValueLiteral :

BooleanLiteral
NumericLiteral
StringLiteral

Runtime Semantics

Runtime Semantics: Evaluation

Literal : *NullLiteral*

1. Return **null**.

ValueLiteral : *BooleanLiteral*

1. Return **false** if *BooleanLiteral* is the token *BooleanLiteral :: false*
2. Return **true** if *BooleanLiteral* is the token *BooleanLiteral :: true*

ValueLiteral : *NumericLiteral*

1. Return the number whose value is MV of *NumericLiteral* as defined in 7.8.3.

Deleted: <#>Let *env* be the result of performing the *GetThisEnvironment* abstract operation.¶

Deleted: *GetThisBinding*

Deleted: concrete method of *env*

Deleted: The *this* keyword evaluates to Return the value of the *ThisBinding* of the current execution context.¶

Comment [AWB878]: It may make sense to define some of the static semantic rules related to static name resolution

Deleted: 3

Deleted: An *Identifier* is evaluated by performing Identifier Resolution as specified in 10.3.1 using the *IdentifierName* corresponding to *Identifier*.

Deleted: Reference

Deleted:
RegularExpressionLiteral

ValueLiteral : StringLiteral

1. Return the string whose elements are the SV of *StringLiteral* as defined in 7.8.4.

Deleted: character

Deleted: A *Literal* is evaluated as described in 7.8.

11.1.4 Array Initialiser

Syntax

ArrayInitialiser :

ArrayLiteral
ArrayComprehension

11.1.4.1 Array Literal

NOTE An *ArrayLiteral* is an expression describing the initialisation of an *Array* object, using a list of zero or more expressions, each of which represents an array element, enclosed in square brackets. The elements need not be literals; they are evaluated each time the array initialiser is evaluated.

Array elements may be elided at the beginning, middle or end of the element list. Whenever a comma in the element list is not preceded by an *AssignmentExpression* (i.e., a comma at the beginning or after another comma), the missing array element contributes to the length of the *Array* and increases the index of subsequent elements. Elided array elements are not defined. If an element is elided at the end of an array, that element does not contribute to the length of the *Array*.

Syntax

ArrayLiteral :

[*Elision_{opt}*]
[*ElementList*]
[*ElementList* , *Elision_{opt}*]

ElementList :

Elision_{opt} *AssignmentExpression*
Elision_{opt} *SpreadElement*
ElementList , *Elision_{opt}* *AssignmentExpression*
ElementList , *Elision_{opt}* *SpreadElement*

Elision :

,
Elision ,

SpreadElement :

... *AssignmentExpression*

Static Semantics

Static Semantics: Elision Width

Elision : ,

1. Return the numeric value 1.

Elision : *Elision* ,

1. Let *preceding* be the Elision Width of *Elision*.
2. Return *preceding*+1.

Deleted: *SealedArrayInitialiser* :
ArrayInitialiser
ArrayInitialiser

Deleted: *array initialiser*

Deleted: written in a form of a literal. It is
Deleted: ,

Deleted: ... *AssignmentExpression*

Deleted: ... *AssignmentExpression*

Deleted: *ArrayComprehension* :
Expression ComprehensionForList
Expression ComprehensionForList if (Expression)
ComprehensionForList :
ComprehensionFor
ComprehensionForList ComprehensionFor
ComprehensionFor :
for (LeftHandSideExpression of Expression)

Deleted: 11.1.4.1

Deleted: Static Semantics: Early Errors
Early Errors

The static semantics of the production
SpreadElementElementList : *Elision_{opt}* ...
AssignmentExpression are:
<#> It is a Syntax Error if the source code parsed with this production is not extended code.

Deleted: ElementList : *ElementList* , *Elision_{opt}* ...
AssignmentExpression
<#> It is a Syntax Error if the source code parsed with this production is not extended code.

Deleted: Elision : [empty] ¶
<#> Return the numeric value 0.¶

Runtime Semantics

Deleted: 11.1.4.2

Runtime Semantics: Array Accumulation

With parameters *array* and *nextIndex*.

ElementList : Elision_{opt} AssignmentExpression

1. Let *padding* be the Elision Width of *Elision*; if *Elision* is not present, use the numeric value zero.
2. Let *initResult* be the result of evaluating *AssignmentExpression*.
3. Let *initValue* be *GetValue(initResult)*.
4. ReturnIfAbrupt(*initValue*).
5. Call the **[[DefineOwnProperty]]** internal method of *array* with arguments
ToString(ToUint32(nextIndex+padding)) and the Property Descriptor { **[[Value]]: *initValue*, [[Writable]]: **true**, [[Enumerable]]: **true**, [[Configurable]]: **true**** }.
6. Assert: the above call to **[[DefineOwnProperty]]** will return **false** or an abrupt completion value.
7. Return *nextIndex+padding+1*.

Deleted: *opt*

Deleted: If *initValue* is an abrupt completion, return *initValue*

Deleted: ,

Deleted: , and false

ElementList : Elision_{opt} SpreadElement

1. Let *padding* be the Elision Width of *Elision*; if *Elision* is not present, use the numeric value zero.
2. Return the result of performing Array Accumulation for *SpreadElement* with arguments *array* and *nextIndex+padding*.

Deleted: *opt*

ElementList : ElementList , Elision_{opt} AssignmentExpression

1. Let *postIndex* be the result of performing Array Accumulation for *ElementList* with arguments *array* and *nextIndex*.
2. ReturnIfAbrupt(*postIndex*).
3. Let *padding* be the Elision Width of *Elision*; if *Elision* is not present, use the numeric value zero.
4. Let *initResult* be the result of evaluating *AssignmentExpression*.
5. Let *initValue* be *GetValue(initResult)*.
6. ReturnIfAbrupt(*initValue*).
7. Call the **[[DefineOwnProperty]]** internal method of *array* with arguments
ToString(ToUint32(postIndex+padding)) and the Property Descriptor { **[[Value]]: *initValue*, [[Writable]]: **true**, [[Enumerable]]: **true**, [[Configurable]]: **true**** }.
8. Assert: the above call to **[[DefineOwnProperty]]** will return **false** or an abrupt completion value.
9. Return *postIndex+padding+1*.

Deleted: If *postIndex* is an abrupt completion, return *postIndex*

Deleted: *opt*

Deleted: If *initValue* is an abrupt completion, return *initValue*

Deleted: (

Deleted: , and false

ElementList : ElementList , Elision_{opt} SpreadElement

1. Let *postIndex* be the result of performing Array Accumulation for *ElementList* with arguments *array* and *nextIndex*.
2. ReturnIfAbrupt(*postIndex*).
3. Let *padding* be the Elision Width of *Elision*; if *Elision* is not present, use the numeric value zero.
4. Return the result of performing Array Accumulation for *SpreadElement* with arguments *array* and *postIndex+padding*.

Deleted: If *postIndex* is an abrupt completion, return *postIndex*

Deleted: Let *pad* be the result of evaluating *Elision_{opt}*; if not present, use the numeric value zero

Comment [AW79]: Note that the value the spread operator is applied to is coerced to an Object.

Deleted: If *spreadObj* is an abrupt completion, return *spreadObj*

Deleted: the **[[**

Deleted: **]]** internal method of

Deleted:

Deleted: with argument

Deleted: "

Deleted: "

SpreadElement : ... AssignmentExpression

1. Let *spreadRef* be the result of evaluating *AssignmentExpression*.
2. Let *spreadValue* be *GetValue(spreadRef)*.
3. Let *spreadObj* be *ToObject(spreadValue)*.
4. ReturnIfAbrupt(*spreadObj*).
5. Let *lenVal* be the result of calling *Get(spreadObj, "length")*.
6. Let *spreadLen* be *ToUint32(lenVal)*.
7. ReturnIfAbrupt(*spreadLen*).
8. Let *n*=0;
9. Repeat, while *n* < *spreadLen*

- a. Let *exists* be the result of HasProperty(*spreadObj*.ToString(*n*)).
 - b. ReturnIfAbrupt(*exists*).
 - c. If *exists* is true then.
 - i. Let *v* be the result of calling the [[Get]] internal method of *spreadObj* passing ToString(*n*) as the argument.
 - ii. ReturnIfAbrupt(*v*).
 - iii. Call the [[DefineOwnProperty]] internal method of *array* with arguments ToString(ToInt32(*nextIndex*)) and Property Descriptor {[[Value]]: *v*, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}.
 - iv. Assert: the above call to [[DefineOwnProperty]] will return false or an abrupt completion value.
 - d. Let *n* = *n* + 1.
 - e. Let *nextIndex* = *nextIndex* + 1.
10. Return *nextIndex*.

NOTE [[DefineOwnProperty]] is used to ensure that own properties are defined for the array even if the standard built-in Array prototype object has been modified in a manner that would preclude the creation of new own properties using [[SetP]].

Runtime Semantics: Evaluation

ArrayLiteral : [*Elision*_{opt}]

1. Let *array* be the result of the abstract operation ArrayCreate with argument 0.
2. Let *pad* be the Elision Width of *Elision*; if *Elision* is not present, use the numeric value zero.
3. Call Put(*array*, "length", *pad*, false).
4. Return *array*.

ArrayLiteral : [*ElementList*]

1. Let *array* be the result of the abstract operation ArrayCreate with argument 0.
2. Let *len* be the result of performing Array Accumulation for *ElementList* with arguments *array* and 0.
3. ReturnIfAbrupt(*len*).
4. Call Put(*array*, "length", *len*, false).
5. Return *array*.

ArrayLiteral : [*ElementList* , *Elision*_{opt}]

1. Let *array* be the result of the abstract operation ArrayCreate with argument 0.
2. Let *len* be the result of performing Array Accumulation for *ElementList* with arguments *array* and 0.
3. ReturnIfAbrupt(*len*).
4. Let *padding* be the Elision Width of *Elision*; if *Elision* is not present, use the numeric value zero.
5. Call Put(*array*, "length", ToUint32(*padding*+*len*), false).
6. Return *array*.

11.1.4.2 Array Comprehension

Syntax

ArrayComprehension :

- [*AssignmentExpression* *ComprehensionForList*]
- [*AssignmentExpression* *ComprehensionForList* *if* *Expression*]

ComprehensionForList :

- ComprehensionFor*
- ComprehensionForList* *ComprehensionFor*

ComprehensionFor :

- for* *ForBinding* *of* *Expression*

Deleted: calling the [[HasProperty]] internal method of

Comment [AW80]: Note that indices wrap. For example consider:

[.....,{ 4294967293: "x", length: Math.pow(2,32)-2}]

Deleted: ...and Property Descriptor {[[Value]]: *v*,

Deleted: Put

Deleted: The production ...rrayLiteral : [*Elision*_{opt}]

Deleted: ion

Deleted: (15.4)

Deleted: the result of creating a new object as if by the expression new **Array**() where **Array** is the standard built-in constructor with that name

Deleted: result of evaluating

Deleted: _{opt}

Deleted: ; if not present, use the numeric value zero

Deleted: the [[...ut]] internal method of....rray with

Deleted: The production ...rrayLiteral : [*ElementList*]

Deleted: ion

Deleted: (15.4)

Deleted: the result of creating a new object as if by the expression new **Array**() where **Array** is the standard built-in constructor with that name

Deleted: Return the...et *len* be the result of evaluating

Deleted: If *len* is an abrupt completion, return *len*

Deleted: the [[...ut]] internal method of....rray with

Deleted: The production ...rrayLiteral : [*ElementList*]

Deleted: ion

Deleted: (15.4)

Deleted: the result of creating a new object as if by the expression new **Array**() where **Array** is the standard built-in constructor with that name

Deleted: <#>Let *array* be the result of evaluating *ElementList*.]

Deleted: If *len* is an abrupt completion, return *len*

Deleted: Let *pad* be the Elision Width of result of evaluating *Elision*_{opt}; if not present, use the numeric value zero.

Deleted: <#>Let *len* be the result of calling the [[Get]] internal method of *array* with argument "length".]

Deleted: the [[...ut]] internal method of....rray with

Comment [AWB881]: AssignmentExpression??

Deleted:

Deleted: (...*Expression*)

Comment [AWB882]: AssignmentExpression??

Deleted: (...*LeftHandSideExpression*)

ForBinding :

BindingIdentifier
BindingPattern

Runtime Semantics

Runtime Semantics: Binding Initialisation

With arguments *value* and *environment*.

NOTE **undefined** is passed for *environment* to indicate that a PutValue operation should be used to assign the initialisation value. This is the case for **var** statements formal parameter lists of non-strict functions. In those cases a lexical binding is hosted and preinitialized prior to evaluation of its initializer.

ForBinding : BindingPattern

1. Let *obj* be ToObject(*value*).
2. ReturnIfAbrupt(*obj*).
3. Return the result of performing Binding Initialisation for *BindingPattern* passing *obj* and *environment* as the arguments.

Runtime Semantics: Evaluation

ToDo

11.1.5 Object Initialiser

NOTE An object initialiser is an expression describing the initialisation of an Object, written in a form resembling a literal. It is a list of zero or more pairs of property names and associated values, enclosed in curly braces. The values need not be literals; they are evaluated each time the object initialiser is evaluated.

Syntax

ObjectLiteral :

{ }
{ PropertyDefinitionList }
{ PropertyDefinitionList , }

PropertyDefinitionList :

PropertyDefinition
PropertyDefinitionList , PropertyDefinition

PropertyDefinition :

IdentifierName
CoverInitialisedName
PropertyName : AssignmentExpression
MethodDefinition

PropertyName :

IdentifierName
StringLiteral
NumericLiteral

CoverInitialisedName :

IdentifierName Initialiser

Initialiser :

= AssignmentExpression

Deleted:)

Deleted: Static Semantics¶

Static Semantics: Bound Names¶

ForBinding : BindingIdentifier ¶

<#>Return the Bound Names of *BindingIdentifier*

ForBinding : BindingPattern ¶

<#>Return the Bound Names of *BindingPattern*.

Deleted: Runtime Semantics: Binding Initialisation¶

With arguments *value* and *environment*.¶

NOTE **undefined** is passed for *environment* to indicate that a PutValue operation should be used to assign the initialisation value. This is the case for **var** statements formal parameter lists of non-strict functions. In those cases a lexical binding is hosted and preinitialized prior to evaluation of its initializer.¶

ForBinding : BindingIdentifier ¶

<#>Perform Binding Initialisation for *BindingIdentifier* passing *value* and *env* as the arguments.¶

ForBinding : BindingPattern ¶

<#>Perform Binding Initialisation for *BindingPattern* passing *value* and *env* as the arguments.¶

Comment [AWB1183]:

Deleted: ArrayComprehensionLiteral : [ElementList] ¶

Let *array* be the result of the abstraction operation *ArrayCreate* (15.4) with arguments 0.¶

Let *len* be result of performing *Array Accumulation* for *ElementList* with arguments *array* and 0.¶

ReturnIfAbrupt(*len*) If *len* is an abrupt completion, return *len*.¶

Call the [[Put]] internal method of *array* with arguments "length", *len*, and false.¶

Return *array*.¶

Deleted: The production *ElementList* : Elision_{opt} AssignmentExpression is evaluated as follows:¶

Let *array* be the result of creating a new object as if by the expression new *Array* where *Array* is the standard built-in constructor with that name.¶

Let *firstIndex* be the result of evaluating *Elision*; if not present, use the numeric value zero.¶

Let *initResult* be the result of evaluating *AssignmentExpression*.¶

Let *initValue* be *GetValue*(*initResult*).¶

Call the [[DefineOwnProperty]] internal method of *array* with arguments

Deleted: *PropertyNameAndValueList*

Deleted: *PropertyNameAndValueList*

Deleted: *PropertyNameAndValueList*

Deleted: *PropertyNameAssignment*

Deleted: *PropertyNameAndValueList*

Deleted: *PropertyNameAssignment*

Deleted: *PropertyNameAssignment*

Deleted: *PropertyName* (*FormalParameterList*) { *FunctionBody* }

* *PropertyName* (*FormalParameterList*) {

NOTE 1 *MethodDefinition* is defined in 13.3.

NOTE 2 In certain contexts, *ObjectLiteral* is used as a cover grammar for a more restricted secondary grammar. The *CoverInitialisedName* production is necessary to fully cover these secondary grammars. However, use of this production results in an early Syntax Error in normal contexts where an actual *ObjectLiteral* is expected.

Static Semantics

Static Semantics: Early Errors

In addition to describe an actual object initialiser the *ObjectLiteral* productions are used as a cover grammar for *ObjectAssignmentPattern* (11.13.1). When *ObjectLiteral* appears in a context where *ObjectAssignmentPattern* is required, the following Early Error rules are **not** applied.

ObjectLiteral : { *PropertyDefinitionList* }

and

ObjectLiteral : { *PropertyDefinitionList* , }

- It is a Syntax Error if *PropertyNameList* of *PropertyDefinitionList* contains any duplicate entries, unless one of the following conditions are true for each duplicate entry:
 1. The source code corresponding to *PropertyDefinitionList* is not strict code and all occurrences in the list of the duplicated entry were obtained from productions of the form *PropertyDefinition* : *PropertyName* : *AssignmentExpression*.
 2. The duplicated entry occurs exactly twice in the list and one occurrence was obtained from a *get* accessor *MethodDefinition* and the other occurrence was obtained from a *set* accessor *MethodDefinition*.

PropertyDefinition : *MethodDefinition*

- It is a Syntax Error if *ReferencesSuper* of *MethodDefinition* is **true**.

PropertyDefinition : *IdentifierName*

- It is a Syntax Error if *IdentifierName* is a *ReservedWord*.

PropertyDefinition : *CoverInitialisedName*

- Always throw a Syntax Error if this production is present

NOTE This production exists so that *ObjectLiteral* can serve as a cover grammar for *ObjectAssignmentPattern* (11.13.1). It can not occur in an actual object initialiser.

Static Semantics: Contains

With parameter *symbol*.

PropertyDefinition : *MethodDefinition*

1. If *symbol* is *MethodDefinition*, return **true**.
2. Return **false**.

NOTE Static semantic rules that depend upon substructure generally do not look into function definitions.

PropertyName : *IdentifierName*

1. If *symbol* is a *ReservedWord*, return **false**.
2. If *symbol* is an *Identifier* and *StringValue* of *symbol* is the same value as the *StringValue* of *IdentifierName*, return **true**.
3. Return **false**.

Deleted: *PropertySetParameterList* :
 BindingIdentifier
 BindingPattern ¶

Deleted: *Identifier*¶
 Semantics¶

Deleted: 11.1.5.1

Deleted: *PropertyNameAndValueList* :
 PropertyNameAndValueList , *PropertyAssignment* ¶

Deleted: *a*

Deleted: *property definition*

Deleted: *property definition*

Deleted: *i*

Comment [AWB884]: The currently prevailing position in TC39 is that use of super should not be allowed in object literals. This restriction is arbitrary in the sense that the runtime semantics would work.

Deleted: *i*

Deleted: <#>It is a Syntax Error if this production is contained in strict code, *PropertyAssignment* is the production *PropertyAssignment* : *PropertyName* : *AssignmentExpression*, and *PropertyDefinitionList*(*PropName* of *PropertyAssignment*) of *PropertyNameAndValueList* is not the empty List.¶

<#>It is a Syntax Error if *PropertyAssignment* is the production *PropertyAssignment* : *IdentifierName* and *PropertyDefinitionList*(*PropName* of *PropertyAssignment*) of *PropertyNameAndValueList* is not the empty List.¶

<#>It is a Syntax Error if *PropertyAssignment* is the production *PropertyAssignment* : *PropertyName* (*FormalParameterList*) { *FunctionBody* } and *PropertyDefinitionList*(*PropName* of *PropertyAssignment*) of *PropertyNameAndValueList* is not the empty List.¶

<#>It is a Syntax Error if *PropertyAssignment* is the production *PropertyAssignment* : *PropertyName* (*FormalParameterList*) { *FunctionBody* } and *PropertyDefinitionList*(*PropName* of *PropertyAssignment*) of *PropertyNameAndValueList* is not the empty List.¶

<#>It is a Syntax Error if *PropertyAssignment* is the production *PropertyAssignment* : *PropertyName* (* *PropertyName* (*FormalParameterList*) { *FunctionBody* }) and *PropertyDefinitionList*(*PropName* of *PropertyAssignment*) of *PropertyNameAndValueList* is not the empty List.¶

<#>It is a Syntax Error if *PropertyAssignment* is the production *PropertyAssignment* : *AssignmentExpression*.¶

<#>It is a Syntax Error if *PropertyAssignment* is the production .
 PropertyAssignment : **get** *PropertyName* ()
 { *FunctionBody* }

and *PropertyDefinitionList*(*PropName* of *PropertyAssignment*) of *PropertyNameAndValueList* includes a production of the form *PropertyAssignment* : *PropertyName* : *AssignmentExpression*.¶

<#>It is a Syntax Error if *PropertyAssignment* is the production .
 PropertyAssignment : **set** *PropertyName* (*PropertySetParameterList*) { *FunctionBody* }
 and *PropertyDefinitionList*(*PropName* of *PropertyAssignment*) of *PropertyNameAndValueList* includes a production of the form *PropertyAssignment* : *PropertyName* : *AssignmentExpression*.¶

<#>It is a Syntax Error if *PropertyAssignment* is the production .
 PropertyAssignment : **get** *PropertyName* ()
 { *FunctionBody* }

and *PropertyDefinitionList*(*PropName* of *PropertyAssignment*) of *PropertyNameAndValueList* includes a production of the form *PropertyAssignment* : *PropertyName* : **get** *PropertyName* () { *FunctionBody* }.¶

Deleted: *PropertyDefinition* : *MethodDefinition* ¶

Deleted:

Deleted:

Static Semantics: IsValidSimpleAssignmentTarget

PrimaryExpression : Literal

1. Return **false**.

Static Semantics: PropName

PropertyDefinition : IdentifierName

1. Return **StringValue** of *IdentifierName*.

PropertyDefinition : PropertyName : AssignmentExpression

1. Return *PropertyName* of *PropertyName*.

PropertyName : StringLiteral

1. Return a **String value**, whose characters are the **SV** of the *StringLiteral*.

PropertyName : NumericLiteral

1. Let *nbr* be the result of forming the value of the *NumericLiteral*.
2. Return **ToString**(*nbr*).

Static Semantics: PropertyNameList

PropertyDefinitionList : PropertyDefinition

1. Return a new List containing *PropertyName* of *PropertyDefinition*.

PropertyDefinitionList : PropertyDefinitionList , PropertyDefinition

1. Let *list* be *PropertyNameList* of *PropertyDefinitionList*.
2. Append *PropName* of *PropertyDefinition* to the end of *list*.
3. Return *list*.

Runtime Semantics

Runtime Semantics: Evaluation

ObjectLiteral : { }

1. Return a new object created as if by the expression **new Object()** where **Object** is the standard built-in constructor with that name.

ObjectLiteral :

```
{ PropertyDefinitionList }  
{ PropertyDefinitionList , }
```

1. Let *obj* be the result of the abstract operation **ObjectCreate**.
2. Let *status* be the result of performing **Property Definition Evaluation** of *PropertyDefinitionList* with argument *obj*.
3. Return **IfAbrupt**(*status*).
4. Return *obj*.

Runtime Semantics: Property Definition Evaluation

With parameter *object*.

Deleted: NOTE Static semantic rules that depend upon substructure generally do not local into function definitions.

Deleted: Static Semantics: **ExpectedArgumentCount**

PropertySetParameterList : *BindingIdentifier* ¶
<#>Return 1.¶

PropertySetParameterList : *BindingPattern* ¶
<#>Return 1.¶

Deleted: Static Semantics: **HasInitialiser**

PropertySetParameterList : *BindingIdentifier* ¶
<#>Return false.¶

PropertySetParameterList : *BindingPattern* ¶
<#>Return false.¶

Deleted: Static Semantics:

PropertyDefinitionList(name)

PropertyNameAndValueList : *PropertyNameAssignment* ¶
PropertyName : *AssignmentExpression* ¶

<#> If *PropertyName* of *PropertyAssignment* is not *name* return the empty List.¶

<#> Return a List containing *PropertyAssignment*

PropertyNameAndValueList : *PropertyNameAndValueList* , *PropertyAssignment*

Deleted: *PropertyAssignment*

Deleted:

Deleted: *PropertyAssignment*

Deleted: *PropertyDefinition* : *MethodDefinition*
<#>Return *PropertyName* of *MethodDefinition*.¶

Deleted: *PropertyAssignment* : *PropertyName* (*FormalParameterList*) { *FunctionBody* }

Deleted: *PropertyName* : *IdentifierName* ¶
<#>Return *PropertyName* of *IdentifierName*.¶

Deleted: the

Deleted: s

Comment [AWB1085]: Issue: static semantic rules probably should call **ToString**

Deleted: 11.1.5.2

Deleted: The production

Deleted: is evaluated as follows:

Deleted: *PropertyNameAndValueList*

Deleted: *PropertyNameAndValueList*

Deleted: *ObjectLiteral* : { *PropertyNameAndValueList* } and

Deleted: ion

Deleted: (15.2)

Deleted: creating a new object as if by the expression **new Object()** where **Object** is

Deleted: P

Deleted: success

Deleted: D

Deleted: *PropertyNameAndValueList*

Deleted: If *successstatus* is an abrupt completion return *successstatus*

Deleted: the result of evaluating *PropertyNameAndValueList*

PropertyDefinitionList : PropertyDefinitionList , PropertyDefinition

1. Let *status* be the result of performing Property Definition Evaluation of *PropertyDefinitionList* with argument *object*.
2. ReturnIfAbrupt(*status*).
3. Return the result of performing Property Definition Evaluation of *PropertyDefinition* with argument *object*.

PropertyDefinition : IdentifierName

1. Let *propName* be *StringValue* of *IdentifierName*.
2. Let *exprValue* be the result of performing Identifier Resolution as specified in 10.3.1 using *IdentifierName*.
3. Let *propValue* be *GetValue*(*exprValue*).
4. ReturnIfAbrupt(*propValue*).
5. Let *desc* be the Property Descriptor {[[Value]]: *propValue*, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}.
6. Return the result of calling the [[DefineOwnProperty]] internal method of *object* with arguments *propName* and *desc*.

PropertyDefinition :PropertyName : AssignmentExpression

1. Let *propName* be *PropName* of *PropertyName*.
2. Let *exprValue* be the result of evaluating *AssignmentExpression*.
3. Let *propValue* be *GetValue*(*exprValue*).
4. ReturnIfAbrupt(*propValue*).
5. Let *desc* be the Property Descriptor {[[Value]]: *propValue*, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}.
6. Return the result of calling the [[DefineOwnProperty]] internal method of *object* with arguments *propName* and *desc*.

11.1.6 Function Defining Expressions

See 13.1 for *PrimaryExpression : FunctionExpression*.

See 13.4 for *PrimaryExpression : GeneratorExpression*.

See 13.5 for *PrimaryExpression : ClassExpression*.

11.1.7 Generator Comprehensions

Syntax

GeneratorComprehension :

(*Expression ComprehensionForList*)
 (*Expression ComprehensionForList if Expression*)

11.1.8 Regular Expression Literals

Syntax

See 7.8.5.

Static Semantics

Static Semantics: Early Errors

PrimaryExpression : RegularExpressionLiteral

- It is a Syntax Error if BodyText of *RegularExpressionLiteral* can not be recognized using the goal symbol Pattern of the ECMAScript RegExp grammar specified in 15.10.

Deleted: The production <i>PropertyNameAndValueListPropertyDefinitionList</i> : <i>PropertyNameAssignmentPropertyDefinition</i> is evaluated as follows: <#>Return the result of Let <i>obj</i> be the result of creating a new object as if by the expression new Object() where Object is the standard built-in constructor with that name. <#>Let <i>propId</i> be the result of evaluating <i>PropertyAssignment</i> . <#>Call the [[DefineOwnProperty]] internal method of <i>obj</i> with arguments <i>propId.name</i> , <i>propId.descriptor</i> , and false.
Deleted: The production <i>PropertyNameAndValueList...ropertyDefinition</i>
Deleted: ...
Deleted: <#>Let <i>obj</i> be the result of evaluating
Deleted: <#>Let <i>previous</i> be the result of calling the
Deleted: <i>success</i>
Deleted: Performing Property Definition Evaluation
Deleted: <i>PropertyNameAndValueList</i>
Deleted: Call the [[DefineOwnProperty]] internal method
Deleted: If <i>successstatus</i> is an abrupt completion, return
Deleted: Performing Property Definition Evaluation
Deleted: <i>PropertyAssignment</i>
Deleted: Return <i>obj</i> .
Deleted: ¶
Deleted: The production
Deleted: <i>PropertyAssignment</i>
Deleted: is evaluated as follows:
Deleted: <i>PropName</i> (
Deleted:)
Deleted: as the <i>Identifier</i>
Deleted: If <i>propValue</i> is an abrupt completion, return
Deleted: Call
Deleted: ..., and <i>desc</i> , and false.
Deleted: <#>Return Property Identifier (<i>propName</i> , <i>desc</i>)
Deleted: The production
Deleted: <i>PropertyAssignment</i>
Deleted: is evaluated as follows:
Deleted: the result of evaluating
Deleted: (...of <i>PropertyName</i>)
Deleted: If <i>propValue</i> is an abrupt completion, return
Deleted: Call
Deleted: ..., and <i>desc</i> , and false
Deleted: Return Property Identifier (<i>propName</i> , <i>desc</i>)
Comment [AWB686]: Need a actual reference
Deleted: <i>PropertyDefinition</i> : <i>MethodDefinition</i> ¶
Deleted: <i>PropertyAssignment</i> : <i>PropertyName</i>
Deleted: Runtime Semantics: Evaluation¶
Deleted: (... <i>Expression</i>)

- It is a Syntax Error if *FlagText* of *RegularExpressionLiteral* contains any character other than "g", "i", "m", "u", or "y", or if it contains the same character more than once.

Runtime Semantics

Runtime Semantics: Evaluation

PrimaryExpression : *RegularExpressionLiteral*

1. A regular expression literal evaluates to a value of the Object type that is an instance of the standard built-in constructor *RegExp*. This value is determined in two steps: first, the characters comprising the regular expression's *RegularExpressionBody* and *RegularExpressionFlags* production expansions are collected uninterpreted into two Strings *Pattern* and *Flags*, respectively. Then each time the literal is evaluated, a new object is created as if by the expression `new RegExp(Pattern, Flags)` where *RegExp* is the standard built-in constructor with that name. The newly constructed object becomes the value of the *RegularExpressionLiteral*.

11.1.9 Template Literals

Syntax

TemplateLiteral :

NoSubstitutionTemplate
 TemplateHead Expression [Lexical goal InputElementTemplateTail] TemplateSpans

TemplateSpans:

TemplateTail
 TemplateMiddleList [Lexical goal InputElementTemplateTail] TemplateTail

TemplateMiddleList:

TemplateMiddle Expression
 TemplateMiddleList [Lexical goal InputElementTemplateTail] TemplateMiddle Expression

Static Semantics

Static Semantics: TemplateStrings

With parameter *raw*.

TemplateLiteral : *NoSubstitutionTemplate*

1. If *raw* is **false**, then
 - a. Let *string* be the TV of *NoSubstitutionTemplate*.
2. Else
 - a. Let *string* be the TRV of *NoSubstitutionTemplate*.
3. Return a List containing the single element, *string*.

TemplateLiteral : *TemplateHead Expression [Lexical goal InputElementTemplateTail] TemplateSpans*

1. If *raw* is **false**, then
 - a. Let *head* be the TV of *TemplateHead*.
2. Else,
 - a. Let *head* be the TRV of *TemplateHead*.
3. Let *tail* be *TemplateStrings* of *TemplateSpans* with argument *raw*.
4. Return a List containing *head* followed by the element, in order of *tail*.

TemplateSpans : *TemplateTail*

1. If *raw* is **false**, then
 - a. Let *tail* be the TV of *TemplateTail*.

Comment [AWB887]: Should convert to a multistep algorithm and breakout a static semantic rule for the early error

Deleted: Quasi

Deleted: Quasi

Deleted: FullQuasi

Deleted: Quasi

Deleted: QuasiMiddleList_{opt} [Lexical goal InputElementQuasiTail]

Deleted: Quasi

Deleted: Tail

Deleted: Quasi

Deleted: [Lexical goal InputElementQuasiTail]
Quasi

Deleted: Quasi

Deleted: Quasi

Deleted: Quasi

Deleted: QuasiStrings

Deleted: Quasi

Deleted: FullQuasi

Deleted: QV

Deleted: FullQuasi

Deleted:

Deleted: QRV

Deleted: FullQuasi

Deleted: Quasi

Deleted: <#>Let *tail* be the QV of *QuasiTail*.

Deleted: QRV

Deleted: Quasi

Deleted: the QRV

Deleted: Quasi

Deleted: Tail

2. Else,
 - a. Let *tail* be the TRV of *TemplateTail*.
3. Return a List containing the single element, *tail*.

TemplateSpans : *TemplateMiddleList* [Lexical goal *InputElementTemplateTail*] *TemplateTail*

1. Let *middle* be *TemplateStrings* of *TemplateMiddleList* with argument *raw*.
2. If *raw* is **false**, then
 - a. Let *tail* be the TV of *TemplateTail*.
3. Else
 - a. Let *tail* be the TRV of *TemplateTail*.
4. Return a List containing the elements, in order, of *middle* followed by *tail*.

TemplateMiddleList : *TemplateMiddle Expression*

1. If *raw* is **false**, then
 - a. Let *string* be the TV of *TemplateMiddle*.
2. Else
 - a. Let *string* be the TRV of *TemplateMiddle*.
3. Return a List containing the single element, *string*.

TemplateMiddleList : *TemplateMiddleList* [Lexical goal *InputElementTemplateTail*] *TemplateMiddle Expression*

1. Let *front* be *TemplateStrings* of *TemplateMiddleList* with argument *raw*.
2. If *raw* is **false**, then
 - a. Let *last* be the TV of *TemplateMiddle*.
3. Else
 - a. Let *last* be the TRV of *TemplateMiddle*.
4. Append *last* as the last element of the List *front*.
5. Return *front*.

Runtime Semantics

Runtime Semantics: ArgumentListEvaluation

TemplateLiteral : *NoSubstitutionTemplate*

1. Let *siteObj* be the result of the abstraction operation *GetTemplateCallSite* passing this *TemplateLiteral* production as the argument.
2. Return a List containing the one element which is *siteObj*.

TemplateLiteral : *TemplateHead Expression* [Lexical goal *InputElementTemplateTail*] *TemplateSpans*

1. Let *siteObj* be the result of the abstraction operation *GetTemplateCallSite* passing this *TemplateLiteral* production as the argument.
2. Let *firstSub* be the result of evaluating *Expression*.
3. ReturnIfAbrupt(*firstSub*).
4. Let *restSub* be SubstitutionEvaluation of *TemplateSpans*.
5. ReturnIfAbrupt(*restSub*).
6. Assert, *restSub* is a List.
7. Return a List whose first element is *siteObj*, whose second elements is *firstSub*, and whose subsequent elements are the elements of *restSub*, in order. *restSub* may contain no elements.

Runtime Semantics: GetTemplateCallSite Abstract Operation

The abstract operation *GetTemplateCallSite* is called with a grammar production, *templateLiteral*, as an argument. It performs the following steps:

1. If a call site object for the source code corresponding to *templateLiteral* has already been created by a previous call to this abstract operation, then return that call site object.

Deleted: Quasi...emplateLiteral...pans : QuasiHead

Deleted: <#>Let head be the QV of QuasiHead.¶

Deleted: <#>Let head be the QRV of QuasiHead.¶

Deleted: <#>Let middle be QuasiStrings of QuasiMiddle with argument raw.¶

Deleted: Quasi...emplateMiddleList : [Lexical goal

Deleted: QV...V of Quasi

Deleted: QRV...RV of Quasi

Deleted: Quasi...emplateMiddleList :

Deleted: QuasiStrings...emplateStrings of Quasi

Deleted: QV...V of Quasi

Deleted: QRV...RV of Quasi

Deleted: Quasi...emplateLiteral : FullQuasi

Deleted: the ...result of the abstraction operation

Deleted: QuasiLiteral : QuasiHead Expression [Lexical g InputElementQuasiTail] QuasiTail¶

<#>Let *siteObj* be the the result of the abstraction operation *GetQuasiCallSite* passing this *QuasiLiteral* production as the argument.¶

<#>Let *firstSub* be the result of evaluating *Expression*.¶

<#>ReturnIfAbrupt(*sub*).¶

<#>Return a List whose first element is *siteObj*, whose second elements *sub*. ¶

Quasi...emplateLiteral : Quasi...emplateHead Expression

Deleted: the ...result of the abstraction operation

Deleted: Quasi...emplateMiddleList

Deleted: Quasi...emplateCallSite is called with a gramm

2. Let `cookedStrings` be `TemplateStrings` of `templateLiteral` with argument `false`.
3. Let `rawStrings` be `TemplateStrings` of `templateLiteral` with argument `true`.
4. Let `count` be the number of elements in the List `cookedStrings`.
5. Let `siteObj` be the result of the abstraction operation `ArrayCreate` with argument `count`.
6. Let `rawObj` be the result of the abstraction operation `ArrayCreate` with argument `count`.
7. Let `index` be `0`.
8. Repeat while `index < count`
 - a. Let `prop` be `ToString(index)`.
 - b. Let `cookedValue` be the string value at `0-based position index` of the List `cookedStrings`.
 - c. Call the `[[DefineOwnProperty]]` internal method of `siteObj` with arguments `prop` and `Property Descriptor` `{[[Value]]: cookedValue, [[Writable]]: false, [[Configurable]]: false}`.
 - d. Let `rawValue` be the string value at `0-based position index` of the List `rawStrings`.
 - e. Call the `[[DefineOwnProperty]]` internal method of `rawObj` with arguments `prop` and `Property Descriptor` `{[[Value]]: rawValue, [[Writable]]: false, [[Configurable]]: false}`.
 - f. Let `index` be `index+1`.
9. Call the `[[Freeze]]` internal method of `rawObj`.
10. Call the `[[DefineOwnProperty]]` internal method of `siteObj` with arguments `"raw"` and `Property Descriptor` `{[[Value]]: rawObj, [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false}`.
11. Call the `[[Freeze]]` internal method of `siteObj`.
12. Remember an association between the source code corresponding to `templateLiteral` and `siteObj` such that `siteObj` can be retrieved in subsequent calls to this abstract operation.
13. Return `siteObj`.

NOTE 1 The creation of a call site object cannot result in an abrupt completion.

NOTE 2 Each `TemplateLiteral` in the program code is associated with a unique `Template` call site object that is used in the evaluation of `tagged Templates` (11.2.6). The same call site object is used each time a specific `tagged Template` is evaluated. Whether call site objects are created lazily upon first evaluation of the `TemplateLiteral` or eagerly prior to first evaluation is an implementation choice that is not observable to ECMAScript code.

Runtime Semantics: SubstitutionEvaluation

`TemplateSpans : TemplateTail`

1. Return an empty List.

`TemplateSpans : TemplateMiddleList [Lexical goal InputElementTemplateTail] TemplateTail`

1. Return the result of `SubstitutionEvaluation` of `TemplateMiddleList`.

`TemplateMiddleList : TemplateMiddle Expression`

1. Let `sub` be the result of evaluating `Expression`.
2. ReturnIfAbrupt(`sub`).
3. Return a List containing only `sub`.

`TemplateMiddleList : TemplateMiddleList [Lexical goal InputElementTemplateTail] TemplateMiddle Expression`

1. Let `preceding` be the result of `SubstitutionEvaluation` of `TemplateMiddleList`.
2. ReturnIfAbrupt(`preceding`).
3. Let `next` be the result of evaluating `Expression`.
4. ReturnIfAbrupt(`next`).
5. Append `next` as the list element of the List `preceding`.
6. Return `preceding`.

Runtime Semantics: Evaluation

`TemplateLiteral : NoSubstitutionTemplate`

1. Return the string value whose elements are the `TV` of `NoSubstitutionTemplate` as defined in 7.8.6.

Deleted: QuasiStrings

Deleted: quasi

Deleted: QuasiStrings

Deleted: quasi

Deleted: ,

Deleted: }

Deleted: , and false

Deleted: value

Deleted: ,

Deleted: }

Deleted: , and false

Deleted: Object

Deleted: abstract operation with argument

Deleted: ,

Deleted: , and false

Deleted: Object

Deleted: abstract operation with argument

Deleted: quasi

Deleted: n

Deleted: Quasi

Deleted: Quasi

Deleted: Quasi

Deleted: Quasi

Deleted: Quasi

Deleted: [Lexical goal InputElementQuasiTail]
Deleted: Quasi

Deleted: middle

Deleted: Quasi

Deleted: Quasi

Deleted: Quasi

Deleted: Quasi

Deleted: Quasi

Deleted: Quasi

Deleted: FullQuasi

Deleted: QV

Deleted: FullQuasi

TemplateLiteral : TemplateHead Expression [Lexical goal InputElementTemplateTail] TemplateSpans

1. Let *head* be the TV of *TemplateHead* as defined in 7.8.6.
2. Let *sub* be the result of evaluating *Expression*.
3. Let *middle* be *ToString(sub)*.
4. ReturnIfAbrupt(*middle*).
5. Let *tail* be the result of evaluating *TemplateSpans*.
6. ReturnIfAbrupt(*tail*).
7. Return the string value whose elements are the code units of *head* followed by the code units of *tail*.

TemplateSpans : TemplateTail

1. Let *tail* be the TV of *TemplateTail* as defined in 7.8.6.
2. Return the string whose elements are the code units of *tail*.

TemplateSpans : TemplateMiddleList [Lexical goal InputElementTemplateTail] TemplateTail

1. Let *head* be the result of evaluating *TemplateMiddleList*.
2. ReturnIfAbrupt(*head*).
3. Let *tail* be the TV of *TemplateTail* as defined in 7.8.6.
4. Return the string whose elements are the elements of *head* followed by the elements of *tail*.

TemplateMiddleList : TemplateMiddle Expression

1. Let *head* be the TV of *TemplateMiddle* as defined in 7.8.6.
2. Let *sub* be the result of evaluating *Expression*.
3. Let *middle* be *ToString(sub)*.
4. ReturnIfAbrupt(*middle*).
5. Return the sequence of characters consisting of the code units of *head* followed by the elements of *middle*.

TemplateMiddleList : TemplateMiddleList [Lexical goal InputElementTemplateTail] TemplateMiddle Expression

1. Let *rest* be the result of evaluating *TemplateMiddleList*.
2. ReturnIfAbrupt(*rest*).
3. Let *middle* be the TV of *TemplateMiddle* as defined in 7.8.6.
4. Let *sub* be the result of evaluating *Expression*.
5. Let *last* be *ToString(sub)*.
6. ReturnIfAbrupt(*last*).
7. Return the sequence of characters consisting of the elements of *rest* followed by the code units of *middle* followed by the elements of *last*.

11.1.10 The Grouping Operator

Static Semantics: Early Errors

PrimaryExpression : CoverParenthesizedExpressionAndArrowParameterList

- It is a Syntax Error if the lexical token sequence matched by *CoverParenthesizedExpressionAndArrowParameterList* cannot be parsed with no tokens left over using *ParenthesizedExpression* as the goal symbol.
- All Early Errors rules for *ParenthesizedExpression* and its derived productions also apply to the *CoveredParenthesizedExpression* of *CoverParenthesizedExpressionAndArrowParameterList*.

Static Semantics: IsValidSimpleAssignmentTarget

PrimaryExpression : CoverParenthesizedExpressionAndArrowParameterList

1. Let *expr* be *CoveredParenthesizedExpression* of *CoverParenthesizedExpressionAndArrowParameterList*.
2. Return *IsValidSimpleAssignmentTarget* of *expr*.

Deleted: Quasi

Deleted: Quasi

Deleted: Quasi

Deleted: Quasi

Deleted: Tail

Deleted: QV

Deleted: Quasi

Comment [AWB988]: Note that the conversion semantics are like `String.prototype.concat` rather than `+` operator.

Deleted: <#>Let *tail* be the QV of *QuasiTail* as defined in 7.8.6.¶

Deleted: followed by the elements of *middle*

Deleted: Quasi

Deleted: Literal

Deleted: QuasiHead Expression

Deleted: Quasi

Deleted: Quasi

Deleted: Quasi

Comment [AWB989]: Note that the conversion semantics are like `String.prototype.concat` rather than `+` operator.

Deleted: <#>Let *head* be the QV of *QuasiHead* as defined in 7.8.6.¶

Deleted: rest

Deleted: QV

Deleted: Quasi

Deleted: code units

Deleted: followed by the elements of *first* followed by the elements of *rest*

Deleted: code units

Deleted: Quasi

Deleted: [Lexical goal InputElementQuasiTail] Quasi

Deleted: QV

Deleted: Quasi

Comment [AWB990]: Note that the conversion

Deleted: Quasi

Comment [AWB991]: Note that the conversion

Deleted: ComprehensionForList ·¶

Deleted: The production *PropertyName* :

Deleted: 6

Deleted: 7

Deleted: 8

ParenthesizedExpression : (Expression)

1. Return IsValidSimpleAssignmentTarget of *Expression*.

Runtime Semantics: Evaluation

PrimaryExpression : CoverParenthesizedExpressionAndArrowParameterList

1. Let *expr* be CoveredParenthesizedExpression of *CoverParenthesizedExpressionAndArrowParameterList*.
2. Return the result of evaluating *expr*.

ParenthesizedExpression : (Expression)

1. Return the result of evaluating *Expression*. This may be of type Reference.

NOTE This algorithm does not apply GetValue to the result of evaluating *Expression*. The principal motivation for this is so that operators such as `delete` and `typeof` may be applied to parenthesised expressions.

11.2 Left-Hand-Side Expressions

Syntax

MemberExpression :

[Lexical goal InputElementRegExp] PrimaryExpression
MemberExpression [Expression]
MemberExpression . IdentifierName
MemberExpression TemplateLiteral
super [Expression]
super . IdentifierName
new MemberExpression Arguments

NewExpression :

MemberExpression
new NewExpression

CallExpression :

MemberExpression Arguments
super Arguments
CallExpression Arguments
CallExpression [Expression]
CallExpression . IdentifierName
CallExpression TemplateLiteral

Arguments :

()
(ArgumentList)

ArgumentList :

AssignmentExpression
... AssignmentExpression
ArgumentList , AssignmentExpression
ArgumentList , ... AssignmentExpression

LeftHandSideExpression :

NewExpression
CallExpression

Static Semantics

Deleted: The production

Deleted: PrimaryExpression

Deleted: is evaluated as follows:

Deleted: FunctionExpression

Deleted: Quasi

Deleted: MemberExpression <| TriangleLiteral

Comment [AWB892]: Issue: do we also want: new super Arguments ?

Deleted: MemberExpression <|

SealedArrayLiteral

MemberExpression <| SealedObjectLiteral

MemberExpression <| FunctionExpression

MemberExpression <| ValueLiteral

Deleted: Quasi

Deleted:

CallExpression <| TriangleLiteral

Deleted: TriangleLiteral :¶

SealedArrayLiteral

SealedObjectLiteral

FunctionExpression

ArrowFunction

ValueLiteral¶

Static Semantics: Contains

With parameter *symbol*.

MemberExpression : MemberExpression . IdentifierName

1. If *MemberExpression* Contains *symbol* is **true**, return **true**.
2. If *symbol* is a *ReservedWord*, return **false**.
3. If *symbol* is an *Identifier* and *StringValue* of *symbol* is the same value as the *StringValue* of *IdentifierName*, return **true**.
4. Return **false**.

Deleted: c

Deleted:

Deleted:

MemberExpression : super . IdentifierName

1. If *symbol* is the *ReservedWord* **super**, return **true**.
2. If *symbol* is a *ReservedWord*, return **false**.
3. If *symbol* is an *Identifier* and *StringValue* of *symbol* is the same value as the *StringValue* of *IdentifierName*, return **true**.
4. Return **false**.

Deleted:

Deleted:

CallExpression : CallExpression . IdentifierName

1. If *CallExpression* Contains *symbol* is **true**, return **true**.
2. If *symbol* is a *ReservedWord*, return **false**.
3. If *symbol* is an *Identifier* and *StringValue* of *symbol* is the same value as the *StringValue* of *IdentifierName*, return **true**.
4. Return **false**.

Deleted: c

Deleted:

Deleted:

Static Semantics: IsValidSimpleAssignmentTarget

CallExpression :

- MemberExpression Arguments
- super Arguments
- CallExpression Arguments
- CallExpression [Expression]
- CallExpression . IdentifierName

MemberExpression :

- MemberExpression [Expression]
- MemberExpression . IdentifierName
- super [Expression]
- super . IdentifierName

1. Return **true**.

CallExpression : CallExpression TemplateLiteral

NewExpression : new NewExpression

MemberExpression : new MemberExpression Arguments

1. Return **false**.

11.2.1 Property Accessors

Properties are accessed by name, using either the dot notation:

MemberExpression . IdentifierName
CallExpression . IdentifierName

or the bracket notation:

Deleted: Static Semantics: *IsValidSimpleAssignmentPattern*

LeftHandSideExpression : NewExpression
 <#> If the source code corresponding to *NewExpression* can be parsed as *ArrayLiteral*, then
 <#> If the source code corresponding to *NewExpression* can be parsed as *ObjectLiteral*, then return **false**.
 <#> If the source code corresponding to *NewExpression* can be parsed using *AssignmentPattern* (11.13.1) as the goal symbol, return **true**.
 <#> Return **false**.
LeftHandSideExpression : CallExpression
 <#> Return **false**.

Comment [AWB1093]: These would become false, we disallow host functions returning reference values.

*MemberExpression [Expression]
CallExpression [Expression]*

The dot notation is explained by the following syntactic conversion:

MemberExpression . IdentifierName

is identical in its behaviour to

MemberExpression [<identifier-name-string>]

and similarly

CallExpression . IdentifierName

is identical in its behaviour to

CallExpression [<identifier-name-string>]

where *<identifier-name-string>* is a string literal containing the same sequence of characters after processing of Unicode escape sequences as the *IdentifierName*.

Runtime Semantics: Evaluation

MemberExpression : MemberExpression [Expression]

1. Let *baseReference* be the result of evaluating *MemberExpression*.
2. Let *baseValue* be *GetValue(baseReference)*.
3. ReturnIfAbrupt(baseValue).
4. Let *propertyNameReference* be the result of evaluating *Expression*.
5. Let *propertyNameValue* be *GetValue(propertyNameReference)*.
6. ReturnIfAbrupt(propertyNameValue).
7. ReturnIfAbrupt(CheckObjectCoercible(baseValue)).
8. Let *propertyNameString* be *ToString(propertyNameValue)*.
9. If the code matched by the syntactic production that is being evaluated is strict mode code, let *strict* be **true**, else let *strict* be **false**.
10. Return a value of type Reference whose base value is *baseValue* and whose referenced name is *propertyNameString*, and whose strict reference flag is *strict*.

CallExpression : CallExpression [Expression]

Is evaluated in exactly the same manner as *MemberExpression : MemberExpression [Expression]*, except that the contained *CallExpression* is evaluated in step 1.

11.2.2 The new Operator

Runtime Semantics: Evaluation

NewExpression : new NewExpression

1. Let *ref* be the result of evaluating *NewExpression*.
2. Let *constructor* be *GetValue(ref)*.
3. ReturnIfAbrupt(constructor).
4. If *Type(constructor)* is not Object, throw a **TypeError** exception.
5. If *constructor* does not implement the [[Construct]] internal method, throw a **TypeError** exception.
6. Return the result of calling the [[Construct]] internal method on *constructor*, with an empty List as the argument.

MemberExpression : new MemberExpression Arguments

1. Let *ref* be the result of evaluating *MemberExpression*.
2. Let *constructor* be *GetValue(ref)*.
3. ReturnIfAbrupt(constructor).

Deleted: The production

Deleted: is evaluated as follows:

Deleted: If *baseValue* is an abrupt completion, return *baseValue*

Deleted: If *propertyNameValue* is an abrupt completion, return *propertyNameValue*

Deleted: Call

Deleted: If the result of

Deleted:

Deleted: is an abrupt completion, return that re

Deleted: contained in

Deleted: mode

Deleted: The production

Deleted: is

Deleted: ,

Deleted: The production

Deleted: is evaluated as follows:

Deleted: If *constructor* is an abrupt completion, return *constructor*

Deleted: , providing no arguments (that is,

Deleted: list

Deleted: of

Comment [AWB994]: TODO probably need to do something about new operators in tail position.

Deleted: arguments)

Deleted: The production

Deleted: is evaluated as follows:

Deleted: If *constructor* is an abrupt completion, return *constructor*

4. Let *argList* be the result of evaluating *Arguments*, producing an internal *List* of argument values (11.2.4).
5. ReturnIfAbrupt(*argList*)
6. If *Type(constructor)* is not Object, throw a **TypeError** exception.
7. If *constructor* does not implement the **[[Construct]]** internal method, throw a **TypeError** exception.
8. Return the result of calling the **[[Construct]]** internal method on *constructor*, passing *argList* as the argument.

Deleted: list

Deleted: If *argList* is an abrupt completion, return *argList*

11.2.3 Function Calls

Runtime Semantics: Evaluation

CallExpression : MemberExpression Arguments

1. Let *ref* be the result of evaluating *MemberExpression*.
2. If this *CallExpression* is in a tail position (13.7) then let *tailCall* be **true**, otherwise let *tailCall* be **false**.
3. Return the result of the abstract operation *EvaluateCall* with arguments *ref*, *Arguments*, and *tailCall*.

Comment [AWB795]: TODO: tail calls.

Jan 19 meeting notes: Tentative decision is to support calls in strict mode only.

Deleted: The production

Deleted: is evaluated as follows:

Deleted:

Deleted: and

CallExpression : CallExpression Arguments

1. Let *ref* be the result of evaluating *CallExpression*.
2. If this *CallExpression* is in a tail position (13.7) then let *tailCall* be **true**, otherwise let *tailCall* be **false**.
3. Return the result of the abstract operation *EvaluateCall* with arguments *ref*, *Arguments*, and *tailCall*.

Deleted:

Deleted: and

Runtime Semantics: EvaluateCall Abstract Operation

The abstract operation *EvaluateCall* takes as arguments a value *ref*, and a syntactic grammar production *arguments*, and a Boolean argument *tailPosition*. It performs the following steps:

1. Let *func* be *GetValue(ref)*.
2. ReturnIfAbrupt(*func*)
3. Let *argList* be the result of performing *ArgumentListEvaluation* of *arguments*.
4. ReturnIfAbrupt(*argList*)
5. If *Type(func)* is not Object, throw a **TypeError** exception.
6. If *IsCallable(func)* is **false**, throw a **TypeError** exception.
7. If *Type(ref)* is Reference, then
 - a. If *IsPropertyReference(ref)* is **true**, then
 - i. Let *thisValue* be *GetThisValue(ref)*.
 - b. Else, the base of *ref* is an Environment Record
 - i. Let *thisValue* be the result of calling the *WithBaseObject* concrete method of *GetBase(ref)*.
8. Else, *Type(ref)* is not Reference,
 - a. Let *thisValue* be **undefined**.
9. If *tailPosition* is **true**, then
 - a. Let *leafContext* be the running execution context.
 - b. Suspend *leafContext*.
 - c. Pop *leafContext* from the execution context context stack. The execution context now on the top of the stack becomes the running execution context, however it remains in its suspended state.
 - d. Assert: *leafContext* has no further use. It will never be activated as the running execution context.
10. Let *result* be the result of calling the **[[Call]]** internal method on *func*, passing *thisValue* as the *thisArgument* and *argList* as the *argumentsList*.
11. Assert: If *tailPosition* is **true**, the above call will not return here, but instead evaluation will continue with the resumption of *leafCallerContext* as the running execution context.
12. Assert: *Type(result)* is an ECMAScript language type
13. Return *result*.

A tail position call must either release any transient internal resources associated with the currently executing function execution context before invoking the target function or reuse those resources in support of the target function.

Deleted:

Deleted: Reference,

Deleted: <#>Let *ref* be the result of evaluating *MemberExpression*.¶

Deleted: If *func* is an abrupt completion, return *func*

Deleted: evaluating

Deleted: *Arguments*

Deleted: , producing an internal list of argument values (see 11.2.4)

Deleted: If *argList* is an abrupt completion, return *argList*

Deleted: *GetBase*

Deleted: ImplicitThisValue

Deleted: ,

Deleted: .

Deleted: <#>Let *leafCallerContext* be *leafContext*'s PreviousContext¶

Deleted: Make *leafCallerContext*

Comment [AWB996]: Is this really true. Need to think about whether generators may impact this assertion.

Deleted: Return

Deleted: providing

Deleted: as the *this* value

Deleted: providing the list

Deleted: *argument values*

Deleted: .

Deleted: a

NOTE 1 For example, a tail position call should only grow an implementation's activation record stack by the amount that the size of the target function's activation record exceeds the size of the calling function's activation record. If the target function's activation record is smaller, then the total size of the stack should decrease.

11.2.4 The `super` Keyword

Static Semantics

Static Semantics: Early Errors

MemberExpression :

`super` [*Expression*]
`super` . *IdentifierName*

- It is a Syntax Error if the source code parsed with this production is global code that is not eval code.
- It is a Syntax Error if the source code parsed with this production is eval code and the source code is not being processed by a direct call to eval that is contained in function code.

CallExpression : super Arguments

- It is a Syntax Error if the source code parsed with this production is global code that is not eval code.
- It is a Syntax Error if the source code parsed with this production is eval code and the source code is not being processed by a direct call to eval that is contained in function code.

Runtime Semantics: Evaluation

MemberExpression : super [Expression]

1. Let *env* be the result of performing the `GetThisEnvironment` abstract operation.
2. If the result of calling the `HasSuperBinding` concrete method of *env* is `false`, then throw a `ReferenceError` exception.
3. Let *actualThis* be the result of calling the `GetThisBinding` concrete method of *env*.
4. Let *baseValue* be the result of calling the `GetSuperBase` concrete method of *env*.
5. Let *propertyNameReference* be the result of evaluating *Expression*.
6. Let *propertyNameValue* be `GetValue(propertyNameReference)`.
7. ReturnIfAbrupt(`CheckObjectCoercible(baseValue)`).
8. Let *propertyKey* be `ToPropertyKey(propertyNameValue)`.
9. If the code matched by the syntactic production that is being evaluated is strict mode code, let *strict* be `true`, else let *strict* be `false`.
10. Return a value of type Reference that is a Super Reference whose base value is *baseValue*, whose referenced name is *propertyKey*, whose `thisValue` is *actualThis*, and whose strict reference flag is *strict*.

MemberExpression : super . IdentifierName

1. Let *env* be the result of performing the `GetThisEnvironment` abstract operation.
2. If the result of calling the `HasSuperBinding` concrete method of *env* is `false`, then throw a `ReferenceError` exception.
3. Let *actualThis* be the result of calling the `GetThisBinding` concrete method of *env*.
4. Let *baseValue* be the result of calling the `GetSuperBase` concrete method of *env*.
5. ReturnIfAbrupt(`CheckObjectCoercible(baseValue)`).
6. Let *propertyKey* be `StringValue of IdentifierName`.
7. If the code matched by the syntactic production that is being evaluated is strict mode code, let *strict* be `true`, else let *strict* be `false`.
8. Return a value of type Reference that is a Super Reference whose base value is *baseValue*, whose referenced name is *propertyKey*, whose `thisValue` is *actualThis*, and whose strict reference flag is *strict*.

CallExpression : super Arguments

1. Let *env* be the result of performing the `GetThisEnvironment` abstract operation.

Deleted: The This production `CallExpression CallExpression Arguments` is evaluated in exactly the same manner, as `CallExpression MemberExpression Arguments` except that the contained `CallExpression` is evaluated in step

Deleted: NOTE 2 The returned result will never be of type Reference if *func* is an native ordinary ECMAScript object. Whether calling host exotic object can return a value of type Reference is implementation-dependent. If a value of type Reference is returned, it must be non-strict Property Reference.¶

Deleted: 3

Deleted: code

Deleted: that is also global code

Deleted: <#>It is a Syntax Error if the source code parsed with this production is not extended code.¶

Deleted: code

Deleted: that is also global code

Deleted: <#>It is a Syntax Error if the source code parsed with this production is not extended code.¶

Deleted: HomeObject

Deleted: <#>Let *baseReference* be the result of evaluating `MemberExpression`.¶
<#>Let *baseValue* be `GetValue(baseReference)`.

Deleted: Call `CheckObjectCoercible(baseValue)`

Deleted: *NameString*

Deleted: String

Deleted: and

Deleted: *NameString*

Deleted: mode

Deleted: HomeObject

Deleted:

Deleted: mode

2. If the result of calling the `HasSuperBinding` concrete method of `env` is `false`, then throw a `ReferenceError` exception.
3. Let `actualThis` be the result of calling the `GetThisBinding` concrete method of `env`.
4. Let `baseValue` be the result of calling the `GetSuperBase` concrete method of `env`.
5. `ReturnIfAbrupt(CheckObjectCoercible(baseValue))`.
6. Let `propertyKey` be the result of calling the `GetMethodKeyName` concrete method of `env`.
7. If the code matched by the syntactic production that is being evaluated is strict mode code, let `strict` be `true`, else let `strict` be `false`.
8. Let `ref` be a value of type Reference that is a Super Reference whose base value is `baseValue`, whose referenced name is `propertyKey`, whose `thisValue`.
9. If this `CallExpression` is in a tail position (13.7) then let `tailCall` be `true`, otherwise let `tailCall` be `false`.
10. Return the result of the abstract operation `EvaluateCall` with arguments `ref`, `Arguments`, and `tailCall`.

11.2.5 Argument Lists

The evaluation of an argument list produces a List of values (see 8.7).

Runtime Semantics

Runtime Semantics: ArgumentListEvaluation

Arguments : ()

1. Return an empty List.

ArgumentList : AssignmentExpression

1. Let `ref` be the result of evaluating `AssignmentExpression`.
2. Let `arg` be `GetValue(ref)`.
3. `ReturnIfAbrupt(arg)`.
4. Return a List whose sole item is `arg`.

ArgumentList : ... AssignmentExpression

1. Let `list` be an empty List.
2. Let `spreadRef` be the result of evaluating `AssignmentExpression`.
3. Let `spreadValue` be `GetValue(spreadRef)`.
4. Let `spreadObj` be `ToObject(spreadValue)`.
5. `ReturnIfAbrupt(spreadObj)`.
6. Let `lenVal` be the result of calling `Get(spreadObj, "length")`.
7. Let `spreadLen` be `ToInt32(lenVal)`.
8. `ReturnIfAbrupt(spreadLen)`.
9. Let `n = 0`.
10. Repeat, while `n < spreadLen`
 - a. Let `nextArg` be the result of calling `Get(spreadObj, ToString(n))`.
 - b. `ReturnIfAbrupt(nextArg)`.
 - c. Append `nextArg` as the last element of `list`.
 - d. Let `n = n+1`.
11. `Return list`.

ArgumentList : ArgumentList , AssignmentExpression

1. Let `precedingArgs` be the result of evaluating `ArgumentList`.
2. `ReturnIfAbrupt(precedingArgs)`.
3. Let `ref` be the result of evaluating `AssignmentExpression`.
4. Let `arg` be `GetValue(ref)`.
5. `ReturnIfAbrupt(arg)`.
6. Return a List whose length is one greater than the length of `precedingArgs` and whose items are the items of `precedingArgs`, in order, followed at the end by `arg` which is the last item of the new list.

Deleted: `HomeObject`

Deleted:

Deleted: and

Deleted: 4

Deleted: 8

Deleted: 11.2.45.1 Static Semantics¶

Static Semantics: Early Errors¶

The production `Arguments : ()` is evaluated as follows:¶

Return an empty List.¶

The production `Arguments : (ArgumentList)` is evaluated as follows:¶

Return the result of evaluating `ArgumentList`.¶

The production `ArgumentList : AssignmentExpression` evaluated as follows:¶

Let `ref` be the result of evaluating `AssignmentExpression`.¶

Let `arg` be `GetValue(ref)`.¶

Return a List whose sole item is `arg`.¶

The static semantics of the production `ArgumentList` ... `AssignmentExpression` are:¶

It is a Syntax Error if the source code parser with this production is not extended code.¶

The static semantics of the production `ArgumentList` , ... `AssignmentExpression` are:¶

It is a Syntax Error if the source code parser with this production is not extended code.¶

11.2.45.2

Deleted: Evaluation

Deleted: The production

Deleted: is evaluated as follows:

Deleted: The production `Arguments : (ArgumentList)` evaluated as follows:¶

<#>Return the result of evaluating `ArgumentList`.¶

Deleted: The production

Deleted: is evaluated as follows:

Deleted: If `arg` is an abrupt completion, return `arg`

Comment [AW97]: Note that the value the spread operator is applied to is coerced to an Object.

Deleted: If `spreadObj` is an abrupt completion, return

Deleted: the [[

Deleted:]] internal method of

Deleted:

Deleted: with argument

Deleted: "

Deleted: "

Deleted: the [[

Deleted:]] internal method of

Deleted: passing

Deleted:

Deleted: as the argument

Deleted: The production

Deleted: is evaluated as follows:

Deleted: If `precedingArgs` is an abrupt completion, return

Deleted: If `arg` is an abrupt completion, return `arg`

ArgumentList : ArgumentList , ... AssignmentExpression

1. Let *precedingArgs* be an empty List.
2. Let *spreadRef* be the result of evaluating *AssignmentExpression*.
3. Let *spreadValue* be *GetValue(spreadRef)*.
4. Let *spreadObj* be *ToObject(spreadValue)*.
5. ReturnIfAbrupt(*spreadObj*).
6. Let *lenVal* be the result of calling *Get(spreadObj, "length")*.
7. Let *spreadLen* be *ToUint32(lenVal)*.
8. ReturnIfAbrupt(*spreadLen*).
9. Let *n* = 0.
10. Repeat, while *n < spreadLen*
 - a. Let *nextArg* be the result of calling *Get(spreadObj, ToString(n))*.
 - b. ReturnIfAbrupt(*nextArg*).
 - c. Append *nextArg* as the last element of *precedingArgs*.
 - d. Let *n* = *n*+1.
11. Return *precedingArgs*.

11.2.6 Tagged Templates

Runtime Semantics

Runtime Semantics: Evaluation

MemberExpression : MemberExpression TemplateLiteral

1. Let *tagRef* be the result of evaluating *MemberExpression*.
2. If this *MemberExpression* is in a tail position (13.7) then let *tailCall* be **true**, otherwise let *tailCall* be **false**.
3. Return the result of the abstract operation *EvaluateCall* with arguments *tagRef, TemplateLiteral, and tailCall*.

CallExpression : CallExpression TemplateLiteral

1. Let *tagRef* be the result of evaluating *CallExpression*.
2. If this *CallExpression* is in a tail position (13.7) then let *tailCall* be **true**, otherwise let *tailCall* be **false**.
3. Return the result of the abstract operation *EvaluateCall* with arguments *tagRef, TemplateLiteral, and tailCall*.

11.3 Postfix Expressions

Syntax

PostfixExpression :
LeftHandSideExpression
LeftHandSideExpression [no LineTerminator here] **++**
LeftHandSideExpression [no LineTerminator here] **--**

Static Semantics

Static Semantics: Early Errors

PostfixExpression :
LeftHandSideExpression [no LineTerminator here] **++**
LeftHandSideExpression [no LineTerminator here] **--**

- It is an early Reference Error if *IsValidSimpleAssignmentTarget* of *LeftHandSideExpression* is **false**.

Static Semantics: IsValidSimpleAssignmentTarget

Deleted: The production

Deleted: is evaluated as follows:

Comment [AW98]: Note that the value the spread operator is applied to is coerced to an Object.

Deleted: If *spreadObj* is an abrupt completion, return *spreadObj*

Deleted: the [[

Deleted:]] internal method of

Deleted:

Deleted: with argument

Deleted: "

Deleted: "

Deleted: the [[

Deleted:]] internal method of

Deleted:

Deleted: passing

Deleted: as the argument

Deleted: Quasi

Deleted: The runtime semantics of production
CallExpression : CallExpression
QuasiTemplateLiteral¶ is identical to that of ¶
MemberExpression : MemberExpression
QuasiTemplateLiteral¶ but with evaluation of *CallExpression* substituted for the evaluation of *MemberExpression*.¶

Deleted: Quasi

Deleted: Quasi

Deleted: PostfixExpression : ¶

LeftHandSideExpression
LeftHandSideExpression [no LineTerminator here] **++**
LeftHandSideExpression [no LineTerminator here] **--**

<#>It is a Syntax Error if the derived *LeftHandSideExpression* is *PrimaryExpression*: *ObjectLiteral* and ContainsNonObjectLiteralProductions of *ObjectLiteral* is **true**.¶
<#>It is a Syntax Error if the derived *LeftHandSideExpression* is *PrimaryExpression*: (*Expression*) and *Expression* derived a production that if used in place of *LeftHandSideExpression* would produce a Syntax Error according to these rules. This rule is recursively applied.¶

Deleted: It is a Syntax Error if the *PostfixExpression* is contained in strict code and *LeftHandSideExpression* is the *Identifier eval* or the *Identifier arguments*.

Deleted: ¶

<#>It is a Syntax Error if the *AssignmentExpression* is contained in extended code and the *LeftHandSideExpression* is a *Literal* or a *FunctionExpression*.¶

<#>It is a Syntax Error if the *AssignmentExpression* is contained in extended code and the *LeftHandSideExpression* is an *Identifier* that does not statically resolve to a

PostfixExpression :
LeftHandSideExpression [no LineTerminator here] ++
LeftHandSideExpression [no LineTerminator here] --

1. Return **false**.

11.3.1 Postfix Increment Operator

Runtime Semantics: Evaluation

PostfixExpression : LeftHandSideExpression [no LineTerminator here] ++

1. Let *lhs* be the result of evaluating *LeftHandSideExpression*.
2. Let *oldValue* be *ToNumber*(*GetValue*(*lhs*)).
3. ReturnIfAbrupt(*oldValue*)
4. Let *newValue* be the result of adding the value **1** to *oldValue*, using the same rules as for the **+** operator (see 11.6.3).
5. Let status be PutValue(lhs, newValue).
6. ReturnIfAbrupt(status).
7. Return *oldValue*.

11.3.2 Postfix Decrement Operator

Runtime Semantics: Evaluation

PostfixExpression : LeftHandSideExpression [no LineTerminator here] --

1. Let *lhs* be the result of evaluating *LeftHandSideExpression*.
2. Let *oldValue* be *ToNumber*(*GetValue*(*lhs*)).
3. Let *newValue* be the result of subtracting the value **1** from *oldValue*, using the same rules as for the **-** operator (11.6.3).
4. Let status be PutValue(lhs, newValue).
5. ReturnIfAbrupt(status).
6. Return *oldValue*.

11.4 Unary Operators

Syntax

UnaryExpression :
PostfixExpression
delete UnaryExpression
void UnaryExpression
typeof UnaryExpression
++ UnaryExpression
-- UnaryExpression
+ UnaryExpression
- UnaryExpression
~ UnaryExpression
! UnaryExpression

Static Semantics

Static Semantics: Early Errors

UnaryExpression :
delete UnaryExpression

Deleted: The production

Deleted: is evaluated as follows:

Deleted: <#> Throw a **SyntaxError** exception if the following conditions are all true:
 <#> Type(*lhs*) is Reference is **true**
 <#> IsStrictReference(*lhs*) is **true**
 <#> Type(GetBase(*lhs*)) is Environment Record
 <#> GetReferencedName(*lhs*) is either "**eval**" or "**arguments**"

Deleted: If *oldValue* is an abrupt completion, return *oldValue*.

Deleted: Call

Deleted: If

Deleted: The production

Deleted: is evaluated as follows:

Deleted: <#> Throw a **SyntaxError** exception if the following conditions are all true:
 <#> Type(*lhs*) is Reference is **true**
 <#> IsStrictReference(*lhs*) is **true**
 <#> Type(GetBase(*lhs*)) is Environment Record
 <#> GetReferencedName(*lhs*) is either "**eval**" or "**arguments**"

Deleted: If Call

- It is a Syntax Error if the *UnaryExpression* is contained in strict code and the derived *UnaryExpression* is the Identifier `eval` or the Identifier `arguments`.
- It is a Syntax Error if the derived *UnaryExpression* is, *PrimaryExpression : CoverParenthesizedExpressionAndArrowParameterList*, and derives a production that if used in place of *UnaryExpression* would produce a Syntax Error according to these rules. This rule is recursively applied.

UnaryExpression :

- + + *UnaryExpression*
- - *UnaryExpression*

- It is an early Reference Error if *IsValidSimpleAssignmentTarget* of *UnaryExpression* is `false`.

Static Semantics: *IsValidSimpleAssignmentTarget*

UnaryExpression :

- ~~delete UnaryExpression~~
- ~~void UnaryExpression~~
- ~~typeof UnaryExpression~~
- + + *UnaryExpression*
- - *UnaryExpression*
- + *UnaryExpression*
- *UnaryExpression*
- ~ *UnaryExpression*
- ! *UnaryExpression*

1. Return `false`.

11.4.1 The `delete` Operator

Static Semantics: Early Errors

UnaryExpression : delete UnaryExpression

- It is a Syntax Error if the *UnaryExpression* is contained in strict code and the *UnaryExpression* derives an Identifier that statically resolves to a environment record.

Runtime Semantics: Evaluation

UnaryExpression : delete UnaryExpression

1. Let *ref* be the result of evaluating *UnaryExpression*.
2. ~~ReturnIfAbrupt(*ref*)~~.
3. If *Type(ref)* is not Reference, return `true`.
4. If *IsUnresolvableReference(ref)* is `true`, then,
 - a. If *IsStrictReference(ref)* is `true`, ~~then~~ throw a `SyntaxError` exception.
 - b. ~~Return true~~.
5. If *IsPropertyReference(ref)* is `true`, then
 - a. If *IsSuperReference(ref)*, then throw a `ReferenceError` exception.
 - b. Let *deleteStatus* be the result of calling the `[[Delete]]` internal method on *ToObject(GetBase(*ref*))*, providing *GetReferencedName(*ref*)* as the argument.
 - c. ~~ReturnIfAbrupt(*deleteStatus*)~~.
 - d. If *deleteStatus* is `false` and *IsStrictReference(ref)* is `true`, then throw a `TypeError` exception.
 - e. ~~Return true~~.
6. Else, *ref* is a Reference to an Environment Record binding.
 - a. Let *bindings* be *GetBase(*ref*)*.
 - b. Return the result of calling the *DeleteBinding* concrete method of *bindings*, providing *GetReferencedName(*ref*)* as the argument.

Deleted: <#>
 ++ *UnaryExpression*
 -- *UnaryExpression*¶

Deleted: <#> It is a Syntax Error if the *UnaryExpression* is contained in extended code and the derived *UnaryExpression* is a *Literal* or *FunctionExpression*.¶

<#> It is a Syntax Error if the *UnaryExpression* contained in extended code and the derived *UnaryExpression* is an *Identifier* that does not statically resolve to a declarative environment record binding or if the resolved binding is an immutable binding.¶

Deleted::

Deleted: (

Deleted: *Expression*)

Deleted: *Expression*

Deleted: d

Deleted: *LeftHandSide*

Deleted: The production

Deleted: is evaluated as follows:

Deleted: If *ref* is an abrupt completion, return *ref*

Deleted: Else, *r*

Deleted: Return

Deleted: and *IsStrictReference(ref)*

Deleted: s

Deleted: t

Deleted: ,

Deleted: so

Deleted: <#> If *IsStrictReference(*ref*)* is `true`, throw a `SyntaxError` exception.¶

NOTE When a `delete` operator occurs within strict mode code, a `SyntaxError` exception is thrown if its `UnaryExpression` is a direct reference to a variable, function argument, or function name. In addition, if a `delete` operator occurs within strict mode code and the property to be deleted has the attribute `{ [[Configurable]]: false }`, a `TypeError` exception is thrown.

11.4.2 The `void` Operator

Runtime Semantics: Evaluation

UnaryExpression : void UnaryExpression

1. Let `expr` be the result of evaluating `UnaryExpression`.
2. Let `status` be `GetValue(expr)`.
3. ReturnIfAbrupt(status).
4. Return `undefined`.

NOTE `GetValue` must be called even though its value is not used because it may have observable side-effects.

Deleted: The production

Deleted: is evaluated as follows:

Deleted: Call

Deleted: <#>`ReturnIfAbrupt(expr)`. If `ref` is an abrupt completion, return `ref`.

11.4.3 The `typeof` Operator

Runtime Semantics: Evaluation

UnaryExpression : typeof UnaryExpression

1. Let `val` be the result of evaluating `UnaryExpression`.
2. If `Type(val)` is Reference, then
 - a. If `IsUnresolvableReference(val)` is `true`, return `"undefined"`.
 - b. Let `val` be `GetValue(val)`.
3. ReturnIfAbrupt(val).
4. Return a String determined by `Type(val)` according to [Table 30](#).

Deleted: The production

Deleted: is evaluated as follows:

Deleted: If `val` is an abrupt completion, return `val`.

Deleted: Table 28Table 26

Deleted: 2826

Table 30—`typeof` Operator Results

Type of <code>val</code>	Result
Undefined	<code>"undefined"</code>
Null	<code>"object"</code>
Boolean	<code>"boolean"</code>
Number	<code>"number"</code>
String	<code>"string"</code>
Object (ordinary and does not implement <code>[[Call]]</code>)	<code>"object"</code>
Object (implements <code>[[Call]]</code>)	<code>"function"</code>
Object (exotic and does not implement <code>[[Call]]</code>)	Implementation-defined unless explicitly specified. May not be <code>"undefined"</code> , <code>"boolean"</code> , <code>"number"</code> , or <code>"string"</code> .

11.4.4 Prefix Increment Operator

Runtime Semantics: Evaluation

UnaryExpression : ++ UnaryExpression

1. Let `expr` be the result of evaluating `UnaryExpression`.
2. Let `oldValue` be `ToNumber(GetValue(expr))`.
3. ReturnIfAbrupt(oldValue).

Deleted: native

Deleted: native or host and does

Deleted:

Deleted: host

Deleted: except m

Deleted: The production

Deleted: is evaluated as follows:

Deleted: <#>Throw a `SyntaxError` exception if the following conditions are all true:
 <#>`Type(expr)` is Reference is `true`
 <#>`IsStrictReference(expr)` is `true`
 <#>`Type(GetBase(expr))` is Environment Record
 <#>`GetReferencedName(expr)` is either `"eval"` or `"arguments"`

Deleted: If `oldValue` is an abrupt completion, return `oldValue`.

4. Let *newValue* be the result of adding the value **1** to *oldValue*, using the same rules as for the **+** operator (see 11.6.3).
5. Let *status* be *PutValue(expr, newValue)*.
6. ReturnIfAbrupt(*status*).
7. Return *newValue*.

Deleted: If
Deleted: Call

11.4.5 Prefix Decrement Operator

Runtime Semantics: Evaluation

UnaryExpression : **-- UnaryExpression**

1. Let *expr* be the result of evaluating *UnaryExpression*.
2. Let *oldValue* be *ToNumber(GetValue(expr))*.
3. ReturnIfAbrupt(*oldValue*).
4. Let *newValue* be the result of subtracting the value **1** from *oldValue*, using the same rules as for the **-** operator (see 11.6.3).
5. Let *status* be *PutValue(expr, newValue)*.
6. ReturnIfAbrupt(*status*).
7. Return *newValue*.

Deleted: The production
Deleted: is evaluated as follows:

Deleted: <#>Throw a **SyntaxError** exception if the following conditions are all true:
<#>Type(*expr*) is Reference is **true**
<#>IsStrictReference(*expr*) is **true**
<#>Type(GetBase(*expr*) is Environment Record
<#>GetReferencedName(*expr*) is either "**eval**" or "arguments"
Deleted: If *oldValue* is an abrupt completion, return *oldValue*.

Deleted: Call
Deleted: If

11.4.6 Unary + Operator

NOTE The unary **+** operator converts its operand to Number type.

Runtime Semantics: Evaluation

UnaryExpression : **+ UnaryExpression**

1. Let *expr* be the result of evaluating *UnaryExpression*.
2. Return *ToNumber(GetValue(expr))*.

Deleted: The production
Deleted: is evaluated as follows:

11.4.7 Unary - Operator

NOTE The unary **-** operator converts its operand to Number type and then negates it. Negating **+0** produces **-0**, and negating **-0** produces **+0**.

Deleted: Note that negating

Runtime Semantics: Evaluation

UnaryExpression : **- UnaryExpression**

1. Let *expr* be the result of evaluating *UnaryExpression*.
2. Let *oldValue* be *ToNumber(GetValue(expr))*.
3. ReturnIfAbrupt(*oldValue*).
4. If *oldValue* is **NaN**, return **NaN**.
5. Return the result of negating *oldValue*; that is, compute a Number with the same magnitude but opposite sign.

Deleted: The production
Deleted: is evaluated as follows:

Deleted: If *oldValue* is an abrupt completion, return *oldValue*.

11.4.8 Bitwise NOT Operator (**~**)

Runtime Semantics: Evaluation

UnaryExpression : **~ UnaryExpression**

1. Let *expr* be the result of evaluating *UnaryExpression*.
2. Let *oldValue* be *ToInt32(GetValue(expr))*.
3. ReturnIfAbrupt(*oldValue*).
4. Return the result of applying bitwise complement to *oldValue*. The result is a signed 32-bit integer.

Deleted: The production
Deleted: is evaluated as follows:

Deleted: If *oldValue* is an abrupt completion, return *oldValue*.

11.4.9 Logical NOT Operator (!)

Runtime Semantics: Evaluation

UnaryExpression : ! UnaryExpression

1. Let *expr* be the result of evaluating *UnaryExpression*.
2. Let *oldValue* be `ToBoolean(GetValue(expr))`.
3. ReturnIfAbrupt(*oldValue*).
4. If *oldValue* is **true**, return **false**.
5. Return **true**.

Deleted: The production

Deleted: is evaluated as follows:

Deleted: If *oldValue* is an abrupt completion, return *oldValue*.

11.5 Multiplicative Operators

Syntax

MultiplicativeExpression :

UnaryExpression
*MultiplicativeExpression * UnaryExpression*
MultiplicativeExpression / UnaryExpression
MultiplicativeExpression % UnaryExpression

Static Semantics: IsValidSimpleAssignmentTarget

MultiplicativeExpression :

*MultiplicativeExpression * UnaryExpression*
MultiplicativeExpression / UnaryExpression
MultiplicativeExpression % UnaryExpression

1. Return **false**.

Deleted: Semantics¶

The production *MultiplicativeExpression : MultiplicativeExpression @ UnaryExpression*, where @ stands for one of the operators in the above definitions, is evaluated as follows:

1. Let *left* be the result of evaluating *MultiplicativeExpression*.
2. Let *leftValue* be `GetValue(left)`.
3. ReturnIfAbrupt(*leftValue*).
4. Let *right* be the result of evaluating *UnaryExpression*.
5. Let *rightValue* be `GetValue(right)`.
6. Let *lnum* be `ToNumber(leftValue)`.
7. ReturnIfAbrupt(*lNum*).
8. Let *rnum* be `ToNumber(rightValue)`.
9. ReturnIfAbrupt(*rNum*).
10. Return the result of applying the specified operation (*, /, or %) to *lNum* and *rNum*. See the Notes below
 11.5.1, 11.5.2, 11.5.3.

Deleted: *lval*

Deleted: If *leftValue* is an abrupt completion, return *leftValue*.

Deleted: *leftNum*

Deleted: *n*

Deleted: If *leftNum* is an abrupt completion, return *leftNum*.

Deleted: *rightNum*

Deleted: *n*

Deleted: If *rightNum* is an abrupt completion, return *rightNum*.

Deleted: *leftNum*

Deleted: *rightNum*

11.5.1 Applying the * Operator

The * operator performs multiplication, producing the product of its operands. Multiplication is commutative. Multiplication is not always associative in ECMAScript, because of finite precision.

The result of a floating-point multiplication is governed by the rules of IEEE 754 binary double-precision arithmetic:

- If either operand is **NaN**, the result is **NaN**.
- The sign of the result is positive if both operands have the same sign, negative if the operands have different signs.
- Multiplication of an infinity by a zero results in **NaN**.

- Multiplication of an infinity by an infinity results in an infinity. The sign is determined by the rule already stated above.
- Multiplication of an infinity by a finite nonzero value results in a signed infinity. The sign is determined by the rule already stated above.
- In the remaining cases, where neither an infinity or NaN is involved, the product is computed and rounded to the nearest representable value using IEEE 754 round-to-nearest mode. If the magnitude is too large to represent, the result is then an infinity of appropriate sign. If the magnitude is too small to represent, the result is then a zero of appropriate sign. The ECMAScript language requires support of gradual underflow as defined by IEEE 754.

11.5.2 Applying the / Operator

The / operator performs division, producing the quotient of its operands. The left operand is the dividend and the right operand is the divisor. ECMAScript does not perform integer division. The operands and result of all division operations are double-precision floating-point numbers. The result of division is determined by the specification of IEEE 754 arithmetic:

- If either operand is **NaN**, the result is **NaN**.
- The sign of the result is positive if both operands have the same sign, negative if the operands have different signs.
- Division of an infinity by an infinity results in **NaN**.
- Division of an infinity by a zero results in an infinity. The sign is determined by the rule already stated above.
- Division of an infinity by a nonzero finite value results in a signed infinity. The sign is determined by the rule already stated above.
- Division of a finite value by an infinity results in zero. The sign is determined by the rule already stated above.
- Division of a zero by a zero results in **NaN**; division of zero by any other finite value results in zero, with the sign determined by the rule already stated above.
- Division of a nonzero finite value by a zero results in a signed infinity. The sign is determined by the rule already stated above.
- In the remaining cases, where neither an infinity, nor a zero, nor **NaN** is involved, the quotient is computed and rounded to the nearest representable value using IEEE 754 round-to-nearest mode. If the magnitude is too large to represent, the operation overflows; the result is then an infinity of appropriate sign. If the magnitude is too small to represent, the operation underflows and the result is a zero of the appropriate sign. The ECMAScript language requires support of gradual underflow as defined by IEEE 754.

11.5.3 Applying the % Operator

The % operator yields the remainder of its operands from an implied division; the left operand is the dividend and the right operand is the divisor.

NOTE In C and C++, the remainder operator accepts only integral operands; in ECMAScript, it also accepts floating-point operands.

The result of a floating-point remainder operation as computed by the % operator is not the same as the “remainder” operation defined by IEEE 754. The IEEE 754 “remainder” operation computes the remainder from a rounding division, not a truncating division, and so its behaviour is not analogous to that of the usual integer remainder operator. Instead the ECMAScript language defines % on floating-point operations to behave in a manner analogous to that of the Java integer remainder operator; this may be compared with the C library function fmod.

The result of an ECMAScript floating-point remainder operation is determined by the rules of IEEE arithmetic:

- If either operand is **NaN**, the result is **NaN**.
- The sign of the result equals the sign of the dividend.
- If the dividend is an infinity, or the divisor is a zero, or both, the result is **NaN**.
- If the dividend is finite and the divisor is an infinity, the result equals the dividend.

- If the dividend is a zero and the divisor is nonzero and finite, the result is the same as the dividend.
- In the remaining cases, where neither an infinity, nor a zero, nor **NaN** is involved, the floating-point remainder r from a dividend n and a divisor d is defined by the mathematical relation $r = n - (d \times q)$ where q is an integer that is negative only if n/d is negative and positive only if n/d is positive, and whose magnitude is as large as possible without exceeding the magnitude of the true mathematical quotient of n and d . r is computed and rounded to the nearest representable value using IEEE 754 round-to-nearest mode.

11.6 Additive Operators

Syntax

AdditiveExpression :

MultiplicativeExpression

AdditiveExpression + *MultiplicativeExpression*

AdditiveExpression - *MultiplicativeExpression*

Static Semantics: IsValidSimpleAssignmentTarget

AdditiveExpression :

AdditiveExpression + *MultiplicativeExpression*

AdditiveExpression - *MultiplicativeExpression*

1. Return **false**.

11.6.1 The Addition operator (+)

NOTE The addition operator either performs string concatenation or numeric addition.

Formatted: Note

Runtime Semantics: Evaluation

AdditiveExpression : *AdditiveExpression* + *MultiplicativeExpression*

Deleted: The production

Deleted: is evaluated as follows:

1. Let *lref* be the result of evaluating *AdditiveExpression*.
2. Let *lval* be *GetValue(lref)*.
3. ReturnIfAbrupt(lval).
4. Let *rref* be the result of evaluating *MultiplicativeExpression*.
5. Let *rval* be *GetValue(rref)*.
6. ReturnIfAbrupt(rval).
7. Let *lprim* be *ToPrimitive(lval)*.
8. ReturnIfAbrupt(lprim).
9. Let *rprim* be *ToPrimitive(rval)*.
10. ReturnIfAbrupt(rprim).
11. If *Type(lprim)* is String or *Type(rprim)* is String, then
 - a. Return the String that is the result of concatenating *ToString(lprim)* followed by *ToString(rprim)*
12. Return the result of applying the addition operation to *ToNumber(lprim)* and *ToNumber(rprim)*. See the Note below 11.6.3.

Deleted: If *lval* is an abrupt completion, return *lval*.

Deleted: If *rval* is an abrupt completion, return *rval*.

Deleted: If *lprim* is an abrupt completion, return *lprim*.

Deleted: If *rprim* is an abrupt completion, return *rprim*.

NOTE 1 No hint is provided in the calls to *ToPrimitive* in steps 5 and 6. All standard ECMAScript objects except Date objects handle the absence of a hint as if the hint Number were given; Date objects handle the absence of a hint as if the hint String were given. Exotic objects may handle the absence of a hint in some other manner.

Deleted: native

NOTE 2 Step 7 differs from step 3 of the comparison algorithm for the relational operators (11.8.1), by using the logical-or operation instead of the logical-and operation.

Deleted: Host

Deleted: 5

11.6.2 The Subtraction Operator (-)

Runtime Semantics: Evaluation

AdditiveExpression : AdditiveExpression – MultiplicativeExpression

1. Let *lref* be the result of evaluating *AdditiveExpression*.
2. Let *lval* be *GetValue(lref)*.
3. ReturnIfAbrupt(*lval*)
4. Let *rref* be the result of evaluating *MultiplicativeExpression*.
5. Let *rval* be *GetValue(rref)*.
6. ReturnIfAbrupt(*rval*)
7. Let *lnum* be *ToNumber(*lval*)*.
8. ReturnIfAbrupt(*lnum*)
9. Let *rnum* be *ToNumber(*rval*)*.
10. ReturnIfAbrupt(*rnum*)
11. Return the result of applying the subtraction operation to *lnum* and *rnum*. See the note below 11.6.3.

Deleted: The production

Deleted: is evaluated as follows:

Deleted: If *lval* is an abrupt completion, return *lval*.

Deleted: If *rval* is an abrupt completion, return *rval*.

Deleted: If *lnum* is an abrupt completion, return *lnum*.

Deleted: If *rnum* is an abrupt completion, return *rnum*.

11.6.3 Applying the Additive Operators to Numbers

The + operator performs addition when applied to two operands of numeric type, producing the sum of the operands. The – operator performs subtraction, producing the difference of two numeric operands.

Addition is a commutative operation, but not always associative.

The result of an addition is determined using the rules of IEEE 754 binary double-precision arithmetic:

- If either operand is **NaN**, the result is **NaN**.
- The sum of two infinities of opposite sign is **NaN**.
- The sum of two infinities of the same sign is the infinity of that sign.
- The sum of an infinity and a finite value is equal to the infinite operand.
- The sum of two negative zeroes is **-0**. The sum of two positive zeroes, or of two zeroes of opposite sign, is **+0**.
- The sum of a zero and a nonzero finite value is equal to the nonzero operand.
- The sum of two nonzero finite values of the same magnitude and opposite sign is **+0**.
- In the remaining cases, where neither an infinity, nor a zero, nor NaN is involved, and the operands have the same sign or have different magnitudes, the sum is computed and rounded to the nearest representable value using IEEE 754 round-to-nearest mode. If the magnitude is too large to represent, the operation overflows and the result is then an infinity of appropriate sign. The ECMAScript language requires support of gradual underflow as defined by IEEE 754.

The – operator performs subtraction when applied to two operands of numeric type, producing the difference of its operands; the left operand is the minuend and the right operand is the subtrahend. Given numeric operands *a* and *b*, it is always the case that *a*–*b* produces the same result as *a* + (*-b*).

11.7 Bitwise Shift Operators

Syntax

ShiftExpression :
AdditiveExpression
ShiftExpression << AdditiveExpression
ShiftExpression >> AdditiveExpression
ShiftExpression >>> AdditiveExpression

Static Semantics: IsValidSimpleAssignmentTarget

ShiftExpression :

ShiftExpression << AdditiveExpression
ShiftExpression >> AdditiveExpression
ShiftExpression >>> AdditiveExpression

1. Return **false**.

11.7.1 The Left Shift Operator (<<)

NOTE Performs a bitwise left shift operation on the left operand by the amount specified by the right operand.

Formatted: Note

Runtime Semantics: Evaluation

ShiftExpression : ShiftExpression << AdditiveExpression

1. Let *lref* be the result of evaluating *ShiftExpression*.
2. Let *lval* be *GetValue(lref)*.
3. ReturnIfAbrupt(*lval*)
4. Let *rref* be the result of evaluating *AdditiveExpression*.
5. Let *rval* be *GetValue(rref)*.
6. ReturnIfAbrupt(*rval*)
7. Let *lnum* be *ToInt32(lval)*.
8. ReturnIfAbrupt(*lnum*)
9. Let *rnum* be *ToUInt32(rval)*.
10. ReturnIfAbrupt(*rnum*)
11. Let *shiftCount* be the result of masking out all but the least significant 5 bits of *rnum*, that is, compute *rnum* & 0x1F.
12. Return the result of left shifting *lnum* by *shiftCount* bits. The result is a signed 32-bit integer.

11.7.2 The Signed Right Shift Operator (>>)

NOTE Performs a sign-filling bitwise right shift operation on the left operand by the amount specified by the right operand.

Formatted: Note

Runtime Semantics: Evaluation

ShiftExpression : ShiftExpression >> AdditiveExpression

1. Let *lref* be the result of evaluating *ShiftExpression*.
2. Let *lval* be *GetValue(lref)*.
3. ReturnIfAbrupt(*lval*)
4. Let *rref* be the result of evaluating *AdditiveExpression*.
5. Let *rval* be *GetValue(rref)*.
6. ReturnIfAbrupt(*rval*)
7. Let *lnum* be *ToInt32(lval)*.
8. ReturnIfAbrupt(*lnum*)
9. Let *rnum* be *ToUInt32(rval)*.
10. ReturnIfAbrupt(*rnum*)
11. Let *shiftCount* be the result of masking out all but the least significant 5 bits of *rnum*, that is, compute *rnum* & 0x1F.
12. Return the result of performing a sign-extending right shift of *lnum* by *shiftCount* bits. The most significant bit is propagated. The result is a signed 32-bit integer.

11.7.3 The Unsigned Right Shift Operator (>>>)

NOTE Performs a zero-filling bitwise right shift operation on the left operand by the amount specified by the right operand.

Formatted: Note

Runtime Semantics: Evaluation

ShiftExpression : ShiftExpression >>> AdditiveExpression

1. Let *lref* be the result of evaluating *ShiftExpression*.
2. Let *lval* be *GetValue(lref)*.
3. ReturnIfAbrupt(*lval*)
4. Let *rref* be the result of evaluating *AdditiveExpression*.
5. Let *rval* be *GetValue(rref)*.
6. ReturnIfAbrupt(*rval*)
7. Let *lnum* be *ToUint32(*lval*)*.
8. ReturnIfAbrupt(*lnum*)
9. Let *rnum* be *ToUint32(*rval*)*.
10. ReturnIfAbrupt(*rnum*)
11. Let *shiftCount* be the result of masking out all but the least significant 5 bits of *rnum*, that is, compute *rnum* & 0x1F.
12. Return the result of performing a zero-filling right shift of *lnum* by *shiftCount* bits. Vacated bits are filled with zero. The result is an unsigned 32-bit integer.

Deleted: The production

Deleted: is evaluated as follows:

Deleted: If *lval* is an abrupt completion, return *lval*.

Deleted: *n*

Deleted: If *lnum* is an abrupt completion, return *lnum*.

Deleted: *n*

Deleted: If *rnum* is an abrupt completion, return *rnum*.

11.8 Relational Operators

NOTE The result of evaluating a relational operator is always of type Boolean, reflecting whether the relationship named by the operator holds between its two operands.

Formatted: Note

Syntax

RelationalExpression :

ShiftExpression
RelationalExpression < ShiftExpression
RelationalExpression > ShiftExpression
RelationalExpression <= ShiftExpression
RelationalExpression >= ShiftExpression
RelationalExpression instanceof ShiftExpression
RelationalExpression in ShiftExpression

RelationalExpressionNoIn :

ShiftExpression
RelationalExpressionNoIn < ShiftExpression
RelationalExpressionNoIn > ShiftExpression
RelationalExpressionNoIn <= ShiftExpression
RelationalExpressionNoIn >= ShiftExpression
RelationalExpressionNoIn instanceof ShiftExpression

The semantics of the *RelationalExpressionNoIn* productions are the same as the *RelationalExpression* productions except that the contained *RelationalExpressionNoIn* is used in place of the contained *RelationalExpression*.

Deleted: evaluated in

Deleted: manner

Deleted: evaluated instead

NOTE The "NoIn" variants are needed to avoid confusing the *in* operator in a relational expression with the *in* operator in a *for* statement.

Static Semantics: IsValidSimpleAssignmentTarget

RelationalExpression :

ShiftExpression
RelationalExpression < ShiftExpression
RelationalExpression > ShiftExpression
RelationalExpression <= ShiftExpression
RelationalExpression >= ShiftExpression
RelationalExpression instanceof ShiftExpression
RelationalExpression in ShiftExpression

1. Return false.

11.8.1 Runtime Semantics

Runtime Semantics: The Abstract Relational Comparison Algorithm

The comparison $x < y$, where x and y are values, produces **true**, **false**, or **undefined** (which indicates that at least one operand is **NaN**). In addition to x and y the algorithm takes a Boolean flag named *LeftFirst* as a parameter. The flag is used to control the order in which operations with potentially visible side-effects are performed upon x and y . It is necessary because ECMAScript specifies left to right evaluation of expressions. The default value of *LeftFirst* is **true** and indicates that the x parameter corresponds to an expression that occurs to the left of the y parameter's corresponding expression. If *LeftFirst* is **false**, the reverse is the case and operations must be performed upon y before x . Such a comparison is performed as follows:

1. ReturnIfAbrupt(x)
2. ReturnIfAbrupt(y)
3. If the *LeftFirst* flag is **true**, then
 - a. Let px be the result of calling `ToPrimitive(x , hint Number)`.
 - b. ReturnIfAbrupt(px)
 - c. Let py be the result of calling `ToPrimitive(y , hint Number)`.
 - d. ReturnIfAbrupt(py)
4. Else the order of evaluation needs to be reversed to preserve left to right evaluation
 - a. Let py be the result of calling `ToPrimitive(y , hint Number)`.
 - b. ReturnIfAbrupt(py)
 - c. Let px be the result of calling `ToPrimitive(x , hint Number)`.
 - d. ReturnIfAbrupt(px)
5. If both px and py are Strings, then
 - a. If py is a prefix of px , return **false**. (A String value p is a prefix of String value q if q can be the result of concatenating p and some other String r . Note that any String is a prefix of itself, because r may be the empty String.)
 - b. If px is a prefix of py , return **true**.
 - c. Let k be the smallest nonnegative integer such that the character at position k within px is different from the character at position k within py . (There must be such a k , for neither String is a prefix of the other.)
 - d. Let m be the integer that is the code unit value for the character at position k within px .
 - e. Let n be the integer that is the code unit value for the character at position k within py .
 - f. If $m < n$, return **true**. Otherwise, return **false**.
6. Else
 - a. Let nx be the result of calling `ToNumber(px)`. Because px and py are primitive values evaluation order is not important.
 - b. Let ny be the result of calling `ToNumber(py)`.
 - c. If nx is **NaN**, return **undefined**.
 - d. If ny is **NaN**, return **undefined**.
 - e. If nx and ny are the same Number value, return **false**.
 - f. If nx is **+0** and ny is **-0**, return **false**.
 - g. If nx is **-0** and ny is **+0**, return **false**.
 - h. If nx is **+∞**, return **false**.
 - i. If ny is **+∞**, return **true**.
 - j. If ny is **-∞**, return **false**.
 - k. If nx is **-∞**, return **true**.
 - l. If the mathematical value of nx is less than the mathematical value of ny —note that these mathematical values are both finite and not both zero—return **true**. Otherwise, return **false**.

NOTE 1 Step 3 differs from step 7 in the algorithm for the addition operator + (11.6.1) in using and instead of or.

NOTE 2 The comparison of Strings uses a simple lexicographic ordering on sequences of code unit values. There is no attempt to use the more complex, semantically oriented definitions of character or string equality and collating order defined in the Unicode specification. Therefore String values that are canonically equal according to the Unicode standard could test as unequal. In effect this algorithm assumes that both Strings are already in normalised form. Also, note that for

Deleted: Semantics

The result of evaluating a relational operator is always of type Boolean, reflecting whether the relationship named by the operator holds between two operands.¶

The *RelationalExpressionNoIn* productions are evaluated in the same manner as the *RelationalExpression* productions except that the contained *RelationalExpressionNoIn* is evaluated instead of the contained *RelationalExpression*.¶

Deleted: If x is an abrupt completion, return x .

Deleted: If y is an abrupt completion, return y .

Deleted: If px is an abrupt completion, return px .

Deleted: If py is an abrupt completion, return py .

Deleted: If py is an abrupt completion, return py .

Deleted: If px is an abrupt completion, return px .

Deleted: If it is not the case that

Deleted: both `Type(px)` is String and `Type(py)` is String, then

Deleted: `<#>Else, both px and py are Strings,`¶

`<#>If py is a prefix of px, return false.` (A String value p is prefix of String value q if q can be the result of concatenating p and some other String r . Note that any String is a prefix of itself, because r may be the empty String.)¶

`<#>If px is a prefix of py, return true.`¶

`<#>Let k be the smallest nonnegative integer such that the character at position k within px is different from the character at position k within py . (There must be such a k , for neither String is a prefix of the other.)`¶

`<#>Let m be the integer that is the code unit value for the character at position k within px .`¶

`<#>Let n be the integer that is the code unit value for the character at position k within py .`¶

`<#>If $m < n$, return true. Otherwise, return false.`¶

strings containing supplementary characters, lexicographic ordering on sequences of UTF-16 code unit values differs from that on sequences of code point values.

Runtime Semantics: Evaluation

RelationalExpression : RelationalExpression < ShiftExpression

1. Let *lref* be the result of evaluating *RelationalExpression*.
2. Let *lval* be *GetValue(lref)*.
3. ReturnIfAbrupt(*lval*)
4. Let *rref* be the result of evaluating *ShiftExpression*.
5. Let *rval* be *GetValue(rref)*.
6. Let *r* be the result of performing abstract relational comparison *lval < rval*. (see 11.8.5)
7. ReturnIfAbrupt(*r*)
8. If *r* is **undefined**, return **false**. Otherwise, return *r*.

Deleted: 11.8.1 *The Less-than Operator (<)¶*
The production

Deleted: is evaluated as follows:

Deleted: If *lval* is an abrupt completion, return *lval*.

RelationalExpression : RelationalExpression > ShiftExpression

1. Let *lref* be the result of evaluating *RelationalExpression*.
2. Let *lval* be *GetValue(lref)*.
3. ReturnIfAbrupt(*lval*)
4. Let *rref* be the result of evaluating *ShiftExpression*.
5. Let *rval* be *GetValue(rref)*.
6. Let *r* be the result of performing abstract relational comparison *rval < lval* with *LeftFirst* equal to **false**.
7. ReturnIfAbrupt(*r*)
8. If *r* is **undefined**, return **false**. Otherwise, return *r*.

Deleted: 11.8.2 *The Greater-than Operator (>)¶*
The production

Deleted: is evaluated as follows:

Deleted: If *lval* is an abrupt completion, return *lval*.

Deleted: . (see 11.8.5).

Deleted: 11.8.3 *The Less-than-or-equal Operator (<=)¶*
The production

Deleted: is evaluated as follows:

Deleted: If *lval* is an abrupt completion, return *lval*.

Deleted: . (see 11.8.5).

Deleted: 11.8.4 *The Greater-than-or-equal Operator (>=)¶*
The production

Deleted: is evaluated as follows:

Deleted: If *lval* is an abrupt completion, return *lval*.

Deleted: . (see 11.8.5)

Deleted: is evaluated as follows:

Deleted: If *lval* is an abrupt completion, return *lval*.

Deleted: If *rval* is an abrupt completion, return *rval*.

Deleted: <#>If *Type(rval)* is not Object, throw *TypeError* exception.¶
<#>If *rval* does not have a [[HasInstance]] internal method, throw a *TypeError* exception.¶

Deleted: calling the

Deleted: calling the [[HasInstance]

Deleted: O

Deleted: abstract operator with arguments

Deleted:]] internal method of

Deleted: *r*

Deleted: with argument

Deleted: and

Deleted: *lval*

RelationalExpression : RelationalExpression <= ShiftExpression

1. Let *lref* be the result of evaluating *RelationalExpression*.
2. Let *lval* be *GetValue(lref)*.
3. ReturnIfAbrupt(*lval*)
4. Let *rref* be the result of evaluating *ShiftExpression*.
5. Let *rval* be *GetValue(rref)*.
6. Let *r* be the result of performing abstract relational comparison *rval < lval* with *LeftFirst* equal to **false**.
7. ReturnIfAbrupt(*r*)
8. If *r* is **true** or **undefined**, return **false**. Otherwise, return **true**.

RelationalExpression : RelationalExpression >= ShiftExpression

1. Let *lref* be the result of evaluating *RelationalExpression*.
2. Let *lval* be *GetValue(lref)*.
3. ReturnIfAbrupt(*lval*)
4. Let *rref* be the result of evaluating *ShiftExpression*.
5. Let *rval* be *GetValue(rref)*.
6. Let *r* be the result of performing abstract relational comparison *lval < rval*.
7. ReturnIfAbrupt(*r*)
8. If *r* is **true** or **undefined**, return **false**. Otherwise, return **true**.

RelationalExpression: RelationalExpression instanceof ShiftExpression

1. Let *lref* be the result of evaluating *RelationalExpression*.
2. Let *lval* be *GetValue(lref)*.
3. ReturnIfAbrupt(*lval*)
4. Let *rref* be the result of evaluating *ShiftExpression*.
5. Let *rval* be *GetValue(rref)*.
6. ReturnIfAbrupt(*rval*)
7. Return the result of instanceofOperator(*lval*, *rval*).

The abstract operation `instanceofOperator(O,C)` implements the generic algorithm for determining if an object `O` inherits from the inheritance path defined by constructor `C`. This abstract operation performs the following steps:

1. If `Type(C)` is not `Object`, throw a `TypeError` exception.
2. Let `instOfHandler` be the result of `GetMethod(C.@@hasInstance)`.
3. `ReturnIfAbrupt(instOfHandler)`.
4. If `instOfHandler` is not `undefined`, then
 - a. Return the result of calling the `[[Call]]` internal method of `instOfHandler` passing `C` as `thisArgument` and a new List containing `O` as `argumentsList`.
5. If `IsCallable(C)` is `false`, then throw a `TypeError` exception.
6. `Return the result of OrdinaryHasInstance(C, O)`.

NOTE Steps 5 and 6 provide compatibility with previous editions of ECMAScript that did not use a `@@hasInstance` method to define the `instanceof` operator semantics. If a function object does not define `@@hasInstance` it is assumed that it implements the default `instanceof` semantics.

*RelationalExpression : RelationalExpression **in** ShiftExpression*

1. Let `lref` be the result of evaluating `RelationalExpression`.
2. Let `lval` be `GetValue(lref)`.
3. `ReturnIfAbrupt(lval)`.
4. Let `rref` be the result of evaluating `ShiftExpression`.
5. Let `rval` be `GetValue(rref)`.
6. `ReturnIfAbrupt(rval)`.
7. If `Type(rval)` is not `Object`, throw a `TypeError` exception.
8. `Return the result of HasProperty(rval, ToPropertyKey(lval))`.

11.9 Equality Operators

NOTE The result of evaluating an equality operator is always of type Boolean, reflecting whether the relationship named by the operator holds between its two operands.

Syntax

EqualityExpression :
RelationalExpression
EqualityExpression _==_ RelationalExpression
EqualityExpression _!=_ RelationalExpression
EqualityExpression _====_ RelationalExpression
EqualityExpression _!==_ RelationalExpression
*EqualityExpression [no LineTerminator here] **is** RelationalExpression*
*EqualityExpression [no LineTerminator here] **isnt** RelationalExpression*

EqualityExpressionNoIn :
RelationalExpressionNoIn
EqualityExpressionNoIn _==_ RelationalExpressionNoIn
EqualityExpressionNoIn _!=_ RelationalExpressionNoIn
EqualityExpressionNoIn _====_ RelationalExpressionNoIn
EqualityExpressionNoIn _!==_ RelationalExpressionNoIn
*EqualityExpression [no LineTerminator here] **is** RelationalExpression*
*EqualityExpression [no LineTerminator here] **isnt** RelationalExpression*

The semantics of the `EqualityExpressionNoIn` productions are the same as the `EqualityExpression` productions except that the contained `EqualityExpressionNoIn` and `RelationalExpressionNoIn` are used in place of the contained `EqualityExpression` and `RelationalExpression`, respectively.

Static Semantics: IsValidSimpleAssignmentTarget

Deleted: HasI

Deleted: ,

Formatted: Note

Deleted: 11.8.7 The `in` operator
The production

Deleted: is evaluated as follows:

Deleted: If `lval` is an abrupt completion, return `lval`.

Deleted: If `rval` is an abrupt completion, return `rval`.

Deleted: of calling the `[[HasProperty]]` internal method of

Deleted: with argument

Deleted: `ToString`

Formatted: Note

EqualityExpression :

```

EqualityExpression == RelationalExpression
EqualityExpression != RelationalExpression
EqualityExpression === RelationalExpression
EqualityExpression !== RelationalExpression
EqualityExpression [no LineTerminator here] is RelationalExpression
EqualityExpression [no LineTerminator here] isnt RelationalExpression

```

1. Return **false**.

11.9.1 Runtime Semantics

Runtime Semantics: The Abstract Equality Comparison Algorithm

The comparison $x == y$, where x and y are values, produces **true** or **false**. Such a comparison is performed as follows:

1. If $\text{Type}(x)$ is the same as $\text{Type}(y)$, then
 - a. Return the result of performing strict equality comparison algorithm $x === y$.
2. If x is **null** and y is **undefined**, return **true**.
3. If x is **undefined** and y is **null**, return **true**.
4. If $\text{Type}(x)$ is Number and $\text{Type}(y)$ is String, return the result of the comparison $x == \text{ToNumber}(y)$.
5. If $\text{Type}(x)$ is String and $\text{Type}(y)$ is Number, return the result of the comparison $\text{ToNumber}(x) == y$.
6. If $\text{Type}(x)$ is Boolean, return the result of the comparison $\text{ToNumber}(x) == y$.
7. If $\text{Type}(y)$ is Boolean, return the result of the comparison $x == \text{ToNumber}(y)$.
8. If $\text{Type}(x)$ is either String or Number and $\text{Type}(y)$ is Object, return the result of the comparison $x == \text{ToPrimitive}(y)$.
9. If $\text{Type}(x)$ is Object and $\text{Type}(y)$ is either String or Number, return the result of the comparison $\text{ToPrimitive}(x) == y$.
10. Return **false**.

NOTE 1 Given the above definition of equality:

- String comparison can be forced by: `" " + a == " " + b`.
- Numeric comparison can be forced by: `+a == +b`.
- Boolean comparison can be forced by: `!a == !b`.

NOTE 2 The equality operators maintain the following invariants:

- $A != B$ is equivalent to $!(A == B)$.
- $A == B$ is equivalent to $B == A$, except in the order of evaluation of A and B .

NOTE 3 The equality operator is not always transitive. For example, there might be two distinct String objects, each representing the same String value; each String object would be considered equal to the String value by the $==$ operator, but the two String objects would not be equal to each other. For Example:

- `new String("a") == "a"` and `"a == new String("a")` are both **true**.
- `new String("a") == new String("a")` is **false**.

NOTE 4 Comparison of Strings uses a simple equality test on sequences of code unit values. There is no attempt to use the more complex, semantically oriented definitions of character or string equality and collating order defined in the Unicode specification. Therefore Strings values that are canonically equal according to the Unicode standard could test as unequal. In effect this algorithm assumes that both Strings are already in normalised form.

Runtime Semantics: The Strict Equality Comparison Algorithm

The comparison $x === y$, where x and y are values, produces **true** or **false**. Such a comparison is performed as follows:

Deleted: 1

Deleted: <#>`ReturnIfAbrupt(x)`. If x is an abrupt completion, return **x**.
<#>`ReturnIfAbrupt(y)`. If y is an abrupt completion, return **y**.
Deleted: <#> If $\text{Type}(x)$ is Undefined, return **true**.
<#> If $\text{Type}(x)$ is Null, return **true**.
<#> If $\text{Type}(x)$ is Number, then
 <#> If x is **NaN**, return **false**.
 <#> If y is **NaN**, return **false**.
 <#> If x is the same Number value as y , return **true**.
 <#> If x is **+0** and y is **-0**, return **true**.
 <#> If x is **-0** and y is **+0**, return **true**.
 <#> Return **false**.
<#> If $\text{Type}(x)$ is String, then return **true** if x and y have exactly the same sequence of characters (same length and same characters in corresponding positions). Otherwise, return **false**.
<#> If $\text{Type}(x)$ is Boolean, return **true** if x and y are both **true** or both **false**. Otherwise, return **false**.
<#> Return **true** if x and y refer to the same objectObject value. Otherwise, return **false**.

1. If Type(*x*) is different from Type(*y*), return **false**.
2. If Type(*x*) is **Undefined**, return **true**.
3. If Type(*x*) is **Null**, return **true**.
4. If Type(*x*) is **Number**, then
 - a. If *x* is **NaN**, return **false**.
 - b. If *y* is **NaN**, return **false**.
 - c. If *x* is the same **Number** value as *y*, return **true**.
 - d. If *x* is **+0** and *y* is **-0**, return **true**.
 - e. If *x* is **-0** and *y* is **+0**, return **true**.
 - f. Return **false**.
5. If Type(*x*) is **String**, then
 - a. If *x* and *y* are exactly the same sequence of characters (same length and same characters in corresponding positions), return **true**.
 - b. Else, return **false**.
6. If Type(*x*) is **Boolean**, then
 - a. If *x* and *y* are both **true** or both **false**, return **true**.
 - b. Else, return **false**.
7. If *x* and *y* are the same **Object** value, return **true**.
8. Return **false**.

NOTE This algorithm differs from the **SameValue Algorithm** (9.12) in its treatment of signed zeroes and NaNs.

Runtime Semantics: Evaluation

EqualityExpression : *EqualityExpression* **==** *RelationalExpression*

1. Let *lref* be the result of evaluating *EqualityExpression*.
2. Let *lval* be *GetValue(lref)*.
3. **ReturnIfAbrupt(lval)**.
4. Let *rref* be the result of evaluating *RelationalExpression*.
5. Let *rval* be *GetValue(rref)*.
6. **ReturnIfAbrupt(rval)**.
7. Return the result of performing abstract equality comparison algorithm *rval == lval*.

EqualityExpression : *EqualityExpression* **!=** *RelationalExpression*

1. Let *lref* be the result of evaluating *EqualityExpression*.
2. Let *lval* be *GetValue(lref)*.
3. **ReturnIfAbrupt(lval)**.
4. Let *rref* be the result of evaluating *RelationalExpression*.
5. Let *rval* be *GetValue(rref)*.
6. **ReturnIfAbrupt(rval)**.
7. Let *r* be the result of performing abstract equality comparison algorithm *rval == lval*.
8. If *r* is **true**, return **false**. Otherwise, return **true**.

EqualityExpression : *EqualityExpression* **====** *RelationalExpression*

1. Let *lref* be the result of evaluating *EqualityExpression*.
2. Let *lval* be *GetValue(lref)*.
3. **ReturnIfAbrupt(lval)**.
4. Let *rref* be the result of evaluating *RelationalExpression*.
5. Let *rval* be *GetValue(rref)*.
6. **ReturnIfAbrupt(rval)**.
7. Return the result of performing the strict equality comparison algorithm *rval === lval*.

EqualityExpression : *EqualityExpression* **!==** *RelationalExpression*

1. Let *lref* be the result of evaluating *EqualityExpression*.
2. Let *lval* be *GetValue(lref)*.
3. **ReturnIfAbrupt(lval)**.

Deleted: <#>*ReturnIfAbrupt(x)*.If *x* is an abrupt completion, return *x*.
 <#>*ReturnIfAbrupt(y)*.If *y* is an abrupt completion, return *y*.

Deleted: *return true* i

Deleted: ; otherwise

Deleted: *return true* i

Deleted: ;

Deleted: otherwise

Deleted: *Return true* i

Deleted: refer to

Deleted: object

Deleted: .

Deleted: Otherwise, r

Deleted: 11.9.1 The Equals Operator (==)
 The production

Deleted: is evaluated as follows:

Deleted: If *lval* is an abrupt completion, return *lval*.

Deleted: (see 11.9.3).

Deleted: 11.9.2 . The Does-not-equals Operator (!=)
 The production

Deleted: is evaluated as follows:

Deleted: If *lval* is an abrupt completion, return *lval*.

Deleted: If *rval* is an abrupt completion, return *rval*.

Deleted: (see 11.9.3).

Deleted: 11.9.4 The Strict Equals Operator (===)
 The production

Deleted: is evaluated as follows:

Deleted: If *lval* is an abrupt completion, return *lval*.

Deleted: (See 11.9.6)

Deleted: 11.9.5 The Strict Does-not-equal Operator
 (!==)
 The production

Deleted: is evaluated as follows:

Deleted: If *lval* is an abrupt completion, return *lval*.

4. Let *rref* be the result of evaluating *RelationalExpression*.
5. Let *rval* be *GetValue(rref)*.
6. **ReturnIfAbrupt(*rval*)**.
7. Let *r* be the result of performing strict equality comparison *algorithm* *rval* === *lval*.
8. If *r* is **true**, return **false**. Otherwise, return **true**.

Deleted: (See 11.9.6)
Deleted: <#>*ReturnIfAbrupt(r)*.¶

*EqualityExpression : EqualityExpression [no LineTerminator here] **is** RelationalExpression*

1. Let *lref* be the result of evaluating *EqualityExpression*.
2. Let *lval* be *GetValue(lref)*.
3. **ReturnIfAbrupt(*lval*)**.
4. Let *rref* be the result of evaluating *RelationalExpression*.
5. Let *rval* be *GetValue(rref)*.
6. Return the result of performing *SameValue(rval, lval)*.

Deleted: If *lval* is an abrupt completion, return *lval*.
Deleted: ¶
Deleted: If *rval* is an abrupt completion, return *rval*.
Deleted: v

*EqualityExpression : EqualityExpression [no LineTerminator here] **isnt** RelationalExpression*

1. Let *lref* be the result of evaluating *EqualityExpression*.
2. Let *lval* be *GetValue(lref)*.
3. **ReturnIfAbrupt(*lval*)**.
4. Let *rref* be the result of evaluating *RelationalExpression*.
5. Let *rval* be *GetValue(rref)*.
6. Let *r* be the result of performing *SameValue(rval, lval)*.
7. **ReturnIfAbrupt(*r*)**.
8. If *r* is **true**, return **false**. Otherwise, return **true**.

Deleted: If *lval* is an abrupt completion, return *lval*.
Deleted: v

11.10 Binary Bitwise Operators

Syntax

BitwiseANDExpression :
EqualityExpression
BitwiseANDExpression & EqualityExpression

BitwiseANDExpressionNoIn :
EqualityExpressionNoIn
BitwiseANDExpressionNoIn & EqualityExpressionNoIn

BitwiseXORExpression :
BitwiseANDExpression
BitwiseXORExpression ^ BitwiseANDExpression

BitwiseXORExpressionNoIn :
BitwiseANDExpressionNoIn
BitwiseXORExpressionNoIn ^ BitwiseANDExpressionNoIn

BitwiseORExpression :
BitwiseXORExpression
BitwiseORExpression | BitwiseXORExpression

BitwiseORExpressionNoIn :
BitwiseXORExpressionNoIn
BitwiseORExpressionNoIn | BitwiseXORExpressionNoIn

Static Semantics: IsValidSimpleAssignmentTarget

BitwiseANDExpression : BitwiseANDExpression & EqualityExpression
BitwiseXORExpression : BitwiseXORExpression ^ BitwiseANDExpression
BitwiseORExpression : BitwiseORExpression | BitwiseXORExpression

1. Return **false**.

Runtime Semantics: Evaluation

The production $A : A @ B$, where $@$ is one of the bitwise operators in the productions above, is evaluated as follows:

1. Let $lref$ be the result of evaluating A .
2. Let $lval$ be GetValue($lref$).
3. ReturnIfAbrupt($lval$)
4. Let $rref$ be the result of evaluating B .
5. Let $rval$ be GetValue($rref$).
6. ReturnIfAbrupt($rval$)
7. Let $lnum$ beToInt32($lval$).
8. ReturnIfAbrupt($lnum$)
9. Let $rnum$ beToInt32($rval$).
10. ReturnIfAbrupt($rnum$)
11. Return the result of applying the bitwise operator $@$ to $lnum$ and $rnum$. The result is a signed 32 bit integer.

Deleted: Semantics

Deleted: If $lval$ is an abrupt completion, return $lval$.

Deleted: If $rval$ is an abrupt completion, return $rval$.

Deleted: If $lnum$ is an abrupt completion, return $lnum$.

Deleted: If $rnum$ is an abrupt completion, return $rnum$.

11.11 Binary Logical Operators

Syntax

LogicalANDExpression :
 BitwiseORExpression
 LogicalANDExpression && BitwiseORExpression

LogicalANDExpressionNoIn :
 BitwiseORExpressionNoIn
 LogicalANDExpressionNoIn && BitwiseORExpressionNoIn

LogicalORExpression :
 LogicalANDExpression
 LogicalORExpression || LogicalANDExpression

LogicalORExpressionNoIn :
 LogicalANDExpressionNoIn
 LogicalORExpressionNoIn || LogicalANDExpressionNoIn

The semantics of the LogicalANDExpressionNoIn and LogicalORExpressionNoIn productions are the same manner as the LogicalANDExpression and LogicalORExpression productions except that the contained LogicalANDExpressionNoIn, BitwiseORExpressionNoIn and LogicalORExpressionNoIn are used in place of the contained LogicalANDExpression, BitwiseORExpression and LogicalORExpression, respectively.

Deleted: evaluated in

Deleted: evaluated instead

NOTE The value produced by a **&&** or **||** operator is not necessarily of type Boolean. The value produced will always be the value of one of the two operand expressions.

Static Semantics: IsValidSimpleAssignmentTarget

LogicalANDExpression : LogicalANDExpression && BitwiseORExpression
LogicalORExpression : LogicalORExpression || LogicalANDExpression

1. Return **false**.

Runtime Semantics: Evaluation

LogicalANDExpression : LogicalANDExpression && BitwiseORExpression

1. Let *lref* be the result of evaluating *LogicalANDExpression*.
2. Let *lval* be *GetValue(lref)*.
3. Let *lbool* be *ToBoolean(lval)*.
4. *ReturnIfAbrupt(lbool)*.
5. If *lbool* is **false**, return *lval*.
6. Let *rref* be the result of evaluating *BitwiseORExpression*.
7. Return *GetValue(rref)*.

LogicalORExpression : LogicalORExpression || LogicalANDExpression

1. Let *lref* be the result of evaluating *LogicalORExpression*.
2. Let *lval* be *GetValue(lref)*.
3. Let *lbool* be *ToBoolean(lval)*.
4. *ReturnIfAbrupt(lbool)*.
5. If *lbool* is **true**, return *lval*.
6. Let *rref* be the result of evaluating *LogicalANDExpression*.
7. Return *GetValue(rref)*.

11.12 Conditional Operator (? :)

Syntax

ConditionalExpression :
LogicalORExpression
LogicalORExpression ? AssignmentExpression : AssignmentExpression

ConditionalExpressionNoIn :
LogicalORExpressionNoIn
LogicalORExpressionNoIn ? AssignmentExpression : AssignmentExpressionNoIn

The semantics of the *ConditionalExpressionNoIn* production is the same as the *ConditionalExpression* production except that the contained *LogicalORExpressionNoIn*, *AssignmentExpression* and *AssignmentExpressionNoIn* are used in place of the contained *LogicalORExpression*, first *AssignmentExpression* and second *AssignmentExpression*, respectively.

NOTE The grammar for a *ConditionalExpression* in ECMAScript is a little bit different from that in C and Java, which each allow the second subexpression to be an Expression but restrict the third expression to be a *ConditionalExpression*. The motivation for this difference in ECMAScript is to allow an assignment expression to be governed by either arm of a conditional and to eliminate the confusing and fairly useless case of a comma expression as the centre expression.

Static Semantics: IsValidSimpleAssignmentTarget

ConditionalExpression : LogicalORExpression ? AssignmentExpression : AssignmentExpression

1. Return false.

Runtime Semantics: Evaluation

ConditionalExpression : LogicalORExpression ? AssignmentExpression : AssignmentExpression

1. Let *lref* be the result of evaluating *LogicalORExpression*.
2. Let *lval* be *ToBoolean(GetValue(lref))*.
3. *ReturnIfAbrupt(lval)*.
4. If *lval* is **true**, then
 - a. Let *trueRef* be the result of evaluating the first *AssignmentExpression*.
 - b. Return *GetValue(trueRef)*.

Deleted: Semantics
 The production

Deleted: is evaluated as follows:

Deleted: *lval*

Deleted: If *lval* is an abrupt completion, return *lval*.

Deleted: *lvalToBoolean(lval)*

Deleted: The production

Deleted: is evaluated as follows:

Deleted: *lval*

Deleted: If *lval* is an abrupt completion, return *lval*.

Deleted: *lvalToBoolean(lval)*

Deleted: The *LogicalANDExpressionNoIn* and *LogicalORExpressionNoIn* productions are evaluated in the same manner as the *LogicalANDExpression* and *LogicalORExpression* productions except that the contained *LogicalANDExpressionNoIn*, *BitwiseORExpressionNoIn* and *LogicalORExpressionNoIn* are evaluated instead of the contained *LogicalANDExpression*, *BitwiseORExpression* and *LogicalORExpression*, respectively.
NOTE The value produced by a **&&** or **||** operator is not necessarily of type Boolean. The value produced will always be the value of one of the two operand expressions.

Deleted: evaluated in

Deleted: manner

Deleted: evaluated instead

5. Else
- Let *falseRef* be the result of evaluating the second *AssignmentExpression*.
 - Return *GetValue(falseRef)*.

11.13 Assignment Operators

Syntax

AssignmentExpression :

ConditionalExpression

YieldExpression

ArrowFunction

LeftHandSideExpression = *AssignmentExpression*

LeftHandSideExpression *AssignmentOperator* *AssignmentExpression*

AssignmentExpressionNoIn :

ConditionalExpressionNoIn

YieldExpression

ArrowFunction

LeftHandSideExpression = *AssignmentExpressionNoIn*

LeftHandSideExpression *AssignmentOperator* *AssignmentExpressionNoIn*

AssignmentOperator : one of

*= /= %= += -= <=> >>= &= ^= |=

The semantics of the *AssignmentExpressionNoIn* productions are the same manner as the *AssignmentExpression* productions except that the contained *ConditionalExpressionNoIn* and *AssignmentExpressionNoIn* are used in place of the contained *ConditionalExpression* and *AssignmentExpression*, respectively.

Static Semantics

Static Semantics: Early Errors

AssignmentExpression : *LeftHandSideExpression* = *AssignmentExpression*

- It is a Syntax Error if *LeftHandSideExpression* is either an *ObjectLiteral* or an *ArrayLiteral* and if the lexical token sequence matched by *LeftHandSideExpression* cannot be parsed with no tokens left over using *AssignmentPattern* as the goal symbol.
- If *LeftHandSideExpression* is either an *ObjectLiteral* or an *ArrayLiteral* and if the lexical token sequence matched by *LeftHandSideExpression* can be parsed with no tokens left over using *AssignmentPattern* as the goal symbol then the following rules are not applied. Instead, the Early Error rules for *AssignmentPattern* are used.
- It is a Syntax Error if *LeftHandSideExpression* is an *Identifier* that can be statically determined to always resolve to a declarative environment record binding and the resolved binding is an immutable binding.
- It is an early Reference Error if *LeftHandSideExpression* is neither an *ObjectLiteral* nor an *ArrayLiteral* and *IsValidSimpleAssignmentTarget* of *LeftHandSideExpression* is false.

AssignmentExpression : *LeftHandSideExpression* *AssignmentOperator* *AssignmentExpression*

- It is a Syntax Error if the *LeftHandSideExpression* is an *Identifier* that can be statically determined to always resolve to a declarative environment record binding and the resolved binding is an immutable binding.
- It is an early Reference Error if *IsValidSimpleAssignmentTarget* of *LeftHandSideExpression* is false.

Static Semantics: *IsValidSimpleAssignmentTarget*

Deleted: Supplemental Syntax

In certain circumstances when processing the production *AssignmentExpression* :
LeftHandSideExpression = *AssignmentExpression* the following grammar is used to refine the interpretation of *LeftHandSideExpression*.||
AssignmentPattern :||
ObjectAssignmentPattern
ArrayAssignmentPattern ||
ObjectAssignmentPattern :||
{ }
{ *AssignmentPropertyList* }
{ *AssignmentPropertyList* , }||
ArrayAssignmentPattern :||
[*Elision_{opt}* *AssignmentRestElement_{opt}*]||
[*AssignmentElementList* , *Elision_{opt}* *AssignmentRestElement_{opt}*]||
AssignmentRestElement_{opt} :||
AssignmentPropertyList :||
AssignmentProperty
AssignmentPropertyList , *AssignmentProperty*||
AssignmentElementList :||
Elision_{opt} *AssignmentElement* .||
AssignmentElementList , *Elision_{opt}* *AssignmentElement* .||
AssignmentElement :||
AssignmentElementList , *Elision_{opt}* *AssignmentElement* .||
AssignmentElement :||
AssignmentProperty :||
Identifier
PropertyName : *LeftHandSideExpression*||
AssignmentElement :||
LeftHandSideExpression||
AssignmentRestElement :||
... *LeftHandSideExpression*||

Deleted: *AssignmentExpression* :

LeftHandSideExpression = *AssignmentExpression*
LeftHandSideExpression *AssignmentOperator* *AssignmentExpression*||
<#>*Semantics*||
<#>11.13.1 Simple Assignment (=)||
<#>The static semantics of *AssignmentExpression* :
LeftHandSideExpression = *AssignmentExpression* are:||
<#>It is a Syntax Error if the *AssignmentExpression* is contained in strict code and *LeftHandSideExpression* is the *Identifier eval* or the *Identifier arguments*.||
<#>It is a Syntax Error if the *AssignmentExpression* is contained in extended code and the *LeftHandSideExpression* is the *Identifier this* or the *Identifier super*.||
<#>It is a Syntax Error if the *AssignmentExpression* is contained in extended code and the *LeftHandSideExpression* is a *FunctionExpression*.||
<#>It is a Syntax Error if the *AssignmentExpression* is contained in extended code and the *LeftHandSideExpression* is an *Identifier* that can be not statically determined to always resolves to a declarative environment record binding or and if the resolved binding is an immutable binding.||
<#>It is a Syntax Error if the *LeftHandSideExpression* is *PrimaryExpression* : (*Expression*) and *Expression* derives a production that would produce a Syntax Error according to these rules. This rule is recursively applied.||

Deleted: the

Deleted: <#>It is a Syntax Error if the *AssignmentExpression* is contained in extended code and *IsInvalidAssignmentPattern* of the *LeftHandSideExpression* is true.||
an *ObjectLiteral* or an *ArrayLiteral* and the source code corresponding to *LeftHandSideExpression* cannot be parsed using *AssignmentPattern* as the goal symbol true.||

AssignmentExpression :**YieldExpression****ArrowFunction****LeftHandSideExpression = AssignmentExpression****LeftHandSideExpression AssignmentOperator AssignmentExpression**

1. Return false.

Runtime Semantics**Runtime Semantics: Evaluation****AssignmentExpression : LeftHandSideExpression = AssignmentExpression**

1. If LeftHandSideExpression is neither an ObjectLiteral nor an ArrayLiteral then
 - a. Let lref be the result of evaluating LeftHandSideExpression.
 - b. ReturnIfAbrupt(lref).
 - c. Let rref be the result of evaluating AssignmentExpression.
 - d. Let rval be GetValue(rref).
 - e. Let status be PutValue(lref, rval).
 - f. ReturnIfAbrupt(status).
 - g. Return rval.
2. Let AssignmentPattern be the parse of the source code corresponding to LeftHandSideExpression using AssignmentPattern as the goal symbol.
3. Let rref be the result of evaluating AssignmentExpression.
4. Let rval be ToObject(GetValue(rref)).
5. ReturnIfAbrupt(rval).
6. Let status be the result of performing Destructuring Assignment Evaluation of AssignmentPattern using rval as the argument.
7. ReturnIfAbrupt(status).
8. Return rval.

AssignmentExpression : LeftHandSideExpression AssignmentOperator AssignmentExpression

1. Let lref be the result of evaluating LeftHandSideExpression.
2. Let lval be GetValue(lref).
3. ReturnIfAbrupt(lval).
4. Let rref be the result of evaluating AssignmentExpression.
5. Let rval be GetValue(rref).
6. ReturnIfAbrupt(rval).
7. Let operator be the @ where AssignmentOperator is @=
8. Let r be the result of applying operator @ to lval and rval.
9. Let status be PutValue(lref, r).
10. ReturnIfAbrupt(status).
11. Return r.

NOTE When an assignment occurs within strict mode code, it is an runtime error if lref in step 1.e of the first algorithm or step 9 of the second algorithm is an unresolvable reference. If it is, a **ReferenceError** exception is thrown. The LeftHandSide also may not be a reference to a data property with the attribute value {[[Writable]]:false}, to an accessor property with the attribute value {[[Set]]:undefined}, nor to a non-existent property of an object where calling its [[IsExtensible]] internal method returns the value **false**. In these cases a **TypeError** exception is thrown.

11.13.1 Destructuring Assignment**Supplemental Syntax**

In certain circumstances when processing the production **AssignmentExpression : LeftHandSideExpression = AssignmentExpression** the following grammar is used to refine the interpretation of LeftHandSideExpression.

Deleted: The production**Deleted:** is evaluated as follows:**Deleted:** If lref is an abrupt completion, return lref.

Deleted: <#> Throw a **SyntaxError** exception
the following conditions are all true:
<#> Type(lref) is Reference is **true**
<#> IsStrictReference(lref) is **true**
<#> Type(GetBase(lref)) is Environment Record
<#> GetReferencedName(lref) is either "eval"
"arguments"

Deleted: Call**Deleted:** If the result of

Deleted: <#> If this is not extended code, throw **ReferenceError** exception.

Deleted: If rval is an abrupt completion, return rval.

Deleted: P**Deleted:** Evaluate**Deleted:** obj parameter

Deleted: If status is an abrupt completion, return rval.

Deleted:

where AssignmentOperator is @= and @ represents one of the operators indicated above

Deleted: If lval is an abrupt completion, return lval.

Deleted: If rval is an abrupt completion, return rval.

Deleted: <#> Throw a **SyntaxError** exception
the following conditions are all true:
<#> Type(lref) is Reference is **true**
<#> IsStrictReference(lref) is **true**
<#> Type(GetBase(lref)) is Environment Record

Deleted: If the result of**Deleted:** Call

Deleted: is an abrupt completion, return that result

Deleted: 1**Formatted:** Note**Deleted:** its LeftHandSide must not evaluate to**Deleted:** d**Deleted:****Deleted:** must not be**Deleted:** an**Deleted:** does**Deleted:** upon assignment**Deleted:** whose**Deleted:** Get**Deleted:** property**Deleted:** has**Deleted:** ¶**Deleted:** .1

AssignmentPattern :

ObjectAssignmentPattern
ArrayAssignmentPattern

ObjectAssignmentPattern :

{ }
[AssignmentPropertyList]
[AssignmentPropertyList ,]

ArrayAssignmentPattern :

[Elision_{opt} AssignmentRestElement_{opt}]
[AssignmentElementList]
[AssignmentElementList , Elision_{opt} AssignmentRestElement_{opt}]

AssignmentPropertyList :

AssignmentProperty
AssignmentPropertyList , AssignmentProperty

AssignmentElementList :

Elision_{opt} AssignmentElement
AssignmentElementList , Elision_{opt} AssignmentElement

AssignmentProperty :

Identifier Initialiser_{opt}
PropertyName : AssignmentElement

AssignmentElement :

DestructuringAssignmentTarget Initialiser_{opt}

AssignmentRestElement :

... DestructuringAssignmentTarget

DestructuringAssignmentTarget :

LeftHandSideExpression

Static Semantics

Static Semantics: Early Errors

AssignmentProperty : Identifier Initialiser_{opt}

- It is a Syntax Error if Identifier is the Identifier eval or the Identifier arguments.
- It is a Syntax Error if Identifier does not statically resolve to a declarative environment record binding or if the resolved binding is an immutable binding.

DestructuringAssignmentTarget : LeftHandSideExpression

- It is a Syntax Error LeftHandSideExpression is either an ObjectLiteral or an ArrayLiteral and if the lexical token sequence matched by LeftHandSideExpression cannot be parsed with no tokens left over using AssignmentPattern as the goal symbol.
- It is a Syntax Error if LeftHandSideExpression is neither an ObjectLiteral nor an ArrayLiteral and IsValidSimpleAssignmentTarget of LeftHandSideExpression is false.
- It is a Syntax Error if the LeftHandSideExpression is an Identifier that can be statically determined to always resolve to a declarative environment record binding and the resolved binding is an immutable binding.
- It is a Syntax Error if LeftHandSideExpression is the Identifier eval or the Identifier arguments.
- It is a Syntax Error if IsInvalidAssignmentPattern of LeftHandSideExpression is true.

Deleted: LeftHandSideExpression

Deleted: LeftHandSideExpression

Deleted: LeftHandSideExpression

Deleted: PropertyName

Deleted: :

Deleted: LeftHandSideExpression

Deleted: <#>It is a Syntax Error if Identifier is the Identifier this or the Identifier super.||

Comment [AW99]: This part probably doesn't need to be here if 11.1.2 has this as a static semantic for extended code.

Deleted: AssignmentElement : LeftHandSideExpression Initialiser_{opt}

Comment [AW100]: This part probably doesn't need to be here if 11.1.2 has this as a static semantic for extended code.

Deleted: <#>It is a Syntax Error if LeftHandSideExpression is the Identifier this or the Identifier super.||

<#>It is a Syntax Error if the LeftHandSideExpression is Literal, a FunctionExpression or a ClassExpression.||

<#>It is a Syntax Error if the LeftHandSideExpression is Identifier that does not statically resolve to a declarative environment record binding or if the resolved binding is an immutable binding.||

Deleted: It is a Syntax Error if the LeftHandSideExpression is an ObjectLiteral or an ArrayLiteral and the source code corresponding to LeftHandSideExpression using cannot be parsed using AssignmentPattern as the goal symbol.

- It is a Syntax Error if the *LeftHandSideExpression* is *CoverParenthesizedExpressionAndArrowParameterList*: *(Expression)*, and *Expression* derived a production that would produce a Syntax Error according to these rules. This rule is recursively applied.

Runtime Semantics

Runtime Semantics: Destructuring Assignment Evaluation

with parameter *obj*

ObjectAssignmentPattern : *{ }*

and

ArrayAssignmentPattern :

11

[Elision]

1. Return NormalCompletion(empty).

AssignmentPropertyList : *AssignmentPropertyList , AssignmentProperty*

- Let *status* be the result of performing Destructuring Assignment Evaluation for *AssignmentPropertyList* using *obj* as the argument.
- ReturnIfAbrupt(*status*).
- Return the result of performing Destructuring Assignment Evaluation for *AssignmentProperty* using *obj* as the argument.

AssignmentProperty : *Identifier Initialiser_{opt}*

- Let *P* be StringValue of *Identifier*.
- Let *v* be the result of calling *Get(obj, P)*.
- ReturnIfAbrupt(*v*).
- If *Initialiser_{opt}* is present and *v* is **undefined**, then
 - Let *defaultValue* be the result of evaluating *Initialiser*.
 - Let *v* be *ToObject(defaultValue)*.
- ReturnIfAbrupt(*v*).
- Let *lref* be the result of performing Identifier Resolution(10.3.1) with the *IdentifierName* corresponding to *Identifier*.
- Return PutValue(*lref, v*).

AssignmentProperty : *PropertyName : AssignmentElement*

- Let *name* be PropName of *PropertyName*.
- Return the result of performing Keyed Destructuring Assignment Evaluation of *AssignmentElement* with *obj* and *name* as the arguments.

ArrayAssignmentPattern : *[Elision_{opt} AssignmentRestElement]*

- Let *skip* be the Elision Width of *Elision*; if *Elision* is not present, use the numeric value zero.
- Return the result of performing Indexed Destructuring Assignment Evaluation of *AssignmentRestElement* with *obj* and *skip* as the arguments.

ArrayAssignmentPattern : *[AssignmentElementList]*

- Return the result of performing Indexed Destructuring Assignment Evaluation of *AssignmentElementList* using *obj* and 0 as the arguments.

ArrayAssignmentPattern : *[AssignmentElementList , Elision_{opt} AssignmentRestElement_{opt}]*

Deleted: PrimaryExpression ... (Expression)
Deleted: AssignmentRestElement : ...
Deleted: The supplemental production
Deleted: The supplemental production
Deleted: . the production
Deleted: ObjectAssignmentPattern : ¶
Deleted: The supplemental production
Deleted: is evaluated with the parameter o...
Deleted: Perform
Deleted: of
Deleted: Evaluate
Deleted: with
Deleted: using ...bj as the obj parameter
Deleted: If status is an abrupt completion,
Deleted: Perform
Deleted: of Evaluate AssignmentProperty
Deleted: with
Deleted: using ...bj as the obj ...rgumentparam...
Deleted: The supplemental production
Deleted:
Deleted: <#>Let exists be the result of calling
Deleted: the [[...et]] internal method of ...bj w...
Deleted: <#>Else ¶
Deleted: v
Deleted: Else,
Deleted: <#> Let v be undefined ¶
Deleted: using
Deleted: Call
Deleted: ¶
Deleted: The static semantics of the
Deleted: LeftHandSideExpression
Deleted: is evaluated with the parameter ob...
Deleted: the result of evaluating ...ropName of
Deleted: Indexed
Deleted: <#>Let v be the result of calling the
Deleted: The supplemental production
Deleted:
Deleted: is evaluated with the parameter o...
Deleted: If Elision is present, then let skip be th...
Deleted: Perform
Deleted: Evaluate ...ssignmentRestElement wi...
Deleted: 0
Deleted: index ...rgumentsparameter... ¶
Deleted: <#>Perform Indexed Destructuring
Deleted: The supplemental production
Deleted: AssignmentPropertyList
Deleted:

1. Let *lastIndex* be the result of performing Indexed Destructuring Assignment Evaluation of *AssignmentElementList* using *obj* and 0 as the arguments.
2. ReturnIfAbrupt(*lastIndex*).
3. Let *skip* be the Elision Width of *Elision*; if *Elision* is not present, use the numeric value zero.
4. If *AssignmentRestElement* is present, then return the result of performing Indexed Destructuring Assignment Evaluation of *AssignmentRestElement* with *obj* and *lastIndex+skip* as the arguments.
5. Return *lastIndex*.

Runtime Semantics: Indexed Destructuring Assignment Evaluation

with parameters *obj* and *index*

AssignmentElementList : *Elision*_{opt} *AssignmentElement*

1. Let *skip* be the Elision Width of *Elision*; if *Elision* is not present, use the numeric value zero.
2. Let *name* be *ToString(index+skip)*.
3. Let *status* be the result of performing Keyed Destructuring Assignment Evaluation of *AssignmentElement* with *obj* and *name* as the arguments.
4. ReturnIfAbrupt(*status*).
5. Return *index+skip+1*.

AssignmentElementList : *AssignmentElementList* , *Elision*_{opt} *AssignmentElement*

1. Let *listNext* be the result of performing Indexed Destructuring Assignment Evaluation of *AssignmentElementList* using *obj* as the *obj* parameter and *index* as the *index* parameter.
2. Let *skip* be the Elision Width of *Elision*; if *Elision* is not present, use the numeric value zero.
3. ReturnIfAbrupt(*listNext*).
4. Let *name* be *ToString(listNext+skip)*.
5. Let *status* be the result of performing Keyed Destructuring Assignment Evaluation of *AssignmentElement* with *obj* and *name* as the arguments.
6. ReturnIfAbrupt(*status*).
7. Return *listNext+skip+1*.

AssignmentRestElement : ... *DestructuringAssignmentTarget*

1. Let *lref* be the result of evaluating *DestructuringAssignmentTarget*.
2. ReturnIfAbrupt(*lref*).
3. Let *lenVal* be the result of *Get(obj, "length")*.
4. Let *len* be *ToInt32(lenVal)*.
5. ReturnIfAbrupt(*len*).
6. Let *A* be the result of the abstract operation *ArrayCreate* with argument 0.
7. Let *n=0*.
8. Repeat, while *index < len*
 - a. Let *P* be *ToString(index)*.
 - b. Let *exists* be the result of *HasProperty(obj, P)*.
 - c. ReturnIfAbrupt(*exists*).
 - d. If *exists* is true, then
 - i. Let *v* be the result of *Get(obj, ToString(index))*.
 - ii. ReturnIfAbrupt(*len*).
 - iii. Call the *[[DefineOwnProperty]]* internal method of *A* with arguments *ToString(n)* and *PropertyDescriptor* *{[[Value]]: v, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}*.
 - e. Let *n = n+1*.
 - f. Let *index = index+1*.
9. Return *PutValue(lref, A)*.

Runtime Semantics: Keyed Destructuring Assignment Evaluation

with parameters *obj* and *propertyName*

Deleted: <#> is evaluated with the parameter *obj* as

Deleted: *index*

Deleted: evaluating ...*AssignmentElementList* using *obj* as

Deleted: If *lastIndex* is an abrupt completion, return

Deleted: If *Elision* is present, then let *skip* be the result of

Deleted: perform

Deleted: evaluate ...*AssignmentRestElement* with using ...

Deleted: *i*

Deleted: *index* ...*argumentsparameter..1*

Deleted: The supplemental production

Deleted: is evaluated with the parameters *obj* and *index*

Deleted: If *Elision* is present, then let *skip* be the result of

Deleted: Perform

Deleted: Indexed

Deleted: Evaluate

Deleted: Let *index* be the result of evaluating

Deleted: using ...*bj* as the *obj* parameter

Deleted: *index+skip*

Deleted: *index* ...*argumentsparameter*

Deleted: If *status* is an abrupt completion, return *status*

Deleted: *+skip*

Deleted: *1*

Deleted: The supplemental production

Deleted: is evaluated with the parameters *obj* and *index*

Deleted: *e...istNextnd*

Deleted: evaluating

Deleted: *tRes*

Deleted: If *Elision* is present, then let *skip* be the result of

Deleted: If *listNext* is an abrupt completion, return *listNext*

Deleted: Let *index* be the result of evaluating

Deleted: Perform

Deleted: Indexed

Deleted: Evaluate ...*AssignmentElement* with using ...*bj* as

Deleted: *e*

Deleted: *listNextnd+ski*

Deleted: *p*

Deleted: *index* ...*argumentsparameter*

Deleted: If *status* is an abrupt completion, return *status*

Deleted: *i...istNextindex*

Deleted: *1*

Deleted: The supplemental production

Deleted: The supplemental production

Deleted: *LeftHandSideExpression*

Deleted: is evaluated with the parameters *obj* and *index*

Deleted: *LeftHandSideExpression*

Deleted: If *lref* is an abrupt completion,

Deleted: calling the *[[...et()]]* internal method of ...*bj* with

Deleted: *t*

Deleted: If *len* is an abrupt completion, return *len*

Deleted: *ion*

Deleted: (15.4)

Deleted: a new array object created as if by the expression

Deleted: calling the *[[HasProperty]]* internal method of ...*bj*

Deleted: calling the *[[...et()]]* internal method of ...*bj*

Deleted: If *v* is an abrupt completion, return *v*

AssignmentElement : DestructuringAssignmentTarget Initialiser_{opt}

1. Let v be the result of Get(obj , $propertyName$).
2. ReturnIfAbrupt(v).
3. If $Initialiser_{opt}$ is present and v is **undefined**, then
 - a. Let v be the result of evaluating $Initialiser$.
4. If DestructuringAssignmentTarget is an *ObjectLiteral* or an *ArrayLiteral* then
 - a. Let AssignmentPattern be the parse of the source code corresponding to DestructuringAssignmentTarget using AssignmentPattern as the goal symbol
 - b. Let $vObj$ be ToObject(v).
 - c. ReturnIfAbrupt($vObj$).
 - d. Return the result of performing Destructuring Assignment Evaluation of AssignmentPattern with $vObj$ as the argument.
5. ReturnIfAbrupt(v).
6. Let $lref$ be the result of evaluating DestructuringAssignmentTarget.
7. Return PutValue($lref, v$).

Deleted: *LeftHandSideExpression*

Deleted: calling the [[

Deleted:]]

Deleted: internal method of

Deleted: with argument

Deleted: *LeftHandSideExpression*

Deleted: *LeftHandSideExpression*

Deleted: *LeftHandSideExpression*

11.14 Comma Operator (,)

Syntax

Expression :

AssignmentExpression

Expression , AssignmentExpression

ExpressionNoIn :

AssignmentExpressionNoIn

ExpressionNoIn , AssignmentExpressionNoIn

Deleted: evaluated in

Deleted: evaluated instead

Static Semantics: IsValidSimpleAssignmentTarget

Expression : Expression , AssignmentExpression

1. Return false.

Deleted: Semantics
The production

Deleted: is evaluated as follows:

Deleted: Call

Deleted: If the result of

Deleted:

Deleted: is an abrupt completion, return that re

Deleted:

NOTE GetValue must be called even though its value is not used because it may have observable side-effects.

12 Statements and Declarations

Syntax

Statement :

- BlockStatement
- VariableStatement
- EmptyStatement
- ExpressionStatement
- IfStatement
- BreakableStatement
- ContinueStatement
- BreakStatement
- ReturnStatement
- WithStatement
- LabelledStatement
- ThrowStatement
- TryStatement
- DebuggerStatement

Declaration :

- FunctionDeclaration
- GeneratorDeclaration
- ClassDeclaration
- LexicalDeclaration

BreakableStatement :

- IterationStatement
- SwitchStatement

Static Semantics

Static Semantics: VarDeclaredNames

Statement :

- EmptyStatement
- ExpressionStatement
- ContinueStatement
- BreakStatement
- ReturnStatement
- ThrowStatement
- DebuggerStatement

1. Return a new empty List.

Runtime Semantics

Runtime Semantics: Labelled Evaluation

With argument labelSet.

BreakableStatement : IterationStatement

1. Let *stmtResult* be the result of performing Labelled Evaluation of *IterationStatement* with argument *labelSet*.
2. If *stmtResult*.[[type]] is **break** and *stmtResult*.[[target]] is **empty**, then
 - a. If *stmtResult*.[[value]] is **empty**, then let *stmtResult* be NormalCompletion(**undefined**).
 - b. Else, let *stmtResult* be NormalCompletion(*stmtResult*.[[value]])
3. Return *stmtResult*.

Deleted: *IterationStatement*

Deleted:
SwitchStatement

Deleted: *LetDeclaration*
Const

Deleted: A *Statement* can be part of a *LabelledStatement* which itself can be part of a *LabelledStatement*, and so on. The labels introduced this way are collectively referred to as the "current label set" when describing the semantic of individual statements. A *LabelledStatement* has no semantic meaning other than the introduction of a label set. The label set of an *IterationStatement* or a *SwitchStatement* initially contains the single element **empty**. The label set of any other statement is initially empty.

Deleted: **Static Semantics: BoundNames**
The BoundNames of the *Declaration* productions are determined as follows:
<#>Return the BoundNames of the single non-terminal symbol that is the right hand side of the production.

Deleted: The VarDeclaredNames of the productions:
Statement : *EmptyStatement*
Statement : *ExpressionStatement*
Statement : *ContinueStatement*
Statement : *BreakStatement*
Statement : *ReturnStatement*
Statement : *ThrowStatement*
Statement : *DebuggerStatement*
is determined as follows:
is determined as follows:

Deleted: *Statement* :
BlockStatement
VariableStatement
IterationStatement
WithStatement
LabelledStatement
SwitchStatement
TryStatement

The VarDeclaredNames of the productions:
Statement : *BlockStatement*
Statement : *IfStatement*
Statement : *IterationStatement*
Statement : *WithStatement*
Statement : *LabelledStatement*
Statement : *SwitchStatement*
Statement : *TryStatement*
is determined as follows:
Return the VarDeclaredNames of the single non-terminal symbol that is the right hand side of the production.
The VarDeclaredNames of the production *Statement* : *VariableStatement* is determined as follows:
Return the BoundNames of *VariableStatement*.

Deleted: L

BreakableStatement : SwitchStatement

1. Let *stmtResult* be the result of evaluating *SwitchStatement*.
2. If *stmtResult*.[[type]] is **break** and *stmtResult*.[[target]] is empty, then
 - a. If *stmtResult*.[[value]] is empty, then let *stmtResult* be NormalCompletion(**undefined**).
 - b. Else, let *stmtResult* be NormalCompletion(*stmtResult*.[[value]])
3. Return *stmtResult*.

NOTE A *BreakableStatement* is one that can be exited via an unlabelled *BreakStatement*.

Deleted: L

Deleted: s

Comment [AWB 3101]: Need to have an evalution semantics in section 13 for *FunctionDeclaration*

Deleted: The *Statement* productions are all evaluated as as follows¶

<#>Return the result of evaluating the single non-terminal symbol that is the right hand side of the production.¶

The *Declaration* productions are all evaluated as as follows¶

<#>Return the result of evaluating the single non-terminal symbol that is the right hand side of the production.¶

NOTE The result of evaluating a *Statement* or *Declaration* is always a Completion value.¶

Deleted: The *BoundNames* of the *Declaration* productions are determined as follows:¶

Return the *BoundNames* of the single non-terminal symbol that is the right hand side of the production.¶

The *Declaration* productions are all evaluated as as follows¶

Return the result of evaluating the single non-terminal symbol that is the right hand side of the production.¶

Deleted: NOTE Several widely used implementations of ECMAScript are known to support the use of *FunctionDeclaration* as a *Statement*. However there are significant and irreconcilable variations among the implementations in the semantics applied to such *FunctionDeclarations*. Because of these irreconcilable differences, the use of a *FunctionDeclaration* as a *Statement* results in code that is not reliably portable among implementations. It is recommended that ECMAScript implementations either disable this usage of *FunctionDeclaration* or issue a warning when such a usage is encountered. Future editions of ECMAScript may define alternative portable means for declaring functions in a *Statement* context.¶

Deleted: <#>It is a Syntax Error if *StatementList* includes a *StatementListItem* : *Declaration* production whose *Declaration* : *FunctionDeclaration* production and the source code matching this *Block* production is not contained in extended code.¶

Deleted: i

Deleted: *StatementList* : *StatementListItem* ¶

<#>Return the LexicalDeclarations of *StatementListItem*.¶

Deleted: names

Runtime Semantics: Evaluation

BreakableStatement :
IterationStatement
SwitchStatement

1. Let *newLabelSet* be a new empty List.
2. Return the result of performing Labelled Evaluation of this *BreakableStatement* with argument *newLabelSet*.

12.1 Block

Syntax

BlockStatement :
Block

Block :
{ *StatementList*_{opt} }

StatementList :
StatementListItem
StatementList *StatementListItem*

StatementListItem :
Statement
Declaration

Static Semantics

Static Semantics: Early Errors

Block : { *StatementList* }

- It is a Syntax Error if the LexicallyDeclaredNames of *StatementList* contains any duplicate entries.
- It is a Syntax Error if any element of the LexicallyDeclaredNames of *StatementList* also occurs in the VarDeclaredNames of *StatementList*.

Static Semantics: LexicalDeclarations

StatementList : *StatementList* *StatementListItem*

1. Let *declarations* be LexicalDeclarations of *StatementList*.
2. Append to *declarations* the elements of the LexicalDeclarations of *StatementListItem*.
3. Return *declarations*.

StatementListItem : *Statement*

1. Return a new empty List.

StatementListItem : *Declaration*

1. Return a new List containing *Declaration*.

Static Semantics: LexicallyDeclaredNames

Block : { }

1. Return a new empty List.

StatementList : StatementList StatementListItem

1. Let *names* be *LexicallyDeclaredNames* of *StatementList*.
2. Append to *names* the elements of the *LexicallyDeclaredNames* of *StatementListItem*.
3. Return *names*.

StatementListItem : Statement

1. Return a new empty List.

StatementListItem : Declaration

1. Return the *BoundNames* of *Declaration*.

Static Semantics: TopLevelLexicallyDeclaredNames

StatementList : StatementList StatementListItem

1. Let *names* be *TopLevelLexicallyDeclaredNames* of *StatementList*.
2. Append to *names* the elements of the *TopLevelLexicallyDeclaredNames* of *StatementListItem*.
3. Return *names*.

StatementListItem : Statement

1. Return a new empty List.

StatementListItem : Declaration

1. If *Declaration* is *Declaration : FunctionDeclaration*, then return a new empty List.
2. Return the *BoundNames* of *Declaration*.

NOTE At the top level of a function, or script, function declarations are treated like var declarations rather than like lexical declarations.

Deleted: return

Deleted: The *VarDeclaredNames* of the production *BlockStatement : Block* is determined as follows:
 <#>Return the *VarDeclaredNames* of *Block*.
 The production *BlockStatement : Block* is evaluated as follows:
 <#>Return the result of evaluating *Block*.

Deleted: The *LexicallyDeclaredNames* of the production

Deleted: *is determined as follows:*

Deleted: *Block : { StatementList }¶*

<#>Return the *LexicallyDeclaredNames* of *StatementList*.
StatementList : StatementListItem ¶

<#>Return the *LexicallyDeclaredNames* of *StatementList*.

Static Semantics: TopLevelLexicallyScopedDeclarations

StatementList : StatementList StatementListItem

1. Let *declarations* be *TopLevelLexicallyScopedDeclarations* of *StatementList*.
2. Append to *declarations* the elements of the *TopLevelLexicallyScopedDeclarations* of *StatementListItem*.
3. Return *declarations*.

StatementListItem : Statement

1. Return a new empty List.

StatementListItem : Declaration

1. If *Declaration* is *Declaration : FunctionDeclaration*, then return a new empty List.
2. Return a new List containing *Declaration*.

Static Semantics: TopLevelVarDeclaredNames

Deleted: ..

StatementList : StatementList StatementListItem

1. Let *names* be TopLevelVarDeclaredNames of *StatementList*.
2. Append to *names* the elements of the TopLevelVarDeclaredNames of *StatementListItem*.
3. Return *names*.

StatementListItem : Declaration

1. If *Declaration* is *Declaration* : *FunctionDeclaration*, then return the LexicallyDeclaredNames of *Declaration*.
2. Return a new empty List.

StatementListItem : Statement

1. Return VarDeclaredNames of *Statement*.

NOTE At the top level of a function or script, inner function declarations are treated like var declarations.

Static Semantics: TopLevelVarScopedDeclarations

StatementList : StatementList StatementListItem

1. Let *declarations* be TopLevelVarScopedDeclarations of *StatementList*.
2. Append to *declarations* the elements of the TopLevelVarScopedDeclarations of *StatementListItem*.
3. Return *declarations*.

StatementListItem : Statement

1. If *Statement* is *Statement* : *VariableStatement*, then return a new List containing *VariableStatement*.
2. Return a new empty List.

StatementListItem : Declaration

1. If *Declaration* is *Declaration* : *FunctionDeclaration*, then return a new List containing *Declaration*.
2. Return a new empty List.

Static Semantics: VarDeclaredNames

Block : { }

1. Return a new empty List.

StatementList : StatementList StatementListItem

1. Let *names* be VarDeclaredNames of *StatementList*.
2. Append to *names* the elements of the VarDeclaredNames of *StatementListItem*.
3. Return *names*.

StatementListItem : Declaration

2. Return a new empty List.

Runtime Semantics

Runtime Semantics: Evaluation

Block : { }

1. Return NormalCompletion(**undefined**)

Deleted: BlockStatement : Block ¶
<#>Return the VarDeclaredNames of Block.¶

Deleted: The VarDeclaredNames of the production

Deleted: is determined as follows:

Deleted: Block : { StatementList } ¶
<#>Return the VarDeclaredNames of StatementList.¶
StatementList : StatementListItem ¶
<#>Return the VarDeclaredNames of StatementListItem.¶

Deleted: StatementListItem : Statement ¶
<#>Return the VarDeclaredNames of Statement.

Deleted: BlockStatement : Block ¶
<#>Return the result of evaluating Block.¶

Deleted: The production

Deleted: is evaluated as follows:

Comment [AWB13102]: Breaking change completion reform

Comment [AWB13103]: TODO, need to verify that under completion reform empty block evaluate to undefined.

Deleted: normal,

Deleted: empty

Deleted: , empty

Block : { StatementList }

1. Let `oldEnv` be the running execution context's LexicalEnvironment.
2. Let `blockEnv` be the result of calling `NewDeclarativeEnvironment` passing `oldEnv` as the argument.
3. Perform Block Declaration Instantiation using `StatementList` and `blockEnv`.
4. Set the running execution context's LexicalEnvironment to `blockEnv`.
5. Let `blockValue` be the result of evaluating `StatementList`.
6. Set the running execution context's LexicalEnvironment to `oldEnv`.
7. If `blockValue.[[type]]` is normal and `blockValue.[[value]]` is empty, then
 - a. Return `NormalCompletion(undefined)`.
8. Return `blockValue`.

NOTE No matter how control leaves the `Block` the LexicalEnvironment is always restored to its former state.

StatementList : StatementList StatementListItem

1. Let `sl` be the result of evaluating `StatementList`.
2. ReturnIfAbrupt(sl).
3. Let `s` be the result of evaluating `StatementListItem`.
4. If `s.[[type]]` is throw, return `s`.
5. If `s.[[value]]` is empty, let `V = sl.[[value]]`, otherwise let `V = s.[[value]]`.
6. Return `Completion{[[type]]: s.[[type]], [[value]]: V, [[target]]: s.[[target]]}`.

NOTE Steps 4 and 5 of the above algorithm ensure that the value of a `StatementList` is the value of the last value producing `Statement` in the `StatementList`. For example, the following calls to the `eval` function all return the value 1:

```
eval("1;;;;")
eval("1;{}")
eval("1;var a;")
```

12.2 Declarations and the Variable Statement

12.2.1 Let and Const Declarations

NOTE A `let` and `const` declarations define variables that are scoped to the running execution context's LexicalEnvironment. The variables are created when their containing Lexical Environment is instantiated but may not be accessed in any way until the variable's `LexicalBinding` is evaluated. A variable defined by a `LexicalBinding` with an `Initialiser` is assigned the value of its `Initialiser's AssignmentExpression` when the `LexicalBinding` is evaluated, not when the variable is created. If a `LexicalBinding` in a `let` declaration does not have an `Initialiser` the variable is assigned the value `undefined` when the `LexicalBinding` is evaluated.

Syntax

LexicalDeclaration :
LetOrConst BindingList ;

LexicalDeclarationNoIn :
LetOrConst BindingListNoIn

LetOrConst :
let
const

BindingList :
LexicalBinding
BindingList , LexicalBinding

BindingListNoIn :
LexicalBindingNoIn
BindingListNoIn , LexicalBindingNoIn

Deleted: The static semantics of the production <code>Block { StatementList }</code> are.
<#> It is a Syntax Error if <code>StatementList</code> includes a <code>StatementListItem : Declaration</code> production whose <code>Declaration</code> is a <code>Declaration : FunctionDeclaration</code> production and the source code matching this <code>Block</code> production is not contained in extended code.
<#> It is a Syntax Error if the LexicallyDeclaredNames <code>StatementList</code> contains any duplicate entries.
<#> It is a Syntax Error if any element of the LexicallyDeclaredNames of <code>StatementList</code> also occurs in the VarDeclaredNames of <code>StatementList</code> .
The LexicallyDeclaredNames of the production <code>Block { StatementList }</code> is determined as follows:
<#> Return the LexicallyDeclaredNames of <code>StatementList</code> . The VarDeclaredNames of the production <code>Block { StatementList }</code> is determined as follows:
Deleted: running
Deleted: current
Deleted: For each element <code>param</code> , of <code>formals</code> ,
Deleted: running
Deleted: current
Deleted: running
Deleted: current
Comment [AWB13104]: Breaking change: completi
Comment [AW105]: If evaluation of code starts
Deleted: The LexicallyDeclaredNames of the produc
Deleted: The production <code>StatementList : StatementListItem</code>
Deleted: The LexicallyDeclaredNames of the produc
Deleted: If <code>sl</code> is an abrupt completion, return <code>sl</code>
Deleted: an exception was thrown, return <code>(...)[[type]]</code>
Deleted: value
Deleted: (...completion {[[type]]: s.type...[type]}, {[[value]]: s.value...[value]})
Deleted: 5 ... and 6
Comment [AWB13106]: ISSUE: above changes to
Deleted: The LexicallyDeclaredNames and the
Deleted: The production <code>StatementListItem : Statement</code>
Deleted: The LexicallyDeclaredNames of the
Deleted: The production <code>StatementListItem : Declara</code>
Deleted: s
Deleted: current
Deleted: Let...he variables are created when their
Deleted: t
Deleted: executed...valuated, not when the variable is
Deleted: t...icalBinding is executed
Deleted: Let
Deleted: let Let
Deleted: Let
Deleted: Let...exicalBinding
Deleted: Let
Deleted: Let...exicalBindingNoIn .

LexicalBinding :
BindingIdentifier Initialiser_{opt}
BindingPattern Initialiser

LexicalBindingNoIn :
BindingIdentifier InitialiserNoIn_{opt}
BindingPattern InitialiserNoIn

BindingIdentifier :
Identifier

InitialiserNoIn :
= AssignmentExpressionNoIn

The semantics of the LexicalDeclarationNoIn, BindingListNoIn, LexicalBindingNoIn and InitialiserNoIn productions are the same as the LexicalDeclaration, BindingList, LexicalBinding and Initialiser productions except that the contained BindingListNoIn, LexicalBindingNoIn, InitialiserNoIn and AssignmentExpressionNoIn are used in place of the contained BindingList, LexicalBinding, Initialiser and AssignmentExpression, respectively.

Static Semantics

Static Semantics: Early Errors

LexicalBinding : BindingIdentifier

- It is a Syntax Error if IsConstantDeclaration of the LexicalDeclaration containing this production is true.

BindingIdentifier : Identifier

- It is a Syntax Error if the BindingIdentifier is contained in strict code and if the Identifier is eval or arguments.

Static Semantics: BoundNames

LexicalDeclaration : LetOrConst BindingList ;

1. Return the BoundNames of BindingList.

BindingList : BindingList , LexicalBinding

1. Let names be the BoundNames of BindingList.
2. Append to names the elements of the BoundNames of LexicalBinding.
3. Return names.

LexicalBinding : BindingIdentifier Initialiser_{opt}

1. Return the BoundNames of BindingIdentifier.

LexicalBinding : BindingPattern Initialiser

1. Return the BoundNames of BindingPattern.

BindingIdentifier : Identifier

1. Return a new List containing the StringValue of Identifier.

Static Semantics: IsConstantDeclaration

LexicalDeclaration : LetOrConst BindingList ;

Deleted: Let

Deleted: Let

Deleted: Initialiser : = AssignmentExpression_{opt}

Deleted: Let

Deleted: NOTE A let declaration defines variables that are scoped to the current execution context's LexicalEnvironment. Local variables are created when their containing Lexical Environment is instantiated but may not be accessed in any way until the variable's LetBinding is executed. A variable defined by a LetBinding with an Initialiser is assigned the value of its Initialiser's AssignmentExpression when the LetBinding is executed, not when the variable is created. A LetBinding does not have an Initialiser.

Deleted: if the BindingIdentifier

Comment [AWB8107]: Consider disallowing

Deleted: Semantics

Deleted: The static semantics of the

Deleted: Bound Names

Deleted: The BoundNames of the production

Deleted: Let

Deleted: let LetBindingList

Deleted: is determined as follows:

Deleted: Bound Names

Deleted: Let

Deleted: LetBindingList : LetLexicalBinding_{opt}

Deleted: Let

Deleted: Let

Deleted: Let

Deleted: N

Deleted:

Deleted: Let

Deleted: of

Deleted: Bound Names

Deleted: Let

Deleted: Let

Deleted: Bound Names

Deleted: Let

Deleted: Bound Names

Deleted:

1. Return IsConstantDeclaration of *LetOrConst*.

LetOrConst : **let**

1. Return **false**.

LetOrConst : **const**

1. Return **true**.

Runtime Semantics

Runtime Semantics: Binding Initialisation

With arguments *value* and *environment*.

NOTE **undefined** is passed for *environment* to indicate that a PutValue operation should be used to assign the initialisation value. This is the case for **var** statements formal parameter lists of non-strict functions. In those cases a lexical binding is hosted and preinitialized prior to evaluation of its initializer.

BindingIdentifier : *Identifier*

1. If *environment* is not **undefined**, then

- Let *name* be StringValue of *Identifier*.
- Let *env* be the environment record component of *environment*.
- Call the InitializeBinding concrete method of *env* passing *name* and *value* as the arguments.
- Return NormalCompletion(**undefined**).

2. Else

- Let *lhs* be the result of evaluating *Identifier* as described in 11.1.2.
- Return PutValue(*lhs*, *value*).

Runtime Semantics: Evaluation

LexicalDeclaration ; *LetOrConst* *BindingList* ;

- Let *next* be the result of evaluating *BindingList*.
- ReturnIfAbrupt(*next*).
- Return NormalCompletion(**empty**).

BindingList : *BindingList* , *LexicalBinding*

- Let *next* be the result of evaluating *BindingList*.
- ReturnIfAbrupt(*next*).
- Return the result of evaluating *LexicalBinding*.

LexicalBinding : *BindingIdentifier*

- Let *env* be the running execution context's LexicalEnvironment.
- Return the result of performing BindingInitialisation for *BindingIdentifier* passing **undefined** and *env* as the arguments.

NOTE A static semantics rule ensures that this form of *LexicalBinding* never occurs in a **const** declaration.

LexicalBinding : *BindingIdentifier Initialiser*

- Let *rhs* be the result of evaluating *Initialiser*.
- Let *value* be GetValue(*rhs*).
- ReturnIfAbrupt(*value*).
- Let *env* be the running execution context's LexicalEnvironment.

Deleted: ... <i>BindingList</i>
Deleted: ... <i>BindingList</i>
Deleted: false
Deleted: RuntimeStatic Semantics: String Value <i>BindingIdentifier</i> : <i>Identifier</i> ¶ Return the String Value of <i>Identifier</i> .¶
Deleted: Initialization
Deleted: <i>enviornment</i>
Deleted: initialization
Deleted: the
Deleted: <i>BindingIdentifier</i> <i>BindingIdentifier</i> : <i>Identifier</i> <#>PReturn the result of performing BindingInitialisation for Identifier passing value and env as the arguments.¶ Token: <i>Identifier</i> ¶
Deleted: <i>enviornment</i>
Deleted:
Deleted: <i>enviornment</i>
Deleted: <i>environment</i> ...assing <i>name</i> <i>Identifier</i>
Deleted: Value
Deleted: Call
Deleted: The production
Deleted: <i>LetDeclaration</i> ... <i>LetOrConst</i> let <i>Let</i>
Deleted: is evaluated as follows:
Deleted: Evaluate <i>Let</i>
Deleted: If <i>next</i> is an abrupt completion, return <i>next</i>
Deleted: (normal, ...mpty, empty)
Deleted: <i>LetBindingList</i> : <i>LetLexicalBinding</i> is evaluated as follows:¶ <#>EvaluateReturn the result of evaluating <i>LetLexicalBinding</i>
Deleted: <i>Let...indingList</i> : <i>Let...indingList</i> , <i>Let</i>
Deleted: is evaluated as follows:
Deleted: Evaluate <i>Let</i>
Deleted: If <i>next</i> is an abrupt completion, return <i>next</i>
Deleted: Evaluate <i>Let</i>
Deleted: <i>Let</i>
Deleted: is evaluated as follows:
Deleted: running
Deleted: current
Deleted: Perform ...inding Initialization
Deleted: e
Deleted: The production
Deleted: <i>Let</i>
Deleted: is evaluated as follows:
Deleted: If <i>value</i> is an abrupt completion, return <i>rval</i> .
Deleted: running
Deleted: current

5. Return the result of performing *Binding Initialisation* for *BindingIdentifier* passing *value* and *env* as the arguments.

LexicalBinding: BindingPattern Initialiser

1. Let *rhs* be the result of evaluating *Initialiser*.
2. Let *value* be *ToObject(GetValue(rhs))*.
3. ReturnIfAbrupt(*value*).
4. Let *env* be the running execution context's *LexicalEnvironment*.
5. Return the result of performing *Binding Initialisation* for *BindingPattern* using *value* and *env* as the arguments.

12.2.2 Variable Statement

NOTE A *var* statement declares variables that are scoped to the running execution context's *VariableEnvironment*. Var variables are created when their containing Lexical Environment is instantiated and are initialised to *undefined* when created. Within the scope of any *VariableEnvironment* a common *Identifier* may appear in more than one *VariableDeclaration* but those declarations collective define only one variable. A variable defined by a *VariableDeclaration* with an *Initialiser* is assigned the value of its *Initialiser*'s *AssignmentExpression* when the *VariableDeclaration* is executed, not when the variable is created.

Syntax

VariableStatement :
var VariableDeclarationList ;

VariableDeclarationList :
VariableDeclaration
VariableDeclarationList , *VariableDeclaration*

VariableDeclarationListNoIn :
VariableDeclarationNoIn
VariableDeclarationListNoIn , *VariableDeclarationNoIn*

VariableDeclaration :
*BindingIdentifier Initialiser*_{opt}
BindingPattern Initialiser

VariableDeclarationNoIn :
*BindingIdentifier InitialiserNoIn*_{opt}
BindingPattern InitialiserNoIn

The semantics of the *VariableDeclarationListNoIn*, *VariableDeclarationNoIn* and *InitialiserNoIn* productions are the same as the *VariableDeclarationList*, *VariableDeclaration* and *Initialiser* productions except that the contained *VariableDeclarationListNoIn*, *VariableDeclarationNoIn*, *InitialiserNoIn* and *AssignmentExpressionNoIn* are used in of the contained *VariableDeclarationList*, *VariableDeclaration*, *Initialiser* and *AssignmentExpression*, respectively.

Static Semantics

Static Semantics: BoundNames

VariableDeclarationList : *VariableDeclarationList* , *VariableDeclaration*

1. Let *names* be *BoundNames* of *VariableDeclarationList*.
2. Append to *names* the elements of *BoundNames* of *VariableDeclaration*.
3. Return *names*.

VariableDeclaration : *BindingIdentifier Initialiser*_{opt}

Deleted: Perform
Deleted: Initialization
Deleted: <i>Let</i>
Deleted: is evaluated as follows:
Deleted: <i>rval</i>
Deleted: If <i>rval</i> is an abrupt completion, return
Deleted:
Deleted: <i>rval</i>
Deleted: running
Deleted: current
Deleted: Perform
Deleted: Initialization
Deleted: Evaluate
Deleted: <i>rval</i>
Deleted: as the <i>obj</i> parameter
Deleted: <i>environment</i> parameter
Deleted: <i>BindingIdentifier</i> : <i>Identifier</i> is evaluated as follows: Return the result of evaluating <i>Identifier</i> as described in 11.1.2.¶
Deleted: The production <i>Initialiser</i> : = <i>AssignmentExpression</i> is evaluated as follows: Return the result of evaluating <i>AssignmentExpression</i> .¶
Deleted: The <i>LetBindingListNoIn</i> , <i>LetBindingNoIn</i> and <i>InitialiserNoIn</i> productions are evaluated in the same manner as the <i>LetBindingList</i> , <i>LetBinding</i> and <i>Initialiser</i> productions except that the contained <i>LetBindingListNoIn</i> , <i>LetBindingNoIn</i> and <i>AssignmentExpressionNoIn</i> are evaluated instead of the contained <i>LetBindingList</i> , <i>LetBinding</i> , <i>Initialiser</i> and <i>AssignmentExpression</i> , respectively.¶
Deleted: 12.2.2 Const Declaration¶ NOTE A const declaration defines read-only variables that are scoped to the current execution context's LexicalEnvironment. Constant variables are created when their containing Lexical Environment is instantiated but may not be accessed in any way until the variable's ConstBinding is executed. A variable defined by a ConstBinding is assigned the value of its Initialiser's AssignmentExpression when ConstBinding is executed, not when the variable is created.¶
Syntax ¶ ConstDeclaration :¶
Deleted: 3
Deleted: current
Deleted: ¶
Deleted: NOTE A var statement declares variables that are scoped to the current
Deleted: Static Semantics: Early Errors¶ <i>VariableDeclaration</i> : <i>BindingPattern Initialiser</i>
Deleted: The <i>BoundNames</i> of the production <i>VariableStatement</i> : <i>var VariableDeclarationList</i>

1. Return the BoundNames of *BindingIdentifier*.

VariableDeclaration : BindingPattern Initialiser

1. Return the BoundNames of *BindingPattern*.

Runtime Semantics

Runtime Semantics: Binding Initialisation

With arguments *value* and *environment*.

NOTE *undefined* is passed for *environment* to indicate that a PutValue operation should be used to assign the initialisation value. This is the case for *var* statements formal parameter lists of non-strict functions. In those cases a lexical binding is hosted and preinitialized prior to evaluation of its initializer.

VariableDeclaration : BindingIdentifier

1. Return the result of performing Binding Initialisation for *BindingIdentifier* passing *value* and *undefined* as the arguments.

VariableDeclaration : BindingIdentifier Initialiser

1. Return the result of performing Binding Initialisation for *BindingIdentifier* passing *value* and *undefined* as the arguments.

VariableDeclaration : BindingPattern Initialiser

1. Return the result of performing Binding Initialisation for *BindingPattern* passing *value* and *undefined* as the arguments.

Runtime Semantics: Evaluation

VariableStatement : var VariableDeclarationList ;

1. Let *next* be the result of evaluating *VariableDeclarationList*.
2. ReturnIfAbrupt(*next*).
3. Return NormalCompletion(*empty*).

VariableDeclarationList : VariableDeclarationList , VariableDeclaration

1. Let *next* be the result of evaluating *VariableDeclarationList*.
2. ReturnIfAbrupt(*next*).
3. Return the result of evaluating *VariableDeclaration*.

VariableDeclaration : BindingIdentifier

1. Return NormalCompletion(*empty*).

VariableDeclaration : BindingIdentifier Initialiser

1. Let *rhs* be the result of evaluating *Initialiser*.
2. Let *value* be *GetValue(rhs)*.
3. ReturnIfAbrupt(*value*).
4. Return the result of performing Binding Initialisation for *BindingIdentifier* passing *value* and *undefined* as the arguments.

NOTE If a *VariableDeclaration* is nested within a *with* statement and the *Identifier* in the *VariableDeclaration* is the same as a property name of the binding object of the *with* statement's object environment record, then step 3 will assign *value* to the property instead of to the *VariableEnvironment* binding of the *Identifier*.

Deleted: the

Deleted: The production

Deleted: is evaluated as follows:

Deleted: Evaluate

Deleted: If *next* is an abrupt completion, return *next*

Deleted: (normal,

Deleted: *y*, empty)

Deleted: The BoundNames of the production
VariableDeclarationList : VariableDeclaration is determined as follows:
 ↪ Return BoundNames of *VariableDeclaration*.¶

Deleted: The production

VariableDeclarationList : VariableDeclaration is evaluated as follows:
 ↪ Return the result of evaluating Evaluate *VariableDeclaration*.¶

Deleted: The BoundNames of the production

VariableDeclarationList : VariableDeclarationList , VariableDeclaration is determined as follows:
 ↪ Let *names* be BoundNames of *VariableDeclarationList*
 ↪ Append to *names* the elements of BoundNames of *VariableDeclaration*.¶
 ↪ Return *names*.¶
 The production

Deleted: is evaluated as follows:

Deleted: Evaluate

Deleted: If *next* is an abrupt completion, return *next*

Deleted: Evaluate

Deleted: The BoundNames of the production
VariableDeclaration : BindingIdentifier Initialiser_{opt} is determined as follows: ¶
 ↪ Return the BoundNames of *BindingIdentifier*.¶
 The production

Deleted: is evaluated as follows:

Deleted: the String value of *BindingIdentifier*

Deleted: The production

Deleted: is evaluated as follows:

Deleted: If *value* is an abrupt completion, return *value*

Deleted: Perform

Deleted: Initialization

Deleted: NOTE 1 The String value of a *VariableDeclaration* is used in the evaluation of for-in statements (12.6.4).¶

Deleted: 2

Deleted: 4

VariableDeclaration : BindingPattern Initialiser

2. Let *rhs* be the result of evaluating *Initialiser*.
3. Let *rval* be *ToObject*(*GetValue(rhs)*).
4. ReturnIfAbrupt(*rval*).
5. Return the result of performing Binding Initialisation for *BindingPattern* passing *rval* and *undefined* as arguments.

12.2.4 Destructuring Binding Patterns

Syntax

BindingPattern :
ObjectBindingPattern
ArrayBindingPattern

ObjectBindingPattern :

{
 { *BindingPropertyList* }
 { *BindingPropertyList* , }

ArrayBindingPattern :

[*Elision*_{opt} *BindingRestElement*_{opt}]
 [*BindingElementList*]
 [*BindingElementList* , *Elision*_{opt} *BindingRestElement*_{opt}]

BindingPropertyList :

BindingProperty
BindingPropertyList , *BindingProperty*

BindingElementList :

*Elision*_{opt} *BindingElement*
BindingElementList , *Elision*_{opt} *BindingElement*

BindingProperty :

SingleNameBinding
PropertyName : *BindingElement*

BindingElement :

SingleNameBinding
*BindingPattern Initialiser*_{opt}

SingleNameBinding :

*BindingIdentifier Initialiser*_{opt}

BindingRestElement :

... *BindingIdentifier*

Static Semantics

Static Semantics: Early Errors

BindingPattern : *ObjectBindingPattern*

- It is a Syntax Error if the *BoundNames* of *ObjectBindingPattern* contains the string “*eval*” or the string “*arguments*”.

BindingPattern : *ArrayBindingPattern*

Deleted: The static semantics of the production *VariableDeclaration* : *BindingPattern Initialiser* are:
 ↪ It is a Syntax Error if the source code matching this production is not contained in extended code.
 The *BoundNames* of the production *VariableDeclaration* : *BindingPattern Initialiser* determined as follows:
 ↪ Return the *BoundNames* of *BindingPattern*. The production
Deleted: is evaluated as follows:
Deleted: *ToObject*(*Initialiser*)
Deleted:)
Deleted: If *rval* is an abrupt completion, return *rval*
Deleted: Perform
Deleted: Initialization
Deleted: Evaluate
Deleted: using
Deleted: as the *obj* parameter
Deleted: the *environment* parameter
Deleted: The *VariableDeclarationListNoIn*, *VariableDeclarationNoIn* and *InitialiserNoIn* productions are evaluated in the same manner as the *VariableDeclarationList*, *VariableDeclaration* and *Initialiser* production except that the contained *VariableDeclarationListNoIn*, *VariableDeclarationNoIn*, *InitialiserNoIn* and *AssignmentExpressionNoIn* are evaluated instead of the contained *VariableDeclarationList*, *VariableDeclaration*, *Initialiser* and *AssignmentExpression*, respectively.
Deleted: *VariableStatement* :
 var *VariableDeclarationList* ;
VariableDeclarationList :
VariableDeclaration
VariableDeclarationList , *VariableDeclaration*
VariableDeclarationListNoIn :
VariableDeclarationNoIn .
VariableDeclarationListNoIn ,
VariableDeclarationNoIn
Comment [AW108]: The destructuring wikitext page argues for allowing empty binding patterns.
Comment [AW109]: See above comment about empty binding patterns.
Comment [AW110]: See above comment about empty binding patterns.
Deleted: *Identifier*
Deleted: *PropertyName* : *SingleNameBinding*
Deleted: *PropertyName* : *BindingPattern Initialiser*_{opt}
Deleted: *Identifier*
Deleted: ...
Deleted: *Identifier*
Deleted: Bound Names
Deleted: *Object*

- It is a Syntax Error if the BoundNames of ArrayBindingPattern contains the string “eval” or the string “arguments”.

Static Semantics: BoundNames

ObjectBindingPattern: { }

1. Return an empty List.

ArrayBindingPattern: [Elision_{opt}]

1. Return an empty List.

ArrayBindingPattern: [Elision_{opt} BindingRestElement]

1. Return the BoundNames of BindingRestElement.

ArrayBindingPattern: [BindingElementList , Elision_{opt}]

1. Return the BoundNames of BindingElementList.

ArrayBindingPattern: [BindingElementList , Elision_{opt} BindingRestElement]

1. Let names be BoundNames of BindingElementList.
2. Append to names the elements of BoundNames of BindingRestElement.
3. Return names.

BindingPropertyList: BindingPropertyList , BindingProperty

1. Let names be BoundNames of BindingPropertyList.
2. Append to names the elements of BoundNames of BindingProperty.
3. Return names.

BindingElementList: Elision_{opt} BindingElement

1. Return BoundNames of BindingElement.

BindingElementList: BindingElementList , Elision_{opt} BindingElement

1. Let names be BoundNames of BindingElementList.
2. Append to names the elements of BoundNames of BindingElement.
3. Return names.

BindingProperty: PropertyName : BindingElement

1. Return the BoundNames of BindingElement.

SingleNameBinding : BindingIdentifier Initialiser_{opt}

1. Return the BoundNames of BindingIdentifier.

BindingElement : BindingPattern Initialiser_{opt}

1. Return the BoundNames of BindingPattern.

Static Semantics: HasInitialiser

BindingElement : BindingPattern

Deleted: Bound Names

Deleted: Bound Names

Deleted: Semantics¶

Deleted: A variable statement declares variables that are created as defined in 10.5. Variables are initialised undefined when created. A variable with an Initialiser assigned the value of its AssignmentExpression when the VariableStatement is executed, not when the variable is created.¶

Semantics¶

The production VariableStatement : var VariableDeclarationList ; is evaluated as follows:¶

<#> Evaluate VariableDeclarationList.¶

<#> Return (normal, empty, empty).¶

The production VariableDeclarationList : VariableDeclaration is evaluated as follows:¶

<#> Evaluate VariableDeclaration.¶

The production VariableDeclarationList : VariableDeclarationList , VariableDeclaration is evaluated as follows:¶

<#> Evaluate VariableDeclarationList.¶

<#> Evaluate VariableDeclaration.¶

The production VariableDeclaration : Identifier Initialiser is evaluated as follows:¶

<#> Return a String value containing the same sequence of characters as in the Identifier.¶

The production VariableDeclaration : Identifier Initialiser is evaluated as follows:¶

<#> Let lhs be the result of evaluating Identifier as described in 11.1.2.¶

<#> Let rhs be the result of evaluating Initialiser.¶

<#> Let value be GetValue(rhs).¶

<#> Call PutValue(lhs, value).¶

<#> Return a String value containing the same sequence of characters as in the Identifier.¶

NOTE 1 The String value of a VariableDeclaration is used in the evaluation of for-in statements (12.6.4).¶

Deleted: The BoundNames of the production BindingPattern : ObjectBindingPattern is determined as follows:¶

<#> Return the Bound Names of ObjectBindingPattern.¶

Comment [AW11]: The destructuring wiki page argues for allowing empty binding patterns. I'm not really convinced.

Deleted: ObjectBindingPattern :¶

```
{ BindingPropertyList } .  
{ BindingPropertyList , } ¶
```

<#> Return the BoundNames of BindingPropertyList.¶

Deleted: List

Deleted: ArrayBindingPattern : [BindingElementList]
<#> Return the BoundNames of BindingElementList.¶

Deleted: BindingPropertyList : BindingProperty ¶
<#> Return BoundNames of BindingProperty.¶

Deleted: BindingProperty : SingleNameBinding ¶
<#> Return the BoundNames of SingleNameBinding.¶

Deleted: BindingElement : SingleNameBinding ¶
<#> Return the BoundNames of SingleNameBinding.¶

Deleted: BindingRestElement : . . . BindingIdentifier ¶
<#> Return the BoundNames of BindingIdentifier.¶

Deleted: BindingElement : SingleNameBinding ¶
<#> Return HasInitializer of SingleNameBinding.¶

1. Return **false**.

BindingElement : BindingPattern Initialiser

1. Return **true**.

SingleNameBinding : BindingIdentifier

1. Return **false**.

SingleNameBinding : BindingIdentifier Initialiser

1. Return **true**.

Runtime Semantics

Runtime Semantics: Binding Initialisation

With parameters *value* and *environment*.

NOTE When **undefined** is passed for *environment* it indicates that a *PutValue* operation should be used to assign the initialisation value. This is the case for formal parameter lists of non-strict functions. In that case the formal parameter bindings are preinitialized in order to deal with the possibility of multiple parameters with the same name.

BindingPattern : ObjectBindingPattern

1. Assert: *Type(value)* is Object
2. Return the result of performing Binding Initialisation for *ObjectBindingPattern* using *value* and *environment* as arguments.

BindingPattern : ArrayBindingPattern

1. Assert: *Type(value)* is Object
2. Return the result of performing Indexed Binding Initialisation for *ArrayBindingPattern* using *value*, 0, and *environment* as arguments.

ObjectBindingPattern: {}

1. Return NormalCompletion(empty).

BindingPropertyList : BindingPropertyList , BindingProperty

1. Let *status* be the result of performing Binding Initialisation for *BindingPropertyList* using *value* and *environment* as arguments.
2. ReturnIfAbrupt(*status*).
3. Return the result of performing Binding Initialisation for *BindingProperty* using *value* and *environment* as arguments.

BindingProperty : SingleNameBinding

1. Let *name* be the string that is the only element of *BoundNames* of *SingleNameBinding*.
2. Return the result of performing Keyed Binding Initialisation for *SingleNameBinding* using *value*, *environment*, and *name* as the arguments.

BindingProperty : PropertyName : BindingElement

1. Let *P* be the *PropName* of *PropertyName*
2. Return the result of performing Keyed Binding Initialisation for *BindingElement* using *value*, *environment*, and *P* as arguments.

Deleted: Initialization

Deleted: environment

Deleted: initialization

Deleted: the

Deleted: The production

Deleted: If *value* is neither of **null** or **undefined** then

Deleted: <#>Let *obj* be *ToObject(value)*.¶
<#>Else, let *obj* be **undefined**.¶

Deleted: is evaluated with parameters *value*

Deleted: Perform ...inding Initialization

Deleted: *value* as the

Deleted: *obj*

Deleted: parameter ...nd *env* as the ...nvironment

Deleted: The BoundNames of the production

Deleted: If *value* is neither of **null** or **undefined**

Deleted: <#>Let *array* be *ToObject(value)*.¶

Deleted: <#>Let *lenValue* be the result of calling

Deleted: <#>Else.¶

Deleted: <#>Let *arrayLength* be 0.¶

Deleted: is evaluated with parameters *value*

Deleted: Perform ...ndexed Binding Initializati

Deleted: Evaluate ...rrayBindingPattern using

Deleted: *array*

Deleted:

Deleted: *arrayLength*, **undefined**

Deleted: as the *obj* parameter ...nd *env* as the

Deleted: The BoundNames of the production

Deleted: with parameters *value* and *env* as

Deleted: Return

Comment [AW112]: The destructuring wiki

Deleted: *ObjectBindingPattern* :¶

Deleted: The BoundNames of the production

Deleted: The production *BindingPropertyList*

Deleted: The BoundNames of the production

Deleted: with parameters *obj* and *env* as

Deleted: *next*

Deleted: Perform ...inding Initializati

Deleted: Evaluate ...indingPropertyList using

Deleted: *next*

Deleted: If *next* is an abrupt completion, return

Deleted: Perform ...inding Initializati

Deleted: Evaluate ...indingProperty using

Deleted: Perform ...yed Binding Initializati

Deleted: Perform ...yed Binding Initializati

Deleted: Evaluate

Runtime Semantics: Indexed Binding Initialisation

With parameters `array`, `nextIndex`, and `environment`.

NOTE When `undefined` is passed for `environment` it indicates that a `PutValue` operation should be used to assign the initialisation value. This is the case for formal parameter lists of non-strict functions. In that case the formal parameter bindings are preinitialized in order to deal with the possibility of multiple parameters with the same name.

`ArrayBindingPattern : [Elisionopt]`

1. Return `NormalCompletion(empty)`.

`ArrayBindingPattern: [Elisionopt BindingRestElement]`

1. Let `nextIndex` be the Elision Width of `Elision`; if `Elision` is not present, use the numeric value zero.
2. Return the result of performing Indexed Binding Initialisation for `BindingRestElement` using `array`, `nextIndex`, and `environment` as arguments.

`ArrayBindingPattern: [BindingElementList]`

1. Return the result of performing Indexed Binding Initialisation for `BindingElementList` using `array`, `nextIndex`, and `environment` as arguments.

`ArrayBindingPattern: [BindingElementList , Elisionopt]`

1. Return the result of performing Indexed Binding Initialisation for `BindingElementList` using `array`, `nextIndex`, and `environment` as arguments.

`ArrayBindingPattern: [BindingElementList , Elisionopt BindingRestElement]`

1. Let `next` be the result of performing Indexed Binding Initialisation for `BindingElementList` using `array`, `nextIndex`, and `environment` as arguments.
2. ReturnIfAbrupt(`next`).
3. Let `skip` be the Elision Width of `Elision`; if `Elision` is not present, use the numeric value zero.
4. Return the result of performing Indexed Binding Initialisation for `BindingRestElement` using `array`, `next+skip`, and `environment` as arguments.

`BindingElementList : Elisionopt BindingElement`

1. Let `skip` be the Elision Width of `Elision`; if `Elision` is not present, use the numeric value zero.
2. Let `status` be the result of performing Indexed Binding Initialisation for `BindingElement` using `array`, `nextIndex+skip`, and `environment` as arguments.
3. ReturnIfAbrupt(`status`).
4. Return `nextIndex+skip+1`.

`BindingElementList : BindingElementList , Elisionopt BindingElement`

1. Let `listNext` be the result of performing Indexed Binding Initialisation for `BindingElementList` using `array`, `nextIndex`, and `environment` as arguments.
2. ReturnIfAbrupt(`listNext`).
3. Let `skip` be the Elision Width of `Elision`; if `Elision` is not present, use the numeric value zero.
4. Let `status` be the result of performing Indexed Binding Initialisation for `BindingElement` using `array`, `listNext+skip`, and `environment` as arguments.
5. ReturnIfAbrupt(`status`).
6. Return `listNext+skip+1`.

`BindingElement: SingleNameBinding`

Deleted: Initialization
Deleted: <code>arrayLength</code> ,
Deleted: initialization
Deleted: the
Deleted: Return
Deleted: If <code>Elision</code> is present, then let <code>nextIndex</code> be the result of performing Indexed Binding Initialisation for <code>Elision</code> using <code>array</code> , <code>nextIndex</code> , and <code>environment</code> .
Deleted: Perform ...ndexed Binding Initialization
Deleted: <code>arrayLength</code> ,
Deleted: Perform ...ndexed Binding Initialization
Deleted: <code>0</code> ,
Deleted: <code>index</code>
Deleted: Initialization
Deleted: ,
Deleted: <code>0</code>
Deleted: <code>index</code>
Deleted: If <code>index</code> is an abrupt completion, return <code>index</code> .
Deleted: If <code>Elision</code> is present, then let <code>skip</code> be the result of performing Indexed Binding Initialisation for <code>Elision</code> using <code>array</code> , <code>nextIndex</code> , and <code>environment</code> .
Deleted: Perform ...ndexed Binding Initialization
Deleted: <code>arrayLength</code> ,
Deleted: <code>index</code>
Deleted: The BoundNames of the production
Deleted: with the parameters <code>obj</code> , <code>env</code> , and <code>index</code> as arguments
Deleted: If <code>Elision</code> is present, then let <code>skip</code> be the result of performing Indexed Binding Initialisation for <code>Elision</code> using <code>array</code> , <code>nextIndex</code> , and <code>environment</code> .
Deleted: Perform ...ndexed Binding Initialization
Deleted: Evaluate ...indingElement using <code>obj...rray</code> as the <code>env</code> parameter, and <code>index+skip</code> as the <code>nextIndex</code> parameter
Deleted: <code>arrayLength</code> ,
Deleted:
Deleted: <code>env</code> as the <code>env</code> parameter, and <code>index+skip</code> as the <code>nextIndex</code> parameter
Deleted: <code>next</code>
Deleted: If <code>next</code> is an abrupt completion, return <code>next</code> .
Deleted: <code>index</code>
Deleted: The BoundNames of the production
Deleted: is evaluated with the parameters <code>obj</code> , <code>env</code> , and <code>index</code> as arguments
Deleted: Initialization
Deleted: <code>obj</code>
Deleted: <code>arrayLength</code> ,
Deleted: as the <code>obj</code> parameter, <code>env</code> as the <code>env</code> parameter, and <code>index</code> as the <code>nextIndex</code> parameter
Deleted: <code>next</code>
Deleted: If <code>next</code> is an abrupt completion, return <code>next</code> .
Deleted: If <code>Elision</code> is present, then let <code>skip</code> be the result of performing Indexed Binding Initialisation for <code>Elision</code> using <code>array</code> , <code>nextIndex</code> , and <code>environment</code> .
Deleted: Evaluate
Deleted: <code>next</code>
Deleted: Perform ...ndexed Binding Initialization
Deleted: <code>obj...rray</code> as the <code>obj</code> parameter
Deleted: <code>arrayLength</code> ,
Deleted: <code>env</code> as the <code>env</code> parameter
Deleted: ,
Deleted: and ...istNext+skip , and <code>environment</code> as the <code>index</code> parameter
Deleted: <code>listNext</code>
Deleted: If <code>listNext</code> is an abrupt completion, return <code>listNext</code> .
Deleted: <code>listNext</code>
Deleted: <code>1</code>
Deleted: The BoundNames of the productions

1. Return the result of performing Keyed Binding Initialisation for *SingleNameBinding* using *array*, *environment*, and *ToString(nextIndex)* as the arguments.

BindingElement: BindingPattern Initialiser_{opt}

1. Let *P* be *ToString(nextIndex)*.
2. Let *v* be the result of *Get(array, P)*.
3. ReturnIfAbrupt(*v*).
4. If *Initialiser_{opt}* is present and *v* is **undefined**, then
 - a. Let *defaultValue* be the result of evaluating *Initialiser*.
 - b. Let *v* be *ToObject(defaultValue)*.
5. ReturnIfAbrupt(*v*).
6. Return the result of performing Binding Initialisation for *BindingPattern* passing *v* and *environment* as arguments.

BindingRestElement : ... BindingIdentifier

2. Let *A* be the result of the abstract operation *ArrayCreate* with argument 0.
3. Let *lenVal* be the result of *Get(array, "length")*.
4. Let *arrayLength* be *ToInt32(lenVal)*.
5. ReturnIfAbrupt(*arrayLength*).
6. Let *n*=0.
7. Let *index* = *nextIndex*.
8. Repeat, while *index* < *arrayLength*
 - a. Let *P* be *ToString(index)*.
 - b. Let *exists* be the result of *HasProperty(array, P)*.
 - c. ReturnIfAbrupt(*exists*).
 - d. If *exists* is **true**, then
 - i. Let *v* be the result of *Get(array, P)*.
 - ii. ReturnIfAbrupt(*v*).
 - iii. Call the *[[DefineOwnProperty]]* internal method of *A* with arguments *ToString(n)* and *PropertyDescriptor* *{[[Value]]: v, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}*.
 - e. Let *n* = *n*+1.
 - f. Let *index* = *index*+1.
9. Return the result of performing Binding Initialisation for *BindingIdentifier* using *A* and *environment* as arguments.

Runtime Semantics: Keyed Binding Initialisation

With parameters *obj*, *environment*, and *propertyName*.

NOTE When **undefined** is passed for *environment* it indicates that a *PutValue* operation should be used to assign the initialisation value. This is the case for formal parameter lists of non-strict functions. In that case the formal parameter bindings are preinitialized in order to deal with the possibility of multiple parameters with the same name.

BindingElement: BindingPattern Initialiser_{opt}

1. Let *v* be the result of *Get(obj, propertyName)*.
2. ReturnIfAbrupt(*v*).
3. If *Initialiser_{opt}* is present and *v* is **undefined**, then
 - a. Let *defaultValue* be the result of evaluating *Initialiser*.
 - b. Let *v* be *ToObject(defaultValue)*.
4. ReturnIfAbrupt(*v*).
5. Return the result of performing Binding Initialisation for *BindingPattern* passing *v* and *environment* as arguments.

SingleNameBinding : BindingIdentifier Initialiser_{opt}

1. Let *v* be the result of *Get(obj, propertyName)*.

- Deleted:** <#>If *nextIndex* ≥ *arrayLength*, then
Deleted: with the parameters *obj*, *env* and *in*
Deleted: Perform ...eyed Binding Initializat
Deleted: Evaluate
Deleted: *P, obj...rray, environment*, and *ToString*
Deleted: The BoundNames of the production
Deleted: <#>If *nextIndex* ≥ *arrayLength*, then
Deleted: <#>Let *exists* be the result of calling
Deleted: with the parameters *obj*, *env* and *in*
Deleted: <#>If *exists* is **true**, then
Deleted: calling the *[[...et]]...* internal method
Deleted: *obj*
Deleted: with argument
Deleted: passing *P* as the argument
Deleted: <#>Else ¶
Deleted: <#>Let *v* be the result of evaluating
Deleted: If *v* is an abrupt completion, return *v*.
Deleted: Perform ...inding Initialization
Deleted: Evaluate ...indingPattern passing *v v*
Deleted: ion
Deleted: (15.4)
Deleted: a new array object created as if by the
Deleted: calling the *[[...et]]...* internal method
Deleted: If *arrayLength* is an abrupt completion
Deleted: calling the *[[HasProperty]]* internal
Deleted: calling the *[[...et]]...* internal method
Deleted: If *v* is an abrupt completion, return *v*
Deleted: ,
Deleted: .[[value]]
Deleted: , and **false**
Deleted: Perform ...inding Initialization
Deleted: *array*
Deleted: Initialization
Deleted: initialization
Deleted: the
Deleted: *BindingElement: SingleNameBinding*
Deleted: <#>Let *exists* be the result of calling
Deleted: calling the *[[...et]]...* internal method
Deleted: <#>Else ¶
Deleted: *v*
Deleted: <#>Else, ¶
Deleted: If *v* is an abrupt completion, return *v*.
Deleted: Perform ...inding Initialization
Deleted: <#>Let *exists* be the result of calling
Deleted: calling the *[[...et]]* internal method of

2. ReturnIfAbrupt(*v*)
3. If *Initialiser_{opt}* is present and *v* is **undefined**, then
 - a. Let *v* be the result of evaluating *Initialiser*.
4. ReturnIfAbrupt(*v*)
5. Return the result of performing Binding Initialisation for *BindingIdentifier* passing *v* and *environment* as arguments.

12.3 Empty Statement

Syntax

EmptyStatement :
;

Runtime Semantics

Runtime Semantics: Evaluation

EmptyStatement : ;

1. Return NormalCompletion(empty).

12.4 Expression Statement

Syntax

ExpressionStatement :
[lookahead $\notin \{\text{, function, class}\}$] *Expression* ;

NOTE An *ExpressionStatement* cannot start with an opening curly brace because that might make it ambiguous with a *Block*. Also, an *ExpressionStatement* cannot start with the **function** or **class** keywords because that would make it ambiguous with a *FunctionDeclaration*, a *GeneratorDeclaration*, or a *ClassDeclaration*.

Runtime Semantics

Runtime Semantics: Evaluation

ExpressionStatement : [lookahead $\notin \{\text{, function, class}\}$] *Expression* ;

1. Let *exprRef* be the result of evaluating *Expression*.
2. Let *value* be *GetValue(exprRef)*.
3. ReturnIfAbrupt(*value*).
4. Return NormalCompletion(*value*).

12.5 The if Statement

Syntax

IfStatement :
 if (*Expression*) *Statement* **else** *Statement*
 if (*Expression*) *Statement*

Each **else** for which the choice of associated **if** is ambiguous shall be associated with the nearest possible **if** that would otherwise have no corresponding **else**.

Static Semantics: VarDeclaredNames

IfStatement : **if** (*Expression*) *Statement* **else** *Statement*

1. Let *names* be *VarDeclaredNames* of the first *Statement*.

Deleted: <#>Else ¶

Deleted: <#>Else, ¶

<#> Let *v* be **undefined** ¶

Deleted: If *v* is an abrupt completion, return *v*.

Deleted: Perform

Deleted: Initialization

Deleted: environment

Deleted: The BoundNames of the production
BindingRestElement : . . . *BindingIdentifier* is determined as follows: ¶

Return the BoundNames of *BindingIdentifier*. ¶

Deleted: The BoundNames of the production
BindingRestElement : . . . *Identifier* is determined as follows: ¶

Return BoundNames of *BindingElement*. ¶

Deleted: The production *BindingRestElement* : ...
BindingIdentifier is evaluated with the parameters *obj*, *env*, and *index* as follows: ¶

Let *lenVal* be the result of calling the [[Get]] internal method of *obj* with argument "length". ¶

Let *len* be *ToInt32(lenVal)*. ¶

Let *A* be a new array object created as if by the expression *new Array()* where *Array* is the standard built-in constructor with that name. ¶

Let *n*=0; ¶

Repeat, while *index* < *len* ¶

Let *P* be *ToString(index)*. ¶

Let *exists* be the result of calling the [[HasProperty] internal method of *obj* with argument *P*. ¶

If *exists* is true, then ¶

Let *v* be the result of calling the [[Get]] internal method of *obj* passing *P* as the argument. ¶

Call the [[DefineOwnProperty]] internal method of *A* with arguments *ToString(n)*, *Property Descriptor* {[[Value]]: *v*, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}, and *false*. ¶

Let *n* = *n*+1. ¶

Let *index* = *index*+1. ¶

Perform Binding Initialization for *BindingIdentifier* using *A* as the *value* and *env* as the *enviornment*. ¶

¶

¶

Deleted: Semantics ¶

The production

Deleted: is evaluated as follows:

Deleted: (normal,

Deleted: , empty).

Deleted: might

Deleted: Semantics ¶

The production

Deleted: is evaluated as follows:

Deleted: If *value* is an abrupt completion, return *value*

Deleted: (normal, *GetValue(exprRef)*)

Deleted: , empty

Deleted: Semantics ¶

The VarDeclaredNames of the production

Deleted: is determined as follows:

2. Append to *names* the elements of the *VarDeclaredNames* of the second *Statement*.
3. Return *names*.

IfStatement : if (Expression) Statement

1. Return the *VarDeclaredNames* of *Statement*.

Runtime Semantics

Runtime Semantics: Evaluation

IfStatement : if (Expression) Statement else Statement

1. Let *exprRef* be the result of evaluating *Expression*.
2. Let *exprValue* be *ToBoolean(GetValue(exprRef))*.
3. ReturnIfAbrupt(*exprValue*).
4. If *exprValue* is true, then
 - a. Let *stmtValue* be the result of evaluating the first *Statement*.
5. Else,
 - a. Let *stmtValue* be the result of evaluating the second *Statement*.
6. If *stmtValue.[[type]]* is normal and *stmtValue.[[value]]* is empty, then
 - a. Return NormalCompletion(*undefined*).
7. Return *stmtValue*.

IfStatement : if (Expression) Statement

1. Let *exprRef* be the result of evaluating *Expression*.
2. Let *exprValue* be *ToBoolean(GetValue(exprRef))*.
3. ReturnIfAbrupt(*exprValue*).
4. If *exprValue* is false, then
 - a. Return NormalCompletion(*undefined*).
5. Else,
 - a. Let *stmtValue* be the result of evaluating *Statement*.
6. If *stmtValue.[[type]]* is normal and *stmtValue.[[value]]* is empty, then
 - a. Return NormalCompletion(*undefined*).
7. Return *stmtValue*.

12.6 Iteration Statements

Syntax

IterationStatement :

```

do Statement while ( Expression )
while ( Expression ) Statement
for ( ExpressionNoInopt; Expressionopt; Expressionopt ) Statement
for ( var VariableDeclarationListNoInopt; Expressionopt; Expressionopt ) Statement
for ( LexicalDeclarationNoInopt; Expressionopt; Expressionopt ) Statement
for ( LeftHandSideExpression in Expression ) Statement
for ( var ForBinding in Expression ) Statement
for ( ForDeclaration in Expression ) Statement
for ( LeftHandSideExpression of Expression ) Statement
for ( var ForBinding of Expression ) Statement
for ( ForDeclaration of Expression ) Statement

```

ForDeclaration :

LetOrConst ForBinding

NOTE 1 *ForBinding* is defined in 11.1.4.2.

Deleted: The production

Deleted: is evaluated as follows:

Deleted: If *exprValue* is an abrupt completion, return *exprValue*

Deleted: *ToBoolean(GetValue(exprRef))*

Deleted: Return

Deleted: Return

Comment [AWB13113]: Breaking change from ES5: completion reform

Deleted: The *VarDeclaredNames* of the production *IfStatement : if (Expression) Statement* is determined as follows:
 ↪ Return the *VarDeclaredNames* of *Statement*. The production

Deleted: is evaluated as follows:

Deleted: If *exprValue* is an abrupt completion, return *exprValue*

Deleted: *ToBoolean(GetValue(exprRef))*

Comment [AWB6114]: Breaking change from ES5: completion reform

Deleted: return

Deleted: (normal, empty)

Deleted: , empty).

Comment [AWB13115]: Breaking change from ES5: completion reform

Deleted: ↪ Return the result of evaluating *Statement*.

Deleted: ;

Comment [AWB6116]: This is breaking change from ES5 which allowed a *VariableDeclarationNoIn* to appear here. See discuss thread "lexical for-in/for-of loose end"

Deleted: *BindingIdentifier*

Deleted: *VariableDeclarationNoIn*

Deleted: *ForVarDeclaration*

Deleted: *ForVarDeclaration* :
BindingPattern
VariableDeclarationNoIn

NOTE 2 A semicolon is not required after a `do-while` statement.

Runtime Semantics

Runtime Semantics: LoopContinues Abstract Operation

The abstract operation `LoopContinues` with arguments `completion` and `labelSet` is defined by the following step:

1. If `completion.[[type]]` is `normal`, then return `true`.
2. If `completion.[[type]]` is not `continue`, then return `false`.
3. If `completion.[[target]]` is `empty`, then return `true`.
4. If `completion.[[target]]` is an element of `labelSet`, then return `true`.
5. Return `false`.

NOTE Within the `Statement` part of an `IterationStatement` a `ContinueStatement` may be used to begin a new iteration.

12.6.1 The `do-while` Statement

Static Semantics: VarDeclaredNames

IterationStatement : do Statement while (Expression)

1. Return the `VarDeclaredNames` of `Statement`.

Runtime Semantics

Runtime Semantics: Labelled Evaluation

With argument `labelSet`.

IterationStatement : do Statement while (Expression)

1. Let `V = undefined`.
2. Repeat
 - a. Let `stmt` be the result of evaluating `Statement`.
 - b. If `stmt.[[value]]` is not `empty`, let `V = stmt.[[value]]`.
 - c. If `stmt` is an abrupt completion and `LoopContinues (stmt,labelSet)` is `false`, return `stmt`.
 - d. Let `exprRef` be the result of evaluating `Expression`.
 - e. Let `exprValue` be `ToBoolean(GetValue(exprRef))`.
 - f. If `exprValue` is `false`, return `NormalCompletion(V)`.
 - g. Else if `exprValue` is not `true`, then
 - i. Assert: `exprValue` is an abrupt completion.
 - ii. If `LoopContinues (exprValue,labelSet)` is `false`, return `exprValue`.

12.6.2 The `while` Statement

Static Semantics: VarDeclaredNames

IterationStatement : while (Expression) Statement

1. Return the `VarDeclaredNames` of `Statement`.

Runtime Semantics

Runtime Semantics: Labelled Evaluation

With argument `labelSet`.

IterationStatement : while (Expression) Statement

Comment [AWB6117]: Note that this is technically a breaking change from ES5, however it is made to match web reality.

Deleted: ForBinding :
BindingIdentifier
BindingPattern ¶

Formatted: Note

Deleted: Within the `Statement` part of an `IterationStatement` a `ContinueStatement` may be used to begin a new iteration. This semantics is defined using t

Deleted: The

Deleted: loopContinues

Deleted: be

Deleted: s

Deleted: The `VarDeclaredNames` of the production

Deleted: ;

Deleted: is determined as follows:

Deleted: Runtime Semantics: Evaluation ¶

Deleted: The production

Deleted: ;

Deleted: is evaluated as follows:

Comment [AWB6118]: Breaking change: completion reform

Deleted: empty

Deleted: <#>Let iterating be true.¶

Deleted: ,

Deleted: while iterating is true

Deleted: <#>If `stmt.type` is not `continue` or || `stmt.target` is not in the current label set, then¶
<#>If `stmt.type` is `break` and `stmt.target` is in the current label set, return (normal, `V`, empty).¶

Deleted: loopContinues

Deleted: ToBoolean(GetValue(exprRef))

Deleted: set `iterating` to false

Comment [AWB6119]: Break/continue/return in the expression works normally (future for `do {}` or block label expressions)

Deleted: a Completion Record

Deleted: loopContinues

Deleted: Return (normal, `V`, empty);¶

Deleted: The `VarDeclaredNames` of the production

Deleted: `Statement` is determined as follows:

Deleted: Runtime Semantics: Evaluation ¶

Deleted: The production

Deleted: is evaluated as follows:

1. Let $V = \text{undefined}$.
2. Repeat
 - a. Let exprRef be the result of evaluating *Expression*.
 - b. Let exprValue be $\text{ToBoolean}(\text{GetValue}(\text{exprRef}))$.
 - c. If exprValue is **false**, return *NormalCompletion(V)*.
 - d. If exprValue is not **true**, then
 - i. Assert: exprValue is an abrupt completion.
 - ii. If $\text{LoopContinues}(\text{exprValue}.labelSet)$ is **false**, return exprValue .
 - e. Let stmt be the result of evaluating *Statement*.
 - f. If $\text{stmt}[\text{value}]$ is not empty, let $V = \text{stmt}[\text{value}]$.
 - g. If $\text{LoopContinues}(\text{stmt}.labelSet)$ is **false**, return stmt .

12.6.3 The `for` Statement

Static Semantics

Static Semantics: VarDeclaredNames

IterationStatement : **for** (*ExpressionNoIn*_{opt} ; *Expression*_{opt} ; *Expression*_{opt}) *Statement*

1. Return the *VarDeclaredNames* of *Statement*.

IterationStatement : **for** (**var** *VariableDeclarationListNoIn* ; *Expression*_{opt} ; *Expression*_{opt}) *Statement*

1. Let *names* be *BoundNames* of *VariableDeclarationListNoIn*.
2. Append to *names* the elements of the *VarDeclaredNames* of *Statement*.
3. Return *names*.

IterationStatement : **for** (*LexicalDeclarationNoIn* ; *Expression*_{opt} ; *Expression*_{opt}) *Statement*

1. Return the *VarDeclaredNames* of *Statement*.

Runtime Semantics

Runtime Semantics: Labelled Evaluation

With argument *labelSet*.

IterationStatement : **for** (*ExpressionNoIn*_{opt} ; *Expression*_{opt} ; *Expression*_{opt}) *Statement*

1. If *ExpressionNoIn* is present, then
 - a. Let exprRef be the result of evaluating *ExpressionNoIn*.
 - b. Let exprValue be $\text{GetValue}(\text{exprRef})$.
 - c. If $\text{LoopContinues}(\text{exprValue}.labelSet)$ is **false**, return exprValue .
2. Return the result of performing For Body Evaluation with the first *Expression* as the *testExpr* argument, the second *Expression* as the *incrementExpr* argument, *Statement* as the *stmt* argument, and with *labelSet*.

IterationStatement : **for** (**var** *VariableDeclarationListNoIn* ; *Expression*_{opt} ; *Expression*_{opt}) *Statement*

1. Let *varDcl* be the result of evaluating *VariableDeclarationListNoIn*.
2. If $\text{LoopContinues}(\text{varDcl}.labelSet)$ is **false**, return *varDcl*.
3. Return the result of performing For Body Evaluation with the first *Expression* as the *testExpr* argument, the second *Expression* as the *incrementExpr* argument, *Statement* as the *stmt* argument, and with *labelSet*.

IterationStatement : **for** (*LexicalDeclarationNoIn* ; *Expression*_{opt} ; *Expression*_{opt}) *Statement*

1. Let *oldEnv* be the running execution context's *LexicalEnvironment*.
2. Let *loopEnv* be the result of calling *NewDeclarativeEnvironment* passing *oldEnv* as the argument.
3. Let *isConst* be the result of performing *IsConstantDeclaration* of *LexicalDeclarationNoIn*.

Comment [AWB6120]: ES5 breaking change: completion reform
Deleted: empty
Deleted: $\text{ToBoolean}(\text{GetValue}(\text{exprRef}))$
Deleted: (normal,
Deleted: , empty
Comment [AWB6121]: Break/continue/return in the expression works normally (future for d {} or block lambda expressions)
Deleted: Else i
Deleted: a Completion Record
Deleted: <i>loopContinues</i>
Deleted: <#>If <i>stmt.type</i> is not continue or <i>stmt.target</i> is not in the current label set, then<#>If <i>stmt.type</i> is break and <i>stmt.target</i> is in the current label set, then<#>Return (normal, <i>V</i> , empty).¶
Deleted: <i>stmt</i> is an abrupt completion
Deleted: <i>loopContinues</i>
Comment [AWB 3122]: The lexical scoping of iteration variables still needs to be taken care of
Deleted: The <i>VarDeclaredNames</i> of the production
Deleted: is determined as follows:
Deleted: Runtime Semantics: Evaluation
Deleted: The production
Deleted: is evaluated as follows:
Deleted: .
Deleted: Call
Deleted: (This value is not used but the call may have side-effects.)
Deleted: <i>loopContinues</i>
Deleted: increment
Deleted: <i>testExpr</i>
Comment [AWB6123]: ES5 breaking change: Completion reform
Deleted: The abstraction operation For Body Evaluation with arguments <i>testExpr</i> , <i>incrementExpr</i> , and <i>labelSet</i> is performed as follows:¶
Deleted: <i>loopContinues</i>
Deleted: <i>incrementExpr</i>
Deleted: <i>testExpr</i>
Comment [AWB6124]: A final decision has
Deleted: <#>Evaluate
Deleted: running
Deleted: current
Deleted: the
Deleted: <i>d</i>

4. For each element *dn* of the *BoundNames* of *LexicalDeclarationNoIn* do
 - a. If *isConst* is **true**, then
 - i. Call *loopEnv*'s *CreateImmutableBinding* concrete method passing *dn* as the argument.
 - b. Else,
 - i. Call *loopEnv*'s *CreateMutableBinding* concrete method passing *dn* and **false** as the arguments.
5. Set the running execution context's *LexicalEnvironment* to *loopEnv*.
6. Let *forDcl* be the result of evaluating *LexicalDeclarationNoIn*.
7. If *LoopContinues*(*forDcl*.*labelSet*) is **false**, then
 - a. Set the running execution context's *LexicalEnvironment* to *oldEnv*.
 - b. Return *forDcl*.
8. Let *bodyResult* be the result of performing For Body Evaluation with the first *Expression* as the *testExpr* argument, the second *Expression* as the *incrementExpr* argument, *Statement* as the *stmt* argument, and with *labelSet*.
9. Set the running execution context's *LexicalEnvironment* to *oldEnv*.
10. Return *bodyResult*.

Runtime Semantics: For Body Evaluation Abstract Operation

The abstract operation For Body Evaluation with arguments *testExpr*, *incrementExpr*, *stmt*, and *labelSet* is performed as follows:

1. Let *V* = **undefined**.
2. Repeat
 - a. If *testExpr* is not **[empty]**, then
 - i. Let *testExprRef* be the result of evaluating *testExpr*.
 - ii. Let *testExprValue* be *ToBoolean*(*GetValue*(*testExprRef*))
 - iii. If *testExprValue* is **false**, return *NormalCompletion*(*V*).
 - iv. Else if *LoopContinues*(*testExprValue*.*labelSet*) is **false**, return *testExprValue*.
 - b. Let *result* be the result of evaluating *stmt*.
 - c. If *result*.**[value]** is not **empty**, let *V* = *result*.**[value]**.
 - d. If *LoopContinues*(*result*.*labelSet*) is **false**, return *result*.
 - e. If *incrementExpr* is not **[empty]**, then
 - i. Let *incExprRef* be the result of evaluating *incrementExpr*.
 - ii. Let *incExprValue* be *GetValue*(*incExprRef*).
 - iii. If *LoopContinues*(*incExprValue*.*labelSet*) is **false**, return *incExprValue*.

12.6.4 The for-in and for-of Statements

Static Semantics

Static Semantics: Early Errors

IterationStatement :

for (*LeftHandSideExpression* **in** *Expression*) *Statement*
for (*LeftHandSideExpression* **of** *Expression*) *Statement*

- It is a Syntax Error *LeftHandSideExpression* is either an *ObjectLiteral* or an *ArrayLiteral* and if the lexical token sequence matched by *LeftHandSideExpression* cannot be parsed with no tokens left over using *AssignmentPattern* as the goal symbol.
- If *LeftHandSideExpression* is either an *ObjectLiteral* or an *ArrayLiteral* and if the lexical token sequence matched by *LeftHandSideExpression* can be parsed with no tokens left over using *AssignmentPattern* as the goal symbol then the following rules are not applied. Instead, the Early Error rules for *AssignmentPattern* are used.
- It is a Syntax Error if the *LeftHandSideExpression* is an *Identifier* that can be statically determined to always resolve to a declarative environment record binding and the resolved binding is an immutable binding.
- It is a Syntax Error if *LeftHandSideExpression* is neither an *ObjectLiteral* nor an *ArrayLiteral* and *IsValidSimpleAssignmentTarget* of *LeftHandSideExpression* is **false**.

Deleted: running
Deleted: current
Deleted: loopContinues
Deleted: varDecl
Deleted: running
Deleted: current
Deleted: varDecl
Deleted: increment
Deleted: testExpr
Deleted: running
Deleted: current

Comment [AWB6125]: ES5 breaking change:
 Completion reform

Deleted:,

- It is a Syntax Error if the LeftHandSideExpression is CoverParenthesizedExpressionAndArrowParameterList : (Expression) and Expression derived a production that would produce a Syntax Error according to these rules. This rule is recursively applied.

IterationStatement :

for (ForDeclaration in Expression) Statement
for (ForDeclaration of Expression) Statement

- It is a Syntax Error if any element of the BoundNames of ForDeclaration also occurs in the VarDeclaredNames of Statement.

Static Semantics: BoundNames

ForDeclaration : LetOrConst ForBinding

1. Return the BoundNames of ForBinding.

Static Semantics: VarDeclaredNames

IterationStatement : for (LeftHandSideExpression in Expression) Statement

1. Return the VarDeclaredNames of Statement.

IterationStatement : for (var ForBinding in Expression) Statement

1. Let names be the BoundNames of ForBinding.
2. Append to names the elements of the VarDeclaredNames of Statement.
3. Return names

IterationStatement : for (ForDeclaration in Expression) Statement

1. Return the VarDeclaredNames of Statement.

IterationStatement : for (LeftHandSideExpression of Expression) Statement

1. Return the VarDeclaredNames of Statement.

IterationStatement : for (var ForBinding of Expression) Statement

1. Let names be the BoundNames of ForBinding.
2. Append to names the elements of the VarDeclaredNames of Statement.
3. Return names

IterationStatement : for (ForDeclaration of Expression) Statement

1. Return the VarDeclaredNames of Statement.

Runtime Semantics

Runtime Semantics: Binding Instantiation

With arguments value and environment.

ForDeclaration : LetOrConst ForBinding

1. For each element name of the BoundNames of ForBinding do
 - a. If IsConstantDeclaration of LetOrConst is false, then
 - i. Call environment's CreateMutableBinding concrete method with argument name.

Deleted: <#>It is a Syntax Error if the IterationStatement is contained in strict code and LeftHandSideExpression is the Identifier eval or the Identifier arguments.¶

<#>It is a Syntax Error if the LeftHandSideExpression is an Identifier that statically resolves to a declarative environment record binding and the resolved binding is an immutable binding.¶

Deleted: <#>It is a Syntax Error if the LeftHandSideExpression is PrimaryExpression: (Expression) and Expression derived a production that would produce a Syntax Error according to these rules. This rule is recursively applied.¶

<#>It is a Syntax Error if IsInvalidAssignmentPattern of LeftHandSideExpression is true.It is a Syntax Error if the LeftHandSideExpression is an ObjectLiteral or an ArrayLiteral and the source code corresponding to LeftHandSideExpression cannot be parsed using AssignmentPattern as goal symbol.¶

Deleted: Lexically Declared Names

Deleted: Var Declared Names

Deleted: Bound Names

Deleted: ForVarDeclaration : BindingPattern ¶
<#>Return the Bound Names of BindingPattern.
ForVarDeclaration : VariableDeclarationNoIn ¶
<#>Return the Bound Names of VariableDeclarationNoIn.¶

Deleted: Bound Names

Deleted: ForBinding : BindingIdentifier ¶
<#>Return the Bound Names of BindingIdentifier.
ForDeclaration : BindingPattern ¶

Deleted: Var Declared Names

Deleted: The VarDeclaredNames of the production

Deleted: is determined as follows:

Deleted: Var Declared Names

Deleted: VariableDeclarationNoIn

Deleted: BindingIdentifier

Deleted: Bound Names

Deleted: Variable

Deleted: BindingIdentifier

Deleted: DeclarationNoIn

Deleted: Var Declared Names

Deleted: Var Declared Names

Deleted: Var Declared Names

Deleted: ForVarDeclaration

Deleted: Bound Names

Deleted: ForVarDeclaration

Deleted: Var Declared Names

Deleted: Var Declared Names

Deleted: Bound Names

- b. Else.
- Call *environment*'s `CreateImmutableBinding` concrete method with argument *name*.
2. Return the result of performing Binding Initialisation for *ForBinding* passing *value* and *environment* as the arguments.

Deleted: Perform

Runtime Semantics: Labelled Evaluation

With argument *labelSet*.

IterationStatement : for (LeftHandSideExpression in Expression) Statement

- Let *keyResult* be the result of performing For In/Of Expression Evaluation with *Statement*, *enumerate*, and *labelSet*.
- ReturnIfAbrupt(*keyResult*).
- Return the result of performing For In/Of Body Evaluation with *LeftHandSideExpression*, *Statement*, *keyResult*, *assignment*, and *labelSet*.

IterationStatement : for (var ForBinding in Expression) Statement

- Let *keyResult* be the result of performing For In/Of Expression Evaluation with *Statement*, *enumerate*, and *labelSet*.
- ReturnIfAbrupt(*keyResult*).
- Return the result of performing For In/Of Body Evaluation with *ForBinding*, *Statement*, *keyResult*, *varBinding*, and *labelSet*.

IterationStatement : for (ForDeclaration in Expression) Statement

- Let *keyResult* be the result of performing For In/Of Expression Evaluation with *Statement*, *enumerate*, and *labelSet*.
- ReturnIfAbrupt(*keyResult*).
- Return the result of performing For In/Of Body Evaluation with *ForDeclaration*, *Statement*, *keyResult*, *lexicalBinding*, and *labelSet*.

IterationStatement : for (LeftHandSideExpression of Expression) Statement

- Let *keyResult* be the result of performing For In/Of Expression Evaluation with *Expression*, *iterate*, and *labelSet*.
- ReturnIfAbrupt(*keyResult*).
- Return the result of performing For In/Of Body Evaluation with *LeftHandSideExpression*, *Statement*, *keyResult*, *assignment*, and *labelSet*.

IterationStatement : for (var ForBinding of Expression) Statement

- Let *keyResult* be the result of performing For In/Of Expression Evaluation with *Expression*, *iterate*, and *labelSet*.
- ReturnIfAbrupt(*keyResult*).
- Return the result of performing For In/Of Body Evaluation with *ForBinding*, *Statement*, *keyResult*, *varBinding*, and *labelSet*.

IterationStatement : for (ForDeclaration of Expression) Statement

- Let *keyResult* be the result of performing For In/Of Expression Evaluation with *Expression*, *iterate*, and *labelSet*.
- ReturnIfAbrupt(*keyResult*).
- Return the result of performing For In/Of Body Evaluation with *ForDeclaration*, *Statement*, *keyResult*, *lexicalBinding*, and *labelSet*.

Deleted: Runtime Semantics: Binding Initialisation

With arguments *value* and *environment*.¶
NOTE `undefined` is passed for *environment* to indicate that a PutValue operation should be used to assign the initialisation value. This is the case for `var` statements formal parameter lists of non-strict functions.

In those cases a lexical binding is hosted and preinitialised prior to evaluation of its initializer.¶
ForVarDeclaration : *BindingPattern*¶

<#>Perform Binding Initialisation for *BindingPattern* passing *value* and *env* as the arguments.¶
ForVarDeclaration : *VariableDeclarationNoIn*¶

<#>Perform Binding Initialisation for *VariableDeclarationNoIn* passing *value* and *env* as the arguments.¶
ForBinding : *BindingIdentifier*¶

<#>Perform Binding Initialisation for *BindingIdentifier* passing *value* and *env* as the arguments.¶
ForBinding : *BindingPattern*¶

<#>Perform Binding Initialisation for *BindingPattern* passing *value* and *env* as the arguments.¶
Deleted: Runtime Semantics: Evaluation¶

Deleted: The production

Deleted: is evaluated as follows:

Deleted: .[[value]]

Deleted: *BindingIdentifier*

Deleted: *BindingIdentifier*

Deleted: .[[value]]

Deleted: .[[value]]

Deleted: *ForDeclaration*

Deleted: *Statement*

Deleted: .[[value]]

Deleted: *BindingIdentifier*

Deleted: *Statement*

Deleted: *BindingIdentifier*

Deleted: .[[value]]

Deleted: *Statement*

Deleted: .[[value]]

Deleted: *ForDeclaration*

Runtime Semantics: For In/Of Expression Evaluation Abstract Operation

The abstract operation For In/Of Expression Evaluation is called with arguments *expr*, *iterationKind*, and *labelSet*. The value of *iterationKind* is either **enumerate** or **iterate**.

1. Let *exprRef* be the result of evaluating the production that is *expr*.
2. Let *exprValue* be GetValue(*exprRef*).
3. If *exprValue* is an abrupt completion,
 - a. If LoopContinues(*exprValue*, *labelSet*) is **false**, then return *exprValue*.
 - b. Else, return Completion {[[type]]: **break**, [[value]]: **empty**, [[target]]: **empty**}
4. If *exprValue*, [[value]] is **null** or **undefined**, return Completion {[[type]]: **break**, [[value]]: **empty**, [[target]]: **empty**}
5. Let *obj* be ToObject(*exprValue*).
6. If *iterationKind* is **enumerate**, then
 - a. Let *keys* be the result of calling the [[Enumerate]] internal method of *obj* with no arguments.
7. Else,
 - a. Assert *iterationKind* is **iterate**.
 - b. Let *keys* be the result of performing Invoke with arguments *obj*, %iterator%, and an empty List.
8. If *keys* is an abrupt completion, then
 - a. If LoopContinues(*exprValue*, *labelSet*) is **false**, then return *exprValue*.
 - b. Assert: *keys*, [[type]] is **continue**
 - c. Return Completion {[[type]]: **break**, [[value]]: **empty**, [[target]]: **empty**}
9. Return *keys*.

Runtime Semantics: For In/Of Body Evaluation Abstract Operation

The abstract operation For In/Of Body Evaluation is called with arguments *lhs*, *stmt*, *keys*, *lhsKind*, and *labelSet*. The value of *lhsKind* is either **assignment**, **varBinding** or **lexicalBinding**.

1. Let *oldEnv* be the running execution context's LexicalEnvironment.
2. Let *noArgs* be an empty List.
3. Let *V* = **undefined**.
4. Repeat
 - a. Let *next* be the result of Invoke(*keys*, "next").
 - b. If IteratorComplete(*next*) is **true**, then return NormalCompletion(*V*).
 - c. If LoopContinues(*next*, *labelSet*) is **false**, then return *next*.
 - d. If *next* is an abrupt completion, then let *status* be *next*.
 - e. Else,
 - i. Assert *next*, [[type]] is **normal**.
 - ii. Let *nextValue* be *next*, [[value]].
 - iii. If *lhsKind* is **assignment**, then
 1. Assert: *lhs* is a **LeftHandSideExpression**.
 2. If *lhs* is neither an **ObjectLiteral** nor an **ArrayLiteral** then
 - a. Let *lhsRef* be the result of evaluating *lhs* (it may be evaluated repeatedly).
 - b. Let *status* be the result of performing PutValue(*lhsRef*, *nextValue*).
 3. Else
 - a. Let *AssignmentPattern* be the parse of the source code corresponding to *lhs* using *AssignmentPattern* as the goal symbol.
 - b. Let *rval* be ToObject(*nextValue*).
 - c. If *rval* is an abrupt completion, then let *status* be *rval*.
 - d. Else, let *status* be the result of performing **Destructuring Assignment Evaluation** of *AssignmentPattern* using *rval* as the argument.
 - iv. Else if *lhsKind* is **varBinding**, then
 1. Assert: *lhs* is a **ForBinding**.
 2. Let *status* be the result of performing **Binding Initialisation** for *lhs* passing *nextValue* and **undefined** as the arguments.
 - v. Else,
 1. Assert *lhsKind* is **lexicalBinding**.
 2. Assert: *lhs* is a **ForDeclaration**.

Deleted: ion
Deleted: is performed as follows:
Deleted: <i>Expression</i>
Deleted: then return
Deleted: loopContinues
Comment [AWB6126]: Note a continue in initializer expression is just like a break
Comment [AWB6127]: Completion value reform
Deleted: undefined,
Comment [AWB6128]: Completion value reform
Deleted: undefined,
Deleted:
Deleted:
Deleted: (normal, empty, empty)
Deleted: arguments true and true
Comment [AWB6129]: Notation for private names known to the implementation
Comment [AWB6130]: Break/continue in the expression works normally (future for do {} on block lambda expressions)
Deleted: <#>Let <i>keys</i> be the result of calling the [[Iterate]] internal method of <i>obj</i> .
Deleted: LoopContinues
Comment [AWB6131]: Note a continue in initializer expression is just like a break
Comment [AWB6132]: Completion value reform
Deleted: undefined,
Deleted: ion
Deleted: is performed as follows:
Deleted: running
Deleted: current
Comment [AWB6133]: Completion value reform
Deleted:)
Deleted: empty
Deleted: performing
Deleted: with arguments
Deleted: , <i>keys</i> , and an empty arguments List
Comment [AWB7134]: TODO: need to define
Deleted: loopContinues
Deleted: <#>Let <i>P</i> be the name of the next
Deleted: the LeftHandSideExpression
Deleted: Call
Deleted: <i>P</i>
Comment [AWB6135]: ToDo, update this
Deleted: ForDeclaration

3. Let `iterationEnv` be the result of calling `NewDeclarativeEnvironment` passing `oldEnv` as the argument.
 4. Perform Binding Instantiation for `lhs` passing `nextValue` and `iterationEnv` as arguments.
 5. Let `status` be `NormalCompletion(empty)`
 6. Set the running execution context's LexicalEnvironment to `iterationEnv`.
- vi. If `status.[[type]]` is `normal`, then
1. Let `status` be the result of evaluating `stmt`.
 2. If `status.[[type]]` is `normal` and `status.[[value]]` is not empty, then
 - a. Let `V = status.[[value]]`.
- vii. Set the running execution context's LexicalEnvironment to `oldEnv`.
- viii. If `status` is an abrupt completion and `LoopContinues(status.labelSet)` is `false`, then return `status`.

Comment [AWB11136]: Need to understand why result of previous step is ignored. See bug 811

Deleted: running

Deleted: current

Deleted: `stmt`

Deleted: `Statement`

Deleted: If `stmt.value` is not empty, I

Deleted: `stmt`

Deleted: running

Deleted: current

Deleted: `loopContinues`

Deleted: <#>If `stmt.type` is `break` and `stmt.target` is in the current label set, return (`normal`, `V`, `empty`).
 <#>If `stmt.type` is not `continue` or `stmt.target` is not in the current label set, then
 <#>If `stmt` is an abrupt completion, return `stmt`.¶

Deleted: The `VarDeclaredNames` of the production `for (var VariableDeclarationNoIn in Expression) Statement` is determined as follows:
 Let `names` be `BoundNames` of `VariableDeclarationNoIn`.
 Append to `names` the elements of the `VarDeclaredNames` of `Statement`.
 Return `names`.¶

Deleted: The production `IterationStatement : for (var VariableDeclarationNoIn in Expression) Statement` is evaluated as follows:
 Let `varName` be the result of evaluating `VariableDeclarationNoIn`.
 Let `exprRef` be the result of evaluating the `Expression`.
 Let `exprValue` be `GetValue(exprRef)`.
 If `exprValue` is null or undefined, return (`normal`, `empty`, `empty`).
 Let `obj` be `ToObject(exprValue)`.
 Let `V = empty`.
 Repeat
 Let `P` be the name of the next property of `obj` whose `[[Enumerable]]` attribute is true. If there is no such property, return (`normal`, `V`, `empty`).¶

Deleted: Semantics¶

Deleted: A program is considered syntactically incorrect if either of the following is true:
 Deleted: The program contains a `continue` statement without the optional `Identifier`, which

Deleted: The program contains a `continue` statement with the optional `Identifier`, where

Deleted: label set

Deleted: A `ContinueStatement` without an `Identifier` is evaluated as follows:
 Deleted: (

Deleted:).

Deleted: A `ContinueStatement` with the optional `Identifier` is evaluated as follows:
 Deleted: (

Deleted:).

12.7 The continue Statement

Syntax

`ContinueStatement :`
`continue ;`
`continue [no LineTerminator here] Identifier ;`

Static Semantics

Static Semantics: Early Errors

`ContinueStatement : continue ;`

- It is a Syntax Error if this production is not nested, directly or indirectly (but not crossing function boundaries), within an `IterationStatement`.

`ContinueStatement : continue [no LineTerminator here] Identifier ;`

- It is a Syntax Error if `Identifier` does not appear in the `CurrentLabelSet` of an enclosing (but not crossing function boundaries) `IterationStatement`.

Runtime Semantics

Runtime Semantics: Evaluation

`ContinueStatement : continue ;`

1. Return Completion `{[[type]]: continue, [[value]]: empty, [[target]]: empty}`.

`ContinueStatement : continue [no LineTerminator here] Identifier ;`

1. Return Completion `{[[type]]: continue, [[value]]: empty, [[target]]: Identifier}`.

12.8 The break Statement

Syntax

`BreakStatement :`
`break ;`
`break [no LineTerminator here] Identifier ;`

Static Semantics

Static Semantics: Early Errors

BreakStatement : break ;

- It is a Syntax Error if this production, not nested, directly or indirectly (but not crossing function boundaries), within an *IterationStatement* or a *SwitchStatement*.

BreakStatement : break [no LineTerminator here] Identifier;

- It is a Syntax Error if *Identifier* does not appear in the *CurrentLabelSet* of an enclosing (but not crossing function boundaries) Statement.

Runtime Semantics

Runtime Semantics: Evaluation

BreakStatement : break ;

1. Return Completion {[[type]]: break, [[value]]: empty, [[target]]: empty}.

BreakStatement : break [no LineTerminator here] Identifier;

1. Return Completion {[[type]]: break, [[value]]: empty, [[target]]: *Identifier*}.

12.9 The return Statement

Syntax

ReturnStatement :
 return ;
 return [no LineTerminator here] Expression ;

NOTE A *return* statement causes a function to cease execution and return a value to the caller. If *Expression* is omitted, the return value is **undefined**. Otherwise, the return value is the value of *Expression*.

Static Semantics

Static Semantics: Early Errors

- It is a Syntax Error if a *return* statement is not within a *FunctionBody*.

Runtime Semantics

Runtime Semantics: Evaluation

ReturnStatement : return ;

1. Return Completion {[[type]]: return, [[value]]: **undefined**, [[target]]: empty}.

ReturnStatement : return [no LineTerminator here] Expression ;

1. Let *exprRef* be the result of evaluating *Expression*.

2. Let *exprValue* be *GetValue(exprRef)*.

3. *ReturnIfAbrupt(exprValue)*.

4. Return Completion {[[type]]: return, [[value]]: *exprValue*, [[target]]: empty}.

12.10 The with Statement

Syntax

WithStatement :
 with (*Expression*) *Statement*

Deleted: Semantics
A program is considered syntactically incorrect if either of the following is true:

Deleted: The program contains a **break** statement without the optional *Identifier*, where is

Deleted: The program contains a **break** statement with the optional *Identifier*, where

Deleted: label set

Deleted: A *BreakStatement* without an *Identifier* is evaluated as follows:

Deleted: (*Identifier*).

Deleted: A *BreakStatement* with an *Identifier* is evaluated as follows:

Deleted: (*Identifier*).

Deleted: (*Identifier*).

Deleted: <#>Semantics

Deleted: An ECMAScript program is considered syntactically incorrect if it contains

Deleted: that

Deleted: A *return* statement causes a function to cease execution and return a value to the caller. If *Expression* is omitted, the return value is **undefined**. Otherwise, the return value is the value of *Expression*.

Deleted: A *ReturnStatement* is evaluated as follows:
If the *Expression* is not present, r

Deleted: (*Identifier*).

Deleted: (*Identifier*).

Comment [AWB9137]: TODO If *exprRef* is Reference that invokes a getter we probably should find a way to specify that the get call is handled as a tail call.

Deleted: If *exprValue* is an abrupt completion, return *exprValue*

Deleted: (*Identifier*).

Deleted: *GetValue(exprRef)*

Deleted: (*Identifier*).

NOTE The `with` statement adds an object environment record for a computed object to the lexical environment of the running execution context. It then executes a statement using this augmented lexical environment. Finally, it restores the original lexical environment.

Deleted: current

Static Semantics

Static Semantics: Early Errors

WithStatement : with (Expression) Statement

- It is a Syntax Error if the code that matches this production is contained in strict code.

Deleted: Semantics¶
The static semantics of the production
Deleted: are:
Deleted: static

Static Semantics: VarDeclaredNames

WithStatement : with (Expression) Statement

1. Return the VarDeclaredNames of Statement.

Deleted: The VarDeclaredNames of the production
Deleted: is determined as follows:

Runtime Semantics

Runtime Semantics: Evaluation

WithStatement : with (Expression) Statement

1. Let val be the result of evaluating Expression.
2. Let obj be ToObject(GetValue(val)).
3. ReturnIfAbrupt(obj).
4. Let oldEnv be the running execution context's LexicalEnvironment.
5. Let newEnv be the result of calling NewObjectEnvironment passing obj and oldEnv as the arguments.
6. Set the withEnvironment flag of newEnv to true.
7. Set the running execution context's LexicalEnvironment to newEnv.
8. Let C be the result of evaluating Statement.
9. Set the running execution context's Lexical Environment to oldEnv.
10. Return C.

NOTE No matter how control leaves the embedded Statement, whether normally or by some form of abrupt completion or exception, the LexicalEnvironment is always restored to its former state.

Deleted: The production
Deleted: is evaluated as follows:

Deleted: If obj is an abrupt completion, return obj
Deleted: j
Deleted: running
Deleted: current
Deleted: provideThis
Deleted: running
Deleted: current
Deleted: but if an exception is thrown during the evaluation let C be (throw, V, empty), where V is the exception.
(Execution now proceeds as if no exception were thrown.)
Deleted: running
Deleted: current

Deleted: 12.10.1 Strict Mode Restrictions¶
Strict mode code may not include a WithStatement. The occurrence of a WithStatement in such a context is treated as a SyntaxError.¶

12.11 The `switch` Statement

Syntax

SwitchStatement :
 `switch (Expression) CaseBlock`

CaseBlock :
 { CaseClauses_{opt} }
 { CaseClauses_{opt} DefaultClause CaseClauses_{opt} }

CaseClauses :
 CaseClause
 CaseClauses CaseClause

CaseClause :
 `case Expression : StatementList`_{opt}

DefaultClause :
 `default : StatementList`_{opt}

Static Semantics

Static Semantics: Early Errors

CaseBlock : { CaseClauses }

- It is a Syntax Error if the LexicallyDeclaredNames of CaseClauses contains any duplicate entries.
- It is a Syntax Error if any element of the LexicallyDeclaredNames of CaseClauses also occurs in the VarDeclaredNames of CaseClauses.

Deleted: are:

Deleted: i

Static Semantics: LexicalDeclarations

CaseBlock : {}

1. Return a new empty List.

CaseBlock : { CaseClauses_{opt} DefaultClause CaseClauses_{opt} }

1. If the first CaseClauses is present, let declarations be the LexicalDeclarations of the first CaseClauses.
2. Else let declarations be a new empty List.
3. Append to declarations the elements of the LexicalDeclarations of the DefaultClause.
4. If the second CaseClauses is not present, return declarations.
5. Else return the result of appending to declarations the elements of the LexicalDeclarations of the second CaseClauses.

Deleted: CaseClause : case Expression : StatementList ¶
 <#>It is a Syntax Error if StatementList includes a StatementListItem : FunctionDeclaration production and the source code matching this CaseClause production is not contained in extended code.¶

Deleted: CaseBlock : { CaseClauses } ¶
 <#>Return the LexicalDeclarations of CaseClauses

CaseClauses : CaseClauses CaseClause

1. Let declarations be LexicalDeclarations of CaseClauses.
2. Append to declarations the elements of the LexicalDeclarations of CaseClause.
3. Return declarations.

Deleted: LexicallyDeclaredNames
Deleted: names
Deleted: names
Deleted: the
Deleted: lyDeclaredNames
Deleted: CaseClauses : CaseClause ¶
 <#>Return the LexicalDeclarations of CaseClause
Deleted: names

CaseClause : case Expression : StatementList_{opt}

1. If the StatementList is present, return the LexicalDeclarations of StatementList.
2. Else return a new empty List.

DefaultClause : default : StatementList_{opt}

1. If the StatementList is present, return the LexicalDeclarations of StatementList.
2. Else return a new empty List.

Static Semantics: LexicallyDeclaredNames

CaseBlock : {}

1. Return a new empty List.

CaseBlock : { CaseClauses_{opt} DefaultClause CaseClauses_{opt} }

1. If the first CaseClauses is present, let names be the LexicallyDeclaredNames of the first CaseClauses.
2. Else let names be a new empty List.
3. Append to names the elements of the LexicallyDeclaredNames of the DefaultClause.
4. If the second CaseClauses is not present, return names.
5. Else return the result of appending to names the elements of the LexicallyDeclaredNames of the second CaseClauses.

Deleted: CaseBlock : { CaseClauses } ¶
 <#>Return the LexicallyDeclaredNames of CaseClauses ¶

Deleted: the

Deleted: CaseClauses : CaseClause ¶
 <#>Return the LexicallyDeclaredNames of CaseClause ¶

CaseClauses : CaseClauses CaseClause

1. Let names be LexicallyDeclaredNames of CaseClauses.

2. Append to *names* the elements of the LexicallyDeclaredNames of *CaseClause*.
3. Return *names*.

CaseClause : **case** *Expression* : *StatementList*_{opt}

1. If the *StatementList* is present, return the LexicallyDeclaredNames of *StatementList*.
2. Else return a new empty List.

DefaultClause : **default** : *StatementList*_{opt}

1. If the *StatementList* is present, return the LexicallyDeclaredNames of *StatementList*.
2. Else return a new empty List.

Static Semantics: VarDeclaredNames

SwitchStatement : **switch** (*Expression*) *CaseBlock*

1. Return the VarDeclaredNames of *CaseBlock*.

CaseBlock : { }

1. Return a new empty List.

CaseBlock : { *CaseClauses*_{opt} *DefaultClause* *CaseClauses*_{opt} }

1. If the first *CaseClauses* is present, let *names* be the VarDeclaredNames of the first *CaseClauses*.
2. Else let *names* be a new empty List.
3. Append to *names* the elements of the VarDeclaredNames of the *DefaultClause*.
4. If the second *CaseClauses* is not present, return *names*.
5. Else return the result of appending to *names* the elements of the VarDeclaredNames of the second *CaseClauses*.

CaseClauses : *CaseClauses* *CaseClause*

1. Let *names* be VarDeclaredNames of *CaseClauses*.
2. Append to *names* the elements of the VarDeclaredNames of *CaseClause*.
3. Return *names*.

CaseClause : **case** *Expression* : *StatementList*_{opt}

1. If the *StatementList* is present, return the VarDeclaredNames of *StatementList*.
2. Else return a new empty List.

DefaultClause : **default** : *StatementList*_{opt}

1. If the *StatementList* is present, return the VarDeclaredNames of *StatementList*.
2. Else return a new empty List.

Runtime Semantics

Runtime Semantics: Case Block Evaluation

With argument *input*.

CaseBlock : { *CaseClauses*_{opt} }

1. Let *V*=**undefined**.
2. Let *A* be the list of *CaseClause* items in source text order.
3. Let *searching* be **true**.

Deleted: Semantics ¶
The VarDeclaredNames of the production

Deleted: is determined as follows:

Deleted: *CaseBlock* : { *CaseClauses* } ¶
<#>Return the VarDeclaredNames of *CaseClauses*.¶

Deleted: the

Deleted: *CaseClauses* : *CaseClause* ¶
<#>Return the VarDeclaredNames of *CaseClause*.¶

Deleted: Runtime Semantics: Evaluation ¶
The production *SwitchStatement* : **switch** (*Expression*) *CaseBlock* is evaluated as follows: ¶
<#>Let *exprRef* be the result of evaluating *Expression*.¶
<#>Let *oldEnv* be the running execution context's LexicalEnvironment.¶
<#>Let *blockEnv* be the result of calling NewDeclarativeEnvironment passing *oldEnv* as the argument.¶
<#>Perform Block Declaration Instantiation using *CaseBlock* and *blockEnv*.¶
<#>Let *R* be the result of evaluating *CaseBlock*, passing *GetValue(exprRef)* as a parameter.¶
<#>Set the running execution context's LexicalEnvironment to *oldEnv*.¶
<#>If *R*.type is **break** and *R*.target is in the current label set (normal, *R*.value, empty).¶
<#>Return *R*.¶
NOTE No matter how control leaves the *SwitchStatement*, the LexicalEnvironment is always restored to its former state.¶

Deleted: The production

Deleted: is given an input parameter, *input*, and is evaluated as follows:

Comment [AWB6138]: ES5 breaking change: completion reform

Deleted: empty

4. Repeat, while *searching* is **true**
 - a. Let *C* be the next *CaseClause* in *A*. If there is no such *CaseClause*, return NormalCompletion(V).
 - b. Let *clauseSelector* be the result of evaluating *C*.
 - c. ReturnIfAbrupt(clauseSelector).
 - d. If *input* is equal to *clauseSelector* as defined by the Strict Equality Comparison Algorithm (11.9.1), then
 - i. Set *searching* to **false**.
 - ii. If *C* has a *StatementList*, then
 1. Evaluate *C*'s *StatementList* and let *R* be the result.
 2. ReturnIfAbrupt(R).
 3. Let *V* = *R.[[value]]*.
5. Repeat
 - a. Let *C* be the next *CaseClause* in *A*. If there is no such *CaseClause*, return NormalCompletion(V).
 - b. If *C* has a *StatementList*, then
 - i. Evaluate *C*'s *StatementList* and let *R* be the result.
 - ii. If *R.[[value]]* is not **empty**, then let *V* = *R.[[value]]*.
 - iii. If *R* is an abrupt completion, then return Completion {[[type]]: *R.[[type]]*, [[value]]: *V*, [[target]]: *R.[[target]]*}.

CaseBlock : { *CaseClauses_{opt}* *DefaultClause* *CaseClauses_{opt}* }

1. Let *V* = **undefined**.
2. Let *A* be the list of *CaseClause* items in the first *CaseClauses*, in source text order.
3. Let *found* be **false**.
4. Repeat letting *C* be in order each *CaseClause* in *A*
 - a. If *found* is **false**, then
 - i. Let *clauseSelector* be the result of Case Selector Evaluation of C.
 - ii. If *clauseSelector* is an abrupt completion, then
 1. If *clauseSelector.[[value]]* is **empty**, then return Completion {[[type]]: *clauseSelector.[[type]]*, [[value]]: **undefined**, [[target]]: *clauseSelector.[[target]]*}.
 2. Else, return *clauseSelector*.
 - iii. If *input* is equal to *clauseSelector* as defined by the Strict Equality Comparison Algorithm (11.9.1), then set *found* to **true**.
 - b. If *found* is **true**, then
 - i. Evaluate *CaseClause C* and let *R* be the result.
 - ii. If *R.[[value]]* is not **empty**, then let *V* = *R.[[value]]*.
 - iii. If *R* is an abrupt completion, then return Completion {[[type]]: *R.[[type]]*, [[value]]: *V*, [[target]]: *R.[[target]]*}.
5. Let *foundInB* be **false**.
6. If *found* is **false**, then
 - a. Let *B* be a new list of the *CaseClause* items in the second *CaseClauses*, in source text order.
 - b. Repeat, letting *C* be in order each *CaseClause* in *B*.
 - i. If *foundInB* is **false**, then
 1. Let *clauseSelector* be the result of Case Selector Evaluation of C.
 2. If *clauseSelector* is an abrupt completion, then
 - a. If *clauseSelector.[[value]]* is **empty**, then return Completion {[[type]]: *clauseSelector.[[type]]*, [[value]]: **undefined**, [[target]]: *clauseSelector.[[target]]*}.
 - b. Else, return *clauseSelector*.
 3. If *input* is equal to *clauseSelector* as defined by the Strict Equality Comparison Algorithm (11.9.1), then set *foundInB* to **true**.
 - ii. If *foundInB* is **true**, then
 1. Evaluate *CaseClause C* and let *R* be the result.
 2. If *R.[[value]]* is not **empty**, then let *V* = *R.[[value]]*.
 3. If *R* is an abrupt completion, then return Completion {[[type]]: *R.[[type]]*, [[value]]: *V*, [[target]]: *R.[[target]]*}.
7. If *foundInB* is **true**, then return NormalCompletion(V).
8. Evaluate *DefaultClause* and let *R* be the result.
9. If *R.[[value]]* is not **empty**, then let *V* = *R.[[value]]*.
10. If *R* is an abrupt completion, then return Completion {[[type]]: *R.[[type]]*, [[value]]: *V*, [[target]]: *R.[[target]]*}.
11. Let *B* be a new list of the *CaseClause* items in the second *CaseClauses*, in source text order.

- Deleted:** (normal,
Deleted: , empty
Deleted: If *clauseSelector* is an abrupt completion
Deleted: return *clauseSelector*
- Deleted:** *i*
Deleted: 6
Deleted: === operator
Deleted: *r*
Deleted: If *R* is an abrupt completion, then return *R*
- Deleted:** (normal,
Deleted: , empty
Deleted: (
Deleted:).
Deleted: The production
Deleted: is given an input parameter, *input*, and is evaluated as follows:
Comment [AWB6139]: ES5 breaking change: completion reform
Deleted: .empty.
Deleted: <#>Let *B* be the list of *CaseClause* items in the second *CaseClauses*, in source text order
Deleted: evaluating
Deleted: Comparision
Deleted: 6
Deleted: === operator
Deleted: <#>If *C* has a *StatementList*, then
Deleted: 's *StatementList*
Deleted: (
Deleted:).
Deleted: while *foundInB* is **false** and all elements of *B* have not been processed
Deleted: <#>Let *C* be the next *CaseClause* in *B*
Deleted: evaluating
Deleted: .
Deleted: Comparision
Deleted: 6
Deleted: === operator
Deleted: 1
Deleted: If *C* has a *StatementList*,
Deleted: *C*'s *StatementList*
Deleted: (
Deleted:).
Deleted: <#>If *foundInB* is **false** and the
Deleted: the
Deleted: 's *StatementList*
Deleted: (*R.type*, *V*, *R.target*)

12. Repeat, letting C be in order each *CaseClause* in B (NOTE this is another complete iteration of the second *CaseClauses*)

- b. Evaluate *CaseClause* C , and let R be the result.
- c. If $R.[[value]]$ is not empty, then let $V = R.[[value]]$.
- d. If R is an abrupt completion, then return Completion {[[type]]: $R.[[type]]$, [[value]]: V , [[target]]: $R.[[target]]$ }.

13. Return NormalCompletion(V).

Runtime Semantics: Case Selector Evaluation

CaseClause : **case** *Expression* : *StatementList*_{opt}

1. Let *exprRef* be the result of evaluating *Expression*.
2. Return GetValue(*exprRef*).

NOTE Case Selector Evaluation does not execute the associated *StatementList*. It simply evaluates the *Expression* and returns the value, which the CaseBlock algorithm uses to determine which *StatementList* to start executing.

Runtime Semantics: Evaluation

SwitchStatement : **switch** (*Expression*) *CaseBlock*

1. Let *exprRef* be the result of evaluating *Expression*.
2. Let *switchValue* be GetValue(*exprRef*).
3. ReturnIfAbrupt(*switchValue*).
4. Let *oldEnv* be the running execution context's LexicalEnvironment.
5. Let *blockEnv* be the result of calling NewDeclarativeEnvironment passing *oldEnv* as the argument.
6. Perform Block Declaration Instantiation using *CaseBlock* and *blockEnv*.
7. Let R be the result of performing Case Block Evaluation of *CaseBlock* with argument *switchValue*.
8. Set the running execution context's LexicalEnvironment to *oldEnv*.
9. Return R .

NOTE No matter how control leaves the *SwitchStatement* the LexicalEnvironment is always restored to its former state.

CaseClause : **case** *Expression* : [empty]

1. Return NormalCompletion(empty).

CaseClause : **case** *Expression* : *StatementList*

1. Return the result of evaluating *StatementList*.

DefaultClause : **default**: [empty]

1. Return NormalCompletion(empty).

DefaultClause : **default**: *StatementList*

1. Return the result of evaluating *StatementList*.

12.12 Labelled Statements

Syntax

LabelledStatement :
 Identifier : *Statement*

NOTE A *Statement* may be prefixed by a label. Labelled statements are only used in conjunction with labelled **break** and **continue** statements. ECMAScript has no **goto** statement. A *Statement* can be part of a *LabelledStatement*, which itself can be part of a *LabelledStatement*, and so on. The labels introduced this way are collectively referred to as the "current label set" when describing the semantics of individual statements. A *LabelledStatement* has no semantic meaning

Deleted: Note

Deleted: that if step 7.a.i has been performed this loop does not start at the beginning of B

Deleted: <#>Let C be the next *CaseClause* in B . If there is no such *CaseClause*, return NormalCompletion((normal, V , empty)).

<#>If C has a *StatementList*, then ¶

Deleted: 's *StatementList*

Deleted: return ($R.type$, V , $R.target$)

Deleted: Evaluating

Deleted: *CaseClause*

Deleted: If *switchValue* is an abrupt completion, return *switchValue*

Deleted: running

Deleted: current

Deleted: running

Deleted: current

Deleted: <#>If $R.[[type]]$ is break and $R.[[target]]$ is in *CurrentLabelSet*, return NormalCompletion($R.[[value]]$). ¶

Deleted: The production

Deleted: opt

Deleted: is evaluated as follows:

Deleted: Let *exprRef* be the result of evaluating *Expression*. ¶

Return GetValue(*exprRef*). ¶

NOTE Evaluating *CaseClause* does not execute the associated *StatementList*. It simply evaluates the *Expression* and returns the value, which the CaseBlock algorithm uses to determine which *StatementList* to start executing. ¶

Deleted: Semantics ¶

other than the introduction of a label to a *label set*. The label set of an *IterationStatement* or a *SwitchStatement* initially contains the single element **empty**. The label set of any other statement is initially empty.

Static Semantics

Static Semantics: Early Errors

- It is a Syntax Error if a *LabelledStatement* is enclosed by a *LabelledStatement* with the same *Identifier* as the enclosed *LabelledStatement*. This does not apply to a *LabelledStatement* appearing within the body of a *FunctionDeclaration* and a *LabelledStatement* that encloses directly or indirectly the *FunctionDeclaration*.

Static Semantics: VarDeclaredNames

LabelledStatement : *Identifier* : *Statement*

1. Return the *VarDeclaredNames* of *Statement*.

Runtime Semantics

Runtime Semantics: Labelled Evaluation

With argument *labelSet*.

LabelledStatement : *Identifier* : *Statement*

1. Let *label* be the *StringValue* of *Identifier*.
2. Let *newLabelSet* be a new *List* containing *label* and the elements of *labelSet*.
3. If *Statement* is either *LabelledStatement* or *BreakableStatement*, then
 - a. Let *stmtResult* be the result of performing Labelled Evaluation of *Statement* with argument *newLabelSet*.
4. Else,
 - a. Let *stmtResult* be the result of evaluating *Statement*.
5. If *stmtResult*.[[type]] is **break** and *stmtResult*.[[target]] is the same value as *label*, then
 - a. Let *result* be *NormalCompletion*(*stmtResult*.[[value]]).
6. Else,
 - a. Let *result* be *stmtResult*.
7. Return *result*.

Runtime Semantics: Evaluation

LabelledStatement : *Identifier* : *Statement*

3. Let *newLabelSet* be a new empty *List*.
4. Return the result of performing Labelled Evaluation of this *LabelledStatement* with argument *newLabelSet*.

12.13 The throw Statement

Syntax

ThrowStatement :
 throw [no *LineTerminator* here] *Expression* ;

Runtime Semantics: Evaluation

The production *ThrowStatement* : **throw** [no *LineTerminator* here] *Expression* ; is evaluated as follows:

Deleted: An ECMAScript program is considered syntactically incorrect if it contains
Deleted: that
Deleted: label
Deleted: labels
Deleted: that
Deleted: is
Deleted: nested
Deleted: ,
Deleted: within
Deleted: a labelled statement
Deleted: The *VarDeclaredNames* of the production *DefaultCase*
Deleted: *t* is determined as follows:

Deleted:
Deleted: I

Deleted: The production *Identifier* : *Statement* evaluated by adding *Identifier* to the label set of *Statement* and then evaluating *Statement*. If the *LabelledStatement* itself has a non-empty label set, these labels are also added to the label set of *Statement* before evaluating it. If the result of evaluating *Statement* is (**break**, *V*, *L*) where *L* is equal to *Identifier*, the production results in (*normal*, *V*, **empty**).¶

Deleted: Prior to the evaluation of a *LabelledStatement*, the contained *Statement* is regarded as possessing an empty label set unless it is an *IterationStatement* or a *SwitchStatement*, in which case it is regarded as possessing a label set consisting of the single element, **empty**.¶

Deleted: Semantics¶

1. Let *exprRef* be the result of evaluating *Expression*.
2. Let *exprValue* be *GetValue(exprRef)*.
3. ReturnIfAbrupt(*exprValue*).
4. Return *Completion* {[[type]]: *throw*, [[value]]: *GetValue(exprRef)*, [[target]]: empty}.

12.14 The `try` Statement

Syntax

TryStatement :

`try` *Block* *Catch*
`try` *Block* *Finally*
`try` *Block* *Catch* *Finally*

Catch :

`catch` (*CatchParameter*) *Block*

Finally :

`finally` *Block*

CatchParameter :

BindingIdentifier
BindingPattern

NOTE The `try` statement encloses a block of code in which an exceptional condition can occur, such as a runtime error or a `throw` statement. The `catch` clause provides the exception-handling code. When a catch clause catches an exception, its *Identifier* is bound to that exception.

Deleted: *Identifier*

Formatted: Note

Static Semantics

Static Semantics: Early Errors

Catch : `catch` (*CatchParameter*) *Block*

- It is a Syntax Error if any element of the *BoundNames* of *CatchParameter* also occurs in the *LexicallyDeclaredNames* of *Block*.
- It is a Syntax Error if any element of the *BoundNames* of *CatchParameter* also occurs in the *VarDeclaredNames* of *Block*.

Deleted: the code that matches this production is contained in extended code and

Comment [AWB140]: Note that this is a new restriction that does not exist in ES5

Deleted: Static Semantics: *BoundNames*¶

CatchParameter: *BindingIdentifier* ¶
<#>Return the *BoundNames* of *BindingIdentifier*. ¶
CatchParameter: *BindingPattern* ¶
<#>Return the *BoundNames* of *BindingPattern*. ¶

Deleted: Semantics¶
The *VarDeclaredNames* of the production

Deleted: is determined as follows:

Static Semantics: VarDeclaredNames

TryStatement : `try` *Block* *Catch*

1. Let *names* be *VarDeclaredNames* of *Block*.
2. Append to *names* the elements of the *VarDeclaredNames* of *Catch*.
3. Return *names*.

TryStatement : `try` *Block* *Finally*

1. Let *names* be *VarDeclaredNames* of *Block*.
2. Append to *names* the elements of the *VarDeclaredNames* of *Finally*.
3. Return *names*.

TryStatement : `try` *Block* *Catch* *Finally*

1. Let *names* be *VarDeclaredNames* of *Block*.
2. Append to *names* the elements of the *VarDeclaredNames* of *Catch*.
3. Append to *names* the elements of the *VarDeclaredNames* of *Finally*.
4. Return *names*.

Catch : catch (CatchParameter) Block

1. Return the VarDeclaredNames of *Block*.

Runtime Semantics

Runtime Semantics: Binding Initialisation

With arguments *value* and *environment*.

NOTE *undefined* is passed for *environment* to indicate that a PutValue operation should be used to assign the initialisation value. This is the case for *var* statements formal parameter lists of non-strict functions. In those cases a lexical binding is hosted and preinitialized prior to evaluation of its initializer.

CatchParameter: BindingPattern

4. Let *exceptionObj* be ToObject(*value*).
5. ReturnIfAbrupt(*exceptionObj*).
6. Return the result of performing Binding Initialisation for *BindingPattern* passing *exceptionObj* and *environment* as the arguments.

Runtime Semantics: Catch Clause Evaluation

with parameter *thrownValue*

Catch : catch (CatchParameter) Block

1. Let *oldEnv* be the running execution context's LexicalEnvironment.
2. Let *catchEnv* be the result of calling NewDeclarativeEnvironment passing *oldEnv* as the argument.
3. For each element *argName* of the BoundNames of *CatchParameter*, do
 - a. Call the CreateMutableBinding concrete method of *catchEnv* passing *argName* as the argument.
4. Let *status* be the result of performing Binding Initialisation for *CatchParameter* passing *thrownValue* and *catchEnv* as arguments.
5. ReturnIfAbrupt(*status*).
6. Set the running execution context's LexicalEnvironment to *catchEnv*.
7. Let *B* be the result of evaluating *Block*.
8. Set the running execution context's LexicalEnvironment to *oldEnv*.
9. Return *B*.

NOTE No matter how control leaves the *Block* the LexicalEnvironment is always restored to its former state.

Runtime Semantics: Evaluation

TryStatement : try Block Catch

1. Let *B* be the result of evaluating *Block*.
2. If *B*.[[type]] is not throw, return *B*.
3. Return the result of performing Catch Clause Evaluation of *Catch* with parameter *B*.[[value]].

TryStatement : try Block Finally

1. Let *B* be the result of evaluating *Block*.
2. Let *F* be the result of evaluating *Finally*.
3. If *F*.[[type]] is normal, return *B*.
4. Return *F*.

TryStatement : try Block Catch Finally

1. Let *B* be the result of evaluating *Block*.

Deleted: Finally : finally Block ¶
Return the VarDeclaredNames of Block.¶

Deleted: Initialization

Deleted: environment

Deleted: initialization

Deleted: the

Deleted: CatchParameter: BindingIdentifier¶
<#>PerformReturn the result of performing BindInitializationInitialisation for *BindingIdentifier* passing *value* and *enviornmentenvironment* as the arguments.¶

Comment [AWB10141]: Catching a throw null or undefined with a destructuring parameter rethrows a TypeError. Does this make sense?

Deleted: Perform

Deleted: Initialization

Deleted: enviornment

Deleted: running

Deleted: current

Deleted: Perform

Deleted: Initialization

Deleted: g

Deleted: If an exception was thrown in the preceding step, return (throw, V, empty) where V is the exception. (Execution now proceeds as if no exception were thrown.)status is an abrupt completion, then return status

Deleted: running

Deleted: current

Deleted: running

Deleted: current

Deleted: The production

Deleted: is evaluated as follows:

Deleted: evaluating

Deleted: The production

Deleted: is evaluated as follows:

Deleted: The production

Deleted: is evaluated as follows:

2. If $B.[[type]]$ is throw, then
 - a. Let C be the result of performing Catch Clause Evaluation of $Catch$ with parameter $B.value$.
3. Else $B.[[type]]$ is not throw,
 - a. Let C be B .
4. Let F be the result of evaluating $Finally$.
5. If $F.[[type]]$ is normal, return C .
6. Return F .

12.15 The debugger statement

Syntax

DebuggerStatement :
 debugger ;

Runtime Semantics: Evaluation

NOTE Evaluating the *DebuggerStatement* production may allow an implementation to cause a breakpoint when run under a debugger. If a debugger is not present or active this statement has no observable effect.

The production *DebuggerStatement* : debugger ; is evaluated as follows:

1. If an implementation defined debugging facility is available and enabled, then
 - a. Perform an implementation defined debugging action.
 - b. Let $result$ be an implementation defined Completion value.
2. Else
 - a. Let $result$ be NormalCompletion(empty).
3. Return $result$.

13 Functions and Generators

13.1 Function Definitions

Syntax

FunctionDeclaration :
 function BindingIdentifier (FormalParameterList) { *FunctionBody* }

FunctionExpression :
 function BindingIdentifier_{opt} (FormalParameterList) { *FunctionBody* }

FormalParameterList :
[empty]
FunctionRestParameter
FormalsList
FormalsList, FunctionRestParameter

FormalsList :
FormalParameter
FormalsList, FormalParameter

FunctionRestParameter :
 ... BindingIdentifier

FormalParameter :
BindingElement

FunctionBody :
StatementList_{opt}

Deleted: evaluating

Deleted: ,

Deleted: The production *Catch* : catch
 (IdentifierCatchParameter) Block is evaluated with
 parameter C as follows:
 Let C be the parameter that has been passed to this
 production.
 Let $oldEnv$ be the running execution context's
 LexicalEnvironment.

Let $catchEnv$ be the result of calling
 NewDeclarativeEnvironment passing $oldEnv$ as the
 argument. ¶

For each element *argName* of the *BoundNames* of
CatchParameter, do ¶

Call the *CreateMutableBinding* concrete method of

catchEnv passing *argName* the *Identifier* String val

as the argument. ¶

Call the *Evaluate* *CatchParameter* *SetMutableBinding* using concrete method of *catchEnv* passing the
Identifier, C and $catEnv$, and false as arguments. Note
 that the last argument is immaterial in this situation.

If an exception was thrown in the preceding step,

return (throw, V , empty) where V is the exception.

(Execution now proceeds as if no exception were

thrown.) ¶

Set the running execution context's
 LexicalEnvironment to *catchEnv*. ¶

Let B be the result of evaluating *Block*. ¶

Set the running execution context's
 LexicalEnvironment to *oldEnv*. ¶

Return B . ¶

NOTE No matter how control leaves the *Block* the
 LexicalEnvironment is always restored to its former

state. ¶

The *VarDeclaredNames* of the production *Finally* :

finally *Block* is determined as follows: ¶

Return the *VarDeclaredNames* of *Block*. ¶

Deleted: The production *Finally* : finally *Block* is evaluated as follows: ¶

Return the result of evaluating *Block*. ¶

Deleted: The *BoundNames* of the production
CatchParameter : *BindingIdentifier* is determined as follows: ¶

Return the *BoundNames* of *BindingIdentifier*. ¶

Deleted: Semantics ¶

Deleted: Runtime Semantics: Evaluation ¶

Deleted: (normal, ¶

Deleted: , empty ¶

Deleted: _{opt} ¶

Deleted: _{opt} ¶

Deleted: ... *Identifier* ¶

Deleted: ... *Identifier* ¶

Deleted: *FormalParameterList* ¶

Deleted: *Identifier* ¶

Deleted: *FormalParameterList* ¶

Deleted: *Identifier* ¶

Deleted: *BindingIdentifier Initialiser*_{opt} .

Deleted: *Pattern* ¶

Deleted: *Initialiser*_{opt} ¶

Deleted: *SourceElements*_{opt}

Static Semantics

Static Semantics: Early Errors

FunctionDeclaration : function BindingIdentifier (FormalParameterList) { FunctionBody }

and

FunctionExpression : function BindingIdentifier_{opt} (FormalParameterList) { FunctionBody }

- It is a Syntax Error if IsSimpleParameterList of FormalParameterList is true and any element of the BoundNames of FormalParameterList also occurs in the VarDeclaredNames of FunctionBody.
- It is a Syntax Error if IsSimpleParameterList of FormalParameterList is false and BoundNames of FormalParameterList contains any duplicate elements.
- It is a Syntax Error if IsSimpleParameterList of FormalParameterList is false and BoundNames of FormalParameterList contains either "eval" or "arguments".
- It is a Syntax Error if the source code matching this production is strict code and BoundNames of FormalParameterList contains any duplicate elements.
- It is a Syntax Error if any element of the BoundNames of FormalParameterList also occurs in the LexicallyDeclaredNames of FunctionBody.
- It is a Syntax Error if FunctionBody Contains YieldExpression.

NOTE The LexicallyDeclaredNames of a FunctionBody does not include identifiers bound using var or function declarations. Simple parameter lists bind identifiers as VarDeclaredNames. Parameter lists that contain destructuring patterns, default value initialisers, or a rest parameter bind identifiers as LexicallyDeclaredNames. Multiple occurrences of the same Identifier in a FormalParameterList is only allowed for non-strict functions with simple parameter lists.

FunctionBody : StatementList

- It is a Syntax Error if the LexicallyDeclaredNames of StatementList contains any duplicate entries.
- It is a Syntax Error if any element of the LexicallyDeclaredNames of StatementList also occurs in the VarDeclaredNames of StatementList.

FormalParameter : BindingElement

- It is a Syntax Error if BindingElement Contains YieldExpression.

Static Semantics: BoundNames

FunctionDeclaration : function BindingIdentifier (FormalParameterList) { FunctionBody }

1. Return the BoundNames of BindingIdentifier.

FormalParameterList : [empty]

1. Return an empty List.

FormalParameterList : FormalsList , FunctionRestParameter

1. Let names be BoundNames of FormalsList.
2. Append to names the BoundNames of FunctionRestParameter.
3. Return names.

FormalsList : FormalsList , FormalParameter

1. Let names be BoundNames of FormalsList.
2. Append to names the elements of BoundNames of FormalParameter.
3. Return names.

Static Semantics: Contains

Deleted: NOTE The identifier of a rest parameter is specified as an Identifier rather than a BindingIdentifier because it may be the identifier arguments..¶

Deleted: Semantics¶

Deleted: <#>It is a Syntax Error if the source code matching this production is extended code and the BoundNames of BindingIdentifier also occurs in the VarDeclaredNames of FunctionBody.¶

<#>It is a Syntax Error if the source code matching this production is extended code and the BoundNames of BindingIdentifier also occurs in the LexicallyDeclaredNames of FunctionBody.¶

Deleted: <#>It is a Syntax Error if the source code matching this production is extended code and any element of the LexicallyDeclaredNames of FormalParameterList also occurs in the VarDeclaredNames of FunctionBody.¶

Deleted: the source code matching this production is extended code and

Deleted: Lexically

Deleted: s

Deleted: s

Deleted: the source code matching this production is extended code and

Deleted: BoundNames

Deleted: i

Deleted: the source code matching this production is extended code and

Deleted: FormalParameterList : FormalsList¶

<#>It is a Syntax Error if FormalParameterList Contains YieldExpression.¶

<#>It is a Syntax Error if BoundNames of FormalsList contains any duplicate elements or either FormalsList Contains BindingPattern or FormalsList Contains Initialiser.¶

<#>It is a Syntax Error if BoundNames of FormalsList contains either "eval" or "arguments" and either FormalsList Contains BindingPattern or FormalsList Contains Initialiser.¶

<#>It is a Syntax Error if BoundNames of FormalsList contains any duplicate elements.¶

<#>It is a Syntax Error if BoundNames of FormalsList contains the any element String Value of the BoundNames of IdentifierFunctionRestParameter.¶

FormalsList : FormalsList , FormalParameter¶

<#>It is a Syntax Error if the source code matching this production is strict code and BoundNames of FormalsList contains any element which is also contained in BoundNames of FormalParameter.¶

FunctionRestParameter : ... BindingIdentifier¶

Deleted: <#>It is a Syntax Error if the source code parsed with this production is not extended code.¶

Deleted: FormalParameterList : FunctionRestParameter¶

Deleted: FormalParameterList : ... BindingIdentifier¶

With parameter symbol.

FunctionDeclaration : function BindingIdentifier (FormalParameterList) { FunctionBody }

1. Return **false**.

FunctionExpression : function BindingIdentifier_{opt} (FormalParameterList) { FunctionBody }

1. Return **false**.

NOTE Static semantic rules that depend upon substructure generally do not look into function definitions.

Static Semantics: ExpectedArgumentCount

FormalParameterList :

[empty]
FunctionRestParameter

1. Return 0.

FormalParameterList : FormalsList , FunctionRestParameter

1. Return the ExpectedArgumentCount of *FormalsList*.

NOTE The ExpectedArgumentCount of a *FormalParameterList* is the number of *FormalParameters* to the left of either the rest parameter or the first *FormalParameter* with an Initialiser. A *FormalParameter* without an initializer is allowed after the first parameter with an initializer but such parameters are considered to be optional with **undefined** as their default value.

FormalsList : FormalParameter

1. If HasInitialiser of *FormalParameter* is **false** return 0
2. Return 1.

FormalsList : FormalsList , FormalParameter

1. Let *count* be the ExpectedArgumentCount of *FormalsList*.
2. If HasInitialiser of *FormalsList* is **true** or HasInitialiser of *FormalParameter* is **true**, then return *count*.
3. Return *count*+1.

Static Semantics: HasInitialiser

FormalsList : FormalsList , FormalParameter

1. If HasInitialiser of *FormalsList* is **true**, then return **true**.
2. Return HasInitialiser of *FormalParameter*.

Static Semantics: IsConstantDeclaration

FunctionDeclaration : function BindingIdentifier (FormalParameterList) { FunctionBody }

1. Return **false**.

Static Semantics: IsSimpleParameterList

FormalParameterList : [empty]

1. Return **true**.

Deleted: ¶

Deleted: *FormalsList*

Deleted: are

Deleted: *FormalsList* : *FormalParameter* ¶
<#>Return HasInitialiser of *FormalParameter*.¶

Deleted: *FormalParameter* : *BindingElement* ¶
<#>Return HasInitialiser of *BindingElement*.¶

FormalParameterList : FunctionRestParameter

1. Return **false**.

FormalParameterList : FormalsList , FunctionRestParameter

1. Return **false**.

FormalsList : FormalsList , FormalParameter

1. If IsSimpleParameterList of FormalsList is **false**, return **false**.
 2. Return IsSimpleParameterList of FormalParameter.

FormalParameter : BindingElement

1. If HasInitialiser of BindingElement is **true**, return **false**.
 2. If FormalParameter Contains BindingPattern is **true**, return **false**.
 3. Return **true**.

Static Semantics: IsStrict

FunctionBody : StatementList_{opt}

1. If this FunctionBody is contained in strict code or if StatementList is strict code, then return **true**.
 Otherwise, return **false**.

Deleted:

Comment [AWB10142]: Need a better definition
Deleted: ¶

Static Semantics: LexicallyDeclaredNames

FunctionDeclaration : function BindingIdentifier (FormalParameterList) { FunctionBody }

1. Return the BoundNames of BindingIdentifier.

FunctionBody : [empty]

1. Return an empty List.

FunctionBody : StatementList

1. Return TopLevelLexicallyDeclaredNames of StatementList.

Deleted: FunctionBody : StatementList ¶
 <#>Return the LexicallyDeclaredNames of StatementList.¶

Static Semantics: VarDeclaredNames

FunctionDeclaration : function BindingIdentifier (FormalParameterList) { FunctionBody }

1. Return an empty List.

FunctionBody : [empty]

1. Return an empty List.

FunctionBody : StatementList

1. Return TopLevelVarDeclaredNames of StatementList.

Deleted: FunctionBody : StatementList ¶
 Return the VarDeclaredNames of StatementList.¶

Deleted: Initialization

Deleted: envirnment

Deleted: and optional parameter index

NOTE When `undefined` is passed for `environment` it indicates that a `PutValue` operation should be used to assign the initialisation value. This is the case for formal parameter lists of non-strict functions. In that case the formal parameter bindings are preinitialized in order to deal with the possibility of multiple parameters with the same name.

FormalParameterList : [empty]

1. Return `NormalCompletion(empty)`.

FormalParameterList : *FunctionRestParameter*

1. Return the result of performing Indexed Binding Initialisation for *FunctionRestParameter* using `value`, `0`, and `environment` as the arguments.

FormalParameterList : *FormalsList*

1. Return the result of performing Indexed Binding Initialisation for *FormalsList* using `value`, `0`, and `environment` as the arguments.

FormalParameterList : *FormalsList* , *FunctionRestParameter*

1. Let `restIndex` be the result of performing Indexed Binding Initialisation for *FormalsList* using `value`, `0`, and `environment` as the arguments.
2. `ReturnIfAbrupt(restIndex)`.
3. Return the result of performing Indexed Binding Initialisation for *FunctionRestParameter* using `value`, `restIndex`, and `environment` as the arguments.

Runtime Semantics: Indexed Binding Initialisation

With parameters `array`, `nextIndex`, and `environment`.

FormalsList : *FormalParameter*

1. Let `status` be the result of performing Indexed Binding Initialisation for *FormalParameter* using `array`, `nextIndex`, and `environment` as the arguments.
2. `ReturnIfAbrupt(status)`.
3. `Return nextIndex + 1`.

FormalsList : *FormalsList* , *FormalParameter*

1. Let `lastIndex` be the result of performing Indexed Binding Initialisation for *FormalsList* using `array`, `nextIndex`, and `environment` as the arguments.
2. `ReturnIfAbrupt(lastIndex)`.
3. Let `status` be the result of performing Indexed Binding Initialisation for *FormalParameter* using `array`, `lastIndex`, and `environment` as the arguments.
4. `ReturnIfAbrupt(status)`.
5. `Return lastIndex + 1`.

FunctionRestParameter : ... *BindingIdentifier*

1. Assert: `array` is a well formed arguments object and hence it has a valid integer valued `"length"` property.
2. Let `status` be the result of `Get(array, "length")`.
3. Let `argumentsLength` be `status.[[value]]`.
4. Let `A` be the result of the abstract operation `ArrayCreate` with argument `0`.
5. Let `n=0`.
6. Repeat, while `nextIndex < argumentsLength`,
 - a. Let `P` be `ToString(nextIndex)`.
 - b. Assert: `array` is a well formed arguments object, hence it must have a property `P`.
 - c. Let `v` be the result of `Get(array, P)`.

Deleted: initialization

Deleted: the

Deleted: Perform...return the result of performing Indexed

Deleted: `lenValue`,

Deleted: .¶

Return.

Deleted: <#>Asset: `value` is a new created arguments object and hence it has a valid integer valued `"length"` property
<#>Let `lenValue` be the result of calling the `[[Get]]` internal method of `value` with argument `"length"`.¶

Deleted: Perform ...ndexed Binding Initialization

Deleted: `lenValue`,

Deleted: <#>Return.¶

Deleted: Initialization

Deleted: `lenValue`,

Deleted: Perform ...ndexed Binding Initialization

Deleted: `lenValue`,

Deleted: .[[value]]

Deleted: <#>Return.¶

Deleted: `arrayLength`,

Deleted: Perform ...nding Initialization

Deleted: `value`

Deleted: `env`, and

Deleted: `i`

Deleted: `i`

Deleted: Initialization

Deleted: `value...array, lenValue`,

Deleted: Perform ...et `status` be the result of performing

Deleted: `value...array, lenValue`,

Deleted: `argumentsLength`

Deleted: calling the `[[...ct]]` internal method of...

Deleted: `value`

Deleted: with argument

Deleted: `argumentsLength`

Deleted: ion

Deleted: (15.4)

Deleted: a new array object created as if by the expression `new Array()` where `Array` is the standard built-in constructor with that name

Deleted: `arrayLength`

Deleted: calling the `[[...ct]]` internal method of ...rray

- d. Call the `[[DefineOwnProperty]]` internal method of *A* with arguments `ToString(n)` and `PropertyDescriptor {[[Value]]: v, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
- e. Let *n* = *n*+1.
- f. Let *nextIndex* = *nextIndex* +1.
- 7. Return the result of performing `BindingInitialisation` for `BindingIdentifier` using *A* and *environment* as arguments.

Deleted: ,
Deleted: , and false
Deleted: Perform
Deleted: Initialization
Deleted: <code>FormalParameter : BindingElement</code> ¶ ¶Return the result of performing <code>PerformIndexedBindingInitialization</code> for <code>BindingElement</code> using <code>array</code> , <code>arrayLength</code> , <code>nextIndex</code> , and <code>environment</code> as the arguments. ¶
Deleted: Instant Function Declaration
Deleted: <#>Let <code>scope</code> be the LexicalEnvironment of the running current execution context. ¶
Deleted: <code>ing</code>
Deleted: The production
Deleted: <code>opt</code>
Deleted: is instantiated as follows during Declaration Binding instantiation (10.5):
Deleted: (normal, empty, empty).
Deleted: Return the result of creating a new Function object as specified in 13.2 with parameters specified by <code>FormalParameterList_{opt}</code> , and body specified by <code>FunctionBody</code> . Pass in the VariableEnvironment of the running execution context as the <code>Scope</code> . Pass in <code>true</code> as the <code>Strict</code> flag if the <code>FunctionDeclaration</code> is contained in strict code or if its <code>FunctionBody</code> is strict code.
Deleted: The production
Deleted: <code>opt</code>
Deleted: is evaluated as follows:
Deleted: current
Deleted: <code>ing</code>
Deleted: the result of creating a new Function object as specified in 13.2 with parameters specified by <code>FormalParameterList_{opt}</code> and body specified by <code>FunctionBody</code> .
Deleted: <code>opt</code>
Deleted: running
Deleted: current
Deleted:
Deleted: the String value of <code>BindingIdentifier</code>
Deleted: <#>Let <code>closure</code> be the result of creating
Deleted: <code>ing</code>
Deleted: Immutable
Deleted: the String value of <code>Identifier</code>
Deleted: Value
Deleted: The production
Deleted: Source
Deleted: Elements
Deleted: is evaluated as follows:

Runtime Semantics: InstantiateFunctionObject

With parameter `scope`.

`FunctionDeclaration : function BindingIdentifier (FormalParameterList) { FunctionBody }`

1. If the `FunctionDeclaration` is contained in strict code or if its `FunctionBody` is strict code, then let `strict` be `true`. Otherwise let `strict` be `false`.
2. Let *F* be the result of performing the `FunctionCreate` abstract operation with arguments `NormalFormalParameterList`, `FunctionBody`, `scope`, and `strict`.
3. Perform the abstract operation `MakeConstructor` with argument *F*.
4. Return *F*.

Runtime Semantics: Evaluation

`FunctionDeclaration : function BindingIdentifier (FormalParameterList) { FunctionBody }`

1. Return `NormalCompletion(empty)`.

`FunctionExpression : function (FormalParameterList) { FunctionBody }`

1. If the `FunctionExpression` is contained in strict code or if its `FunctionBody` is strict code, then let `strict` be `true`. Otherwise let `strict` be `false`.
2. Let `scope` be the LexicalEnvironment of the running execution context.
3. Let *closure* be the result of performing the `FunctionCreate` abstract operation with arguments `NormalFormalParameterList`, `FunctionBody`, `scope`, and `strict`.
4. Perform the abstract operation `MakeConstructor` with argument *closure*.
5. Return *closure*.

`FunctionExpression : function BindingIdentifier (FormalParameterList) { FunctionBody }`

1. If the `FunctionExpression` is contained in strict code or if its `FunctionBody` is strict code, then let `strict` be `true`. Otherwise let `strict` be `false`.
2. Let *funcEnv* be the result of calling `NewDeclarativeEnvironment` passing the running execution context's Lexical Environment as the argument.
3. Let *envRec* be *funcEnv*'s environment record.
4. Let `name` be `StringValue` of `BindingIdentifier`.
5. Call the `CreateImmutableBinding` concrete method of *envRec* passing `name` as the argument.
6. Let *closure* be the result of performing the `FunctionCreate` abstract operation with arguments `NormalFormalParameterList`, `FunctionBody`, *funcEnv*, and `strict`.
7. Perform the abstract operation `MakeConstructor` with argument *closure*.
8. Call the `InitializeBinding` concrete method of *envRec* passing `name` and *closure* as the arguments.
9. Return `NormalCompletion(closure)`.

NOTE 1 The `BindingIdentifier` in a `FunctionExpression` can be referenced from inside the `FunctionExpression`'s `FunctionBody` to allow the function to call itself recursively. However, unlike in a `FunctionDeclaration`, the `BindingIdentifier` in a `FunctionExpression` cannot be referenced from and does not affect the scope enclosing the `FunctionExpression`.

NOTE 2 A `prototype` property is automatically created for every function defined using a `FunctionDeclaration` or `FunctionExpression`, to allow for the possibility that the function will be used as a constructor.

`FunctionBody : StatementListopt`

1. The code of this *FunctionBody* is strict mode code if it is contained in strict mode code or if the Directive Prologue (14.1) of its *StatementList* contains a Use Strict Directive or if any of the conditions in 10.1.1 apply. If the code of this *FunctionBody* is strict mode code, *StatementList* is evaluated in the following steps as strict mode code. Otherwise, *StatementList* is evaluated in the following steps as non-strict mode code.
2. If *StatementList* is not present, then return NormalCompletion(**undefined**).
3. Let *result* be the result of evaluating *StatementList*.
4. If *result*.[[type]] is return then return NormalCompletion(*result*.[[value]])
5. ReturnIfAbrupt(*result*).
6. Return NormalCompletion(**undefined**).

13.2 Arrow Function Definitions

Syntax

ArrowFunction :
ArrowParameters => *ConciseBody*

ArrowParameters :
BindingIdentifier
CoverParenthesizedExpressionAndArrowParameterList

ConciseBody :
 $\text{[lookahead } \notin \{ \{ \} \text{]} \text{AssignmentExpression}$
 $\{ \text{FunctionBody} \}$

Supplemental Syntax

When processing the production *ArrowParameters* : *CoverParenthesizedExpressionAndArrowParameterList* the following grammar is used to refine the interpretation of *CoverParenthesizedExpressionAndArrowParameterList*.

ArrowFormalParameterList :
 $(\text{FormalParameterList})$

Static Semantics

Static Semantics: Early Errors

ArrowFunction : *ArrowParameters* => *ConciseBody*

- It is a Syntax Error if *IsSimpleParameterList* of *ArrowParameters* is **true** and any element of the *BoundNames* of *ArrowParameters* also occurs in the *VarDeclaredNames* of *ConciseBody*.
- It is a Syntax Error if *IsSimpleParameterList* of *ArrowParameters* is **false** and *BoundNames* of *ArrowParameters* contains any duplicate elements.
- It is a Syntax Error if *IsSimpleParameterList* of *ArrowParameters* is **false** and *BoundNames* of *ArrowParameters* contains either "eval" or "arguments".
- It is a Syntax Error if the source code matching this production is strict code and *BoundNames* of *ArrowParameters* contains any duplicate elements.
- It is a Syntax Error if any element of the *BoundNames* of *ArrowParameters* also occurs in the *LexicallyDeclaredNames* of *ConciseBody*.
- It is a Syntax Error if *ConciseBody* Contains *YieldExpression*.

ArrowParameters : *BindingIdentifier*

- It is a Syntax Error if the *StringValue* of the sole element of the *BoundNames* of *BindingIdentifier* is **eval** or **arguments**.

ArrowParameters : *CoverParenthesizedExpressionAndArrowParameterList*

Deleted: part of a *FunctionDeclaration* or *FunctionExpression* that is
Deleted: *SourceElements*
Deleted: *SourceElements*
Deleted: *SourceElements*
Deleted: *Source*
Deleted: *Elements*
Deleted: return the
Deleted: *SourceElements*
Deleted: Else r
Deleted: normal,
Deleted: , empty

Deleted: (*ArrowFormalParameterList*)

Deleted: *ArrowFormalParameterList* :
 $\{ \}$
 [empty]
FunctionRestParameter
CoverFormalsList
CoverFormalsList, *FunctionRestParameter* ¶

Deleted: *CoverFormalsList* :
Expression ¶
Supplemental Syntax ¶
When processing the production *CoverFormalsList* :
Expression the *FormalsList* production is used to further restrict the source code that matches
Expression. ¶
ArrowFormalParameterList :
FormalParameterList ¶

Deleted: *ConciseBody*
Deleted: *FormalParameterList*

Deleted: <#>It is a Syntax Error if any element of the *LexicallyDeclaredNames* of *ConciseBody* also occurs in the *VarDeclaredNames* of *ConciseBody* ¶

Deleted: *ConciseBody*

Deleted: *ConciseBody*

Deleted:

Deleted: *ArrowFormalParameterList* : *CoverFormalsList*
FunctionRestParameter ¶
<#>It is a Syntax Error if *BoundNames* of *CoverFormals* contains any element which is also contained in *BoundNames* of *FunctionRestParameter*. ¶

Deleted: *CoverFormalsList*

Deleted: *Expression*

- It is a Syntax Error if the lexical token sequence matched by *CoverParenthesizedExpressionAndArrowParameterList* cannot be parsed with no tokens left over using *ArrowFormalParameterList* as the goal symbol.

Static Semantics: BoundNames

ArrowParameters : CoverParenthesizedExpressionAndArrowParameterList

- Let *formals* be CoveredFormalsList of *CoverParenthesizedExpressionAndArrowParameterList*.
- Return the BoundNames of *formals*.

Static Semantics: Contains

With parameter symbol.

ArrowFunction : ArrowParameters => ConciseBody

- If *symbol* is neither super or this, then return false.
- If *ArrowParameters* Contains *symbol* is true, return true;
- Return ConciseBody Contains *symbol*.

NOTE Normally, Contains does not look inside most function forms. However, Contains is used to detect this and super usage within an ArrowFunction.

ArrowParameters : CoverParenthesizedExpressionAndArrowParameterList

- Let *formals* be CoveredFormalsList of *CoverParenthesizedExpressionAndArrowParameterList*.
- Return *formals* Contains *symbol*.

Static Semantics: CoveredFormalsList

CoverParenthesizedExpressionAndArrowParameterList:

```
( Expression )
( )
( ... Identifier )
( Expression , ... Identifier )
```

- Return the result of parsing the lexical token stream matched by *CoverParenthesizedExpressionAndArrowParameterList* using *ArrowFormalParameterList* as the goal symbol.

Static Semantics: ExpectedArgumentCount

ArrowParameters : BindingIdentifier

- Return 1.

ArrowParameters : CoverParenthesizedExpressionAndArrowParameterList

- Let *formals* be CoveredFormalsList of *CoverParenthesizedExpressionAndArrowParameterList*.
- Return the ExpectedArgumentCount of *formals*.

Static Semantics: IsSimpleParameterList

ArrowParameters : BindingIdentifier

- Return true.

ArrowParameters : CoverParenthesizedExpressionAndArrowParameterList

Deleted: source code

Deleted: corresponding to

Deleted: Expression

Deleted: FormalsList

Deleted: <#>All Early Errors rules for *FormalParameterList* and its derived production *FormalsList* also apply to the Covered FormalsList of *CoverParenthesizedExpressionAndArrowParameterListExpression*.¶

Deleted: *ArrowParameters : BindingIdentifier*¶
<#>Return the BoundNames of *BindingIdentifier*
ArrowParameters : (ArrowFormalParameterList¶
<#>Return the BoundNames of *ArrowFormalParameterList*¶

Deleted: *ArrowFormalParameterList : [empty]*¶
<#>Return an empty List.¶
ArrowFormalParameterList : FunctionRestParameter¶
<#>Return the BoundNames of *FunctionRestParameter*.¶
ArrowFormalParameterList : CoverFormalsList¶
<#>Return the BoundNames of *CoverFormalsList*.
ArrowFormalParameterList : CoverFormalsList¶
<#>Return the BoundNames of *CoverFormalsList*.
<#>Let *names* be BoundNames of *CoverFormalsList*.¶
<#>Append to *names* the BoundNames of *FunctionRestParameter*.¶
<#>Return *names*.¶
CoverFormalsList : Expression¶
<#>Return the BoundNames of *Covered FormalsList* of *Expression*.¶

Deleted: *ConciseBody*
Deleted: s
Deleted: s
Deleted: NOTE Static semantic rules that depend upon substructure generally do not look into function definitions. This Contains is used to detect yield and super usage within an ArrowFunction.¶

Deleted:
Deleted: *CoverFormalsList : Expression*¶
Deleted: source code
Deleted: corresponding to
Deleted: Expression
Deleted: FormalsList

Deleted: *ArrowParameters : (ArrowFormalParameterList)*¶
<#>Return the ExpectedArgumentCount of *ArrowFormalParameterList*.¶

Deleted: *ArrowFormalParameterList : [empty]*¶
FunctionRestParameter¶
<#>Return 0.¶
ArrowFormalParameterList : CoverFormalsList¶
CoverFormalsList , FunctionRestParameter¶

Deleted: *CoveredCFormalsList of CoverFormalsList*

1. Let *formals* be *CoverFormalsList* of *CoverParenthesizedExpressionAndArrowParameterList*.
2. Return the *IsSimpleParameterList* of *formals*.

Static Semantics: LexicallyDeclaredNames

ConciseBody : *[lookahead* \notin { , }] *AssignmentExpression*

1. Return an empty List.

Runtime Semantics

Runtime Semantics: Binding Initialisation

With parameters *value* and *environment*.

NOTE When *undefined* is passed for *environment* it indicates that a *PutValue* operation should be used to assign the initialisation value. This is the case for formal parameter lists of non-strict functions. In that case the formal parameter bindings are preinitialized in order to deal with the possibility of multiple parameters with the same name.

ArrowParameters : *BindingIdentifier*

1. Return the result of performing *Binding Initialisation* for *BindingIdentifier* using *value* and *environment* as the arguments.

ArrowParameters : *CoverParenthesizedExpressionAndArrowParameterList*

1. Let *formals* be *CoverFormalsList* of *CoverParenthesizedExpressionAndArrowParameterList*.
2. Return the result of performing *Binding initialisation* of *formals* with arguments *value* and *environment*.

Runtime Semantics: Evaluation

ArrowFunction : *ArrowParameters* \Rightarrow *ConciseBody*

1. Let *strict* be *true*.
2. Let *scope* be the *LexicalEnvironment* of the running execution context.
3. Let *closure* be the result of performing the *FunctionCreate* abstract operation with arguments *Arrow*, *ArrowParameters*, *ConciseBody*, *scope*, and *strict*.
4. Return *closure*.

NOTE Even though an *ArrowFunction* may contain references to *super*, the *FunctionCreate* call in step 3 is not passed the optional *homeObject* and *methodName* parameters. An *ArrowFunction* that references *super* is always contained within a non-*ArrowFunction* and the necessary state to implement *super* is accessible via the *scope* that is captured by the function object of the *ArrowFunction*.

ConciseBody : *[lookahead* \notin { , }] *AssignmentExpression*

1. The code of this *ConciseBody* is strict mode code if it is contained in strict mode code or if any of the conditions in 10.1.1 apply. If the code of this *ConciseBody* is strict mode code, *AssignmentExpression* is evaluated in the following steps as strict mode code. Otherwise, *AssignmentExpression* is evaluated in the following steps as non-strict mode code.
2. Let *exprRef* be the result of evaluating *AssignmentExpression*.
3. Let *exprValue* be *GetValue(exprRef)*.
4. If *exprValue*.[[type]] is *return* then return *NormalCompletion(result, [[value]])*.
5. *ReturnIfAbrupt(exprValue)*.
6. Return *NormalCompletion(exprValue)*.

NOTE In the absence of extensions to this specification, the test in step 4 will never be *true*.

Deleted: *ConciseBody*

Deleted: *ConciseBody* : *{ FunctionBody }*
 Return the *LexicallyDeclaredNames* of *FunctionBody*
 Static Semantics: *VarDeclaredNames*
ConciseBody : *[lookahead* \notin { , }]
AssignmentExpression
 Return the *VarDeclaredNames* of
AssignmentExpression.
ConciseBody : *{ FunctionBody }*
 Return the *VarDeclaredNames* of *FunctionBody*.

Deleted: *and optional parameter index*

Deleted: *Indexed*

Deleted: *, lenValue*

Deleted: *,*

Deleted: *0,*

Deleted: *ro*

Deleted: *z*

Deleted: *and optional argument index, if index was passed to this routine*

Deleted: *ArrowParameters* : *(ArrowFormalParameterList)*

*<#>*Return the result of performing *Binding Initialisation* for *ArrowFormalParameterList* using *value*, *environment* as the arguments. Also pass the optional argument *index* if it is present.
<#>

Deleted: *ArrowFormalParameterList* : [empty]
*<#>*Return *NormalCompletion(empty)*.

ArrowFormalParameterList : *FunctionRestParameter*
*<#>*Return the result of performing *Indexed Binding Initialisation* for *FunctionRestParameter* using *value*, *lenValue*, 0, and *environment* as the arguments..
<#>

ArrowFormalParameterList : *CoverFormalsList*
*<#>*Return the result of performing *Indexed Binding Initialisation* for *CoverFormalsList* of *CoverFormalsList* using *value*, *lenValue*, 0, and *environment* as the arguments.
<#>

ArrowFormalParameterList : *CoverFormalsList*, *FunctionRestParameter*
*<#>*Return the result of performing *Indexed Binding Initialisation* for *CoverFormalsList* of *CoverFormalsList* using *value*, 0, and *environment* as the arguments.
<#>

Deleted: *restIndex* be the result of performing *Indexed Binding Initialisation* for *CoverFormalsList* of *CoverFormalsList* using *value*, 0, and *environment* as the arguments.
<#>

Deleted: *ConciseBody*

Comment [AWB7143]: Confirm: concise methods are always strict code.

Deleted: *current*

Deleted: *List*

Deleted: *ConciseBody*

Deleted: *Arrow*

Deleted: *Arrow*

Comment [AWB7144]: TODO, need to resolve whether or not ArrowBodies are always strict

Comment [AWB9145]: TODO If *exprRef* is a Reference that invokes a getter we probably should find

Deleted: If *exprValue* is an abrupt completion, return *exprValue*

Deleted: *[[type]]: return, [[value]]*

Deleted: *, [[target]]: empty*

Formatted: Note

13.3 Method Definitions

Syntax

MethodDefinition :

```

PropertyName ( FormalParameterList ) { FunctionBody }
* PropertyName ( FormalParameterList ) { FunctionBody }
get PropertyName ( ) { FunctionBody }
set PropertyName ( PropertySetParameterList ) { FunctionBody }

```

PropertySetParameterList :

```

BindingIdentifier
BindingPattern

```

NOTE The single element of a PropertySetParameterList may not have a default value Initialiser because set accessor are always called with an implicitly provided argument.

Static Semantics

Static Semantics: Early Errors

MethodDefinition : PropertyName (FormalParameterList) { FunctionBody }

and

MethodDefinition : * PropertyName (FormalParameterList) { FunctionBody }

- It is a Syntax Error if IsSimpleParameterList of FormalParameterList is true and any element of the BoundNames of FormalParameterList also occurs in the VarDeclaredNames of FunctionBody.
- It is a Syntax Error if IsSimpleParameterList of FormalParameterList is false and BoundNames of FormalParameterList contains any duplicate elements.
- It is a Syntax Error if IsSimpleParameterList of FormalParameterList is false and BoundNames of FormalParameterList contains either "eval" or "arguments".
- It is a Syntax Error if the source code matching this production is strict code and BoundNames of FormalParameterList contains any duplicate elements.
- It is a Syntax Error if any element of the BoundNames of FormalParameterList also occurs in the LexicallyDeclaredNames of FunctionBody.

MethodDefinition : PropertyName (FormalParameterList) { FunctionBody }

- It is a Syntax Error if FunctionBody Contains YieldExpression.

MethodDefinition : * PropertyName (FormalParameterList) { FunctionBody }

- It is a Syntax Error if FunctionBody Contains YieldExpression is false.

MethodDefinition : get PropertyName () { FunctionBody }

- It is a Syntax Error if FunctionBody Contains YieldExpression.

MethodDefinition : set PropertyName (PropertySetParameterList) { FunctionBody }

- It is a Syntax Error if IsSimpleParameterList of PropertySetParameterList is true and any element of the BoundNames of PropertySetParameterList also occurs in the VarDeclaredNames of FunctionBody.
- It is a Syntax Error if IsSimpleParameterList of PropertySetParameterList is false and BoundNames of PropertySetParameterList contains any duplicate elements.
- It is a Syntax Error if IsSimpleParameterList of PropertySetParameterList is false and BoundNames of PropertySetParameterList contains either "eval" or "arguments".
- It is a Syntax Error if BoundNames of PropertySetParameterList contains any duplicate elements.

Deleted: ConciseBody : { FunctionBody }
 Return the result of evaluating
~~FunctionBody.¶~~

Deleted: ConciseBody

Deleted: ConciseBody

Deleted: {

Deleted: ConciseBody

Deleted: FunctionBody }

Deleted:

Deleted: {

Deleted: ConciseBody

Deleted: FunctionBody }

Deleted: ed

Deleted: ConciseBody

Deleted: ConciseBody

Deleted:

Deleted: <#>It is a Syntax Error if any element of the LexicallyDeclaredNames of FormalParameterList also occurs in the VarDeclaredNames of ConciseFunctionBody.¶

Deleted: s

Deleted: s

Deleted: <#>It is a Syntax Error if any element of the BoundNames of FormalParameterList also occurs in the LexicallyDeclaredNames of ConciseFunctionBody.¶

Deleted: ConciseBody

Deleted:

Deleted: FormalParameterList

Deleted: FormalParameterList

Deleted: FormalParameterList

Deleted: FormalsParameterList

Deleted: FormalParameterList

Deleted: FormalParameterList

- It is a Syntax Error if any element of the *BoundNames* of *PropertySetParameterList* also occurs in the *LexicallyDeclaredNames* of *FunctionBody*.
- It is a Syntax Error if *PropertySetParameterList* Contains *YieldExpression*.
- It is a Syntax Error if *FunctionBody* Contains *YieldExpression*.

Static Semantics: ExpectedArgumentCount

PropertySetParameterList : *BindingIdentifier*

1. Return 1.

PropertySetParameterList : *BindingPattern*

1. Return 1.

Static Semantics: IsSimpleParameterList

PropertySetParameterList : *BindingIdentifier*

1. Return **true**.

PropertySetParameterList : *BindingPattern*

1. Return **false**.

Static Semantics: PropName

MethodDefinition :

```
PropertyName ( FormalParameterList ) { FunctionBody }
*PropertyName ( FormalParameterList ) { FunctionBody }
get PropertyName ( ) { FunctionBody }
set PropertyName ( PropertySetParameterList ) { FunctionBody }
```

1. Return *PropName* of *PropertyName*.

Static Semantics: ReferencesSuper

MethodDefinition :

```
PropertyName ( FormalParameterList ) { FunctionBody }
*PropertyName ( FormalParameterList ) { FunctionBody }
```

1. If *FormalParameterList* Contains **super** is **true**, then return **true**.
2. Return *FunctionBody* Contains **super**.

MethodDefinition : **get** *PropertyName* () { *FunctionBody* }

1. Return *FunctionBody* Contains **super**.

MethodDefinition : **set** *PropertyName* (*PropertySetParameterList*) { *FunctionBody* }

1. If *PropertySetParameterList* Contains **super** is **true**, then return **true**.
2. Return *FunctionBody* Contains **super**.

Static Semantics: SpecialMethod

MethodDefinition : *PropertyName* (*FormalParameterList*) { *FunctionBody* }

1. Return **false**.

Deleted: *ConciseBody*

Deleted: *ConciseBody*

Deleted:

Deleted: *PropertySetParameterList* : *BindingPattern* ¶
 <#>It is a Syntax Error if *BoundNames* of *BindingPattern* contains any duplicate elements.¶

Deleted: **Static Semantics: BoundNames**¶
PropertySetParameterList : *BindingIdentifier* ¶
 <#>Return *BoundNames* of *BindingIdentifier*.¶
PropertySetParameterList : *BindingPattern* ¶
 <#>Return *BoundNames* of *BindingPattern*.¶

Deleted: *MethodDefinition* : *PropertyName* (*FormalParameterList*) *ConciseBody* ¶

Deleted: *MethodDefinition* : ***** *PropertyName* (*FormalParameterList*) *ConciseBody* ¶
 <#>Return *PropName* of *PropertyName*.¶
MethodDefinition : **get** *PropertyName* () *ConciseBody* ¶
 <#>Return *PropName* of *PropertyName*.¶
MethodDefinition : **set** *PropertyName* (*PropertySetParameterList*) *ConciseBody* ¶
 <#>Return *PropName* of *PropertyName*.¶

Deleted:
get *PropertyName* () { *FunctionBody* }
set *PropertyName* (*PropertySetParameterList*) { *FunctionBody* }

MethodDefinition :

```
* PropertyName ( FormalParameterList ) { FunctionBody }
get PropertyName ( ) { FunctionBody }
set PropertyName ( PropertySetParameterList ) { FunctionBody }
```

1. Return **true**.

Runtime SemanticsRuntime Semantics: Property Definition Evaluation

With parameter object.

MethodDefinition : PropertyName (FormalParameterList) { FunctionBody }

1. Let *propName* be *PropName* of *PropertyName*.
2. Let *strict* be *IsStrict* of *FunctionBody*.
3. Let *scope* be the running execution context's *LexicalEnvironment*.
4. If *ReferencesSuper* of *MethodDefinition* is **true**, then
 - a. Let *closure* be the result of performing the *FunctionCreate* abstract operation with arguments *Method*, *FormalParameterList*, *FunctionBody*, *scope*, and *strict* and with *object* as the *homeObject* optional argument and *propName* as the *methodName* optional argument.
5. Else
 - a. Let *closure* be the result of performing the *FunctionCreate* abstract operation with arguments *Method*, *FormalParameterList*, *FunctionBody*, *scope*, and *strict*.
6. Let *desc* be the Property Descriptor{[[Value]]: *closure*, [[Writable]]: **true**, [[Enumerable]]: **true**, [[Configurable]]: **true**}.
7. Let *status* be the result of calling the *[[DefineOwnProperty]]* internal method of *object* with arguments *propName* and *desc*.
8. ReturnIfAbrupt(*status*).
9. NormalCompletion(*closure*).

MethodDefinition : * PropertyName (FormalParameterList) { FunctionBody }

1. Let *propName* be *PropName* of *PropertyName*.
2. Let *strict* be *IsStrict* of *FunctionBody*.
3. Let *scope* be the running execution context's *LexicalEnvironment*.
4. If *ReferencesSuper* of *MethodDefinition* is **true**, then
 - a. Let *closure* be the result of performing the *FunctionCreate* abstract operation with arguments *Method*, *FormalParameterList*, *FunctionBody*, *scope*, and *strict* and with *object* as the *homeObject* optional argument and *propName* as the *methodName* optional argument.
5. Else
 - a. Let *closure* be the result of performing the *FunctionCreate* abstract operation with arguments *Method*, *FormalParameterList*, *FunctionBody*, *scope*, and *strict*.
6. Let *desc* be the Property Descriptor{[[Value]]: *closure*, [[Writable]]: **true**, [[Enumerable]]: **true**, [[Configurable]]: **true**}.
7. Let *status* be the result of calling the *[[DefineOwnProperty]]* internal method of *object* with arguments *propName* and *desc*.
8. ReturnIfAbrupt(*status*).
9. Return NormalCompletion(*closure*).

MethodDefinition : get PropertyName () { FunctionBody }

1. Let *propName* be *PropName* of *PropertyName*.
2. Let *strict* be *IsStrict* of *FunctionBody*.
3. Let *scope* be the running execution context's *LexicalEnvironment*.
4. Let *formalParameterList* be the production *FormalParameterList* : [empty].
5. If *ReferencesSuper* of *MethodDefinition* is **true**, then

Deleted: ConciseBody
Deleted:
Deleted: true
Deleted: current
Deleted: <#>Let <i>needsSuperBinding</i> be the result of <i>FunctionBody</i> Contains super . <#>If <i>needsSuperBinding</i> is false, then let <i>needsSuperBinding</i> be the result of <i>FormalParameterList</i> Contains super . Deleted: <i>needsSuperBinding</i>
Deleted: ConciseBody
Comment [AWB10146]: At its sept 2012 meeting TC39 decided that it wants methods be enumerable.
Deleted: true ,
Deleted: false
Deleted: false
Deleted: Return
Deleted: ,
Deleted: , and false
Deleted: ConciseBody
Deleted:
Deleted: true
Deleted: current
Comment [AWB8147]: A default value expression could reference super
Deleted: <#>Let <i>needsSuperBinding</i> be the result of <i>FunctionBody</i> Contains super . <#>If <i>needsSuperBinding</i> is false, then let <i>needsSuperBinding</i> be the result of <i>FormalParameterList</i> Contains super . Deleted: <i>needsSuperBinding</i>
Comment [AWB8148]: TODO: need to replace with creation of a generator object
Deleted: <#>Let <i>closure</i> be the result of performing the <i>FunctionCreate</i> abstract operation with arguments <i>Method</i> , <i>FormalParameterList</i> , <i>ConciseBody</i> , <i>scope</i> , and <i>strict</i> and with <i>object</i> as
Deleted: true ,
Deleted: false
Deleted: false
Deleted: Return
Deleted: ,
Deleted: , and false
Deleted: ConciseBody
Deleted: { <i>FunctionBody</i> }
Deleted: If this <i>MethodDefinition</i> is contained in
Deleted: current
Deleted: <#>Let <i>needsSuperBinding</i> be the result of <i>needsSuperBinding</i>

- a. Let *closure* be the result of performing the *FunctionCreate* abstract operation with arguments *Method*, *formalParameterList*, *FunctionBody*, *scope*, and *strict* and with *object* as the *homeObject* optional argument and *propName* as the *methodName* optional argument.
6. Else
 - a. Let *closure* be the result of performing the *FunctionCreate* abstract operation with arguments *Method*, *formalParameterList*, *FunctionBody*, *scope*, and *strict*.
7. Let *desc* be the Property Descriptor $\{[[\text{Get}]]: \text{closure}, [[\text{Enumerable}]]: \text{true}, [[\text{Configurable}]]: \text{true}\}$
8. Let *status* be the result of calling the *[[DefineOwnProperty]]* internal method of *object* with arguments *propName* and *desc*.
9. *ReturnIfAbrupt(status)*.
10. *Return NormalCompletion(closure)*.

MethodDefinition : set PropertyName (PropertySetParameterList) { FunctionBody }

1. Let *propName* be *PropName* of *PropertyName*.
2. Let *strict* be *IsStrict* of *FunctionBody*.
3. Let *scope* be the running execution context's *LexicalEnvironment*.
4. If *ReferencesSuper* of *MethodDefinition* is *true*, then
 - a. Let *closure* be the result of performing the *FunctionCreate* abstract operation with arguments *Method*, *PropertySetParameterList*, *FunctionBody*, *scope*, and *strict* and with *object* as the *homeObject* optional argument and *propName* as the *methodName* optional argument.
5. Else
 - a. Let *closure* be the result of performing the *FunctionCreate* abstract operation with arguments *Method*, *PropertySetParameterList*, *FunctionBody*, *scope*, and *strict*.
6. Let *desc* be the Property Descriptor $\{[[\text{Set}]]: \text{closure}, [[\text{Enumerable}]]: \text{true}, [[\text{Configurable}]]: \text{true}\}$
7. Let *status* be the result of calling the *[[DefineOwnProperty]]* internal method of *object* with arguments *propName* and *desc*.
8. *ReturnIfAbrupt(status)*.
9. *Return NormalCompletion(closure)*.

13.4 Generator Definitions

Syntax

GeneratorDeclaration :
 $\text{function}^* \text{ BindingIdentifier } (\text{FormalParameterList}) \{ \text{FunctionBody} \}$

GeneratorExpression :
 $\text{function}^* \text{ BindingIdentifier}_{\text{opt}} (\text{FormalParameterList}) \{ \text{FunctionBody} \}$

YieldExpression :
 $\text{yield} \text{ YieldDelegator}_{\text{opt}} [\text{Lexical goal InputElementRegExp}] \text{ AssignmentExpression}$

YieldDelegator :
 $*$
 $-$

Static Semantics

Static Semantics: Early Errors

*GeneratorDeclaration : function * BindingIdentifier (FormalParameterList) { FunctionBody }*
and
*GeneratorExpression : function * BindingIdentifier_{opt} (FormalParameterList) { FunctionBody }*

- It is a Syntax Error if any element of the *BoundNames* of *FormalParameterList* also occurs in the *LexicallyDeclaredNames* of *FunctionBody*.
- It is a Syntax Error if *FunctionBody* Contains *YieldExpression* is false.

YieldExpression : yield YieldDelegator_{opt} AssignmentExpression

Deleted: <#>Let *closure* be the result of performing the *FunctionCreate* abstract operation with arguments *Method*, *formalParameterList*, *ConciseBody*, *scope*, and *strict* and with *object* as the *homeObject* optional argument and *propName* as the *methodName* optional argument.¶

Deleted: <#>TODO: Make closure a constructor, for ESS compat¶

Deleted: Return

Deleted: ,

Deleted: , and false

Deleted: o

Deleted: ConciseBody

Deleted: { FunctionBody }

Deleted: If this *MethodDefinition* is contained in strict code or if *FunctionBody ConciseBody* is strict code, then let *strict* be true. Otherwise, let *strict* be false.

Deleted: current

Deleted: <#>Let *needsSuperBinding* be the result of *FunctionBody Contains super*.¶

<#>If *needsSuperBinding* is false, then let *needsSuperBinding* be the result of *PropertySetParameterList cContains super*.

Deleted: *needsSuperBinding*

Deleted: o

Deleted: o

Deleted: <#>Let *closure* be the result of performing the *FunctionCreate* abstract operation with arguments *Method*, *PropertySetParameterList*, *ConciseBody*, *scope*, and *strict* and with *object* as the *homeObject* optional argument and *propName* as the *methodName* optional argument.¶

Deleted: <#>TODO: Make closure a constructor, for ESS compat¶

Deleted: Return

Deleted: ,

Deleted: , and false

Deleted: NOTE The strictness and property attributes for *set* and *get MethodDefinition* productions differ from the other *MethodDefinition* productions in order to maintain compatibility with previous editions of this specification.¶

Deleted: f

Comment [AWB10149]: This actually doesn't accomplish anything because a similar annotation with *MemberExpression* takes care of the possibility of a leading RegEx here.

Deleted: *Function*

Deleted: *Function*

Deleted:)

- It is a Syntax Error if AssignmentExpression Contains YieldExpression.

Deleted: any

Static Semantics: BoundNames

GeneratorDeclaration : function * BindingIdentifier (FormalParameterList) { FunctionBody }

1. Return the BoundNames of BindingIdentifier.

Static Semantics: Contains

With parameter symbol.

GeneratorDeclaration ; function * BindingIdentifier (FormalParameterList) { FunctionBody }

Deleted: FunctionDeclaration

1. Return false.

GeneratorExpression : function * BindingIdentifier_{opt} (FormalParameterList) { FunctionBody }

Deleted: Function

1. Return false.

NOTE Static semantic rules that depend upon substructure generally do not look into function definitions.

Static Semantics: IsConstantDeclaration

GeneratorDeclaration : function * BindingIdentifier (FormalParameterList) { FunctionBody }

1. Return false.

Static Semantics: LexicallyDeclaredNames

GeneratorDeclaration : function * BindingIdentifier (FormalParameterList) { FunctionBody }

1. Return the BoundNames of BindingIdentifier.

Static Semantics: VarDeclaredNames

GeneratorDeclaration : function * BindingIdentifier (FormalParameterList) { FunctionBody }

1. Return an empty List.

Runtime Semantics

13.5 Class Definitions

Syntax

ClassDeclaration:

class BindingIdentifier ClassTail

Comment [AWB8150]: Class definitions have not yet been achieved final acceptance by TC39 for ES6 hence this section could disappear in future draft.

ClassExpression:

class BindingIdentifier_{opt} ClassTail

ClassTail:

ClassHeritage_{opt} { ClassBody_{opt} }

ClassHeritage:

extends AssignmentExpression

ClassBody :
ClassElementList

ClassElementList :
ClassElement
ClassElementList ClassElement

ClassElement :
MethodDefinition
⋮

Static Semantics

Static Semantics: Early Errors

ClassDeclaration : class BindingIdentifier ClassTail
and
ClassExpression : class BindingIdentifier ClassTail

- It is a Syntax Error if BindingIdentifier contains either "eval" or "arguments"

ClassBody : ClassElementList

- It is a Syntax Error if PropertyNameList of ClassElementList contains any duplicate entries, unless the following condition is true for each duplicate entry: The duplicated entry occurs exactly twice in the list and one occurrence was obtained from a get accessor MethodDefinition and the other occurrence was obtained from a set accessor MethodDefinition.

ClassElement : MethodDefinition

- It is a Syntax Error if PropName of MethodDefinition is "constructor" and SpecialMethod of MethodDefinition is true.

Static Semantics: BoundNames

ClassDeclaration: class BindingIdentifier ClassTail

1. Return the BoundNames of BindingIdentifier.

Static Semantics: ConstructorMethod

ClassBody : ClassElementList

1. Let list be MethodDefinitions of ClassElementList.
2. For each MethodDefinition m in list, do
 - a. If PropName of m is "constructor", return m.
3. Return empty.

NOTE Early Error rules ensure that there is only one method definition named "constructor" and that it isn't an accessor property or generator definition.

Static Semantics: Contains

With parameter symbol.

ClassTail : ClassHeritage_{opt} { ClassBody }

1. If symbol is ClassBody, return true.
2. If ClassHeritage is not present, return false.

Deleted: {

Deleted: }

Deleted: Method

Deleted: ClassHeritage : extends AssignmentExpression
<#> It is a Syntax Error if AssignmentExpression Contains YieldExpression.¶

3. If *symbol* is *ClassHeritage*, return **true**.
4. Return the result of *Contains* for *ClassHeritage* with argument *symbol*.

NOTE Static semantic rules that depend upon substructure generally do not look into class bodies.

Static Semantics: IsConstantDeclaration

ClassDeclaration: class BindingIdentifier ClassTail

1. Return **false**.

Deleted: true

Static Semantics: LexicallyDeclaredNames

ClassDeclaration: class BindingIdentifier ClassTail

1. Return the *BoundNames* of *BindingIdentifier*.

Static Semantics: MethodDefinitions

ClassElementList : ClassElement

1. If *PropName* of *ClassElement* is empty, return a new empty List.
2. Return a List containing *ClassElement*.

ClassElementList : ClassElementList ClassElement

5. Let *list* be *MethodDefinitions* of *ClassElementList*.
6. If *PropName* of *ClassElement* is empty, return *list*.
7. Append *ClassElement* to the end of *list*.
8. Return *list*.

Static Semantics: PropName

ClassElement : ;

1. Return empty.

Static Semantics: PropertyNameList

ClassElementList : ClassElement

1. If *PropName* of *ClassElement* is empty, return a new empty List.
2. Return a List containing *PropName* of *ClassElement*.

ClassElementList : ClassElementList ClassElement

1. Let *list* be *PropertyNameList* of *ClassElementList*.
2. If *PropName* of *ClassElement* is empty, return *list*.
3. Append *PropName* of *ClassElement* to the end of *list*.
4. Return *list*.

Static Semantics: VarDeclaredNames

ClassDeclaration: class BindingIdentifier ClassTail

1. Return an empty List.

Runtime Semantics

Runtime Semantics: ClassDefinitionEvaluation

With parameter *className*.

ClassTail : *ClassHeritage*_{opt} { *ClassBody* }

1. If *ClassHeritage*_{opt} is not present, then
 - a. Let *protoParent* be the intrinsic object %ObjectPrototype%.
 - b. Let *constructorParent* be the intrinsic object %FunctionPrototype%.
2. Else
 - a. Let *superclass* be the result of evaluating *ClassHeritage*.
 - b. ReturnIfAbrupt(*superclass*).
 - c. If *superclass* is **null**, then
 - i. Let *protoParent* be **null**.
 - ii. Let *constructorParent* be the intrinsic object %FunctionPrototype%.
 - d. Else if Type(*superclass*) is not Object, throw a **TypeError** exception.
 - e. Else if *superclass* does not have a [[Construct]] internal method, then
 - i. Let *protoParent* be *superclass*.
 - ii. Let *constructorParent* be the intrinsic object %FunctionPrototype%.
 - f. Else
 - i. Let *protoParent* be the result of Get(*superclass*, "prototype").
 - ii. ReturnIfAbrupt(*protoParent*).
 - iii. If Type(*protoParent*) is neither Object or Null, throw a **TypeError** exception.
 - iv. Let *constructorParent* be *superclass*.
3. Let *proto* be the result of the abstract operation ObjectCreate with argument *protoParent*.
4. Let *lex* be the LexicalEnvironment of the running execution context.
5. If *className* is not **undefined**, then
 - a. Let *scope* be the result of calling NewDeclarativeEnvironment passing *lex* as the argument.
 - b. Let *envRec* be *scope*'s environment record.
 - c. Call the CreateImmutableBinding concrete method of *envRec* passing *className* as the argument.
 - d. Set the running execution context's LexicalEnvironment to *scope*.
6. Let *constructor* be ConstructorMethod of *ClassBody*.
7. If *constructor* is empty, then
 - a. Let *constructor* be the result of parsing the String "**constructor**(...*args*) {*super*.**constructor**(...*args*) ;}" using the syntactic grammar with the goal symbol *MethodDefinition*.
8. If the *ClassTail* is contained in strict code or if *constructor* is strict code, then let *strict* be **true**. Otherwise let *strict* be **false**.
9. Let *F* be the result of performing Property Definition Evaluation for *constructor* with argument *proto*.
10. Perform the abstract operation MakeConstructor with argument *F* and **false** as the optional *writablePrototype* argument and *proto* as the optional *prototype* argument.
11. Let *desc* be the Property Descriptor {[[Enumerable]]: **false**, [[Writable]]: **true**, [[Configurable]]: **true**}.
12. Call the [[DefineOwnProperty]] internal method of *proto* with arguments "constructor" and *desc*.
13. Let *methods* be MethodDefinitions of *ClassBody*.
14. For each *MethodDefinition m* in order from *methods*
 - a. Perform Property Definition Evaluation for *m* with argument *proto*.
15. Set the running execution context's LexicalEnvironment to *lex*.
16. Return *F*.

Runtime Semantics: Evaluation

ClassDeclaration: **class** *BindingIdentifier* *ClassTail*

1. Let *value* be the result of ClassDefinitionEvaluation of *ClassTail* with argument **undefined**.
2. ReturnIfAbrupt(*value*).
3. Let *env* be the running execution context's LexicalEnvironment.

Deleted: property

Deleted: calling the [[

Deleted:]] internal method of

Deleted:

Deleted: passing

Deleted: as the argument

Deleted: *proto*

Deleted: <#>If the *ClassTail* is contained in strict code or its *FunctionBody* is strict code, then let *strict* be **true**. Otherwise let *strict* be **false**.¶

Comment [AWB9151]: Note that this variable currently isn't used in this algorithm

Comment [AWB8152]: As it now stands, this will never be an abrupt completion

Deleted: *ing*

Deleted: **false**

Deleted: **false**

Deleted: *object*

Deleted: ,

Deleted: , and **false**.

Deleted: <#>Let *className* be String Value of *BindingIdentifier*.¶

Deleted: *className*

Deleted: If *value* is an abrupt completion, return *value*

4. Let *status* be the result of performing Binding Initialisation for *BindingIdentifier* passing *value* and *env* as the arguments.
5. ReturnIfAbrupt(*status*).
6. Return NormalCompletion(empty).

NOTE The argument to ClassDefinitionEvaluation controls whether or not the class that is defined with a *BindingIdentifier* has a local binding to the identifier. Only a *ClassExpression* gets a local name binding of its name. A *ClassDeclaration* never has such a binding. This maintains the parallel with *FunctionExpression* and *FunctionDeclaration*.

ClassExpression: `class BindingIdentifieropt ClassTail`

1. If *BindingIdentifier_{opt}* is not present, then let *className* be **undefined**.
2. Else, let *className* be *StringValue* of *BindingIdentifier*.
3. Let *value* be the result of ClassDefinitionEvaluation of *ClassTail* with argument *className*.
4. ReturnIfAbrupt(*value*).
5. Return NormalCompletion(*value*).

13.6 Creating Function Objects and Constructors

Runtime Semantics: FunctionCreate Abstract Operation

The abstract operation FunctionCreate requires the arguments: *kind* which is one of (Normal, Method, Arrow), an parameter list specified by *ParameterList*, a body specified by *Body*, a Lexical Environment specified by *Scope*, a Boolean flag *Strict*, and optionally, an object *functionPrototype*, an object *homeObject* and a string *methodName*. FunctionCreate performs the following steps:

1. Create a new ECMAScript object and let *F* be that object.
2. Set *F*'s essential internal methods except for *[[GetP]]* and *[[GetOwnProperty]]* to the default ordinary object definitions specified in 8.3.
3. Set *F*'s essential internal methods for *[[Call]]*, *[[GetP]]* and *[[GetOwnProperty]]* to the default ordinary object definitions specified in 8.3.19.
4. Add the *[[BuiltInBrand]]* internal data property with value *BuiltinFunction* to *F*.
5. If the *functionPrototype* argument was not provided, then
 - a. Let *functionPrototype* be the intrinsic object *%FunctionPrototype%*.
6. Set the *[[Prototype]]* internal data property of *F* to *functionPrototype*.
7. Set the *[[Scope]]* internal data property of *F* to the value of *Scope*.
8. Set the *[[FormalParameters]]* internal property of *F* to *ParameterList*.
9. Set the *[[Code]]* internal data property of *F* to *Body*.
10. Set the *[[Extensible]]* internal data property of *F* to **true**.
11. Set the *[[Realm]]* internal data property of *F* to the running execution context's Realm.
12. If the *homeObject* argument was provided, set the *[[HomeObject]]* internal data property of *F* to *homeObject*.
13. If the *methodName* argument was provided, set the *[[MethodName]]* internal data property of *F* to *methodName*.
14. Set the *[[Strict]]* internal data property of *F* to *Strict*.
15. If *kind* is Arrow, then set the *[[ThisMode]]* internal data property of *F* to *lexical*.
16. Else if *Strict* is **true**, then set the *[[ThisMode]]* internal data property of *F* to *strict*.
17. Else set the *[[ThisMode]]* internal data property of *F* to *global*.
18. Let *len* be the *ExpectedArgumentCount* of *ParameterList*.
19. Call the *[[DefineOwnProperty]]* internal method of *F* with arguments **"length"** and Property Descriptor *{[[Value]]: len, [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false}*.
20. If *Strict* is **true**, then
 - a. Perform the *AddRestrictedFunctionProperties* abstract operation, with argument *F*.
21. Return *F*.

Runtime Semantics: MakeConstructor Abstract Operation

The abstract operation MakeConstructor requires a Function argument *F* and optionally, a Boolean *writablePrototype* and an object *prototype*. If *prototype* is provided it is assume to already contain a "constructor" whose value is *F*. This operation converts *F* into a constructor by performs the following steps:

Deleted:
Deleted: Value
Deleted: 13.1 Strict Mode Restrictions
Deleted: 2
Deleted: 1.1
Deleted: 5
Comment [AWB12153]: This probably
Deleted: A Function object is constructed as
Deleted: optional
Deleted: Formal
Deleted: Function
Deleted: and
Deleted: a Function object is constructed as
Deleted: native
Deleted: <#>Set all the internal methods, exce
Deleted: Set
Deleted: Class
Deleted: IsFunction
Deleted: NativeBrand
Deleted: NativeFunction
Deleted: of
Deleted: to "Function"
Deleted: the
Deleted: standard built-in Function prototype
Deleted: <#>Set the <i>[[GetProperty]]</i> internal
Deleted: <#>Set the <i>[[Construct]]</i> internal
Deleted: <#>Let <i>names</i> be a List containing, in
Deleted: Formal
Deleted: names
Deleted: Function
Deleted: internaldata
Deleted: current
Deleted: number of formal parameters specified
Deleted: Formal
Deleted: .
Deleted: If no parameters are specified, let <i>len</i>
Deleted: ",
Deleted: , and false.
Deleted: kind is Normal and
Deleted: o
Deleted: r
Deleted: <#>Let <i>thrower</i> be the
Deleted: <#>Set the <i>[[Strict]]</i> internal property
Deleted:
Deleted: It

1. Let *installNeeded* be **false**.
2. If the *prototype* argument was not provided, then
 - a. Let *installNeeded* be **true**.
 - b. Let *prototype* be the result of the abstract operation *ObjectCreate*.
3. If the *writablePrototype* argument was not provided, then
 - a. Let *writablePrototype* be **true**.
4. Set *F*'s essential internal method *[[Construct]]* to the definition specified in 8.3.19.2.
5. If *installNeeded*, then
 - a. Call the *[[DefineOwnProperty]]* internal method of *prototype* with arguments "**constructor**" and Property Descriptor *{[[Value]]: F, [[Writable]]: writablePrototype, [[Enumerable]]: false, [[Configurable]]: writablePrototype}*.
7. Call the *[[DefineOwnProperty]]* internal method of *F* with arguments "**prototype**" and Property Descriptor *{[[Value]]: prototype, [[Writable]]: writablePrototype, [[Enumerable]]: false, [[Configurable]]: false}*.
8. Return *F*.

13.6.3 The *[[ThrowTypeError]]* Function Object

The *[[ThrowTypeError]]* object is a unique function object that is defined once as follows:

1. Create a new ECMAScript object and let *F* be that object.
2. Set all the internal methods of *F* as described in 8.12.
3. Add the *[[BuiltinBrand]]* internal data property with value *BuiltinFunction* to *F*.
4. Set the *[[Prototype]]* internal *data* property of *F* to the standard built-in Function prototype object as specified in 15.3.3.1.
5. Set the *[[Call]]* internal *method* of *F* as described in 13.6.1.
6. Set the *[[Scope]]* internal *data* property of *F* to the Global Environment.
7. Set the *[[FormalParameters]]* internal *data* property of *F* to the *FormalParameterList : [empty]* production.
8. Set the *[[Code]]* internal *data* property of *F* to a *FunctionBody* that unconditionally throws a *TypeError* exception and performs no other action.
9. Call the *[[DefineOwnProperty]]* internal method of *F* with arguments "**length**" and Property Descriptor *{[[Value]]: 0, [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false}*.
10. Call the *[[PreventExtensions]]* internal *method* of *F*.
11. Let *[[ThrowTypeError]]* be *F*.

Runtime Semantics: AddRestrictedFunctionProperties Abstract Operation

The abstract operation is called with a function object *F* as its argument. It performs the following steps:

1. Let *thrower* be the *[[ThrowTypeError]]* function Object defined above.
2. Call the *[[DefineOwnProperty]]* internal method of *F* with arguments "**caller**" and PropertyDescriptor *{[[Get]]: thrower, [[Set]]: thrower, [[Enumerable]]: false, [[Configurable]]: false}*.
3. Call the *[[DefineOwnProperty]]* internal method of *F* with arguments "**arguments**" and PropertyDescriptor *{[[Get]]: thrower, [[Set]]: thrower, [[Enumerable]]: false, [[Configurable]]: false}*.

13.7 Tail Position Calls

The wiki proposal has a preliminary attempt at defining tail position. See http://wiki.ecmascript.org/doku.php?id=harmony:proper_tail_calls.

This material still needs to be reviewed and updated for incorporation here.

- Deleted:** ion
Deleted: (15.2)
Deleted: [...] to the definitions
Deleted: Set the *[[Construct]]* internal property of *F* as described in 13.5.2.
Deleted: <#>Set the *[[HasInstance]]* internal property of *F* as described in 15.3.5.3.
Deleted: ¶
Deleted: <#>Set the *[[Home]]* internal property of *F* to *prototype*.¶
<#>Set the *[[MethodName]]* internal property of *F* to "*constructor*".¶
Deleted: <#>Let *proto* be the result of creating a new obj
Deleted: ",
Deleted: {
Deleted:
Deleted: true... [[Enumerable]]: false, [[Configurable]]:
Deleted: , and false.
Deleted: ",
Deleted: *proto*
Deleted: {
Deleted: true
Deleted: , and false
Deleted: <#>If *Strict* is true, then¶
Comment [AWB 3154]: May need to update section
Comment [AWB155]: Exceptions could occur during
Deleted: NOTE A *prototype* property is
Deleted: 13.2156.1.1 *[[Call]]* Internal Method¶
Deleted: 2
Deleted: 1
Deleted: 5
Deleted: .1
Deleted: native
Deleted: Set ...dd the *[[Class]*
Deleted: IsFunction
Deleted: NativeBrand...*uiltinBrand*] internal data property
Deleted: of ...o *F* to "Function"
Deleted: property
Deleted: 2
Deleted: an empty List
Deleted: "... and Property Descriptor *{[[Value]]: 0,*
Deleted: Set ...all the *[[PreventExtensionsExtensible...]*
Deleted: ion
Deleted: <#>Let *[[ThrowTypeError]]* be *F*.¶
Deleted: ...and PropertyDescriptor *{[[Get]]: thrower,*
Deleted: ...and PropertyDescriptor *{[[Get]]: thrower,*
Comment [AWB9156]: TODO: Need to define tail

14 Scripts and Modules

14.1 Script

Syntax

Script :

*ScriptBody*_{opt}

ScriptBody :

OuterStatementList

OuterStatementList :

OuterItem

OuterStatementList OuterItem

OuterItem :

ModuleDeclaration

ImportDeclaration

StatementListItem

Static Semantics

Static Semantics: Early Errors

ScriptBody : *OuterStatementList*

- It is a Syntax Error if the LexicallyDeclaredNames of *OuterStatementList* contains any duplicate entries.
- It is a Syntax Error if any element of the LexicallyDeclaredNames of *OuterStatementList* also occurs in the VarDeclaredNames of *OuterStatementList*.
- It is a Syntax Error if *OuterStatementList* Contains *ReturnStatement*.
- It is a Syntax Error if *OuterStatementList* Contains *super*.
- It is a Syntax Error if *OuterStatementList* Contains *YieldExpression*.

NOTE Additional error conditions relating to conflicting or duplicate declarations are checked during module linking prior to evaluation of a *Script*. If any such errors are detected the *Script* is not evaluated.

Static Semantics: IsStrict

ScriptBody : *OuterStatementList*

1. If this *ScriptBody* is contained in strict code or if *OuterStatementList* is strict code, then return **true**. Otherwise, return **false**.

Deleted: Program

Comment [AWB10157]: Need a better definition

Static Semantics: LexicallyDeclaredNames

OuterStatementList : *OuterStatementList OuterItem*

1. Let *names* be LexicallyDeclaredNames of *OuterStatementList*.
2. Append to *names* the elements of the LexicallyDeclaredNames of *OuterItem*.
3. Return *names*.

OuterItem : *ModuleDeclaration*

1. Return the BoundNames of *ModuleDeclaration*.

Deleted: Import

OuterItem : *ImportDeclaration*

1. Return the BoundNames of *ImportDeclaration*.

OuterItem : StatementListItem

1. Return TopLevelLexicallyDeclaredNames of *StatementListItem*.

NOTE At the top level of a *Script*, function declarations are treated like *var* declarations rather than like lexical declarations.

Static Semantics: LexicallyScopedDeclarations

OuterStatementList : OuterStatementList OuterItem

1. Let *declarations* be LexicallyScopedDeclarations of *OuterStatementList*.
2. Append to *declarations* the elements of the LexicallyScopedDeclarations of *OuterItem*.
3. Return *declarations*.

OuterItem : ModuleDeclaration

1. Return a new List containing *ModuleDeclaration*.

OuterItem : ImportDeclaration

1. Return a new List containing *ImportDeclaration*.

OuterItem : StatementListItem

1. Return TopLevelLexicallyScopedDeclarations of *StatementListItem*.

Static Semantics: VarDeclaredNames

OuterStatementList : OuterStatementList OuterItem

1. Let *names* be VarDeclaredNames of *OuterStatementList*.
2. Append to *names* the elements of the VarDeclaredNames of *OuterItem*.
3. Return *names*.

OuterItem : ModuleDeclaration

2. Return an empty List.

OuterItem : ImportDeclaration

2. Return an empty List.

OuterItem : StatementListItem

2. Return TopLevelVarDeclaredNames of *StatementListItem*.

Static Semantics: VarScopedDeclarations

OuterStatementList : OuterStatementList OuterItem

1. Let *declarations* be VarScopedDeclarations of *OuterStatementList*.
2. Append to *declarations* the elements of the VarScopedDeclarations of *OuterItem*.
3. Return *declarations*.

OuterItem : ModuleDeclaration

1. Return a new empty List.

OuterItem : ImportDeclaration

1. Return a new empty List.

OuterItem : StatementListItem

1. Return the TopLevelVarScopedDeclarations of *StatementListItem*.

Runtime Semantics

Runtime Semantics: Script Evaluation

With argument *realm* and *deletableBindings*.

Script : ScriptBody_{opt}

1. The code of this *Script* is strict mode code if the Directive Prologue (14.1) of its *ScriptBody* contains a Use Strict Directive or if any of the conditions of 10.1.1 apply. If the code of this *Script* is strict mode code, *ScriptBody* is evaluated in the following steps as strict mode code. Otherwise *ScriptBody* is evaluated in the following steps as non-strict mode code.
2. If *ScriptBody* is not present, return *NormalCompletion(empty)*.
3. Let *globalEnv* be *realm.[[globalEnv]]*.
4. Let *status* be the result of performing Global Declaration Instantiation as described in 10.5.1 using *ScriptBody*, *globalEnv*, and *deletableBindings* as arguments.
5. ReturnIfAbrupt(*status*).
6. Let *progCxt* be a new ECMAScript code execution context.
7. Set the *progCxt*'s Realm to *realm*.
8. Set the *progCxt*'s VariableEnvironment to *globalEnv*.
9. Set the *progCxt*'s LexicalEnvironment to *globalEnv*.
10. If there is a currently running execution context, suspend it.
11. Push *progCxt* on to the execution context stack; *progCxt* is now the running execution context.
12. Let *result* be the result of evaluating *ScriptBody*.
13. Suspend *progCxt* and remove it from the execution context stack.
14. If the execution context stack is not empty, resume the context that is now on the top of the execution context stack as the running execution context. Otherwise, the execution context stack is now empty and there is no running execution context.
15. Return *result*.

NOTE The processes for initiating the evaluation of a *Script* and for dealing with the result of such an evaluation are defined by an ECMAScript implementation and not by this specification.

Runtime Semantics: Evaluation

OuterStatementList : OuterStatementList OuterItem

1. Let *sl* be the result of evaluating *OuterStatementList*.
2. ReturnIfAbrupt(*sl*).
3. Let *s* be the result of evaluating *OuterItem*.
4. If *s.[[type]]* is throw, return *s*.
5. If *s.[[value]]* is empty, let *V = sl.[[value]]*, otherwise let *V = s.[[value]]*.
6. Return Completion {[[type]]: *s.[[type]]*, [[value]]: *V*, [[target]]: *s.[[target]]*}

NOTE See the 12.1 NOTE regarding evaluation of *StatementList : StatementListItem*.

14.1.1 Directive Prologues and the Use Strict Directive

A Directive Prologue is the longest sequence of *ExpressionStatement* productions occurring as the initial *StatementListItem* productions of a *ScriptBody* or *FunctionBody* and where each *ExpressionStatement* in the sequence consists entirely of a *StringLiteral* token followed by a semicolon. The semicolon may appear explicitly or may be inserted by automatic semicolon insertion. A Directive Prologue may be an empty sequence.

Deleted: SourceElement : Statement FunctionDeclaration

Deleted: Program

Deleted: Semantics
The production

Deleted: Program

Deleted: SourceElements_{opt}

Deleted: Program

Deleted: is evaluated as follows:

Deleted: Program

Deleted: SourceElements

Deleted: Program

Deleted: SourceElements

Deleted: ProgramBody

Deleted: SourceElements

Deleted: Program

Deleted: SourceElements

Deleted: ProgramBody

Deleted: SourceElements

Deleted: Program

Deleted: SourceElements

Deleted: ProgramBody

Deleted: (normal,

Deleted:

Deleted: , empty

Deleted: Binding

Deleted: for global code as described in 10.4.1

Deleted: <#>Set the *progCxt*'s PreviousContext to empty.

Deleted: *realm*'s .[[Global Environment]]

Deleted: *realm*.[[globalEnv]]

Deleted: 's Global Environment

Deleted: <#>If ProgramBody is present, then

<#>Perform Global Binding Instantiation as described in 10.5.x using the global code.

Deleted: SourceElements

Deleted: ProgramBody

Deleted:

Comment [AWB6158]: This is a place where we could put something about what to do with

Deleted: Exit the execution context *progCxt*.

Deleted: T

Deleted: running current execution context to

Deleted: Program

Comment [AWB11159]: Not strictly true as

Deleted: The production SourceElements

Deleted: The production SourceElement :

Deleted: 1

Deleted: as the initial SourceElement

Deleted: Program

A Use Strict Directive is an *ExpressionStatement* in a Directive Prologue whose *StringLiteral* is either the exact character sequences "`use strict`" or '`use strict`'. A Use Strict Directive may not contain an *EscapeSequence* or *LineContinuation*.

A Directive Prologue may contain more than one Use Strict Directive. However, an implementation may issue a warning if this occurs.

NOTE The *ExpressionStatement* productions of a Directive Prologue are evaluated normally during evaluation of the containing production. Implementations may define implementation specific meanings for *ExpressionStatement* productions which are not a Use Strict Directive and which occur in a Directive Prologue. If an appropriate notification mechanism exists, an implementation should issue a warning if it encounters in a Directive Prologue an *ExpressionStatement* that is not a Use Strict Directive or which does not have a meaning defined by the implementation.

Deleted: *SourceElements*

14.2 Modules

15 Standard Built-in ECMAScript Objects

There are certain built-in objects available whenever an ECMAScript program begins execution. One, the global object, is part of the lexical environment of the executing program. Others are accessible as initial properties of the global object.

Unless specified otherwise, a built-in object has the *[[BuiltInBrand]]* internal *data* property with value *BuiltinFunction* if that built-in object has a *[[Call]]* internal method. Unless specified otherwise, the *[[Extensible]]* internal *data* property of a built-in object initially has the value *true*.

Many built-in objects are functions: they can be invoked with arguments. Some of them furthermore are constructors: they are functions intended for use with the `new` operator. For each built-in function, this specification describes the arguments required by that function and properties of the Function object. For each built-in constructor, this specification furthermore describes properties of the prototype object of that constructor and properties of specific object instances returned by a `new` expression that invokes that constructor.

Unless otherwise specified in the description of a particular function, if a function or constructor described in this clause is given fewer arguments than the function is specified to require, the function or constructor shall behave exactly as if it had been given sufficient additional arguments, each such argument being the *undefined* value.

Unless otherwise specified in the description of a particular function, if a function or constructor described in this clause is given more arguments than the function is specified to allow, the extra arguments are evaluated by the call and then ignored by the function. However, an implementation may define implementation specific behaviour relating to such arguments as long as the behaviour is not the throwing of a *TypeError* exception that is predicated simply on the presence of an extra argument.

NOTE Implementations that add additional capabilities to the set of built-in functions are encouraged to do so by adding new functions rather than adding new parameters to existing functions.

Every built-in function and every built-in constructor has the Function prototype object, which is the initial value of the expression `Function.prototype` (15.3.4), as the value of its *[[Prototype]]* internal *data* property.

Unless otherwise specified every built-in prototype object has the Object prototype object, which is the initial value of the expression `Object.prototype` (15.2.4), as the value of its *[[Prototype]]* internal *data* property, except the Object prototype object itself.

None of the built-in functions described in this clause that are not constructors shall implement the *[[Construct]]* internal method unless otherwise specified in the description of a particular function. The behavior specified in this clause for each built-in function is the specification of the *[[Call]]* internal method behavior for that function. None of the built-in functions described in this clause shall have a *prototype* property unless otherwise specified in the description of a particular function.

Deleted: the

Deleted: *[[Class]]* internal property of

Deleted: is "Function"

Deleted: *IsFunction*

Deleted: *NativeBrand*

Deleted: *NativeFunction*

Deleted: *property*

Deleted: , or "Object" if that built-in object does not have a *[[Call]]* internal property

This clause generally describes distinct behaviours for when a constructor is “called as a function” and for when it is “called as part of a **new** expression”. The “called as a function” behaviour corresponds to the invocation of the constructor’s [[Call]] internal method and the “called as part of a new expression” behaviour corresponds to the invocation of the constructor’s [[Construct]] internal method.

Deleted: ¶

Every built-in Function object, *F*, described in this clause—whether as a constructor, an ordinary function, or both—has the properties that are defined by performing the following step when the function object is created:

1. Perform the AddRestrictedFunctionProperties (13.6.3) abstract operation with argument *F*.

Deleted: operator

Every built-in Function object described in this clause—whether as a constructor, an ordinary function, or both—has a **length** property whose value is an integer. Unless otherwise specified, this value is equal to the largest number of named arguments shown in the subclause headings for the function description, including optional parameters.

NOTE For example, the Function object that is the initial value of the **slice** property of the String prototype object is described under the subclause heading “String.prototype.slice (start, end)” which shows the two named arguments start and end; therefore the value of the **length** property of that Function object is 2.

In every case, the **length** property of a built-in Function object described in this clause has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

Deleted:].

Every other **data** property described in this clause has the attributes { [[Writable]]: **true**, [[Enumerable]]: **false**, [[Configurable]]: **true** } unless otherwise specified.

Every accessor property described in this clause has the attributes { [[Enumerable]]: **false**, [[Configurable]]: **true** } unless otherwise specified. If only a get accessor function is described, the set accessor function is the default value, **undefined**. If only a set accessor is function is described the get accessor is the default value, **undefined**.

Deleted:).

15.1 The Global Object

The unique **global object** is created before control enters any execution context.

Unless otherwise specified, the standard built-in properties of the global object have attributes { [[Writable]]: **true**, [[Enumerable]]: **false**, [[Configurable]]: **true** }.

Deleted: property

The global object does not have a [[Construct]] internal method; it is not possible to use the global object as a constructor with the **new** operator.

Deleted: property

The global object does not have a [[Call]] internal method; it is not possible to invoke the global object as a function.

The value of the [[Prototype]] internal data property of the global object is implementation-dependent.

Deleted: s

Deleted: and [[Class]]

Deleted: ies

Deleted: are

In addition to the properties defined in this specification the global object may have additional host defined properties. This may include a property whose value is the global object itself; for example, in the HTML document object model the **window** property of the global object is the global object itself.

15.1.1 Value Properties of the Global Object

15.1.1.1 NaN

The value of **NaN** is **NaN** (see 8.5). This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.1.1.2 Infinity

The value of `Infinity` is $+\infty$ (see 8.5). This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.1.1.3 undefined

The value of `undefined` is `undefined` (see 8.1). This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.1.2 Function Properties of the Global Object

15.1.2.1 eval (x)

When the `eval` function is called with one argument `x`, the following steps are taken:

4. If `Type(x)` is not `String`, return `x`.
5. Let `script` be the ECMAScript code that is the result of parsing `x`, interpreted as UTF-16 encoded Unicode text as described in 8.4, for the goal symbol `Script`. If the parse fails or any early errors are detected, throw a `SyntaxError` exception (but see also clause 16).
6. If `script` Contains `ScriptBody` is `false`, return `undefined`.
7. Let `strictScript` be `IsStrict` of `script`.
8. If this is a direct call to `eval` (15.1.2.1.1), let `direct` be `true`, otherwise let `direct` be `false`.
9. If `direct` is `true` and the code that made the direct call to `eval` is strict code, then let `strictCaller` be `true`. Otherwise, let `strictCaller` be `false`.
10. Let `ctx` be the running execution context. If `direct` is `true` `ctx` will be the execution context that performed the direct eval. If `direct` is `false` `ctx` will be the execution context for the invocation of the `eval` function.
11. Let `evalRealm` be `ctx`'s Realm.
12. If `direct` is `false` and `strictScript` is `false`, then
 - a. Return the result of Script Evaluation for `script` with arguments `evalRealm` and `true`.
13. If `direct` is `true`, `strictScript` is `false`, `strictCaller` is `false`, and `ctx`'s LexicalEnvironment is the same as `evalRealm.[[globalEnv]]`, then
 - a. Return the result of Script Evaluation for `script` with arguments `evalRealm` and `true`.
14. If `direct` is `true`, then
 - a. If the code that made the direct call to `eval` is `function code` and `ValidInFunction` of `script` is `false`, then throw a `SyntaxError` exception.
 - b. If the code that made the direct call to `eval` is `module code` and `ValidInModule` of `script` is `false`, then throw a `SyntaxError` exception.
15. If `direct` is `true`, then
 - a. Let `lexEnv` be `ctx`'s LexicalEnvironment.
 - b. Let `varEnv` be `ctx`'s VariableEnvironment.
16. Else,
 - a. Let `lexEnv` be `evalRealm.[[globalEnv]]`.
 - b. Let `varEnv` be `evalRealm.[[globalEnv]]`.
17. If `strictScript` is `true` or if `direct` is `true` and `strictCaller` is `true`, then
 - a. Let `strictVarEnv` be the result of calling `NewDeclarativeEnvironment` passing the `lexEnv` as the argument.
 - b. Let `lexEnv` be `strictVarEnv`.
 - c. Let `varEnv` be `strictVarEnv`.
18. Let `status` be the result of performing Eval Declaration Instantiation as described in 10.5.5 with `script`, `varEnv`, and `lexEnv`.
19. `ReturnIfAbrupt(status)`.
20. Let `evalCxt` be a new ECMAScript code execution context.
21. Set the `evalCxt`'s Realm to `evalRealm`.
22. Set the `evalCxt`'s VariableEnvironment to `varEnv`.
23. Set the `evalCxt`'s LexicalEnvironment to `lexEnv`.
24. If there is a currently running execution context, suspend it.
25. Push `evalCxt` on to the execution context stack; `evalCxt` is now the running execution context.
26. Let `result` be the result of evaluating `script`.

Deleted: `prog`

Deleted: as a

Deleted: `Program`

Deleted: `k`

Deleted: `staticScript`

Deleted: `staticScript`

Comment [AWB11161]: or eval code that was direc eval'ed by function code???

Comment [AWB11162]: TODO

Deleted: `k`

Comment [AWB11163]: or module code that was

Comment [AWB11164]: TODO

Deleted: `k`

Deleted: <#>Let `evalCxt` be the result of establishing a no

Deleted: ,

Deleted: <#>Set the `ThisBinding` to the same value as the

Deleted: `Lexical`

Deleted: `ironment`

Deleted: `to`

Deleted: the same value as the

Deleted: of the calling execution context

Deleted: Set the

Deleted: `Variable`

Deleted: toironment

Deleted: to the same value as the

Deleted: of the calling execution context

Deleted: `to`

Deleted: `to`

Deleted: `staticScript`

Deleted: the eval code is strict code

Deleted: `LexicalEnvironment`

Deleted: Set

Deleted: the

Deleted: `LexicalEnvironment`

Deleted: `to`

Deleted: Set

Deleted: the

Deleted: `VariableEnvironment`

Deleted: `to`

Deleted: `Set`

Deleted: the

Deleted: `using the eval code`

Deleted: `realm`

Deleted: `the program`

Deleted: `prog`

27. Suspend *evalCxt* and remove it from the execution context stack.
28. Resume the context that is now on the top of the execution context stack as the running execution context.
29. Return result.

NOTE The eval code cannot instantiate variable or function bindings in the variable environment of the calling context that invoked the eval if either the code of the calling context or the eval code is strict code. Instead such bindings are instantiated in a new VariableEnvironment that is only accessible to the eval code.

15.1.2.1.1 Direct Call to Eval

A direct call to the eval function is one that is expressed as a *CallExpression* that meets the following two conditions:

The Reference that is the result of evaluating the *MemberExpression* in the *CallExpression* has an environment record as its base value and its reference name is "eval".

The result of calling the abstract operation GetValue with that Reference as the argument is the standard built-in function defined in 15.1.2.1.

15.1.2.2 parseInt (string , radix)

The **parseInt** function produces an integer value dictated by interpretation of the contents of the *string* argument according to the specified *radix*. Leading white space in *string* is ignored. If *radix* is **undefined** or 0, it is assumed to be 10 except when the number begins with the character pairs **0x** or **0X**, in which case a radix of 16 is assumed. If *radix* is 16, the number may also optionally begin with the character pairs **0x** or **0X**.

When the **parseInt** function is called, the following steps are taken:

1. Let *inputString* be *ToString(string)*.
2. ReturnIfAbrupt(string).
3. Let *S* be a newly created substring of *inputString* consisting of the first character that is not a *StrWhiteSpaceChar* and all characters following that character. (In other words, remove leading white space.) If *inputString* does not contain any such characters, let *S* be the empty string.
4. Let *sign* be 1.
5. If *S* is not empty and the first character of *S* is a minus sign **-**, let *sign* be **-1**.
6. If *S* is not empty and the first character of *S* is a plus sign **+** or a minus sign **-**, then remove the first character from *S*.
7. Let *R* = *ToInt32(radix)*.
8. ReturnIfAbrupt(R).
9. Let *stripPrefix* be **true**.
10. If *R* \neq 0, then
 - a. If *R* < 2 or *R* > 36, then return **NaN**.
 - b. If *R* \neq 16, let *stripPrefix* be **false**.
11. Else *R* = 0
 - a. Let *R* = 10.
12. If *stripPrefix* is **true**, then
 - a. If the length of *S* is at least 2 and the first two characters of *S* are either "**0x**" or "**0X**", then remove the first two characters from *S* and let *R* = 16.
13. If *S* contains any character that is not a radix-*R* digit, then let *Z* be the substring of *S* consisting of all characters before the first such character; otherwise, let *Z* be *S*.
14. If *Z* is empty, return **NaN**.
15. Let *mathInt* be the mathematical integer value that is represented by *Z* in radix-*R* notation, using the letters **A-Z** and **a-z** for digits with values 10 through 35. (However, if *R* is 10 and *Z* contains more than 20 significant digits, every significant digit after the 20th may be replaced by a **0** digit, at the option of the implementation; and if *R* is not 2, 4, 8, 10, 16, or 32, then *mathInt* may be an implementation-dependent approximation to the mathematical integer value that is represented by *Z* in radix-*R* notation.)
16. Let *number* be the Number value for *mathInt*.
17. Return *sign* \times *number*.

Deleted: <#>Exit the running execution context *evalCtx*, restoring the previous execution context.
<#>If *result.type* is normal and its completion value is a value *V*, then return the value *V*.
<#>If *result.type* is normal and its completion value is empty, then return the value **undefined**. Otherwise, *result.type* must be throw. Throw *result.value* as an exception.

NOTE `parseInt` may interpret only a leading portion of *string* as an integer value; it ignores any characters that cannot be interpreted as part of the notation of an integer, and no indication is given that any such characters were ignored.

15.1.2.3 `parseFloat` (*string*)

The `parseFloat` function produces a Number value dictated by interpretation of the contents of the *string* argument as a decimal literal.

When the `parseFloat` function is called, the following steps are taken:

1. Let *inputString* be `ToString(string)`.
2. ReturnIfAbrupt(*string*).
3. Let *trimmedString* be a substring of *inputString* consisting of the leftmost character that is not a *StrWhiteSpaceChar* and all characters to the right of that character. (In other words, remove leading white space.) If *inputString* does not contain any such characters, let *trimmedString* be the empty string.
4. If neither *trimmedString* nor any prefix of *trimmedString* satisfies the syntax of a *StrDecimalLiteral* (see 9.3.1), return **NaN**.
5. Let *numberString* be the longest prefix of *trimmedString*, which might be *trimmedString* itself, that satisfies the syntax of a *StrDecimalLiteral*.
6. Return the Number value for the MV of *numberString*.

NOTE `parseFloat` may interpret only a leading portion of *string* as a Number value; it ignores any characters that cannot be interpreted as part of the notation of an decimal literal, and no indication is given that any such characters were ignored.

15.1.2.4 `isNaN` (*number*)

Returns **true** if the argument coerces to **NaN**, and otherwise returns **false**.

1. Let *num* be `ToNumber(number)`.
2. ReturnIfAbrupt(*num*).
3. If *num* is **NaN**, return **true**.
4. Otherwise, return **false**.

Deleted: `ToNumber(number)`

NOTE A reliable way for ECMAScript code to test if a value *x* is a **NaN** is an expression of the form *x* \neq *x*. The result will be **true** if and only if *x* is a **NaN**.

15.1.2.5 `isFinite` (*number*)

Returns **false** if the argument coerces to **NaN**, $+\infty$, or $-\infty$, and otherwise returns **true**.

1. Let *num* be `ToNumber(number)`.
2. ReturnIfAbrupt(*num*).
3. If `ToNumber(num)` is **NaN**, $+\infty$, or $-\infty$, return **false**.
4. Otherwise, return **true**.

Deleted: `ber`

15.1.3 URI Handling Function Properties

Uniform Resource Identifiers, or URIs, are Strings that identify resources (e.g. web pages or files) and transport protocols by which to access them (e.g. HTTP or FTP) on the Internet. The ECMAScript language itself does not provide any support for using URIs except for functions that encode and decode URIs as described in 15.1.3.1, 15.1.3.2, 15.1.3.3 and 15.1.3.4.

NOTE Many implementations of ECMAScript provide additional functions and methods that manipulate web pages; these functions are beyond the scope of this standard.

A URI is composed of a sequence of components separated by component separators. The general form is:

Scheme : *First* / *Second* ; *Third* ? *Fourth*

where the italicised names represent components and “:”, “/”, “;” and “?” are reserved characters used as separators. The `encodeURI` and `decodeURI` functions are intended to work with complete URIs; they assume that any reserved characters in the URI are intended to have special meaning and so are not encoded. The `encodeURIComponent` and `decodeURIComponent` functions are intended to work with the individual component parts of a URI; they assume that any reserved characters represent text and so must be encoded so that they are not interpreted as reserved characters when the component is part of a complete URI.

The following lexical grammar specifies the form of encoded URIs.

Syntax

uri ::=

 *uriCharacters*_{opt}

uriCharacters ::=

 uriCharacter *uriCharacters*_{opt}

uriCharacter ::=

 uriReserved
 uriUnescaped
 uriEscaped

uriReserved :: one of
 ; / ? : @ & = + \$,

uriUnescaped ::=

 uriAlpha
 DecimalDigit
 uriMark

uriEscaped ::=

 % *HexDigit* *HexDigit*

uriAlpha :: one of
 a b c d e f g h i j k l m n o p q r s t u v w x y z
 A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

uriMark :: one of
 - - . ! ~ * ' ()

NOTE The above syntax is based upon RFC 2396 and does not reflect changes introduced by the more recent RFC 3986.

Runtime Semantics

When a character to be included in a URI is not listed above or is not intended to have the special meaning sometimes given to the reserved characters, that character must be encoded. The character is transformed into its UTF-8 encoding, with surrogate pairs first converted from UTF-16 to the corresponding code point value. (Note that for code units in the range [0,127] this results in a single octet with the same value.) The resulting sequence of octets is then transformed into a String with each octet represented by an escape sequence of the form "%xx".

Runtime Semantics: Encode Abstract Operation

The encoding and escaping process is described by the abstract operation `Encode` taking two String arguments *string* and *unescapeSet*.

1. Let *strLen* be the number of characters in *string*.
2. Let *R* be the empty String.

3. Let k be 0.
4. Repeat
 - a. If k equals $strLen$, return R .
 - b. Let C be the character at position k within $string$.
 - c. If C is in $unescapedSet$, then
 - i. Let S be a String containing only the character C .
 - ii. Let R be a new String value computed by concatenating the previous value of R and S .
 - d. Else C is not in $unescapedSet$,
 - i. If the code unit value of C is not less than 0xDC00 and not greater than 0xDFFF, throw a **URIError** exception.
 - ii. If the code unit value of C is less than 0xD800 or greater than 0xDBFF, then
 1. Let V be the code unit value of C .
 - iii. Else,
 1. Increase k by 1.
 2. If k equals $strLen$, throw a **URIError** exception.
 3. Let $kChar$ be the code unit value of the character at position k within $string$.
 4. If $kChar$ is less than 0xDC00 or greater than 0xDFFF, throw a **URIError** exception.
 5. Let V be $((\text{the code unit value of } C) - 0xD800) \times 0x400 + (kChar - 0xDC00) + 0x10000$.
 - iv. Let $Octets$ be the array of octets resulting by applying the UTF-8 transformation to V , and let L be the array size.
 - v. Let j be 0.
 - vi. Repeat, while $j < L$
 1. Let $jOctet$ be the value at position j within $Octets$.
 2. Let S be a String containing three characters "%XY" where XY are two uppercase hexadecimal digits encoding the value of $jOctet$.
 3. Let R be a new String value computed by concatenating the previous value of R and S .
 4. Increase j by 1.
 - e. Increase k by 1.

Deleted: ,

Runtime Semantics: Decode Abstract Operation

The unescaping and decoding process is described by the abstract operation `Decode` taking two String arguments $string$ and $reservedSet$.

1. Let $strLen$ be the number of characters in $string$.
2. Let R be the empty String.
3. Let k be 0.
4. Repeat
 - a. If k equals $strLen$, return R .
 - b. Let C be the character at position k within $string$.
 - c. If C is not '%', then
 - i. Let S be the String containing only the character C .
 - d. Else C is '%',
 - i. Let $start$ be k .
 - ii. If $k + 2$ is greater than or equal to $strLen$, throw a **URIError** exception.
 - iii. If the characters at position $(k+1)$ and $(k + 2)$ within $string$ do not represent hexadecimal digits, throw a **URIError** exception.
 - iv. Let B be the 8-bit value represented by the two hexadecimal digits at position $(k + 1)$ and $(k + 2)$.
 - v. Increment k by 2.
 - vi. If the most significant bit in B is 0, then
 1. Let C be the character with code unit value B .
 2. If C is not in $reservedSet$, then
 - a. Let S be the String containing only the character C .
 3. Else C is in $reservedSet$,
 - a. Let S be the substring of $string$ from position $start$ to position k included.
 - vii. Else the most significant bit in B is 1,

Deleted: ,

Deleted: ,

Deleted: ,

1. Let n be the smallest non-negative number such that $(B \ll n) \& 0x80$ is equal to 0.
2. If n equals 1 or n is greater than 4, throw a **URIError** exception.
3. Let $Octets$ be an array of 8-bit integers of size n .
4. Put B into $Octets$ at position 0.
5. If $k + (3 \times (n - 1))$ is greater than or equal to $strLen$, throw a **URIError** exception.
6. Let j be 1.
7. Repeat, while $j < n$
 - a. Increment k by 1.
 - b. If the character at position k within *string* is not "%", throw a **URIError** exception.
 - c. If the characters at position $(k + 1)$ and $(k + 2)$ within *string* do not represent hexadecimal digits, throw a **URIError** exception.
 - d. Let B be the 8-bit value represented by the two hexadecimal digits at position $(k + 1)$ and $(k + 2)$.
 - e. If the two most significant bits in B are not 10, throw a **URIError** exception.
 - f. Increment k by 2.
 - g. Put B into $Octets$ at position j .
 - h. Increment j by 1.
8. Let V be the value obtained by applying the UTF-8 transformation to $Octets$, that is, from an array of octets into a 21-bit value. If $Octets$ does not contain a valid UTF-8 encoding of a Unicode code point throw an **URIError** exception.
9. If $V \leq 0x10000$, then
 - a. Let C be the character with code unit value V .
 - b. If C is not in *reservedSet*, then
 - i. Let S be the String containing only the character C .
 - c. Else C is in *reservedSet*
 - i. Let S be the substring of *string* from position *start* to position k included.
10. Else $V \geq 0x10000$
 - a. Let L be $((V - 0x10000) \& 0x3FF) + 0xDC00$.
 - b. Let H be $((((V - 0x10000) \gg 10) \& 0x3FF) + 0xD800$.
 - c. Let S be the String containing the two characters with code unit values H and L .
- e. Let R be a new String value computed by concatenating the previous value of R and S .
- f. Increase k by 1.

NOTE This syntax of Uniform Resource Identifiers is based upon RFC 2396 and does not reflect the more recent RFC 3986 which replaces RFC 2396. A formal description and implementation of UTF-8 is given in RFC 3629.

In UTF-8, characters are encoded using sequences of 1 to 6 octets. The only octet of a "sequence" of one has the higher-order bit set to 0, the remaining 7 bits being used to encode the character value. In a sequence of n octets, $n > 1$, the initial octet has the n higher-order bits set to 1, followed by a bit set to 0. The remaining bits of that octet contain bits from the value of the character to be encoded. The following octets all have the higher-order bit set to 1 and the following bit set to 0, leaving 6 bits in each to contain bits from the character to be encoded. The possible UTF-8 encodings of ECMAScript characters are specified in [Table 31](#).

Table 31—UTF-8 Encodings

Code Unit Value	Representation	1st Octet	2nd Octet	3rd Octet	4th Octet
0x0000 – 0x007F	00000000 0zzzzzzz	0zzzzzzz			
0x0080 – 0x07FF	00000yyy yyzzzzzz	110yyyyy	10zzzzzz		
0x0800 – 0xD7FF	xxxxyyyy yyzzzzzz	1110xxxx	10yyyyyy	10zzzzzz	
0xD800 – 0xDBFF followed by 0xDC00 – 0xFFFF	110110vv vvvwwwxx followed by 110111yy yyzzzzzz	11110uuu	10uuwwww	10xxyyyy	10zzzzzz
0xDB800 – 0xDBFF not followed by 0xDC00 – 0xFFFF	causes URIerror				
0xDC00 – 0xFFFF	causes URIerror				
0xE000 – 0xFFFF	xxxxyyyy yyzzzzzz	1110xxxx	10yyyyyy	10zzzzzz	

Where

$$uuuuu = vvvv + 1$$

to account for the addition of 0x10000 as in Surrogates, section 3.7, of the Unicode Standard.

The range of code unit values 0xD800-0xDFFF is used to encode surrogate pairs; the above transformation combines a UTF-16 surrogate pair into a UTF-32 representation and encodes the resulting 21-bit value in UTF-8. Decoding reconstructs the surrogate pair.

RFC 3629 prohibits the decoding of invalid UTF-8 octet sequences. For example, the invalid sequence C0 80 must not decode into the character U+0000. Implementations of the Decode algorithm are required to throw a **URIError** when encountering such invalid sequences.

15.1.3.1 `decodeURI (encodedURI)`

The `decodeURI` function computes a new version of a URI in which each escape sequence and UTF-8 encoding of the sort that might be introduced by the `encodeURI` function is replaced with the character that it represents. Escape sequences that could not have been introduced by `encodeURI` are not replaced.

When the `decodeURI` function is called with one argument *encodedURI*, the following steps are taken:

1. Let *uriString* be `ToString(encodedURI)`.
2. ReturnIfAbrupt(*uriString*).
3. Let *reservedURISet* be a String containing one instance of each character valid in *uriReserved* plus “#”.
4. Return the result of calling `Decode(uriString, reservedURISet)`

NOTE The character “#” is not decoded from escape sequences even though it is not a reserved URI character.

15.1.3.2 `decodeURIComponent (encodedURIComponent)`

The `decodeURIComponent` function computes a new version of a URI in which each escape sequence and UTF-8 encoding of the sort that might be introduced by the `encodeURIComponent` function is replaced with the character that it represents.

When the `decodeURIComponent` function is called with one argument *encodedURIComponent*, the following steps are taken:

1. Let *componentString* be `ToString(encodedURIComponent)`.
2. ReturnIfAbrupt(*componentString*).
3. Let *reservedURIComponentSet* be the empty String.
4. Return the result of calling `Decode(componentString, reservedURIComponentSet)`

15.1.3.3 `encodeURI (uri)`

The `encodeURI` function computes a new version of a URI in which each instance of certain characters is replaced by one, two, three, or four escape sequences representing the UTF-8 encoding of the character.

When the `encodeURI` function is called with one argument *uri*, the following steps are taken:

1. Let *uriString* be `ToString(uri)`.
2. ReturnIfAbrupt(*uriString*).
3. Let *unescapeURISet* be a String containing one instance of each character valid in *uriReserved* and *uriUnescaped* plus “#”.
4. Return the result of calling `Encode(uriString, unescapeURISet)`

NOTE The character “#” is not encoded to an escape sequence even though it is not a reserved or unescaped URI character.

15.1.3.4 encodeURIComponent (*uriComponent*)

The `encodeURIComponent` function computes a new version of a URI in which each instance of certain characters is replaced by one, two, three, or four escape sequences representing the UTF-8 encoding of the character.

When the `encodeURIComponent` function is called with one argument *uriComponent*, the following steps are taken:

1. Let *componentString* be `ToString(uriComponent)`.
2. ReturnIfAbrupt(*componentString*).
3. Let *unescapeURIComponentSet* be a String containing one instance of each character valid in *uriUnescaped*.
4. Return the result of calling `Encode(componentString, unescapeURIComponentSet)`

15.1.4 Constructor Properties of the Global Object

15.1.4.1 Object (...)

See 15.2.1 and 15.2.2.

15.1.4.2 Function (...)

See 15.3.1 and 15.3.2.

15.1.4.3 Array (...)

See 15.4.1 and 15.4.2.

15.1.4.4 String (...)

See 15.5.1 and 15.5.2.

15.1.4.5 Boolean (...)

See 15.6.1 and 15.6.2.

15.1.4.6 Number (...)

See 15.7.1 and 15.7.2.

15.1.4.7 Date (...)

See 15.9.2.

15.1.4.8 RegExp (...)

See 15.10.3 and 15.10.4.

15.1.4.9 Error (...)

See 15.11.1 and 15.11.2.

15.1.4.10 EvalError (...)

See 15.11.6.1.

15.1.4.11 RangeError (. . .)

See 15.11.6.2.

15.1.4.12 ReferenceError (. . .)

See 15.11.6.3.

15.1.4.13 SyntaxError (. . .)

See 15.11.6.4.

15.1.4.14 TypeError (. . .)

See 15.11.6.5.

15.1.4.15 URIError (. . .)

See 15.11.6.6.

15.1.4.16 Map (. . .)

See 15.14.3.

15.1.4.17 WeakMap (. . .)

See 15.15.3.

15.1.4.18 Set (. . .)

See 15.16.3.

15.1.5 Other Properties of the Global Object

15.1.5.1 Math

See 15.8.

15.1.5.2 JSON

See 15.12.

15.2 Object Objects

15.2.1 The Object Constructor Called as a Function

When `Object` is called as a function rather than as a constructor, it performs a type conversion.

15.2.1.1 Object ([value])

When the `Object` function is called with no arguments or with one argument `value`, the following steps are taken:

1. If `value` is `null`, `undefined` or not supplied, return the result of the abstract operation `ObjectCreate`.
2. Return `ToObject(value)`.

Deleted: Runtime Semantics: ObjectCreate Abstract Operation¶

The abstract operation `ObjectCreate` with optional argument `proto` (an object or `null`) is used to specify the creation of new `Object` objects. It performs the following steps:¶

```
<#>If proto was not provided, let proto be the intrinsic %ObjectPrototype%¶
<#>Let obj be a newly created ECMAScript object.¶
<#>Set the [[Prototype]] internal property of obj to proto.¶
<#>Set obj's common internal methods to the default definitions specified in 8.12.¶
<#>Set the [[Extensible]] internal property of obj to true.¶
<#>Return obj.¶
<#>¶
```

Deleted: create and

Deleted: ion

Deleted: a new `Object` object exactly as if the standard built-in `Object` constructor had been called with the same arguments (15.2.2.1)

15.2.2 The Object Constructor

When `Object` is called as part of a `new` expression, it is a constructor that may create an object.

15.2.2.1 `new Object ([value])`

When the `Object` constructor is called with no arguments or with one argument `value`, the following steps are taken:

1. If `value` is supplied, then
 - a. If `Type(value)` is `Object`, then return `value`.
 - b. If `Type(value)` is `String`, return `ToObject(value)`.
 - c. If `Type(value)` is `Boolean`, return `ToObject(value)`.
 - d. If `Type(value)` is `Number`, return `ToObject(value)`.
2. Assert: The argument `value` was not supplied or its type was `Null` or `Undefined`.
3. Return the result of the abstract operation `ObjectCreate`.

Deleted: ¶
If the `value` is a native ECMAScript object, do not create a new object but simply

Deleted: <#>If the `value` is a host object, then actions are taken and a result is returned in an implementation-dependent manner that may depend on the host object.¶

Deleted: <#>Let `obj` be a newly created native ECMAScript object.¶

<#>Set the `[[Prototype]]` internal property of `obj` to the standard built-in `Object` prototype object (15.2.4).¶

<#>Set the `[[Class]]` internal property of `obj` to "Object".¶

<#>Set the `[[Extensible]]` internal property of `obj` to `true`.¶

<#>Set all the internal methods of `obj` as specified in 8.12.¶

Deleted: `obj`

Deleted: `ion`

Deleted: the internal properties and

15.2.3 Properties of the Object Constructor

The value of the `[[Prototype]]` internal `data` property of the `Object` constructor is the standard built-in `Function` prototype object.

Besides the `length` property (whose value is `1`), the `Object` constructor has the following properties:

15.2.3.1 `Object.prototype`

The initial value of `Object.prototype` is the standard built-in `Object` prototype object (15.2.4).

This property has the attributes `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false`.

15.2.3.2 `Object.getPrototypeOf (O)`

When the `getPrototypeOf` function is called with argument `O`, the following steps are taken:

1. If `Type(O)` is not `Object` throw a `TypeError` exception.
2. Return the result of calling the `[[GetInheritance]]` internal method of `O`.

Deleted: `value`

Deleted: the

Deleted: Prototype

Deleted: e

Deleted: property

Deleted: name

Deleted: `ToString`

Deleted: name

Deleted: name

Deleted: 10

15.2.3.3 `Object.getOwnPropertyDescriptor (O, P)`

When the `getOwnPropertyDescriptor` function is called, the following steps are taken:

1. If `Type(O)` is not `Object` throw a `TypeError` exception.
2. Let `key` be `ToPropertyKey(P)`.
3. **ReturnIfAbrupt(key).**
4. Let `desc` be the result of calling the `[[GetOwnProperty]]` internal method of `O` with argument `key`.
5. Return the result of calling `FromPropertyDescriptor(desc)` (8.2.5.4).

Deleted: `value`

Deleted: the

Deleted: Prototype

Deleted: e

Deleted: property

Deleted: name

Deleted: `ToString`

Deleted: name

Deleted: name

Deleted: 10

15.2.3.4 `Object.getOwnPropertyNames (O)`

When the `getOwnPropertyNames` function is called, the following steps are taken:

1. If `Type(O)` is not `Object`, throw a `TypeError` exception.
2. Let `keys` be the result of calling the `[[OwnPropertyKeys]]` internal method of `O`.
3. **ReturnIfAbrupt(keys).**
4. Let `nameList` be a new empty List.
5. Let `gotAllNames` be `false`.
6. Repeat while `gotAllNames` is `false`.
 - a. Let `next` be the result of `Invoke(keys, "next")`.
 - b. If `IteratorComplete(next)` is `true`, then let `gotAllNames` be `true`.
 - c. Else.

Comment [AWB7165]: TODO: need to define

- i. If *next* is an abrupt completion, then return *next*.
 - ii. Assert *next.[[type]]* is normal.
 - iii. Let *nextKey* be *next.[[value]]*.
 - iv. If Type(*nextKey*) is String, then
 1. Append *nextKey* as the last element of *nameList*.
7. Return CreateArrayFromList(*keys*).

15.2.3.5 Object.create (O [, Properties])

The **create** function creates a new object with a specified prototype. When the **create** function is called, the following steps are taken:

1. If Type(*O*) is not Object or Null throw a **TypeError** exception.
2. Let *obj* be the result of the abstract operation **ObjectCreate** with argument *O*.
3. If the argument *Properties* is present and not **undefined**, then
 - a. Return the result of the abstract operation **ObjectDefineProperties** with arguments *obj* and *Properties*.
4. Return *obj*.

15.2.3.6 Object.defineProperty (O, P, Attributes)

The **defineProperty** function is used to add an own property and/or update the attributes of an existing own property of an object. When the **defineProperty** function is called, the following steps are taken:

1. If Type(*O*) is not Object throw a **TypeError** exception.
2. Let *name* be **ToPropertyKey**(*P*).
3. **ReturnIfAbrupt**(*name*).
4. Let *desc* be the result of calling **ToPropertyDescriptor** with *Attributes* as the argument.
5. **ReturnIfAbrupt**(*desc*).
6. Let *success* be the result of **DefinePropertyOrThrow**(*O, name, desc*).
7. **ReturnIfAbrupt**(*success*).
8. Return *O*.

15.2.3.7 Object.defineProperties (O, Properties)

The **defineProperties** function is used to add own properties and/or update the attributes of existing own properties of an object. When the **defineProperties** function is called, the following steps are taken:

1. Return the result of the abstract operation **ObjectDefineProperties** with arguments *O* and *Properties*.

Runtime Semantics: ObjectDefineProperties Abstract Operation

The abstract operation **ObjectDefineProperties** with arguments *O* and *Properties* performs the following steps:

1. If Type(*O*) is not Object throw a **TypeError** exception.
2. Let *props* be **ToObject**(*Properties*).
3. Let *names* be an internal list containing the *keys* of each enumerable own property of *props*.
4. Let *descriptors* be an empty internal List.
5. For each element *P* of *names* in list order,
 - a. Let *descObj* be the result of **Get**(*props, P*).
 - b. **ReturnIfAbrupt**(*descObj*).
 - c. Let *desc* be the result of calling **ToPropertyDescriptor** with *descObj* as the argument.
 - d. **ReturnIfAbrupt**(*desc*).
 - e. Append the pair (a two element List) consisting of *P* and *desc* to the end of *descriptors*.
6. Let *pendingException* be **undefined**.
7. For each *pair* from *descriptors* in list order,
 - a. Let *P* be the first element of *pair*.
 - b. Let *desc* be the second element of *pair*.
 - c. Let *status* be the result of **DefinePropertyOrThrow**(*O, P, desc*).
 - d. If *status* is an Abrupt Completion then
 - i. If *pendingException* is **undefined**, then set *pendingException* to *status*.

Deleted: <#> If Type(*O*) is not Object throw a **TypeError** exception.
Deleted: <#> Let *keys* be the result of calling the [[OwnPropertyKeys]] internal method of *O*.
Deleted: <#> ReturnIfAbrupt(*keys*).
Deleted: <#> Let *array* be the result of the abstraction operation **ArrayCreate** (15.4) with argument 0 the result of creating a new object as if by the expression **new Array** where **Array** is the standard built-in constructor with that name.
Deleted: <#> Let *n* be 0.
Deleted: <#> For each named own property *P* of *O*
Deleted: <#> Let *name* be the String value that is the name of *P*.
Deleted: <#> Call the [[DefineOwnProperty]] internal method of *array* with arguments **Tostring**(*n*), the **PropertyDescriptor** {{[[Name]]: *name*, [[Writable]]: **true**, [[Enumerable]]: **true**, [[Configurable]]: **true**}, and **false**.
Deleted: <#> Increment *n* by 1.
Deleted: <#> Return **arrayCreateArrayFromList**(*keys*).
Deleted: NOTE If *O* is a String instance, the set of own properties processed in step 4 includes the implicit properties defined in 15.5.5.2 that correspond to character positions within the object's [[PrimitiveValue]] String.
Deleted: abstraction operation
Deleted: the result of creating a new object as if by the expression **new Object()** where **Object** is the standard built-in constructor.
Deleted: <#> Set the [[Prototype]] internal property of *obj* to *O*.
Deleted: add own properties to *obj* as if by calling the **Object.defineProperties** abstract operation.
Deleted: **Object.defineProperties**
Deleted: **Tostring**
Deleted: **Call**
Deleted: the [[*[[*]]]]
Deleted: Own
Deleted: **J**
Deleted: internal method of **Object**
Deleted: with arguments
Deleted: , and **true**
Deleted: **em**
Deleted: **s**
Deleted: names
Deleted: calling the [[*[[*]]]] internal method of **Object**
Deleted: with
Deleted: as the argument
Deleted: **Call**
Deleted: calling the [[*[[*]]]] internal method of **Object**
Deleted: Own
Deleted: **J**
Deleted: internal method of **Object**
Deleted: with arguments
Deleted: , and **true**
Deleted: **undefined**

8. `ReturnIfAbrupt(pendingException)`.
9. Return O .

If an implementation defines a specific order of enumeration for the for-in statement, that same enumeration order must be used to order the list elements in step 3 of this algorithm.

NOTE An exception in defining an individual property in step 7 does not terminate the process of defining other properties. All valid property definitions are processed.

15.2.3.8 `Object.seal (O)`

When the `seal` function is called, the following steps are taken:

1. If $\text{Type}(O)$ is not `Object` throw a `TypeError` exception.
2. Let $status$ be the result of `MakeObjectSecure(O, false)`.
3. `ReturnIfAbrupt(status)`.
4. Return O .

15.2.3.9 `Object.freeze (O)`

When the `freeze` function is called, the following steps are taken:

1. If $\text{Type}(O)$ is not `Object` throw a `TypeError` exception.
2. Let $status$ be the result of `MakeObjectSecure(O, true)`.
3. `ReturnIfAbrupt(status)`.
4. Return O .

15.2.3.10 `Object.preventExtensions (O)`

When the `preventExtensions` function is called, the following steps are taken:

1. If $\text{Type}(O)$ is not `Object` throw a `TypeError` exception.
2. Let $status$ be the result of calling the `[[PreventExtensions]]` internal method of O .
3. `ReturnIfAbrupt(status)`.
4. Return O .

15.2.3.11 `Object.isSealed (O)`

When the `isSealed` function is called with argument O , the following steps are taken:

1. If $\text{Type}(O)$ is not `Object` throw a `TypeError` exception.
2. `Return TestIfSecureObject(O, false)`.

15.2.3.12 `Object.isFrozen (O)`

When the `isFrozen` function is called with argument O , the following steps are taken:

1. If $\text{Type}(O)$ is not `Object` throw a `TypeError` exception.
2. `Return TestIfSecureObject(O, true)`.

15.2.3.13 `Object.isExtensible (O)`

When the `isExtensible` function is called with argument O , the following steps are taken:

1. If $\text{Type}(O)$ is not `Object` throw a `TypeError` exception.
2. Return the result of calling the `[[IsExtensible]]` internal method of O .

15.2.3.14 `Object.keys (O)`

When the `keys` function is called with argument O , the following steps are taken:

8. If $\text{Type}(O)$ is not `Object`, throw a `TypeError` exception.

Deleted: `status`

Formatted: Note

Deleted: <#>For each named own property name P of O ,
 <#>Let $desc$ be the result of calling the `[[GetOwnProperty]]` internal method of O with P .
 <#>If $desc.[[Configurable]]$ is `true`, set $desc.[[Configurable]]$ to `false`.
 Call

Deleted: `of`

Deleted: `u`

Deleted: `P, desc`

Deleted: calling the `[[DefineOwnProperty]]` internal method of O with $P, desc$, and `true` as arguments

Deleted: <#>Set the `[[Extensible]]` internal property of O to `false`.
 Deleted

Deleted: <#>For each named own property name P of O ,
 <#>Let $desc$ be the result of calling the `[[GetOwnProperty]]` internal method of O with P .
 <#>If $desc.[[IsDataDescriptor]]$ is `true`, then
 <#>If $desc.[[Writable]]$ is `true`, set $desc.[[Writable]]$ to `false`.
 <#>If $desc.[[Configurable]]$ is `true`, set $desc.[[Configurable]]$ to `false`.
 Deleted

Deleted: calling Call the `[[DefineOwnProperty]]` internal method of O

Deleted: `u`

Deleted:

Deleted: `with`

Deleted: `P, desc, and true as arguments`

Deleted: <#>Set the `[[Extensible]]` internal property of O to `false`.
 Deleted

Deleted: `Set`

Deleted: `Extensible`

Deleted: `property`

Deleted: `to false`

Deleted: <#>For each named own property name P of O ,
 <#>Let $desc$ be the result of calling the `[[GetOwnProperty]]` internal method of O with P .
 <#>If $desc.[[Configurable]]$ is `true`, then return
 $false$.
 <#>Let $extensible$ be the result of calling the `[[IsExtensible]]` internal property of O .
 <#>ReturnIfAbrupt($extensible$).
 Deleted

Deleted: `false`

Deleted: <#>For each named own property name P of O ,

Deleted: `false`

Deleted: Boolean value of the

Deleted: `Get`

Deleted: `property`

Deleted: `the`

9. Let `keys` be the result of calling the `[[OwnPropertyKeys]]` internal method of `O`.

Deleted: Keys

10. ReturnIfAbrupt(`keys`).

11. Let `nameList` be a new empty List.

12. Let `gotAllNames` be `false`.

13. Repeat while `gotAllNames` is `false`.

a. Let `next` be the result of `Invoke(keys, "next")`.

b. If `IteratorComplete(next)` is `true`, then let `gotAllNames` be `true`.

c. Else,

i. If `next` is an abrupt completion, then return `next`.

ii. Assert `next.[[type]]` is normal.

iii. Let `nextKey` be `next.[[value]]`.

iv. If `Type(nextKey)` is String, then

1. Let `desc` be the result of calling the `[[GetOwnProperty]]` internal method of `O` with

argument `nextKey`.

2. `ReturnIfAbrupt(desc)`.

3. If `desc` is not `undefined` and `desc.[[Enumerable]]` is `true`, then

a. Append `nextKey` as the last element of `nameList`.

14. Return `CreateArrayFromList(keys)`.

If an implementation defines a specific order of enumeration for the for-in statement, the same order must be used for the elements of the array returned in step 7.

Comment [AWB7166]: TODO: need to define

15.2.3.15 Object.assign (target, source)

TODO :

- Only enumerable own properties of source
- Invoke `[[Get]]` on property list derived from source, for each property in list `[[Put]]` on target
- private names are not copied
- unique names are copied
- super mechanism (rebind super)
- Returns modified "target"

Deleted: <#>Let `n` be the number of own enumerable properties of `O`¶

<#>Let `array` be the result of the abstraction operation `ArrayCreate` (15.4) with argument `n` the result of creating a new Object as if by the expression `new Array` where `Array` is the standard built-in constructor with that name.¶

<#>Let `index` be 0.¶

<#>For each own enumerable property of `O` whose name String is `P`¶

<#>Let `P` be the key of the property.¶

<#>Call the `[[DefineOwnProperty]]` internal method of `array` with arguments `ToString(index)`, the `PropertyDescriptor` `{[[Value]]: P, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}, and false.¶`

<#>Increment `index` by 1.¶

<#>Return `array`.¶

If an implementation defines a specific order of enumeration for the for-in statement, that same enumeration order must be used in step 5 of this algorithm.¶

Comment [AWB11167]: TODO need an algorithm

Because `[[Get]]/[[Put]]` are invoked we need to figure out something to say about the order in which properties are accessed.

Deleted: 15.2.3.15 Object.createObject (O)¶

When the `isObject` function is called with argument the following steps are taken:¶

If `Type(O)` is `Object` return `true`.¶

Return `false`.¶

Deleted: , the value of the `[[Class]]` internal property is "Object".

15.2.4 Properties of the Object Prototype Object

The value of the `[[Prototype]]` internal `data` property of the Object prototype object is `null`, and the initial value of the `[[Extensible]]` internal `data` property is `true`.

15.2.4.1 Object.prototype.constructor

The initial value of `Object.prototype.constructor` is the standard built-in `Object` constructor.

15.2.4.2 Object.prototype.toString ()

When the `toString` method is called, the following steps are taken:

1. If the `this` value is `undefined`, return "[object Undefined]".
2. If the `this` value is `null`, return "[object Null]".
3. Let `O` be the result of calling `ToObject` passing the `this` value as the argument.

4. If O is an exotic Symbol object, then let tag be "Symbol".
5. Else if O has a [[BuiltInBrand]] internal data property, let tag be the corresponding value from Table 32.
6. Else
 - a. Let $hasTag$ be the result of $\text{HasProperty}(O, \text{@@toStringTag})$.
 - b. ReturnIfAbrupt($hasTag$).
 - c. If $hasTag$ is false, then let tag be "Object".
 - d. Else,
 - i. Let tag be the result of $\text{Get}(O, \text{@@toStringTag})$.
 - ii. If tag is an abrupt completion, let tag be $\text{NormalCompletion}("???"$).
 - iii. Let tag be $O.\text{[[value]]}$.
 - iv. If $\text{Type}(tag)$ is not String, let tag be "???".
 - v. If tag is any of "Arguments", "Array", "Boolean", "Date", "Error", "Function", "JSON", "Math", "Number", "RegExp", or "String" then let tag be the string value "~" concatenated with the current value of tag .
7. Return the String value that is the result of concatenating the three Strings "[object ", tag , and "]".

Table 32 — [[BuiltInBrand]] Tag Values

[[BuiltInBrand]] Value	tag Value
BuiltinFunction	"Function"
BuiltinArray	"Array"
BuiltinStringWrapper	"String"
BuiltinBooleanWrapper	"Boolean"
BuiltinNumberWrapper	"Number"
BuiltinMath	"Math"
BuiltinDate	"Date"
BuiltinRegExp	"RegExp"
BuiltinError	"Error"
BuiltinJSON	"JSON"
BuiltinArguments	"Arguments"

NOTE Historically, this function was occasionally used to access the string value of the [[Class]] internal data property that was used in previous editions of this specification as a nominal type tag for various built-in objects. This definition of `toString` preserves the ability to use it as a reliable test for those specific kinds of built-in objects but it does not provide a reliable type testing mechanism for other kinds of built-in or program defined objects.

15.2.4.3 Object.prototype.toLocaleString ()

When the `toLocaleString` method is called, the following steps are taken:

1. Let O be the `this` value.
2. ReturnIfAbrupt(O).
3. Return the result of $\text{Invoke}(O, \text{"toString"})$.

NOTE 1 This function is provided to give all Objects a generic `toLocaleString` interface, even though not all may use it. Currently, `Array`, `Number`, and `Date` provide their own locale-sensitive `toLocaleString` methods.

NOTE 2 The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.2.4.4 Object.prototype.valueOf ()

When the `valueOf` method is called, the following steps are taken:

1. Let O be the result of calling `ToObject` passing the `this` value as the argument.
2. Return O .

- Deleted:** I
- Deleted:** NativeBrand
- Deleted:** Table 30Table 28
- Deleted:** calling the [[HasProperty]] internal method of
- Deleted:** with argument
- Deleted:** calling the $\text{[[$
- Deleted:**]] internal method of
- Deleted:**
- Deleted:** with argument
- Deleted:** i
- Deleted:** O
- Deleted:** a host object, let tag be an implementation defined string value. This value n
- Deleted:** "Object",
- Deleted:** .
- Deleted:** <#>Else, Let let class tag be the string
- Deleted:** class
- Deleted:** ¶
- Deleted:** 3028
- Deleted:** NativeBrand
- Deleted:** NativeFunction
- Deleted:** NativeArray
- Deleted:** StringWrapper
- Deleted:** BooleanWrapper
- Deleted:** NumberWrapper
- Deleted:** NativeMath
- Deleted:** NativeDate
- Deleted:** NativeRegExp
- Deleted:** NativeError
- Deleted:** NativeJSON
- Deleted:** NativeArguments
- Deleted:** result of calling `ToObject` passing the
- Deleted:** as the argument
- Deleted:** <#>Let `toString` be the result of calling
- Deleted:** calling
- Deleted:** the abstract operation
- Deleted:** the
- Deleted:** with arguments
- Deleted:** [[Call]] internal method o
- Deleted:** `.toString` passing O ,
- Deleted:** as the `this` value
- Deleted:** and
- Deleted:** no
- Deleted:** an empty arguments List
- Deleted:** <#>If O is the result of calling the

15.2.4.5 Object.prototype.hasOwnProperty (V)

When the `hasOwnProperty` method is called with argument *V*, the following steps are taken:

1. Let *P* be `ToPropertyKey(V)`.
2. `ReturnIfAbrupt(P)`.
3. Let *O* be the result of calling `ToObject` passing the `this` value as the argument.
4. `ReturnIfAbrupt(O)`.
5. Return the result of calling the `[[HasOwnProperty]]` internal method of *O* passing *P* as the argument.

NOTE The ordering of steps 1 and 3 is chosen to ensure that any exception that would have been thrown by step 1 in previous editions of this specification will continue to be thrown even if the `this` value is `undefined` or `null`.

15.2.4.6 Object.prototype.isPrototypeOf (V)

When the `isPrototypeOf` method is called with argument *V*, the following steps are taken:

1. If *V* is not an object, return `false`.
2. Let *O* be the result of calling `ToObject` passing the `this` value as the argument.
3. `ReturnIfAbrupt(O)`.
4. Repeat
 - a. Let *V* be the result of calling the `[[GetInheritance]]` internal method of *V* with no arguments.
 - b. If *V* is `null`, return `false`.
 - c. If *O* and *V* refer to the same object, return `true`.

NOTE The ordering of steps 1 and 2 is chosen to preserve the behaviour specified by previous editions of this specification for the case where *V* is not an object and the `this` value is `undefined` or `null`.

15.2.4.7 Object.prototype.propertyIsEnumerable (V)

When the `propertyIsEnumerable` method is called with argument *V*, the following steps are taken:

1. Let *P* be `ToString(V)`.
2. `ReturnIfAbrupt(P)`.
3. Let *O* be the result of calling `ToObject` passing the `this` value as the argument.
4. `ReturnIfAbrupt(O)`.
5. Let *desc* be the result of calling the `[[GetOwnProperty]]` internal method of *O* passing *P* as the argument.
6. If *desc* is `undefined`, return `false`.
7. Return the value of *desc*.`[[Enumerable]]`.

NOTE 1 This method does not consider objects in the prototype chain.

NOTE 2 The ordering of steps 1 and 2 is chosen to ensure that any exception that would have been thrown by step 1 in previous editions of this specification will continue to be thrown even if the `this` value is `undefined` or `null`.

15.2.5 Properties of Object Instances

Object instances have no special properties beyond those inherited from the Object prototype object.

15.3 Function Objects

15.3.1 The Function Constructor Called as a Function

When `Function` is called as a function rather than as a constructor, it creates and initialises a new `Function` object. Thus the function call `Function(...)` is equivalent to the object creation expression `new Function(...)` with the same arguments.

Deleted: `ToString`

Deleted: `Let desc be`

Deleted: `GetOwnProperty`

Deleted: `<#>If desc is undefined, return false.¶`
`<#>Return true.¶`

NOTE 1 Unlike `[[HasProperty]]` (8.12.6), this method does not consider objects in the prototype chain.¶

Deleted: `2`

Deleted: `2`

Deleted: `value`

Deleted: `of`

Deleted: `Prototype`

Deleted: `e`

Deleted: `property`

15.3.1.1 Function (p₁, p₂, ..., p_n, body)

When the **Function** function is called with some arguments *p*₁, *p*₂, ..., *p*_{*n*}, *body* (where *n* might be 0, that is, there are no “*p*” arguments, and where *body* might also not be provided), the following steps are taken:

1. Create and return a new Function object as if the standard built-in constructor Function was used in a **new** expression with the same arguments (15.3.2.1).

15.3.2 The Function Constructor

When **Function** is called as part of a **new** expression, it is a constructor: it initialises the newly created object.

15.3.2.1 new Function (p₁, p₂, ..., p_n, body)

The last argument specifies the body (executable code) of a function; any preceding arguments specify formal parameters.

When the **Function** constructor is called with some arguments *p*₁, *p*₂, ..., *p*_{*n*}, *body* (where *n* might be 0, that is, there are no “*p*” arguments, and where *body* might also not be provided), the following steps are taken:

1. Let *argCount* be the total number of arguments passed to this function invocation.
2. Let *P* be the empty String.
3. If *argCount* = 0, let *bodyText* be the empty String.
4. Else if *argCount* = 1, let *bodyText* be that argument.
5. Else *argCount* > 1,
 - a. Let *firstArg* be the first argument.
 - b. Let *P* be *ToString(firstArg)*.
 - c. ReturnIfAbrupt(*P*).
 - d. Let *k* be 2.
 - e. Repeat, while *k* < *argCount*
 - i. Let *nextArg* be the *k*'th argument.
 - ii. Let *nextArgString* be *ToString(nextArg)*.
 - iii. ReturnIfAbrupt(*nextArgString*).
 - iv. Let *P* be the result of concatenating the previous value of *P*, the String " , " (a comma), and *nextArgString*.
 - v. Increase *k* by 1.
 - f. Let *bodyText* be the *k*'th argument.
6. Let *bodyText* be *ToString(bodyText)*.
7. ReturnIfAbrupt(*bodyText*).
8. Let *parameters* be the result of parsing *P*, interpreted as UTF-16 encoded Unicode text as described in 8.4, using *FormalParameterList* as the goal symbol. Throw a **SyntaxError** exception if the parse fails.
9. Let *body* be the result of parsing *bodyText*, interpreted as UTF-16 encoded Unicode text as described in 8.4, using *FunctionBody* as the goal symbol. Throw a **SyntaxError** exception if the parse fails or if any static semantics errors are detected.
10. If *bodyText* is strict mode code (see 10.1.1) then let *strict* be **true**, else let *strict* be **false**.
11. Return a new Function object created as specified in 13.6 passing *parameters* as the *FormalParameterList*, and *body* as the *FunctionBody*. Pass in the Global Environment as the *Scope* parameter and *strict* as the *Strict* flag.

Deleted: ,

Deleted: *ToString()*
Deleted:)

Deleted: If
Deleted: is not parsable as a
Deleted: *opt*
Deleted: then t
Deleted: <#>If *body* is not parsable as
FunctionBody then throw a **SyntaxError** exception
Deleted: <#>If *strict* is **true**, throw any
exceptions specified in 13.1 that apply. ¶
Deleted: 2
Deleted: *P*
Deleted: *opt*

A **prototype** property is automatically created for every function, to provide for the possibility that the function will be used as a constructor.

NOTE It is permissible but not necessary to have one argument for each formal parameter to be specified. For example, all three of the following expressions produce the same result:

```

new Function("a", "b", "c", "return a+b+c")

new Function("a, b, c", "return a+b+c")

new Function("a,b", "c", "return a+b+c")

```

15.3.3 Properties of the Function Constructor

The Function constructor is itself a Function object and has a [[BuiltinBrand]] internal data property whose value is `BuiltinFunction`. The value of the [[Prototype]] internal data property of the Function constructor is the standard built-in Function prototype object (15.3.4).

The value of the [[Extensible]] internal data property of the Function constructor is **true**.

The Function constructor has the following properties:

15.3.3.1 Function.prototype

The initial value of `Function.prototype` is the standard built-in Function prototype object (15.3.4).

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.3.3.2 Function.length

This is a data property with a value of 1. This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.3.4 Properties of the Function Prototype Object

The Function prototype object is itself a Function object and has a [[BuiltinBrand]] internal data property whose value is `BuiltinFunction`. When invoked, it accepts any arguments and returns `undefined`.

The value of the [[Prototype]] internal data property of the Function prototype object is the standard built-in Object prototype object (15.2.4). The initial value of the [[Extensible]] internal data property of the Function prototype object is **true**.

The function prototype object does not have a `prototype` property.

The Function prototype object does not have a `valueOf` property of its own; however, it inherits the `valueOf` property from the Object prototype Object.

The `length` property of the Function prototype object is **0**.

15.3.4.1 Function.prototype.constructor

The initial value of `Function.prototype.constructor` is the built-in `Function` constructor.

15.3.4.2 Function.prototype.toString ()

An implementation-dependent representation of the function is returned. This representation has the syntax of a `FunctionDeclaration`. Note in particular that the use and placement of white space, line terminators, and semicolons within the representation String is implementation-dependent.

The `toString` function is not generic; it throws a `TypeError` exception if its `this` value is not a Function object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

15.3.4.3 Function.prototype.apply (thisArg, argArray)

When the `apply` method is called on an object `func` with arguments `thisArg` and `argArray`, the following steps are taken:

1. If `IsCallable(func)` is **false**, then throw a `TypeError` exception.
2. If `argArray` is `null` or `undefined`, then

Deleted: its
Deleted: Class
Deleted: IsFunction
Deleted: NativeBrand
Deleted: is "Function"
Deleted: NativeFunction

Deleted: IsFunction
Deleted: NativeBrand
Deleted: NativeFunction
Deleted: (its [[Class]] is "Function") that,
Deleted: when

- a. Return the result of calling the `[[Call]]` internal method of `func`, providing `thisArg` as `thisArgument` and an empty `List` of arguments as `argumentsList`.
3. If `Type(argArray)` is not `Object`, then throw a `TypeError` exception.
4. Let `len` be the result of `Get(argArray, "length")`.
5. Let `n` be `ToUint32(len)`.
6. `ReturnIfAbrupt(n)`.
7. Let `argList` be an empty `List`.
8. Let `index` be `0`.
9. Repeat while `index < n`
 - a. Let `indexName` be `ToString(index)`.
 - b. Let `nextArg` be the result of `Get(argArray, indexName)`.
 - c. `ReturnIfAbrupt(nextArg)`.
 - d. Append `nextArg` as the last element of `argList`.
 - e. Set `index` to `index + 1`.
10. Return the result of calling the `[[Call]]` internal method of `func`, providing `thisArg` as `thisArgument` and `argList` as `argumentsList`.

The `length` property of the `apply` method is `2`.

NOTE The `thisArg` value is passed without modification as the `this` value. This is a change from Edition 3, where a `undefined` or `null` `thisArg` is replaced with the global object and `ToObject` is applied to all other values and that result is passed as the `this` value.

15.3.4.4 Function.prototype.call (thisArg [, arg1 [, arg2, ...]])

When the `call` method is called on an object `func` with argument `thisArg` and optional arguments `arg1`, `arg2`, etc, the following steps are taken:

1. If `IsCallable(func)` is `false`, then throw a `TypeError` exception.
2. Let `argList` be an empty `List`.
3. If this method was called with more than one argument then in left to right order starting with `arg1` append each argument as the last element of `argList`.
4. Return the result of calling the `[[Call]]` internal method of `func`, providing `thisArg` as `thisArgument` and `argList` as `argumentsList`.

The `length` property of the `call` method is `1`.

NOTE The `thisArg` value is passed without modification as the `this` value. This is a change from Edition 3, where a `undefined` or `null` `thisArg` is replaced with the global object and `ToObject` is applied to all other values and that result is passed as the `this` value.

15.3.4.5 Function.prototype.bind (thisArg [, arg1 [, arg2, ...]])

The `bind` method takes one or more arguments, `thisArg` and (optionally) `arg1`, `arg2`, etc, and returns a new function object by performing the following steps:

1. Let `Target` be the `this` value.
2. If `IsCallable(Target)` is `false`, throw a `TypeError` exception.
3. Let `A` be a new (possibly empty) internal list consisting of all of the argument values provided after `thisArg` (`arg1`, `arg2` etc), in order.
4. Let `F` be the result of the abstract operation `BoundFunctionCreate` with arguments `Target`, `thisArg`, and `A`.
5. If `Target` has the `[[BuiltinBrand]]` internal property with value `BuiltinFunction`, then
 - a. Let `targetLen` be the result of `Get(Target, "length")`.
 - b. `ReturnIfAbrupt(targetLen)`.
 - c. Let `L` be the larger of `0` and the result of `targetLen` minus the number of elements of `A`.
6. Else let `L` be `0`.
7. Call the `[[DefineOwnProperty]]` internal method of `F` with arguments `"length"` and `PropertyDescriptor` `{[[value]]: L, [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false}`.
8. Perform the `AddRestrictedFunctionProperties` abstract operation with argument `F`.
9. Return `F`.

Deleted: the <code>this</code> value
Deleted: list
Deleted: calling the <code>[[</code>
Deleted: <code>]]</code> internal method of
Deleted:
Deleted: with argument
Deleted: calling the <code>[[</code>
Deleted: <code>]]</code> internal method of
Deleted:
Deleted:
Deleted: with
Deleted: as the argument
Deleted: the
Deleted: this value
Deleted: the list of arguments
Deleted: the this value
Deleted: the list of arguments
Deleted: a new native ECMAScript object
Deleted: <#>Set all the internal methods, except for <code>[[Get]]</code> , of <code>F</code> as specified in 8.12.¶
<#>Set the <code>[[Get]]</code> internal property of <code>F</code> as specified in 15.3.5.4.¶
<#> of <code>F</code> to <code>true</code> .¶
<#>Set the <code>[[TargetFunction]]</code> internal property of <code>F</code> to <code>Target</code> .¶
<#>Set the <code>[[BoundThis]]</code> internal property of <code>F</code> the value of <code>thisArg</code> .¶
<#>Set the <code>[[BoundArgs]]</code> internal property of <code>F</code> <code>A</code> .¶
Deleted: the <code>[[Class]]</code> internal property of
Deleted: is "Function"
Deleted: IsFunction
Deleted: NativeBrand
Deleted: NativeFunction
Deleted: calling the <code>[[</code>
Deleted: <code>]]</code> internal method of
Deleted:
Deleted: with argument
Deleted: the <code>length</code> property of <code>Target</code>
Deleted: length
Deleted: <#>Set the <code>length</code> own property of <code>F</code>
Deleted: set
Deleted: the <code>length</code> own property of <code>F</code> to
Deleted: ,
Deleted: , and <code>false</code>
Deleted: or
Deleted: <#>Set the attributes of the <code>length</code> own property of <code>F</code>
Deleted: <#>Set the <code>[[Extensible]]</code> internal property of <code>F</code>
Deleted: <#>Let <code>thrower</code> be the

The `length` property of the `bind` method is 1.

NOTE Function objects created using `Function.prototype.bind` are exotic objects. They also do not have a `prototype` property.

15.3.4.6 `@@create ()`

When the `@@create` method of an object *F*, the following steps are taken:

1. Return the result of calling `OrdinaryCreateFromConstructor(F, "%ObjectPrototype%")`.

15.3.4.7 `@@hasInstance (V)`

When the `@@hasInstance` method of an object *F* is called with value *V*, the following steps are taken:

1. Let *F* be the `this` value.
2. Return the result of `OrdinaryHasInstance(F, V)`.

15.3.5 Properties of Function Instances

In addition to the required internal properties, every function instance has a `[[Call]]` internal method and in most cases uses a different version of the `[[Get]]` internal method. Depending on how they are created (see 8.6.2, 13.6, 15, and 15.3.4.5), function instances may have a `[[Scope]]` internal data property, a `[[Construct]]` internal method, a `[[FormalParameters]]` internal data property, a `[[Code]]` internal data property, a `[[BoundTargetFunction]]` internal data property, a `[[BoundThis]]` internal data property, and a `[[BoundArguments]]` internal data property.

Every function instance has a `[[BuiltinBrand]]` internal data property whose value is `BuiltinFunction`.

Function instances that correspond to strict mode functions (13.6) and function instances created using the `Function.prototype.bind` method (15.3.4.5) have properties named `caller` and `arguments` that throw a `TypeError` exception. An ECMAScript implementation must not associate any implementation specific behaviour with accesses of these properties from strict mode function code.

15.3.5.1 `length`

The value of the `length` property is an integer that indicates the typical number of arguments expected by the function. However, the language permits the function to be invoked with some other number of arguments. The behaviour of a function when invoked on a number of arguments other than the number specified by its `length` property depends on the function. This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.3.5.2 `prototype`

The value of the `prototype` property is used to initialise the `[[Prototype]]` internal data property of a newly created `ordinaryObject` before the Function object is invoked as a constructor for that newly created object. This property has the attribute { `[[Writable]]: true`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

NOTE Function objects created using `Function.prototype.bind` do not have a `prototype` property.

15.4 Array Objects

Array objects are exotic objects that give special treatment to a certain class of property names. See 8.4.2 for a definition of this special treatment.

An `Array` object, *O*, is said to be *sparse* if the following algorithm returns `true`:

1. Let *len* be the result of `Get(O, "length")`.
2. For each integer *i* in the range $0 \leq i < \text{ToUint32}(len)$

Deleted: or the `[[Code]]`, `[[FormalParameters]]`, and `[[Scope]]` internal properties

Deleted: 15.3.4.5.1 `[[Call]]`

When the `[[Call]]` internal method of a function object, *F*, which was created using the `bind` function is called with parameters `thisArgument` and `argumentsList`, a List of ECMAScript `a this` value and a list of arguments `ExtraArgs`, the following steps are taken:
 ↘ Let `boundArgs` be the value of *F*'s `[[BoundArgs]]` internal property.
 ↘ Let `boundThis` be the value of *F*'s `[[BoundThis]]` internal property.
 ↘ Let `target` be the value of *F*'s `[[TargetFunction]]` internal property.
 ↘ Let `args` be a new list containing the same values as the list `boundArgs` in the same order followed by the same values as the list `argumentsList ExtraArgs` in the same order.
 ↘ Return the result of calling the `[[Call]]` internal method `target` providing `boundThis` as `thisArgument` the `this` value a providing `args` as `argumentsList` the arguments.

Deleted: 15.3.4.5.2 `[[Construct]]`

When the `[[Construct]]` internal method of a function object, *F*, that was created using the `bind` function is called with a list of arguments `ExtraArgs`, the following steps are taken:
 ↘ Let `target` be the value of *F*'s `[[TargetFunction]]` internal property.

Deleted: 6

Deleted: ;

Deleted: 15.3.4.5.3 `[[HasInstance]] (V)`

Deleted: property

Deleted: property

Deleted: 2

Deleted: a `[[HasInstance]]` internal property,

Deleted: property

Comment [AWB12168]: TODO, need to update to

Deleted: `BoundArgs`

Deleted: The value of the `[[Class]]` internal property is

Deleted: `IsFunction`

Deleted: `NativeBrand`

Deleted: `NativeFunction`

Deleted: 2

Deleted: "

Deleted: 15.3.5.3 `[[HasInstance]] (V)`

Deleted: A property name *P* (in the form of a String

Deleted: calling the `[[`

Deleted: `]]` internal method of

Deleted:

Deleted: with argument

- a. Let *elem* be the result of calling the `[[GetOwnProperty]]` internal method of *O* with argument `ToString(i)`.
- b. If *elem* is `undefined`, return `true`.
3. Return `false`.

15.4.1 The Array Constructor Called as a Function

NOTE When `Array` is called as a function rather than as a constructor, it creates and initialises a new `Array` object. Thus the function call `Array(...)` is equivalent to the object creation expression `new Array(...)` with the same arguments.

15.4.1.1 `Array([item1[, item2[, ...]])`

When the `Array` function is called the following steps are taken:

1. Return the result that would be obtained if this functions had been called with the same arguments, as constructor. This result is defined by 15.4.2.1 or 15.4.2.2 depending upon the actual number of arguments.

15.4.2 The Array Constructor

NOTE When `Array` is called as part of a `new` expression, it is a constructor: it initialises the newly created object.

15.4.2.1 `new Array([item0[, item1[, ...]])`

This description applies if and only if the `Array` constructor is given no arguments or at least two arguments.

1. Let *len* be the number of arguments passed to this constructor call.
2. Let *array* be the result of the abstract operation `ArrayCreate` with argument *len*.
3. ReturnIfAbrupt(*array*).
4. Let *k* be 0.
5. Let *items* be a zero-originated List contain the argument items in order.
6. Repeat, while *k* < *len*
 - a. Let *Pk* be `ToString(k)`.
 - b. Let *itemK* be *k*th element of *items*.
 - c. Call the `[[DefineOwnProperty]]` internal method of *array* with arguments *Pk* and Property Descriptor `{[[Value]]: itemK, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 - d. Increase *k* by 1.
7. Let *putStatus* be the result of `Put(array, "length", len, true)`.
8. ReturnIfAbrupt(*putStatus*).
9. Return *array*.

15.4.2.2 `new Array(len)`

This description applies if and only if the `Array` constructor is given exactly one argument.

1. If `Type(len)` is not `Number`, then
 - a. Let *array* be the result of the abstract operation `ArrayCreate` with argument 1.
 - b. ReturnIfAbrupt(*array*).
 - c. Let *defineStatus* be the result of `DefinePropertyOrThrow(array, "0", Property Descriptor {[[Value]]: len, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}).`
 - d. ReturnIfAbrupt(*defineStatus*).
 - e. Return *array*.
2. Let *intLen* be `ToUint32(len)`.
3. If *intLen* ≠ *len*, then throw a **RangeError** exception.
4. Let *array* be the result of the abstract operation `ArrayCreate` with argument *intLen*.
5. Return *array*.

Comment [AWB11169]: TODO: see if this algorithm is really needed

Deleted: Runtime Semantics: `ArrayCreateAbstractOperation`

The abstract operation `ArrayCreate` with argument *length* (a positive integer) is used to specify the creation of new `Array` objects. It performs the following steps:[¶]

<#> Let *A* be a newly created ECMAScript object.
<#> Set the `[[Prototype]]` internal property of *A* to the intrinsic object `%ArrayPrototype%`.
<#> Set *A*'s common internal methods except for `[[DefineOwnProperty]]` to the default definitions for ordinary objects specified in 8.123.
<#> Set the `[[Prototype]]` internal data property to the intrinsic object `%ArrayPrototype%`.
<#> Set *A*'s `[[DefineOwnProperty]]` internal methods to the definition given in 15.4.5.1.
<#> Set the `[[NativeBrandBuiltInBrand]]` internal data property of *A* to the value `NativeArrayBuiltInArray`.[¶]

Formatted: Note

Deleted: Create and return a new `Array` object

Formatted: Note

Deleted: of

Deleted: abstraction operation

Deleted: (15.4)

Deleted: Let `defineStatus` be the result of calling

Deleted: ,

Deleted: , and `true`

Deleted: <#>`ReturnIfAbrupt(defineStatus)`.[¶]

Comment [AWB12170]: Can this Put even

Deleted: calling the `[[`

Deleted: `]]` internal method of

Deleted::

Deleted: with arguments

Deleted: and

Deleted: The `[[Prototype]]` internal property

Deleted: The `[[Prototype]]` internal property

Deleted: of

Deleted: abstraction operation

Deleted: (15.4)

Deleted: calling the `[[`

Deleted: Own

Deleted: `]]`

Deleted: internal method of

Deleted: with

Deleted: arguments

Deleted: , and `true`

Deleted: of

Deleted: abstraction operation

Deleted: (15.4)

15.4.3 Properties of the Array Constructor

The value of the `[[Prototype]]` internal data property of the `Array` constructor is the Function prototype object (15.3.4).

Besides and the `length` property (whose value is 1), the `Array` constructor has the following properties:

Deleted: the internal properties

15.4.3.1 `Array.prototype`

The initial value of `Array.prototype` is the `Array` prototype object (15.4.4).

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

15.4.3.2 `Array.isArray (arg)`

The `isArray` function takes one argument `arg`, and returns the Boolean value `true` if the argument is an object whose `[[BuiltinBrand]]` internal property is `BuiltinArray`; otherwise it returns `false`. The following steps are taken:

1. If `Type(arg)` is not `Object`, return `false`.
2. If `arg` has the `[[BuiltinBrand]]` internal property with value `BuiltinArray`, then return `true`.
3. Return `false`.

15.4.3.3 `Array.of (...items)`

When the `of` method is called with any number of arguments, the following steps are taken:

1. Let `lenValue` be the result of Get(items, "length").
2. Let `len` be `ToInteger(lenValue)`.
3. Let `C` be the `this` value.
4. If `IsConstructor(C)` is `true`, then
 - a. Let `newObj` be the result of calling the `[[Construct]]` internal method of `C` with an argument list containing the single item `len`.
 - b. Let `A` be `ToObject(newObj)`.
5. Else,
 - a. Let `A` be the result of the abstract operation `ArrayCreate` with argument `len`.
6. `ReturnIfAbrupt(A)`.
7. Let `k` be 0.
8. Repeat, while `k < len`
 - a. Let `Pk` be `ToString(k)`.
 - b. Let `kValue` be the result of Get(items, Pk).
 - c. Let `defineStatus` be the result of DefinePropertyOrThrow(A, Pk, Property Descriptor {[[Value]]: kValue, [[value]]: kValue, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}).
 - d. `ReturnIfAbrupt(defineStatus)`.
 - e. Increase `k` by 1.
9. Let `putStatus` be the result of Put(A, "length", len, true).
10. `ReturnIfAbrupt(putStatus)`.
11. Return `A`.

The `length` property of the `of` method is **0**.

NOTE 1 The `items` argument is assumed to be a well-formed rest argument value.

NOTE 2 The `of` function is an intentionally generic factory method; it does not require that its `this` value be the `Array` constructor. Therefore it can be transferred to or inherited by other constructors that may be called with a single numeric argument.

15.4.3.4 `Array.from (arrayLike)`

When the `from` method is called with argument `arrayLike`, the following steps are taken:

Deleted: class

Deleted: "Array"

Deleted: the value of the `[[Class]]` internal property of

Deleted: is "Array"

Deleted: isArray

Deleted: NativeBrand

Deleted: NativeArray

Deleted: calling the `[[`

Deleted:] internal method of

Deleted:

Deleted: with the argument

Deleted: i

Comment [AWB7171]: It would be nice to have a more explicit way to create a collection with a pre-specified number of elements.

Deleted: abstraction operation

Deleted: (15.4)

Deleted: calling the `[[`

Deleted:] internal method of

Deleted:

Deleted: with argument

Deleted: of calling the `[[`

Deleted: Own

Deleted:] internal method of

Deleted: with arguments

Deleted:, and true

Deleted: calling the `[[`

Deleted:] internal method of

Deleted:

Deleted: with arguments

Deleted: and

Deleted: 3

Deleted: any number of

Deleted: s

1. Let *items* be `ToObject(arrayLike)`.
2. `ReturnIfAbrupt(items)`.
3. Let *lenValue* be the result of `Get(items, "length")`.
4. Let *len* be `ToInteger(lenValue)`.
5. `ReturnIfAbrupt(len)`.
6. Let *C* be the `this` value.
7. If `IsConstructor(C)` is `true`, then
 - a. Let *newObj* be the result of calling the `[[Construct]]` internal method of *C* with an argument list containing the single item *len*.
 - b. Let *A* be `ToObject(newObj)`.
8. Else,
 - a. Let *A* be the result of the abstract operation `ArrayCreate` with argument *len*.
9. `ReturnIfAbrupt(A)`.
10. Let *k* be `0`.
11. Repeat, while *k* < *len*
 - a. Let *Pk* be `ToString(k)`.
 - b. Let *kPresent* be the result of `HasProperty(items, Pk)`.
 - c. `ReturnIfAbrupt(kPresent)`.
 - d. If *kPresent* is `true`, then
 - i. Let *kValue* be the result of `Get(items, Pk)`.
 - ii. `ReturnIfAbrupt(kValue)`.
 - iii. Let *defineStatus* be the result of calling the `[[DefineOwnProperty]]` internal method of *A* with arguments *Pk* and Property Descriptor `{[[Value]]: kValue, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 - iv. `ReturnIfAbrupt(defineStatus)`.
 - e. Increase *k* by 1.
12. Let *putStatus* be the result of `Put(A, "length", len, true)`.
13. `ReturnIfAbrupt(putStatus)`.
14. `Return A`.

NOTE The `from` function is an intentionally generic factory method; it does not require that its `this` value be the Array constructor. Therefore it can be transferred to or inherited by any other constructors that may be called with a single numeric argument.

15.4.4 Properties of the Array Prototype Object

The value of the `[[Prototype]]` internal `data` property of the Array prototype object is the standard built-in Object prototype object (15.2.4).

The Array prototype object is itself an array; it has an `[[BuiltinBrand]]` internal data property with value `BuiltinArray`, and it has a `length` property (whose initial value is `+0`) and the special `[[DefineOwnProperty]]` internal method described in 15.4.5.1.

In following descriptions of functions that are properties of the Array prototype object, the phrase “this object” refers to the object that is the `this` value for the invocation of the function. It is permitted for the `this` to be an object which does not have an `[[BuiltinBrand]]` internal data property with value `BuiltinArray`.

NOTE The Array prototype object does not have a `valueOf` property of its own; however, it inherits the `valueOf` property from the standard built-in Object prototype Object.

15.4.4.1 `Array.prototype.constructor`

The initial value of `Array.prototype.constructor` is the standard built-in `Array` constructor.

15.4.4.2 `Array.prototype.toString()`

When the `toString` method is called, the following steps are taken:

1. Let *array* be the result of calling `ToObject` on the `this` value.
2. `ReturnIfAbrupt(array)`.

Deleted: calling the `[[`
Deleted: `]]` internal method of
Deleted: with the argument
Deleted: `i`
Comment [AWB7172]: It would be nice to have a more explicit way to create a collection with a pre-specified number of elements.
Deleted: abstraction operation
Deleted: (15.4)

Deleted: calling the `[[HasProperty]]` internal method of
Deleted: with argument
Deleted: calling the `[[`
Deleted: `]]` internal method of
Deleted: with argument
Deleted: ,
Deleted: , and `true`
Deleted: calling the `[[`
Deleted: `]]` internal method of
Deleted: with arguments
Deleted: and

Deleted: its `[[Class]]` is `"Array"`
Deleted: NativeBrand
Deleted: IsArray
Deleted: NativeArray
Deleted: for
Deleted: the value of the `[[Class]]` internal property is not `"Array"`
Deleted: IsArray
Deleted: NativeBrand
Deleted: NativeArray

Deleted: If *array* is an abrupt completion, return *array*.

3. Let *func* be the result of Get(*array*, "join").
4. ReturnIfAbrupt(*func*)
5. If IsCallable(*func*) is false, then let *func* be the standard built-in method Object.prototype.toString (15.2.4.2).
6. Return the result of calling the [[Call]] internal method of *func* providing *array* as *thisArgument* and an empty List as *argumentsList*.

NOTE The `toString` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `toString` function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

15.4.4.3 `Array.prototype.toLocaleString()`

The elements of the array are converted to Strings using their `toLocaleString` methods, and these Strings are then concatenated, separated by occurrences of a separator String that has been derived in an implementation-defined locale-specific way. The result of calling this function is intended to be analogous to the result of `toString`, except that the result of this function is intended to be locale-specific.

The result is calculated as follows:

1. Let *array* be the result of calling `ToObject` passing the `this` value as the argument.
2. ReturnIfAbrupt(*array*)
3. Let *arrayLen* be the result of Get(*array*, "length").
4. Let *len* be `ToUint32(arrayLen)`.
5. ReturnIfAbrupt(*len*)
6. Let *separator* be the String value for the list-separator String appropriate for the host environment's current locale (this is derived in an implementation-defined way).
7. If *len* is zero, return the empty String.
8. Let *firstElement* be the result of Get(*array*, "0").
9. Let *noArgs* be an empty List.
10. ReturnIfAbrupt(*firstElement*)
11. If *firstElement* is `undefined` or `null`, then
 - a. Let *R* be the empty String.
12. Else
 - a. Let *R* be the result of `Invoke(firstElement, "toLocaleString")`.
 - b. Let *R* be `ToString(R)`.
 - c. ReturnIfAbrupt(*R*).
13. Let *k* be 1.
14. Repeat, while *k* < *len*
 - a. Let *S* be a String value produced by concatenating *R* and *separator*.
 - b. Let *nextElement* be the result of Get(*array*, `ToString(k)`).
 - c. ReturnIfAbrupt(*nextElement*).
 - d. If *nextElement* is `undefined` or `null`, then
 - i. Let *R* be the empty String.
 - e. Else
 - i. Let *R* be the result of `Invoke(nextElement, "toLocaleString")`.
 - ii. Let *R* be `ToString(R)`.
 - iii. ReturnIfAbrupt(*R*).
 - f. Let *R* be a String value produced by concatenating *S* and *R*.
 - g. Increase *k* by 1.
15. Return *R*.

NOTE 1 The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

NOTE 2 The `toLocaleString` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `toLocaleString` function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** internal method of *array*
- Deleted:** with argument
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Comment [AWB7173]:** This step was missing in ES<=5.1
- Deleted:** If *R* is an abrupt completion, return *R*.
- Deleted:** Let *R* be the result of calling the [[Call]] internal method of *func* providing *elementObj* as the `this` value and an empty arguments list.
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Deleted:** calling the [[Delete]] internal method of *array*
- Deleted:** the `this` value
- Deleted:** *l*
- Deleted:** host
- Comment [AWB7174]:** This step was missing in ES<=5.1
- Deleted:** If *R* is an abrupt completion, return *R*.
- Deleted:** <#>Let *func* be the result of calling the [[Get]] internal method of *elementObj* with argument "toLocaleString". ¶
- Deleted:** <#>If IsCallable(*func*) is false, throw a `TypeError` exception.
- Deleted:** <#>Let *R* be the result of calling the [[Call]] internal method of *func* providing *elementObj* as the `this` value and an empty arguments list. ¶
- Deleted:** host

15.4.4.4 Array.prototype.concat ([item1 [, item2 [, ...]]])

When the `concat` method is called with zero or more arguments `item1`, `item2`, etc., it returns an array containing the array elements of the object followed by the array elements of each argument in order.

The following steps are taken:

1. Let `O` be the result of calling `ToObject` passing the `this` value as the argument.
2. `ReturnIfAbrupt(O)`.
3. Let `A` be the result of the abstract operation `ArrayCreate` with argument `O`.
4. Let `n` be `0`.
5. Let `items` be an internal List whose first element is `O` and whose subsequent elements are, in left to right order, the arguments that were passed to this function invocation.
6. Repeat, while `items` is not empty
 - a. Remove the first element from `items` and let `E` be the value of the element.
 - b. If `E` has the `[[BuiltInBrand]]` internal data property with value `BuiltinArray`, then
 - i. Let `k` be `0`.
 - ii. Let `len` be the result of `Get(E, "length")`.
 - iii. `ReturnIfAbrupt(len)`.
 - iv. Repeat, while `k < len`
 1. Let `P` be `ToString(k)`.
 2. Let `exists` be the result of `HasProperty(E, P)`.
 3. `ReturnIfAbrupt(exists)`.
 4. If `exists` is `true`, then
 - a. Let `subElement` be the result of `Get(E, P)`.
 - b. Call the `[[DefineOwnProperty]]` internal method of `A` with arguments `ToString(n)` and Property Descriptor `{[[Value]]: subElement, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 5. Increase `n` by `1`.
 6. Increase `k` by `1`.
 - c. Else `E` is not an `Array`.
 - i. Call the `[[DefineOwnProperty]]` internal method of `A` with arguments `ToString(n)` and Property Descriptor `{[[Value]]: E, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 - ii. Increase `n` by `1`.
7. Let `putStatus` be the result of `Put(A, "length", n, true)`.
8. `ReturnIfAbrupt(putStatus)`.
9. Return `A`.

The `length` property of the `concat` method is `1`.

NOTE 1 The explicit setting of the `length` property in step 7 is necessary to ensure that its value is correct in situations where the trailing elements of the result `Array` are not present.

NOTE 2 The `concat` function is intentionally generic; it does not require that its `this` value be an `Array` object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `concat` function can be applied successfully to an `exotic object` that is not an `Array` is implementation-dependent.

15.4.4.5 Array.prototype.join (separator)

The elements of the array are converted to Strings, and these Strings are then concatenated, separated by occurrences of the `separator`. If no separator is provided, a single comma is used as the separator.

The `join` method takes one argument, `separator`, and performs the following steps:

1. Let `O` be the result of calling `ToObject` passing the `this` value as the argument.
2. `ReturnIfAbrupt(O)`.
3. Let `lenVal` be the result of `Get(O, "length")`.
4. Let `len` be `ToInt32(lenVal)`.

Deleted: abstraction operation

Deleted: (15.4)

Deleted: a new array created as if by the expression `new Array()` where `Array` is the standard built-in constructor with that name

Deleted: the value of the `[[Class]]` internal property of

Deleted: is "Array"

Deleted: IsArray

Deleted: NativeBrand

Deleted: NativeArray

Deleted: calling the `[[Get]]` internal method of `A` with argument `"length"`

Deleted: calling the `[[HasProperty]]` internal method of

Deleted: with

Deleted: calling the `[[`

Deleted: `]]` internal method of

Deleted:

Deleted: with argument

Deleted: `)`,

Deleted: , and false

Deleted: ,

Deleted: `)`,

Deleted: , and false

Deleted: Call

Deleted: calling the `[[Put]]` internal method of `A` with arguments `"length"`, `n`, and `true`

Deleted: If `putStatus` is an abrupt completion, return `putStatus`.

Deleted: host

Deleted: calling the `[[Get]]` internal method of `O` with argument `"length"`

5. ReturnIfAbrupt(len).
6. If *separator* is **undefined**, let *separator* be the single-character String " , ".
7. Let *sep* be *ToString(separator)*.
8. If *len* is zero, return the empty String.
9. Let *element0* be the result of Get(*O*, "0").
10. If *element0* is **undefined** or **null**, let *R* be the empty String; otherwise, let *R* be *ToString(element0)*.
11. ReturnIfAbrupt(*R*).
12. Let *k* be 1.
13. Repeat, while *k* < *len*.
 - a. Let *S* be the String value produced by concatenating *R* and *sep*.
 - b. Let *element* be the result of Get(*O*, *ToString(k)*).
 - c. If *element* is **undefined** or **null**, then let *next* be the empty String; otherwise, let *next* be *ToString(element)*.
 - d. ReturnIfAbrupt(*next*).
 - e. Let *R* be a String value produced by concatenating *S* and *next*.
 - f. Increase *k* by 1.
14. Return *R*.

The **length** property of the **join** method is 1.

NOTE The **join** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore, it can be transferred to other kinds of objects for use as a method. Whether the **join** function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

15.4.4.6 Array.prototype.pop ()

The last element of the array is removed from the array and returned.

1. Let *O* be the result of calling **ToObject** passing the **this** value as the argument.
2. ReturnIfAbrupt(*O*).
3. Let *lenVal* be the result of Get(*O*, "length").
4. Let *len* be **ToInt32(lenVal)**.
5. ReturnIfAbrupt(*len*).
6. If *len* is zero,
 - a. Let *putStatus* be the result of Put(*O*, "length", 0, true).
 - b. ReturnIfAbrupt(*putStatus*).
 - c. Return **undefined**.
7. Else *len* > 0,
 - a. Let *newLen* be *len*-1.
 - b. Let *indx* be *ToString(newLen)*.
 - c. Let *element* be the result of Get(*O*, *indx*).
 - d. ReturnIfAbrupt(*element*).
 - e. Let *deleteStatus* be the result of DeletePropertyOrThrow(*O*, *indx*).
 - f. ReturnIfAbrupt(*deleteStatus*).
 - g. Let *putStatus* be the result of Put(*O*, "length", *newLen*, true).
 - h. ReturnIfAbrupt(*putStatus*).
 - i. Return *element*.

NOTE The **pop** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **pop** function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

15.4.4.7 Array.prototype.push ([*item1* [, *item2* [, ...]]])

The arguments are appended to the end of the array, in the order in which they appear. The new length of the array is returned as the result of the call.

When the **push** method is called with zero or more arguments *item1*, *item2*, etc., the following steps are taken:

- Deleted:** calling the [[Delete]] internal method of *O*
- Deleted:**]] internal method of *O*
- Deleted:**
- Deleted:** with argument *O*
- Deleted:** Let *O*
- Deleted:** If *O* is an abrupt completion, return *O*
- Deleted:** calling the [[Delete]] internal method of *O*
- Deleted:**]] internal method of *O*
- Deleted:**
- Deleted:** with argument *O*
- Deleted:** L
- Deleted:** If *O* is an abrupt completion, return *O*
- Deleted:** host

1. Let O be the result of calling `ToObject` passing the `this` value as the argument.
2. `ReturnIfAbrupt(O)`
3. Let $lenVal$ be the result of `Get(O , "length")`.
4. Let n be `ToInt32(lenVal)`.
5. `ReturnIfAbrupt(n)`.
6. Let $items$ be an internal List whose elements are, in left to right order, the arguments that were passed to this function invocation.
7. Repeat, while $items$ is not empty
 - a. Remove the first element from $items$ and let E be the value of the element.
 - b. `Let putStatus be the result of Put(O , ToString(n), E , true)`.
 - c. `ReturnIfAbrupt(putStatus)`.
 - d. Increase n by 1.
8. `Let putStatus be the result of Put(O , "length", n , true)`.
9. `ReturnIfAbrupt(putStatus)`.
10. Return n .

The `length` property of the `push` method is 1.

NOTE The `push` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `push` function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

Deleted: calling the [[Get]] internal method of O with argument "length"
Deleted: len

Deleted: calling Call the [[...ut]] internal method of O
Deleted: If $putStatus$ is an abrupt completion, return $putStatus$.
Deleted: calling Call the [[Put]] internal method of O with arguments "length", n , and true
Deleted: If $putStatus$ is an abrupt completion, return $putStatus$

Deleted: host

15.4.4.8 `Array.prototype.reverse()`

The elements of the array are rearranged so as to reverse their order. The object is returned as the result of the call.

1. Let O be the result of calling `ToObject` passing the `this` value as the argument.
2. `ReturnIfAbrupt(O)`.
3. Let $lenVal$ be the result of `Get(O , "length")`.
4. Let len be `ToInt32(lenVal)`.
5. `ReturnIfAbrupt(len)`.
6. Let $middle$ be `floor(len/2)`.
7. Let $lower$ be `0`.
8. Repeat, while $lower \neq middle$
 - a. Let $upper$ be $len - lower - 1$.
 - b. Let $upperP$ be `ToString(upper)`.
 - c. Let $lowerP$ be `ToString(lower)`.
 - d. Let $lowerValue$ be the result of `Get(O , lowerP)`.
 - e. `ReturnIfAbrupt(lowerValue)`.
 - f. Let $upperValue$ be the result of `Get(O , upper)`.
 - g. `ReturnIfAbrupt(upperValue)`.
 - h. Let $lowerExists$ be the result of `HasProperty(O , lowerP)`.
 - i. `ReturnIfAbrupt(lowerExists)`.
 - j. Let $upperExists$ be the result of `HasProperty(O , upperP)`.
 - k. `ReturnIfAbrupt(upperExists)`.
9. If $lowerExists$ is `true` and $upperExists$ is `true`, then
 - i. `Let putStatus be the result of Put(O , lowerP, upperValue, true)`.
 - ii. `ReturnIfAbrupt(putStatus)`.
 - iii. `Let putStatus be the result of Put(O , upperP, lowerValue, true)`.
 - iv. `ReturnIfAbrupt(putStatus)`.
10. Else if $lowerExists$ is `false` and $upperExists$ is `true`, then
 - i. `Let putStatus be the result of Put(O , lowerP, upperValue, true)`.
 - ii. `ReturnIfAbrupt(putStatus)`.
 - iii. `Let deleteStatus be the result of DeletePropertyOrThrow (O , upperP)`.
 - iv. `ReturnIfAbrupt(deleteStatus)`.
11. Else if $lowerExists$ is `true` and $upperExists$ is `false`, then
 - i. `Let deleteStatus be the result of DeletePropertyOrThrow (O , lowerP)`.
 - ii. `ReturnIfAbrupt(deleteStatus)`.

Deleted: calling the [[Get]] internal method of O with argument "length"

Deleted: calling the [[...et]] internal method of O

Deleted: If $lowerValue$ is an abrupt completion, return $lowerValue$

Deleted: calling the [[...et]] internal method of O

Deleted: If $upperValue$ is an abrupt completion, return $upperValue$

Deleted: calling the [[HasProperty]] internal method of O with argument

Deleted: calling the [[HasProperty]] internal method of O with argument

Deleted: calling Call the [[...ut]] internal method of O

Deleted: If $putStatus$ is an abrupt completion, return $putStatus$

Deleted: calling Call the [[...ut]] internal method of O

Deleted: If $putStatus$ is an abrupt completion, return $putStatus$

Deleted: calling Call the [[...ut]] internal method of O

Deleted: If $putStatus$ is an abrupt completion, return $putStatus$

Deleted: calling Call the [[...ut]] internal method of O

Deleted: If $putStatus$ is an abrupt completion, return $putStatus$

Deleted: calling Call the [[...ut]] internal method of O

Deleted: If $putStatus$ is an abrupt completion, return $putStatus$

Deleted: calling Call the [[...ut]] internal method of O

Deleted: If $putStatus$ is an abrupt completion, return $putStatus$

Deleted: calling Call the [[...ut]] internal method of O

Deleted: If $putStatus$ is an abrupt completion, return $putStatus$

iii. Let *putStatus* be the result of Put(*O*, *upperP*, *lowerValue*, *true*).
 iv. ReturnIfAbrupt(*putStatus*).

- o. Else both *lowerExists* and *upperExists* are **false**.
 - i. No action is required.
 - p. Increase *lower* by 1.

9. Return *O*.

NOTE The **reverse** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore, it can be transferred to other kinds of objects for use as a method. Whether the **reverse** function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

Deleted: calling Call the **[...ut]** internal method of...

Deleted: If *putStatus* is an abrupt completion, return *putStatus*

Deleted:,

Deleted: host

15.4.4.9 Array.prototype.shift ()

The first element of the array is removed from the array and returned.

1. Let *O* be the result of calling ToObject passing the **this** value as the argument.

2. ReturnIfAbrupt(*O*).

3. Let *lenVal* be the result of Get(*O*, "length").

4. Let *len* be ToUint32(*lenVal*).

5. ReturnIfAbrupt(*len*).

6. If *len* is zero, then

- a. Let *putStatus* be the result of Put(*O*, "length", 0, *true*).
 b. ReturnIfAbrupt(*putStatus*).
 c. Return **undefined**.

7. Let *first* be the result of Get(*O*, "0").

8. ReturnIfAbrupt(*first*).

9. Let *k* be 1.

10. Repeat, while *k* < *len*

- a. Let *from* be ToString(*k*).
 b. Let *to* be ToString(*k*-1).
 c. Let *fromPresent* be the result of HasProperty(*O*, *from*).
 d. ReturnIfAbrupt(*fromPresent*).

e. If *fromPresent* is **true**, then

- i. Let *fromVal* be the result of Get(*O*, *from*).
 ii. ReturnIfAbrupt(*fromVal*).
 iii. Let *putStatus* be the result of Put(*O*, *to*, *fromVal*, *true*).
 iv. ReturnIfAbrupt(*putStatus*).

f. Else *fromPresent* is **false**,

- i. Let *deleteStatus* be the result of DeletePropertyOrThrow(*O*, *to*).
 ii. ReturnIfAbrupt(*deleteStatus*).

g. Increase *k* by 1.

11. Let *deleteStatus* be the result of DeletePropertyOrThrow(*O*, ToString(*len*-1)).

12. ReturnIfAbrupt(*deleteStatus*).

13. Let *putStatus* be the result of Put(*O*, "length", *len*-1, *true*).

14. ReturnIfAbrupt(*putStatus*).

15. Return *first*.

NOTE The **shift** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **shift** function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

Deleted: calling the **[Get]** internal method of *O* with argument "length"

Deleted: calling Call the **[Put]** internal method of *O* with arguments "length", 0, and *true*

Deleted: If *putStatus* is an abrupt completion, return *putStatus*

Deleted: calling the **[...et]** internal method of...

Deleted: If *first* is an abrupt completion, return *first*

Deleted: calling the **[HasProperty]** internal method of...

Deleted: calling the **[...et]** internal method of...

Deleted: If *fromVal* is an abrupt completion, return *fromVal*

Deleted: calling Call the **[...ut]** internal method of...

Deleted: If *putStatus* is an abrupt completion, return *putStatus*

Deleted:,

Deleted: calling Call the **[...ete]** internal method

Deleted: If *deleteStatus* is an abrupt completion, return *deleteStatus*

Deleted: calling Call the **[...etePropertyOrThrow()**

Deleted: If *deleteStatus* is an abrupt completion, return *deleteStatus*

Deleted: calling Call the **[...ut]** internal method of...

Deleted: If *putStatus* is an abrupt completion, return *putStatus*

Deleted: host

15.4.4.10 Array.prototype.slice (start, end)

The **slice** method takes two arguments, *start* and *end*, and returns an array containing the elements of the array from element *start* up to, but not including, element *end* (or through the end of the array if *end* is **undefined**). If *start* is negative, it is treated as *length+start* where *length* is the length of the array. If *end* is negative, it is treated as *length+end* where *length* is the length of the array. The following steps are taken:

1. Let *O* be the result of calling ToObject passing the **this** value as the argument.

2. ReturnIfAbrupt(*O*).

3. Let A be the result of the abstract operation `ArrayCreate` with argument `0`.
4. Let $lenVal$ be the result of `Get(O , "length")`.
5. Let len be `ToUint32(lenVal)`.
6. `ReturnIfAbrupt(len)`.
7. Let $relativeStart$ be `ToInteger(start)`.
8. `ReturnIfAbrupt(relativeStart)`.
9. If $relativeStart$ is negative, let k be $\max((len + relativeStart), 0)$; else let k be $\min(relativeStart, len)$.
10. If end is `undefined`, let $relativeEnd$ be len ; else let $relativeEnd$ be `ToInteger(end).`
11. `ReturnIfAbrupt(relativeEnd)`.
12. If $relativeEnd$ is negative, let $final$ be $\max((len + relativeEnd), 0)$; else let $final$ be $\min(relativeEnd, len)$.
13. Let n be `0`.
14. Repeat, while $k < final$
 - a. Let Pk be `ToString(k)`.
 - b. Let $kPresent$ be the result of `HasProperty(O , Pk)`.
 - c. `ReturnIfAbrupt(kPresent)`.
 - d. If $kPresent$ is `true`, then
 - i. Let $kValue$ be the result of `Get(O , Pk)`.
 - ii. `ReturnIfAbrupt(kValue)`.
 - iii. Let $status$ be the result of `CreateOwnDataProperty(A , ToString(n), $kValue$)`.
 - iv. `ReturnIfAbrupt(status)`.
 - v. If $status$ is `false`, throw a `TypeError` exception.
 - e. Increase k by `1`.
 - f. Increase n by `1`.
15. Let $putStatus$ be the result of `Put(A , "length", $final$, true)`.
16. `ReturnIfAbrupt(putStatus)`.
17. Return A .

The `length` property of the `slice` method is `2`.

NOTE 1 The explicit setting of the `length` property of the result Array in step 15 is necessary to ensure that its value is correct in situations where the trailing elements of the result Array are not present.

NOTE 2 The `slice` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `slice` function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

15.4.4.11 `Array.prototype.sort(comparefn)`

The elements of this array are sorted. The sort is not necessarily stable (that is, elements that compare equal do not necessarily remain in their original order). If `comparefn` is not `undefined`, it should be a function that accepts two arguments x and y and returns a negative value if $x < y$, zero if $x = y$, or a positive value if $x > y$.

Let obj be the result of calling `ToObject` passing the `this` value as the argument.

Let len be the result of applying `Uint32` to the result of `Get(obj, "length")`.

If `comparefn` is not `undefined` and is not a consistent comparison function for the elements of this array (see below), the behaviour of `sort` is implementation-defined.

Let $proto$ be the result of calling the `[[GetInheritance]]` internal method of obj . If $proto$ is not `null` and there exists an integer j such that all of the conditions below are satisfied then the behaviour of `sort` is implementation-defined:

- obj is sparse (15.4)
- $0 \leq j < len$
- The result of `HasProperty(proto, ToString(j))` is `true`.

The behaviour of `sort` is also implementation defined if obj is sparse and any of the following conditions are true:

Deleted: abstraction operation
Deleted: (15.4)
Deleted: a new array created as if by the expression <code>new Array()</code> where <code>Array</code> is the standard built-in constructor with that name
Deleted: calling the <code>[[Get]]</code> internal method of obj with argument <code>"length"</code>
Deleted: If <code>relativeStart</code> is an abrupt completion return <code>relativeStart</code>
Deleted: If <code>relativeEnd</code> is an abrupt completion return <code>relativeEnd</code>
Deleted: calling the <code>[[HasProperty]]</code> internal method of obj
Deleted: with argument
Deleted: calling the <code>[[</code>
Deleted: <code>]]</code> internal method of $proto$
Deleted: with argument
Deleted: If <code>kValue</code> is an abrupt completion, return <code>kValue</code>
Deleted: Call the <code>[[DefineOwnProperty]]</code> internal method of $proto$
Deleted: with arguments
Deleted: <code>,</code>
Deleted: Property Descriptor <code>{[[Value]]: ..., [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}</code>
Deleted: <code>,</code> and <code>false</code>
Comment [AWB9175]: Fix for ES5 bug https://bugs.ecmascript.org/show_bug.cgi?id=17
Deleted: calling the <code>[[Put]]</code> internal method of $proto$ with arguments <code>"length"</code> , <code>final</code> , and <code>true</code>
Deleted: host
Comment [AWB7176]: TODO: take completion values into account.
Deleted: <code>O</code>
Deleted: calling the <code>[[Get]]</code> internal method of $proto$ with argument <code>"length"</code>
Deleted: value
Deleted: Prototype
Deleted: <code>e</code>
Deleted: property
Deleted: calling the <code>[[</code>
Deleted: <code>]]</code> internal method of $proto$
Deleted: with argument

- The result of calling the `[[IsExtensible]]` internal method of *obj* is **false**.
- Any array index property of *obj* whose name is a nonnegative integer less than *len* is a data property whose `[[Configurable]]` attribute is **false**.

Deleted: property

The behaviour of `sort` is also implementation defined if any array index property of *obj* whose name is a nonnegative integer less than *len* is an accessor property or is a data property whose `[[Writable]]` attribute is **false**.

Otherwise, the following steps are taken.

- Perform an implementation-dependent sequence of calls to the `[[GetP]]` and `[[SetP]]` internal methods of *obj*, to the `DeletePropertyOrThrow` abstract operation with *obj* as the first argument, and to `SortCompare` (described below), where the `property key` argument for each call to `[[GetP]]`, `[[SetP]]`, or `DeletePropertyOrThrow` is the string representation of a nonnegative integer less than *len* and where the arguments for calls to `SortCompare` are results of previous calls to the `[[GetP]]` internal method. If *obj* is not sparse then `DeletePropertyOrThrow` must not be called. If any `[[SetP]]` call returns **false** a `TypeError` exception is thrown. If an abrupt completion is returned from any of these operations, it is immediately returned as the value of this function.
- Return *obj*.

The returned object must have the following two properties.

- There must be some mathematical permutation π of the nonnegative integers less than *len*, such that for every nonnegative integer *j* less than *len*, if property $\text{old}[j]$ existed, then $\text{new}[\pi(j)]$ is exactly the same value as $\text{old}[j]$. But if property $\text{old}[j]$ did not exist, then $\text{new}[\pi(j)]$ does not exist.
- Then for all nonnegative integers *j* and *k*, each less than *len*, if $\text{SortCompare}(j, k) < 0$ (see `SortCompare` below), then $\pi(j) < \pi(k)$.

Here the notation $\text{old}[j]$ is used to refer to the hypothetical result of calling the `[[GetP]]` internal method of *obj* with argument *j* before this function is executed, and the notation $\text{new}[j]$ to refer to the hypothetical result of calling the `[[GetP]]` internal method of *obj* with argument *j* after this function has been executed.

A function `comparefn` is a consistent comparison function for a set of values *S* if all of the requirements below are met for all values *a*, *b*, and *c* (possibly the same value) in the set *S*: The notation $a <_{\text{CF}} b$ means $\text{comparefn}(a, b) < 0$; $a =_{\text{CF}} b$ means $\text{comparefn}(a, b) = 0$ (of either sign); and $a >_{\text{CF}} b$ means $\text{comparefn}(a, b) > 0$.

- Calling `comparefn(a, b)` always returns the same value *v* when given a specific pair of values *a* and *b* as its two arguments. Furthermore, `Type(v)` is `Number`, and *v* is not `NaN`. Note that this implies that exactly one of $a <_{\text{CF}} b$, $a =_{\text{CF}} b$, and $a >_{\text{CF}} b$ will be true for a given pair of *a* and *b*.
- Calling `comparefn(a, b)` does not modify the `this` object.
- $a =_{\text{CF}} a$ (reflexivity)
- If $a =_{\text{CF}} b$, then $b =_{\text{CF}} a$ (symmetry)
- If $a =_{\text{CF}} b$ and $b =_{\text{CF}} c$, then $a =_{\text{CF}} c$ (transitivity of $=_{\text{CF}}$)
- If $a <_{\text{CF}} b$ and $b <_{\text{CF}} c$, then $a <_{\text{CF}} c$ (transitivity of $<_{\text{CF}}$)
- If $a >_{\text{CF}} b$ and $b >_{\text{CF}} c$, then $a >_{\text{CF}} c$ (transitivity of $>_{\text{CF}}$)

NOTE The above conditions are necessary and sufficient to ensure that `comparefn` divides the set *S* into equivalence classes and that these equivalence classes are totally ordered.

Runtime Semantics: SortCompare Abstract Operation

When the `SortCompare` abstract operation is called with two arguments *j* and *k*, the following steps are taken:

- Let *jString* be `ToString(j)`.
- Let *kString* be `ToString(k)`.
- Let *hasj* be the result of `HasProperty(obj, jString)`.
- ReturnIfAbrupt(hasj).**
- Let *hask* be the result of `HasProperty(obj, kString)`.
- ReturnIfAbrupt(hask).**

Deleted: ,
Deleted: Put
Deleted: and
Deleted: [[
Deleted:]]
Deleted: internal methods
Deleted: of
Deleted: first
Deleted: Put
Deleted: [[Delete]]
Deleted:]
Deleted: The throw argument to the [[Put]] and [[Delete]] internal methods will be the value **true**.
Deleted: [[
Deleted:]]

7. If *hasj* and *hask* are both **false**, then return **+0**.
8. If *hasj* is **false**, then return 1.
9. If *hask* is **false**, then return -1.
10. Let *x* be the result of Get(*obj*, *jString*).
11. ReturnIfAbrupt(*x*).
12. Let *y* be the result of Get(*obj*, *kString*).
13. ReturnIfAbrupt(*y*).
14. If *x* and *y* are both **undefined**, return **+0**.
15. If *x* is **undefined**, return 1.
16. If *y* is **undefined**, return -1.
17. If the argument *comparefn* is not **undefined**, then
 - a. If *IsCallable(comparefn)* is **false**, throw a **TypeError** exception.
 - b. Return the result of calling the **[[Call]]** internal method of *comparefn* passing **undefined** as *thisArgument* and with a List contain the values of *x* and *y* as the *argumentsList*.
18. Let *xString* be *ToString(x)*.
19. ReturnIfAbrupt(*xString*).
20. Let *yString* be *ToString(y)*.
21. ReturnIfAbrupt(*yString*).
22. If *xString* < *yString*, return -1.
23. If *xString* > *yString*, return 1.
24. Return **+0**.

NOTE 1 Because non-existent property values always compare greater than **undefined** property values, and **undefined** always compares greater than any other value, **undefined** property values always sort to the end of the result, followed by non-existent property values.

NOTE 2 The **sort** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore, it can be transferred to other kinds of objects for use as a method. Whether the **sort** function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

15.4.4.12 Array.prototype.splice (start, deleteCount [, item1 [, item2 [, ...]]])

When the **splice** method is called with two or more arguments *start*, *deleteCount* and (optionally) *item1*, *item2*, etc., the *deleteCount* elements of the array starting at array index *start* are replaced by the arguments *item1*, *item2*, etc. An Array object containing the deleted elements (if any) is returned. The following steps are taken:

1. Let *O* be the result of calling **ToObject** passing the **this** value as the argument.
2. ReturnIfAbrupt(*O*).
3. Let *A* be the result of the abstract operation **ArrayCreate** with argument 0.
4. Let *lenVal* be the result of Get(*O*, "length").
5. Let *len* be **ToUint32(lenVal)**.
6. ReturnIfAbrupt(*len*).
7. Let *relativeStart* be **ToInteger(start)**.
8. ReturnIfAbrupt(*relativeStart*).
9. If *relativeStart* is negative, let *actualStart* be **max((*len* + *relativeStart*), 0)**; else let *actualStart* be **min(*relativeStart*, *len*)**.
10. Let *actualDeleteCount* be **min(max(**ToInteger(deleteCount)**, 0), *len* - *actualStart*)**.
11. Let *k* be 0.
12. Repeat, while *k* < *actualDeleteCount*
 - a. Let *from* be *ToString(actualStart + k)*.
 - b. Let *fromPresent* be the result of HasProperty(*O*, *from*).
 - c. ReturnIfAbrupt(*fromPresent*).
 - d. If *fromPresent* is **true**, then
 - i. Let *fromValue* be the result of Get(*O*, *from*).
 - ii. ReturnIfAbrupt(*fromValue*).
 - iii. Call the **[[DefineOwnProperty]]** internal method of *A* with arguments *ToString(k)* and Property Descriptor **{[[Value]]: *fromValue*, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}**.
 - e. Increment *k* by 1.
13. Let *putStatus* be the result of Put(*A*, "length", *actualDeleteCount*, true).

Deleted: calling the **[[**
Deleted: **]]** internal method of
Deleted:
Deleted: with argument
Deleted: calling the **[[**
Deleted: **]]** internal method of
Deleted:
Deleted: with argument
Deleted: the **this** value
Deleted: arguments

Deleted: host

Deleted: abstraction operation
Deleted: (15.4)
Deleted: a new array created as if by the expression **new Array()** where **Array** is the standard built-in constructor with that name
Deleted: calling the **[[Get]]** internal method of *O* with argument "**length**".
Deleted: calling the **[[HasProperty]]** internal method of *O*
Deleted: with argument
Deleted: calling the **[[**
Deleted: **]]** internal method of
Deleted:
Deleted: with argument
Deleted: , and **false**
Deleted: calling the **[[**
Deleted: **]]** internal method of
Deleted:
Deleted: with arguments
Deleted: and

14. ReturnIfAbrupt(*putStatus*)

15. Let *items* be an internal List whose elements are, in left to right order, the portion of the actual argument list starting with *item1*. The list will be empty if no such items are present.

16. Let *itemCount* be the number of elements in *items*.

17. If *itemCount* < *actualDeleteCount*, then

- a. Let *k* be *actualStart*.
- b. Repeat, while *k* < (*len* - *actualDeleteCount*)
 - i. Let *from* be *ToString*(*k* + *actualDeleteCount*).
 - ii. Let *to* be *ToString*(*k* + *itemCount*).
 - iii. Let *fromPresent* be the result of HasProperty(*O*, *from*).
 - iv. ReturnIfAbrupt(*fromPresent*).
 - v. If *fromPresent* is **true**, then
 - 1. Let *fromValue* be the result of Get(*O*, *from*).
 - 2. ReturnIfAbrupt(*fromValue*).
 - 3. Let putStatus be the result of Put(O, to, fromValue, true).
 - 4. ReturnIfAbrupt(*putStatus*).
 - vi. Else *fromPresent* is **false**,
 - 1. Let deleteStatus be the result of DeletePropertyOrThrow(O, to).
 - 2. ReturnIfAbrupt(*deleteStatus*).
 - vii. Increase *k* by 1.
- c. Let *k* be *len*.
- d. Repeat, while *k* > (*len* - *actualDeleteCount* + *itemCount*)
 - i. Let deleteStatus be the result of DeletePropertyOrThrow(O, ToString(k-1)).
 - ii. ReturnIfAbrupt(*deleteStatus*).
 - iii. Decrease *k* by 1.

18. Else if *itemCount* > *actualDeleteCount*, then

- a. Let *k* be (*len* - *actualDeleteCount*).
- b. Repeat, while *k* > *actualStart*
 - i. Let *from* be *ToString*(*k* + *actualDeleteCount* - 1).
 - ii. Let *to* be *ToString*(*k* + *itemCount* - 1).
 - iii. Let *fromPresent* be the result of HasProperty(*O*, *from*).
 - iv. ReturnIfAbrupt(*fromPresent*).
 - v. If *fromPresent* is **true**, then
 - 1. Let *fromValue* be the result of Get(*O*, *from*).
 - 2. ReturnIfAbrupt(*fromValue*).
 - 3. Let putStatus be the result of Put(O, to, fromValue, true).
 - 4. ReturnIfAbrupt(*putStatus*).
 - vi. Else *fromPresent* is **false**,
 - 1. Let deleteStatus be the result of DeletePropertyOrThrow(O, to).
 - 2. ReturnIfAbrupt(*deleteStatus*).
 - vii. Decrease *k* by 1.

19. Let *k* be *actualStart*.

20. Repeat, while *items* is not empty

- a. Remove the first element from *items* and let *E* be the value of that element.
- b. Let putStatus be the result of Put(O, ToString(k), E, true).
- c. ReturnIfAbrupt(*putStatus*).
- d. Increase *k* by 1.

21. Let putStatus be the result of Put(O, "length", len - actualDeleteCount + itemCount, true).

22. ReturnIfAbrupt(*putStatus*).

23. Return *A*.

The **length** property of the **splice** method is **2**.

NOTE 1 The explicit setting of the **length** property of the result Array in step 13 is necessary to ensure that its value is correct in situations where its trailing elements are not present.

NOTE 2 The **splice** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **splice** function can be applied successfully to an **exotic object** that is not an Array is implementation-dependent.

Deleted: calling the [[HasProperty]] internal method of ...

Deleted: calling the [[...et]] internal method of... ... with

Deleted: calling the [[...ut]] internal method of... ... with

Deleted:,

Deleted: Call

Deleted: calling the [[...elete]] internal method

Deleted: calling Call the [[...eletePropertyOrThrow()]]

Deleted: calling the [[HasProperty]] internal method of ...

Deleted: calling the [[...et]] internal method of... ... with

Deleted: calling Call the [[...ut]] internal method of ...

Deleted:,

Deleted: calling Call the [[...eletePropertyOrThrow()]]

Deleted: calling Call the [[...ut]] internal method of... ... with

Deleted: host

15.4.4.13 Array.prototype.unshift ([item1 [, item2 [, ...]]])

The arguments are prepended to the start of the array, such that their order within the array is the same as the order in which they appear in the argument list.

When the `unshift` method is called with zero or more arguments *item1*, *item2*, etc., the following steps are taken:

1. Let *O* be the result of calling `ToObject` passing the `this` value as the argument.
2. `ReturnIfAbrupt(O)`.
3. Let *lenVal* be the result of `Get(O, "length")`.
4. Let *len* be `ToInt32(lenVal)`.
5. `ReturnIfAbrupt(len)`.
6. Let *argCount* be the number of actual arguments.
7. Let *k* be *len*.
8. Repeat, while *k* > 0,
 - a. Let *from* be `ToString(k-1)`.
 - b. Let *to* be `ToString(k+argCount -1)`.
 - c. Let *fromPresent* be the result of `HasProperty(O, from)`.
 - d. `ReturnIfAbrupt(fromPresent)`.
 - e. If *fromPresent* is `true`, then
 - i. Let *fromValue* be the result of `Get(O, from)`.
 - ii. `ReturnIfAbrupt(fromValue)`.
 - iii. Let *putStatus* be the result of `Put(O, to, fromValue, true)`.
 - iv. `ReturnIfAbrupt(putStatus)`.
 - f. Else *fromPresent* is `false`,
 - i. Let *deleteStatus* be the result of `DeletePropertyOrThrow(O, to)`.
 - ii. `ReturnIfAbrupt(deleteStatus)`.
 - g. Decrease *k* by 1.
9. Let *j* be 0.
10. Let *items* be an internal List whose elements are, in left to right order, the arguments that were passed to this function invocation.
11. Repeat, while *items* is not empty
 - a. Remove the first element from *items* and let *E* be the value of that element.
 - b. Let *putStatus* be the result of `Put(O, ToString(j), E, true)`.
 - c. `ReturnIfAbrupt(putStatus)`.
 - d. Increase *j* by 1.
12. Let *putStatus* be the result of `Put(O, "length", len+argCount, true)`.
13. `ReturnIfAbrupt(putStatus)`.
14. Return *len+argCount*.

The `length` property of the `unshift` method is 1.

NOTE The `unshift` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `unshift` function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

15.4.4.14 Array.prototype.indexOf (searchElement [, fromIndex])

`indexOf` compares *searchElement* to the elements of the array, in ascending order, using the internal Strict Equality Comparison Algorithm (11.9.1), and if found at one or more positions, returns the index of the first such position; otherwise, -1 is returned.

The optional second argument *fromIndex* defaults to 0 (i.e. the whole array is searched). If it is greater than or equal to the length of the array, -1 is returned, i.e. the array will not be searched. If it is negative, it is used as the offset from the end of the array to compute *fromIndex*. If the computed index is less than 0, the whole array will be searched.

When the `indexOf` method is called with one or two arguments, the following steps are taken:

- Deleted:** calling the [[Get]] internal method of with argument "length".
- Deleted:** calling the [[HasProperty]] internal method of
- Deleted:** with argument
- Deleted:** calling the [[
- Deleted:**]] internal method of
- Deleted:**
- Deleted:** with argument
- Deleted:** calling Call the [[
- Deleted:**]] internal method of
- Deleted:**
- Deleted:** with arguments
- Deleted:** and
- Deleted:**
- Deleted:** calling Call the [[
- Deleted:**]] internal method of
- Deleted:**
- Deleted:** with arguments
- Deleted:** and
- Deleted:** calling Call the [[
- Deleted:**]] internal method of
- Deleted:**
- Deleted:** with arguments
- Deleted:** host
- Deleted:** 6

1. Let O be the result of calling `ToObject` passing the `this` value as the argument.
2. `ReturnIfAbrupt(O)`.
3. Let $lenValue$ be the result of `Get(O , "length")`.
4. Let len be `ToInt32(lenValue)`.
5. `ReturnIfAbrupt(len)`.
6. If len is 0, return -1.
7. If argument $fromIndex$ was passed let n be `ToInteger(fromIndex)`; else let n be 0.
8. `ReturnIfAbrupt(n)`.
9. If $n \geq len$, return -1.
10. If $n \geq 0$, then
 - a. Let k be n .
11. Else $n < 0$,
 - a. Let k be $len - \text{abs}(n)$.
 - b. If $k \leq 0$, then let k be 0.
12. Repeat, while $k < len$
 - a. Let $kPresent$ be the result of `GetProperty(O , ToString(k)`.
 - b. `ReturnIfAbrupt($kPresent$)`.
 - c. If $kPresent$ is `true`, then
 - i. Let $elementK$ be the result of `Get(O , ToString(k)`.
 - ii. `ReturnIfAbrupt(elementK)`.
 - iii. Let $same$ be the result of performing the Strict Equality Comparison Algorithm $searchElement \equiv\equiv elementK$.
 - iv. If $same$ is `true`, return k .
 - d. Increase k by 1.
13. Return -1.

The `length` property of the `indexOf` method is 1.

NOTE The `indexOf` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `indexOf` function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

15.4.4.15 `Array.prototype.lastIndexOf (searchElement [, fromIndex])`

`lastIndexOf` compares $searchElement$ to the elements of the array in descending order using the internal Strict Equality Comparison Algorithm (11.9.1), and if found at one or more positions, returns the index of the last such position; otherwise, -1 is returned.

The optional second argument $fromIndex$ defaults to the array's length minus one (i.e. the whole array is searched). If it is greater than or equal to the length of the array, the whole array will be searched. If it is negative, it is used as the offset from the end of the array to compute $fromIndex$. If the computed index is less than 0, -1 is returned.

When the `lastIndexOf` method is called with one or two arguments, the following steps are taken:

1. Let O be the result of calling `ToObject` passing the `this` value as the argument.
2. `ReturnIfAbrupt(O)`.
3. Let $lenValue$ be the result of `Get(O , "length")`.
4. Let len be `ToInt32(lenValue)`.
5. `ReturnIfAbrupt(len)`.
6. If len is 0, return -1.
7. If argument $fromIndex$ was passed let n be `ToInteger(fromIndex)`; else let n be $len - 1$.
8. `ReturnIfAbrupt(n)`.
9. If $n \geq 0$, then let k be $\min(n, len - 1)$.
10. Else $n < 0$,
 - a. Let k be $len - \text{abs}(n)$.
11. Repeat, while $k \geq 0$
 - a. Let $kPresent$ be the result of `GetProperty(O , ToString(k)`.
 - b. `ReturnIfAbrupt($kPresent$)`.
 - c. If $kPresent$ is `true`, then

Deleted: calling the [[Get]] internal method of O with the argument "length".

Deleted: If n is an abrupt completion, return n .

Deleted:,

Deleted: is less than

Deleted: calling the [[HasProperty]] internal method of

Deleted: with argument

Deleted: calling the [[

Deleted:]] internal method of

Deleted:

Deleted: with the argument

Deleted: If $elementK$ is an abrupt completion, return $elementK$.

Deleted: applying

Deleted: to

Deleted: and

Deleted: host

Deleted: 6

Deleted: calling the [[Get]] internal method of O with the argument "length".

Deleted: If n is an abrupt completion, return n .

Deleted:,

Deleted: calling the [[HasProperty]] internal method of

Deleted: with argument

- i. Let $elementK$ be the result of $\text{Get}(O, \text{ToString}(k))$.
 - ii. $\text{ReturnIfAbrupt}(elementK)$.
 - iii. Let $same$ be the result of performing Strict Equality Comparison Algorithm $\text{searchElement} \equiv\equiv elementK$.
 - iv. If $same$ is **true**, return k .
 - d. Decrease k by 1.
12. Return -1.

The **length** property of the **lastIndexOf** method is **1**.

NOTE The **lastIndexOf** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **lastIndexOf** function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

15.4.4.16 Array.prototype.every (callbackfn [, thisArg])

callbackfn should be a function that accepts three arguments and returns a value that is coercible to the Boolean value **true** or **false**. **every** calls *callbackfn* once for each element present in the array, in ascending order, until it finds one where *callbackfn* returns **false**. If such an element is found, **every** immediately returns **false**. Otherwise, if *callbackfn* returned **true** for all elements, **every** will return **true**. *callbackfn* is called only for elements of the array which actually exist; it is not called for missing elements of the array.

If a *thisArg* parameter is provided, it will be used as the **this** value for each invocation of *callbackfn*. If it is not provided, **undefined** is used instead.

callbackfn is called with three arguments: the value of the element, the index of the element, and the object being traversed.

every does not directly mutate the object on which it is called but the object may be mutated by the calls to *callbackfn*.

The range of elements processed by **every** is set before the first call to *callbackfn*. Elements which are appended to the array after the call to **every** begins will not be visited by *callbackfn*. If existing elements of the array are changed, their value as passed to *callbackfn* will be the value at the time **every** visits them; elements that are deleted after the call to **every** begins and before being visited are not visited. **every** acts like the "for all" quantifier in mathematics. In particular, for an empty array, it returns **true**.

When the **every** method is called with one or two arguments, the following steps are taken:

1. Let O be the result of calling **ToObject** passing the **this** value as the argument.
2. $\text{ReturnIfAbrupt}(O)$.
3. Let $lenValue$ be the result of $\text{Get}(O, \text{"length"})$.
4. Let len be $\text{ToUint32}(lenValue)$.
5. $\text{ReturnIfAbrupt}(len)$.
6. If **IsCallable(callbackfn)** is **false**, throw a **TypeError** exception.
7. If *thisArg* was supplied, let T be *thisArg*; else let T be **undefined**.
8. Let k be 0.
9. Repeat, while $k < len$
 - a. Let P_k be **ToString**(k).
 - b. Let $kPresent$ be the result of **HasProperty**(O, P_k).
 - c. If $kPresent$ is **true**, then
 - i. Let $kValue$ be the result of $\text{Get}(O, P_k)$.
 - ii. $\text{ReturnIfAbrupt}(kValue)$.
 - iii. Let $testResult$ be the result of calling the **[[Call]]** internal method of *callbackfn* with T as **thisArgument** and a List containing $kValue$, k , and O as **argumentsList**.
 - iv. $\text{ReturnIfAbrupt}(testResult)$.
 - v. If **ToBoolean(testResult)** is **false**, return **false**.
 - d. Increase k by 1.
10. Return **true**.

- Deleted:** calling the **[[Get]]** internal method of O .
- Deleted:** $]]$ internal method of O .
- Deleted:**
- Deleted:** with the argument O .
- Deleted:** If $elementK$ is an abrupt completion, return $elementK$.
- Deleted:** applying callbackfn .
- Deleted:** the O .
- Deleted:** Algorithm $\text{searchElement} \equiv\equiv elementK$.
- Deleted:** to O .
- Deleted:** and O .
- Deleted:** host

The **length** property of the **every** method is **1**.

NOTE The **every** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **every** function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

Deleted: host

15.4.4.17 Array.prototype.some (callbackfn [,thisArg])

callbackfn should be a function that accepts three arguments and returns a value that is coercible to the Boolean value **true** or **false**. **some** calls *callbackfn* once for each element present in the array, in ascending order, until it finds one where *callbackfn* returns **true**. If such an element is found, **some** immediately returns **true**. Otherwise, **some** returns **false**. *callbackfn* is called only for elements of the array which actually exist; it is not called for missing elements of the array.

If a *thisArg* parameter is provided, it will be used as the **this** value for each invocation of *callbackfn*. If it is not provided, **undefined** is used instead.

callbackfn is called with three arguments: the value of the element, the index of the element, and the object being traversed.

some does not directly mutate the object on which it is called but the object may be mutated by the calls to *callbackfn*.

The range of elements processed by **some** is set before the first call to *callbackfn*. Elements that are appended to the array after the call to **some** begins will not be visited by *callbackfn*. If existing elements of the array are changed, their value as passed to *callbackfn* will be the value at the time that **some** visits them; elements that are deleted after the call to **some** begins and before being visited are not visited. **some** acts like the "exists" quantifier in mathematics. In particular, for an empty array, it returns **false**.

When the **some** method is called with one or two arguments, the following steps are taken:

1. Let *O* be the result of calling **ToObject** passing the **this** value as the argument.
2. **ReturnIfAbrupt**(*O*).
3. Let *lenValue* be the result of **Get**(*O*, "**length**").
4. Let *len* be **ToUint32**(*lenValue*).
5. **ReturnIfAbrupt**(*len*).
6. If **IsCallable**(*callbackfn*) is **false**, throw a **TypeError** exception.
7. If *thisArg* was supplied, let *T* be *thisArg*; else let *T* be **undefined**.
8. Let *k* be 0.
9. Repeat, while *k* < *len*
 - a. Let *Pk* be **ToString**(*k*).
 - b. Let *kPresent* be the result of **GetProperty**(*O*, *Pk*).
 - c. **ReturnIfAbrupt**(*kPresent*).
 - d. If *kPresent* is **true**, then
 - i. Let *kValue* be the result of **Get**(*O*, *Pk*).
 - ii. **ReturnIfAbrupt**(*kValue*).
 - iii. Let *testResult* be the result of calling the **[[Call]]** internal method of *callbackfn* with *T* as *thisArgument* and a List containing *kValue*, *k*, and *O* as *argumentsList*.
 - iv. **ReturnIfAbrupt**(*testResult*).
 - v. If **ToBoolean**(*testResult*) is **true**, return **true**.
 - e. Increase *k* by 1.
10. Return **false**.

The **length** property of the **some** method is **1**.

NOTE The **some** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **some** function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

Deleted: calling the **[[Get]]** internal method of *O* with the argument "**length**"

Deleted: calling the **[[HasProperty]]** internal method of

Deleted: with argument

Deleted: calling the **[[**

Deleted: **]]** internal method of

Deleted:

Deleted: with argument

Deleted: If *kValue* is an abrupt completion, return *kValue*.

Deleted: the **this** value

Deleted: argument

Deleted: list

Deleted: If *testResult* is an abrupt completion, return *testResult*.

Deleted: host

15.4.4.18 Array.prototype.forEach (callbackfn [, thisArg])

callbackfn should be a function that accepts three arguments. **forEach** calls *callbackfn* once for each element present in the array, in ascending order. *callbackfn* is called only for elements of the array which actually exist; it is not called for missing elements of the array.

If a *thisArg* parameter is provided, it will be used as the **this** value for each invocation of *callbackfn*. If it is not provided, **undefined** is used instead.

callbackfn is called with three arguments: the value of the element, the index of the element, and the object being traversed.

forEach does not directly mutate the object on which it is called but the object may be mutated by the calls to *callbackfn*.

The range of elements processed by **forEach** is set before the first call to *callbackfn*. Elements which are appended to the array after the call to **forEach** begins will not be visited by *callbackfn*. If existing elements of the array are changed, their value as passed to callback will be the value at the time **forEach** visits them; elements that are deleted after the call to **forEach** begins and before being visited are not visited.

When the **forEach** method is called with one or two arguments, the following steps are taken:

1. Let *O* be the result of calling **ToObject** passing the **this** value as the argument.
2. **ReturnIfAbrupt(*O*)**
3. Let *lenValue* be the result of **Get(*O*, "length")**.
4. Let *len* be **ToInt32(*lenValue*)**.
5. **ReturnIfAbrupt(*len*)**.
6. If **IsCallable(*callbackfn*)** is **false**, throw a **TypeError** exception.
7. If *thisArg* was supplied, let *T* be *thisArg*; else let *T* be **undefined**.
8. Let *k* be 0.
9. Repeat, while *k* < *len*
 - a. Let *Pk* be **ToString(*k*)**.
 - b. Let *kPresent* be the result of **HasProperty(*O*, *Pk*)**.
 - c. **ReturnIfAbrupt(*kPresent*)**.
 - d. If *kPresent* is **true**, then
 - i. Let *kValue* be the result of **Get(*O*, *Pk*)**.
 - ii. **ReturnIfAbrupt(*kValue*)**.
 - iii. Let *funcResult* be the result of calling the **[[Call]]** internal method of *callbackfn* with *T* as *thisArgument* and a List containing *kValue*, *k*, and *O* as *argumentsList*.
 - iv. **ReturnIfAbrupt(*funcResult*)**.
 - e. Increase *k* by 1.
10. Return **undefined**.

The **length** property of the **forEach** method is 1.

NOTE The **forEach** function is intentionally generic; it does not require that its **this** value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the **forEach** function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

15.4.4.19 Array.prototype.map (callbackfn [, thisArg])

callbackfn should be a function that accepts three arguments. **map** calls *callbackfn* once for each element in the array, in ascending order, and constructs a new Array from the results. *callbackfn* is called only for elements of the array which actually exist; it is not called for missing elements of the array.

If a *thisArg* parameter is provided, it will be used as the **this** value for each invocation of *callbackfn*. If it is not provided, **undefined** is used instead.

callbackfn is called with three arguments: the value of the element, the index of the element, and the object being traversed.

Deleted: calling the **[[Get]]** internal method of *O* with the argument "**length**".

Deleted: calling the **[[HasProperty]]** internal method of *O* with argument

Deleted: calling the **[[**

Deleted: **]]** internal method of

Deleted:

Deleted: with argument

Deleted: If *kValue* is an abrupt completion, return *kValue*.

Deleted: Call

Deleted: the **this** value

Deleted: argument

Deleted: list

Deleted: If *funcResult* is an abrupt completion, return *funcResult*.

Deleted: host

`map` does not directly mutate the object on which it is called but the object may be mutated by the calls to `callbackfn`.

The range of elements processed by `map` is set before the first call to `callbackfn`. Elements which are appended to the array after the call to `map` begins will not be visited by `callbackfn`. If existing elements of the array are changed, their value as passed to `callbackfn` will be the value at the time `map` visits them; elements that are deleted after the call to `map` begins and before being visited are not visited.

When the `map` method is called with one or two arguments, the following steps are taken:

1. Let O be the result of calling `ToObject` passing the `this` value as the argument.
2. ReturnIfAbrupt(O)
3. Let $lenValue$ be the result of `Get(O , "length")`
4. Let len be `ToUint32(lenValue)`.
5. ReturnIfAbrupt(len)
6. If `IsCallable(callbackfn)` is `false`, throw a `TypeError` exception.
7. If `thisArg` was supplied, let T be `thisArg`; else let T be `undefined`.
8. Let A be the result of the abstract operation `ArrayCreate` with argument len .
9. Let k be 0 .
10. Repeat, while $k < len$
 - a. Let Pk be `ToString(k)`.
 - b. Let $kPresent$ be the result of `HasProperty(O , Pk)`.
 - c. ReturnIfAbrupt($kPresent$).
 - d. If $kPresent$ is `true`, then
 - i. Let $kValue$ be the result of `Get(O , Pk)`.
 - ii. ReturnIfAbrupt($kValue$).
 - iii. Let $mappedValue$ be the result of calling the `[[Call]]` internal method of `callbackfn` with T as `thisArgument` and a List containing $kValue$, k , and O as `argumentsList`.
 - iv. ReturnIfAbrupt($mappedValue$).
 - v. Call the `[[DefineOwnProperty]]` internal method of A with arguments Pk and `Property Descriptor` `{[[Value]]: mappedValue, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 - e. Increase k by 1.
11. Return A .

The `length` property of the `map` method is 1.

NOTE The `map` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `map` function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

15.4.4.20 `Array.prototype.filter (callbackfn [,thisArg])`

`callbackfn` should be a function that accepts three arguments and returns a value that is coercible to the Boolean value `true` or `false`. `filter` calls `callbackfn` once for each element in the array, in ascending order, and constructs a new array of all the values for which `callbackfn` returns `true`. `callbackfn` is called only for elements of the array which actually exist; it is not called for missing elements of the array.

If a `thisArg` parameter is provided, it will be used as the `this` value for each invocation of `callbackfn`. If it is not provided, `undefined` is used instead.

`callbackfn` is called with three arguments: the value of the element, the index of the element, and the object being traversed.

`filter` does not directly mutate the object on which it is called but the object may be mutated by the calls to `callbackfn`.

The range of elements processed by `filter` is set before the first call to `callbackfn`. Elements which are appended to the array after the call to `filter` begins will not be visited by `callbackfn`. If existing elements of

Deleted: calling the `[[Get]]` internal method of O with the argument `"length"`.

Deleted: abstraction operation

Deleted: (15.4)

Deleted: a new array created as if by the expression `new Array(len)` where `Array` is the standard built-in constructor with that name and len is the value of

Deleted: calling the `[[HasProperty]]` internal method of O with argument

Deleted: calling the `[[`

Deleted: `]]` internal method of

Deleted:

Deleted: with argument

Deleted: the `this` value

Deleted: argument

Deleted: list

Deleted:

Deleted: , and false

Deleted: host

the array are changed their value as passed to `callbackfn` will be the value at the time `filter` visits them; elements that are deleted after the call to `filter` begins and before being visited are not visited.

When the `filter` method is called with one or two arguments, the following steps are taken:

1. Let O be the result of calling `ToObject` passing the `this` value as the argument.
2. `ReturnIfAbrupt(O)`.
3. Let $lenValue$ be the result of `Get(O , "length")`.
4. Let len be `ToInt32(lenValue)`.
5. `ReturnIfAbrupt(len)`.
6. If `IsCallable(callbackfn)` is `false`, throw a `TypeError` exception.
7. If `thisArg` was supplied, let T be `thisArg`; else let T be `undefined`.
8. Let A be the result of the abstract operation `ArrayCreate` with argument 0 .
9. Let k be 0 .
10. Let to be 0 .
11. Repeat, while $k < len$
 - a. Let Pk be `ToString(k)`.
 - b. Let $kPresent$ be the result of `HasProperty(O , Pk)`.
 - c. `ReturnIfAbrupt(kPresent)`.
 - d. If $kPresent$ is `true`, then
 - i. Let $kValue$ be the result of `Get(O , Pk)`.
 - ii. `ReturnIfAbrupt(kValue)`.
 - iii. Let $selected$ be the result of calling the `[[Call]]` internal method of `callbackfn` with T as `thisArgument` and a List containing $kValue$, k , and O as `argumentsList`.
 - iv. `ReturnIfAbrupt(selected)`.
 - v. If `ToBoolean(selected)` is `true`, then
 1. Call the `[[DefineOwnProperty]]` internal method of A with arguments `ToString(to)` and `Property Descriptor {[[Value]]: $kValue$, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 2. Increase to by 1.
 - e. Increase k by 1.
12. Return A .

The `length` property of the `filter` method is `1`.

NOTE The `filter` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `filter` function can be applied successfully to an exotic object that is not an Array is implementation-dependent.


15.4.4.21 `Array.prototype.reduce (callbackfn [, initialValue])`

`callbackfn` should be a function that takes four arguments. `reduce` calls the callback, as a function, once for each element present in the array, in ascending order.

`callbackfn` is called with four arguments: the `previousValue` (or value from the previous call to `callbackfn`), the `currentValue` (value of the current element), the `currentIndex`, and the object being traversed. The first time that callback is called, the `previousValue` and `currentValue` can be one of two values. If an `initialValue` was provided in the call to `reduce`, then `previousValue` will be equal to `initialValue` and `currentValue` will be equal to the first value in the array. If no `initialValue` was provided, then `previousValue` will be equal to the first value in the array and `currentValue` will be equal to the second. It is a `TypeError` if the array contains no elements and `initialValue` is not provided.

`reduce` does not directly mutate the object on which it is called but the object may be mutated by the calls to `callbackfn`.

The range of elements processed by `reduce` is set before the first call to `callbackfn`. Elements that are appended to the array after the call to `reduce` begins will not be visited by `callbackfn`. If existing elements of the array are changed, their value as passed to `callbackfn` will be the value at the time `reduce` visits them; elements that are deleted after the call to `reduce` begins and before being visited are not visited.

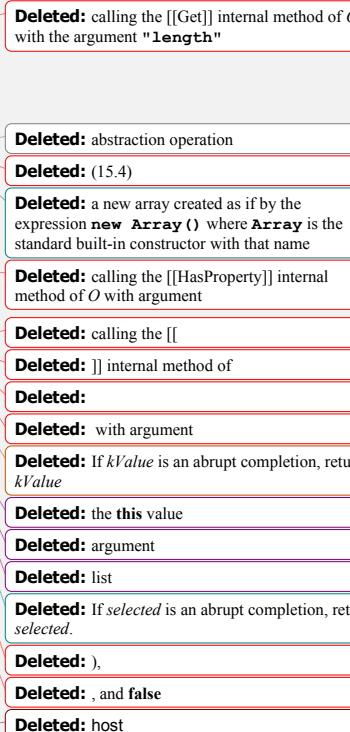

When the `reduce` method is called with one or two arguments, the following steps are taken:

1. Let O be the result of calling `ToObject` passing the `this` value as the argument.
2. `ReturnIfAbrupt(O)`
3. Let $lenValue$ be the result of `Get(O , "length")`
4. Let len be `ToInt32(lenValue)`.
5. `ReturnIfAbrupt(len)`
6. If `IsCallable(callbackfn)` is **false**, throw a `TypeError` exception.
7. If len is 0 and $initialValue$ is not present, throw a `TypeError` exception.
8. Let k be 0.
9. If $initialValue$ is present, then
 - a. Set $accumulator$ to $initialValue$.
10. Else $initialValue$ is not present,
 - a. Let $kPresent$ be **false**.
 - b. Repeat, while $kPresent$ is **false** and $k < len$
 - i. Let Pk be `ToString(k)`.
 - ii. Let $kPresent$ be the result of `HasProperty(O , Pk)`.
 - iii. `ReturnIfAbrupt(kPresent)`.
 - iv. If $kPresent$ is **true**, then
 1. Let $accumulator$ be the result of `Get(O , Pk)`.
 2. `ReturnIfAbrupt(accumulator)`.
 - v. Increase k by 1.
 - c. If $kPresent$ is **false**, throw a `TypeError` exception.
11. Repeat, while $k < len$
 - a. Let Pk be `ToString(k)`.
 - b. Let $kPresent$ be the result of `HasProperty(O , Pk)`.
 - c. `ReturnIfAbrupt(kPresent)`.
 - d. If $kPresent$ is **true**, then
 - i. Let $kValue$ be the result of `Get(O , Pk)`.
 - ii. `ReturnIfAbrupt(kValue)`.
 - iii. Let $accumulator$ be the result of calling the `[[Call]]` internal method of `callbackfn` with **undefined** as `thisArgument` and a `List` containing $accumulator$, $kValue$, k , and O as `argumentsList`.
 - iv. `ReturnIfAbrupt(accumulator)`.
 - e. Increase k by 1.
12. Return $accumulator$.

The `length` property of the `reduce` method is 1.

NOTE The `reduce` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `reduce` function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

15.4.4.22 `Array.prototype.reduceRight (callbackfn [, initialValue])`

`callbackfn` should be a function that takes four arguments. `reduceRight` calls the callback, as a function, once for each element present in the array, in descending order.

`callbackfn` is called with four arguments: the `previousValue` (or value from the previous call to `callbackfn`), the `currentValue` (value of the current element), the `currentIndex`, and the object being traversed. The first time the function is called, the `previousValue` and `currentValue` can be one of two values. If an `initialValue` was provided in the call to `reduceRight`, then `previousValue` will be equal to `initialValue` and `currentValue` will be equal to the last value in the array. If no `initialValue` was provided, then `previousValue` will be equal to the last value in the array and `currentValue` will be equal to the second-to-last value. It is a `TypeError` if the array contains no elements and `initialValue` is not provided.

`reduceRight` does not directly mutate the object on which it is called but the object may be mutated by the calls to `callbackfn`.

Deleted: calling the `[[Get]]` internal method of O with the argument "length"

Deleted:,

Deleted: calling the `[[HasProperty]]` internal method of O with argument

Deleted: calling the `[[`

Deleted: `]]` internal method of

Deleted:

Deleted: with argument

Deleted: If $accumulator$ is an abrupt completion, return $accumulator$.

Deleted: calling the `[[HasProperty]]` internal method of O with argument

Deleted: calling the `[[`

Deleted: `]]` internal method of

Deleted:

Deleted: with argument

Deleted: If $kValue$ is an abrupt completion, return $kValue$

Deleted: the `this` value

Deleted: argument

Deleted: list

Deleted: If $accumulator$ is an abrupt completion, return $accumulator$

Deleted: host

The range of elements processed by `reduceRight` is set before the first call to `callbackfn`. Elements that are appended to the array after the call to `reduceRight` begins will not be visited by `callbackfn`. If existing elements of the array are changed by `callbackfn`, their value as passed to `callbackfn` will be the value at the time `reduceRight` visits them; elements that are deleted after the call to `reduceRight` begins and before being visited are not visited.

When the `reduceRight` method is called with one or two arguments, the following steps are taken:

1. Let O be the result of calling `ToObject` passing the `this` value as the argument.
2. `ReturnIfAbrupt(O)`
3. Let $lenValue$ be the result of `Get(O , "length")`.
4. Let len be `ToInt32(lenValue)`.
5. `ReturnIfAbrupt(len)`.
6. If `IsCallable(callbackfn)` is `false`, throw a `TypeError` exception.
7. If len is 0 and `initialValue` is not present, throw a `TypeError` exception.
8. Let k be $len-1$.
9. If `initialValue` is present, then
 - a. Set `accumulator` to `initialValue`.
10. Else, `initialValue` is not present,
 - a. Let $kPresent$ be `false`.
 - b. Repeat, while $kPresent$ is `false` and $k \geq 0$
 - i. Let Pk be `ToString(k)`.
 - ii. Let $kPresent$ be the result of `GetProperty(O , Pk)`.
 - iii. `ReturnIfAbrupt($kPresent$)`.
 - iv. If $kPresent$ is `true`, then
 1. Let `accumulator` be the result of `Get(O , Pk)`.
 2. `ReturnIfAbrupt(accumulator)`.
 - v. Decrease k by 1.
 - c. If $kPresent$ is `false`, throw a `TypeError` exception.
 - c. If $k \geq 0$
 - a. Let Pk be `ToString(k)`.
 - b. Let $kPresent$ be the result of `GetProperty(O , Pk)`.
 - c. `ReturnIfAbrupt($kPresent$)`.
 - d. If $kPresent$ is `true`, then
 - i. Let $kValue$ be the result of `Get(O , Pk)`.
 - ii. `ReturnIfAbrupt($kValue$)`.
 - iii. Let `accumulator` be the result of calling the `[[Call]]` internal method of `callbackfn` with `undefined` as `thisArgument` and a `List` containing `accumulator`, `kValue`, `k`, and O as `argumentsList`.
 - iv. `ReturnIfAbrupt(accumulator)`.
 - e. Decrease k by 1.
 12. Return `accumulator`.

The `length` property of the `reduceRight` method is 1.

NOTE The `reduceRight` function is intentionally generic; it does not require that its `this` value be an Array object. Therefore it can be transferred to other kinds of objects for use as a method. Whether the `reduceRight` function can be applied successfully to an exotic object that is not an Array is implementation-dependent.

15.4.4.23 Array.prototype.entries()

The following steps are taken:

1. Let O be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(O)`.
3. Return the result of calling the `CreateArrayIterator` abstract operation with arguments O and `"key+value"`.

Deleted: calling the `[[Get]]` internal method of O with the argument "length"

Deleted:,

Deleted: calling the `[[HasProperty]]` internal method of O with argument

Deleted: of calling the `[[`

Deleted: `]]` internal method of

Deleted::

Deleted: with argument

Deleted: If `accumulator` is an abrupt completion return `accumulator`

Deleted: calling the `[[HasProperty]]` internal method of O with argument

Deleted: calling the `[[`

Deleted: `]]` internal method of

Deleted::

Deleted: with argument

Deleted: If $kValue$ is an abrupt completion, return $kValue$

Deleted: the `this` value

Deleted: argument

Deleted: list

Deleted: If `accumulator` is an abrupt completion return `accumulator`

Deleted: host

Comment [AWB11177]: Need to decide whether to allow an argument that requests sparse iteration

Deleted: items

15.4.4.24 Array.prototype.keys()

The following steps are taken:

1. Let O be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(O).
3. Return the result of calling the `CreateArrayIterator` abstract operation with arguments O and `"key"`.

15.4.4.25 Array.prototype.values()

The following steps are taken:

1. Let O be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(O).
3. Return the result of calling the `CreateArrayIterator` abstract operation with arguments O and `"value"`.

15.4.4.26 Array.prototype[@@iterator]()

The initial value of the `@@iterator` property is the same function object as the initial value of the `Array.prototype.values` property.

15.4.5 Properties of Array Instances

Array instances are exotic Array objects that inherit properties from the Array prototype object and have the `[[BuiltinBrand]]` internal data property with value `BuiltinArray`. Array instances also have the following properties.

15.4.5.1 length

The `length` property of this Array object is a data property whose value is always numerically greater than the name of every deletable property whose name is an array index.

The `length` property initially has the attributes `{ [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: false }`.

NOTE Attempting to set the `length` property of an Array object to a value that is numerically less than or equal to the largest numeric property name of an existing array indexed non-deletable property of the array will result in the `length` being set to a numeric value that is one greater than that largest numeric property name. See 15.4.5.1.

15.4.6 Array Iterator Object Structure

An Array Iterator is an object, with the structure defined below, that represent a specific iteration over some specific Array instance object. There is not a named constructor for Array Iterator objects. Instead, Array iterator objects are created by calling certain methods of Array instance objects.

15.4.6.1 CreateArrayIterator Abstract Operation

Several methods of Array objects return iterator objects. The abstract operation `CreateArrayIterator` with arguments `array` and `kind` is used to create such iterator objects. It performs the following steps:

1. Let O be the result of calling `ToObject(array)`.
2. ReturnIfAbrupt(O).
3. Let itr be the result of the abstract operation `ObjectCreate` with the intrinsic object `%ArrayIteratorPrototype%` as its argument.
4. Add a `[[IteratedObject]]` internal data property to itr with value O .
5. Add a `[[ArrayIteratorNextIndex]]` internal data property to itr with value `0`.
6. Add a `[[ArrayIterationKind]]` internal data property of itr with value `kind`.
7. Return itr .

Comment [AWB11178]: Need to decide whether to allow an argument that requests sparse iteration

Comment [AWB11179]: Need to decide whether to allow an argument that requests sparse iteration

Comment [AWB10180]: This is how we identify a property whose key is a built-in Symbol

Comment [AWB10181]: Do we really want to do this sort of method sharing. It has a bad smell.

Deleted: items

Deleted: their `[[Class]]`

Deleted: isArray

Deleted: NativeBrand

Deleted: NativeArray

Deleted: value is "Array"

Deleted: 15.4.5.1 `[[DefineOwnProperty]]` (P , $Desc$, $Throw$)

Array objects use a variation of the `[[DefineOwnProperty]]` internal method used for other native ECMAScript objects (8.12.9).
Assume A is an Array object, $Desc$ is a Property Descriptor, and $Throw$ is a Boolean flag.

In the following algorithm, the term "Reject" means "If $Throw$ is true, then throw a `TypeError` exception, otherwise return `false`".
When the `[[DefineOwnProperty]]` internal method of A is called with property P , Property Descriptor $Desc$, and Boolean flag $Throw$, the following steps are taken:
`<#>ReturnIfAbrupt(A).
<#>Let oldLenDesc be the result of calling the [[GetOwnProperty]] internal method of A passing "length" as the argument. The result will never be undefined or an accessor descriptor because Array objects are created with a length data property that cannot be deleted or reconfigured.
<#>Let oldLen be oldLenDesc [[Value]].
<#>If P is "length", then
<#>If the [[Value]] field of $Desc$ is absent, then
<#>Return the result of calling the default [[DefineOwnProperty]] internal method (8.12.9) on A passing "length", $Desc$, and $Throw$ as arguments.
<#>Let newLenDesc be a copy of $Desc$.
<#>Let newLen be ToUint32($Desc$.[[Value]]).
<#>If newLen is not equal to ToNumber($Desc$.[[Value]]), then throw a RangeError exception.
<#>Set newLenDesc.[[Value]] to newLen.
<#>If newLen \geq oldLen, then
<#>Return the result of calling the default [[DefineOwnProperty]] internal method (8.12.9) on A passing "length", newLenDesc, and $Throw$ as arguments.
<#>Reject if oldLenDesc.[[Writable]] is false.
<#>If newLenDesc.[[Writable]] is absent or has the value true, let newWritable be true.
<#>Else, let newWritable be false.
<#>Need to defer setting the [[Writable]] attribute to false case any elements cannot be deleted.
<#>Let newWritable be false.
<#>Set newLenDesc.[[Writable]] to true.
<#>Let succeeded be the result of calling the default [[DefineOwnProperty]] internal method (8.12.9) on A passing "length", newLenDesc, and $Throw$ as arguments.
<#>If succeeded is false, return false.
<#>While newLen $<$ oldLen repeat
<#>Set oldLen to oldLen - 1.
Deleted: 2`

15.4.6.2 The Array Iterator Prototype

All Array Iterator Objects inherit properties from a common Array Iterator Prototype object. The `[[Prototype]]` internal data property of the Array Iterator Prototype is the `%ObjectPrototype%` intrinsic object. In addition, the Array Iterator Prototype has the following properties:

15.4.6.2.1 `ArrayIterator.prototype.constructor`

15.4.6.2.2 `ArrayIterator.prototype.next()`

1. Let O be the `this` value.
2. If `Type(O)` is not `Object`, throw a `TypeError` exception.
3. If O does not have all of the internal properties of a `Array Iterator Instance` (15.4.6.1.2), throw a `TypeError` exception.
4. Let a be the value of the `[[IteratedObject]]` internal data property of O .
5. Let $index$ be the value of the `[[ArrayIteratorNextIndex]]` internal data property of O .
6. Let $itemKind$ be the value of the `[[ArrayIterationKind]]` internal data property of O .
7. Let $lenValue$ be the result of `Get(a, "length")`.
8. Let len be `ToUint32(lenValue)`.
9. `ReturnIfAbrupt(len)`.
10. If $itemKind$ contains the substring `"sparse"`, then
 - a. Let $found$ be `false`.
 - b. Repeat, while $found$ is `false` and $index < len$
 - i. Let $elementKey$ be `ToString(index)`.
 - ii. Let $found$ be the result of `HasProperty(a, elementKey)`.
 - iii. `ReturnIfAbrupt(found)`.
 - iv. If $found$ is `false`, then
 1. Increase $index$ by 1.
11. If $index > len$, then
 - a. Set the value of the `[[ArrayIteratorNextIndex]]` internal data property of O to $+\infty$.
 - b. Return `Completion{[[type]]: throw, [[value]]: %StopIteration%, [[target]]: empty}`.
12. Let $elementKey$ be `ToString(index)`.
13. Set the value of the `[[ArrayIteratorNextIndex]]` internal data property of O to $index + 1$.
14. If $itemKind$ contains the substring `"value"`, then
 - a. Let $elementValue$ be the result of `Get(a, elementKey)`.
 - b. `ReturnIfAbrupt(elementValue)`.
15. If $itemKind$ contains the substring `"key+value"`, then
 - a. Let $result$ be the result of the abstract operation `ArrayCreate` with argument 2.
 - b. Assert: $result$ is a new, well-formed `Array` object so the following operations will never fail.
 - c. Call the `[[DefineOwnProperty]]` internal method of $result$ with arguments `"0"` and `Property Descriptor{[[Value]]: elementKey, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 - d. Call the `[[DefineOwnProperty]]` internal method of $result$ with arguments `"1"` and `Property Descriptor{[[Value]]: elementValue, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 - e. `Return result`.
16. Else If $itemKind$ contains the substring `"key"` then, return `elementKey`.
17. Else $itemKind$ is `"value"`.
 - a. `Return elementValue`.

15.4.6.2.3 `ArrayIterator.prototype.[@@iterator]()`

The following steps are taken:

1. `Return the this value.`

Comment [AWB10182]: TODO: need to decide what to use for a constructor for these sort of objects.

Deleted: calling the `[[Get]]` internal method of a with the argument `"length"`

Deleted: calling the `[[HasProperty]]` internal method of a with argument

Deleted: Infinity

Comment [AWB10183]: We may need to elaborate on this??

Deleted: calling the `[[`

Deleted: `]]` internal method of

Deleted: with argument

Deleted:,

Comment [AWB11184]: This is a string. Should be return the numeric value of $index$ instead?

Deleted:, and false

Deleted:,

Deleted:, and false

Comment [AWB11185]: This is a string. Should be return the numeric value of $index$ instead?

Comment [AWB10186]: This is how we identify a property whose key is a built-in `Symbol`

15.4.6.2.4 ArrayIterator.prototype.@@toStringTag

The initial value of the `@@toStringTag` property is the string value "`Array Iterator`".

15.4.6.3 Properties of Array Iterator Instances

Array Iterator instances inherit properties from the Array Iterator prototype (the intrinsic, `%ArrayIteratorPrototype%`.) Array Iterator instances are initially created with the internal properties listed in Table 33.

Deleted: Table 31Table 29

Deleted: 3129

Table 33—Internal Data Properties of Array Iterator Instances

Internal Data Property Name	Description
<code>[[IteratedObject]]</code>	The object whose array elements are being iterated.
<code>[[ArrayIteratorNextIndex]]</code>	The integer index of the next array index to be examined by this iteration.
<code>[[ArrayIterationKind]]</code>	A string value that identifies what is to be returned for each element of the iteration. The possible values are: <code>"key"</code> , <code>"value"</code> , <code>"key+value"</code> , <code>"sparse:key"</code> , <code>"sparse:value"</code> , <code>"sparse:key+value"</code> .

15.5 String Objects

15.5.1 The String Constructor Called as a Function

When `String` is called as a function rather than as a constructor, it performs a type conversion.

15.5.1.1 `String ([value])`

Returns a String value (not a String object) computed by `ToString(value)`. If `value` is not supplied, the empty String `""` is returned.

15.5.2 The String Constructor

When `String` is called as part of a `new` expression, it is a constructor: it initialises the newly created exotic String object.

15.5.2.1 `new String ([value])`

The `[[Prototype]]` internal data property of the newly constructed object is set to the standard built-in String prototype object that is the initial value of `String.prototype` (15.5.3.1).

The `[[Extensible]]` internal data property of the newly constructed object is set to `true`.

The `[[StringData]]` internal data property of the newly constructed object is set to `ToString(value)`, or to the empty String if `value` is not supplied.

Deleted: The `[[Class]]` internal property of the newly constructed object is set to `"String"` has the `[[IsStringNativeBrand]]` internal property with value `StringWrapper`.
Deleted: PrimitiveValue

15.5.3 Properties of the String Constructor

The value of the `[[Prototype]]` internal data property of the String constructor is the standard built-in Function prototype object (15.3.4).

Besides the `length` property (whose value is `1`), the String constructor has the following properties:

Deleted: the internal properties and

15.5.3.1 String.prototype

The initial value of `String.prototype` is the standard built-in String prototype object (15.5.4).

This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.5.3.2 String.fromCharCode(...codeUnits)

The `String.fromCharCode` function may be called with a variable number of arguments which form the rest parameter `codeUnits`. The following steps are taken:

1. Assert: `codeUnits` is a well-formed rest parameter object.
2. Let `length` be the result of `Get(codeUnits, "length")`.
3. Let `elements` be a new List.
4. Let `nextIndex` be 0.
5. Repeat while `nextIndex < length`
 - a. Let `next` be the result of `Get(codeUnits, ToString(nextIndex))`.
 - b. Let `nextCU` be `ToUint16(next)`.
 - c. ReturnIfAbrupt(`nextCU`).
 - d. Append `nextCU` to the end of `elements`.
 - e. Let `nextIndex` be `nextIndex + 1`.
6. Return the string value whose elements are, in order, the elements in the List `elements`. If `length` is 0, the empty string is returned.

The `length` property of the `fromCharCode` function is 1.

15.5.3.3 String.fromCodePoint(...codePoints)

The `String.fromCodePoint` function may be called with a variable number of arguments which form the rest parameter `codePoints`. The following steps are taken:

1. Assert: `codePoints` is a well-formed rest parameter object.
2. Let `length` be the result of `Get(codePoints, "length")`.
3. Let `elements` be a new List.
4. Let `nextIndex` be 0.
5. Repeat while `nextIndex < length`
 - a. Let `next` be the result of `Get(codePoints, ToString(nextIndex))`.
 - b. Let `nextCP` be `ToNumber(next)`.
 - c. ReturnIfAbrupt(`nextCP`).
 - d. If `SameValue(nextCP, ToInteger(nextCP))` is `false`, then throw a **RangeError** exception.
 - e. If `nextCP < 0` or `nextCP > 0x10FFFF`, then throw a **RangeError** exception.
 - f. Append the elements of the UTF-16 Encoding (clause 6) of `nextCP` to the end of `elements`.
 - g. Let `nextIndex` be `nextIndex + 1`.
6. Return the string value whose elements are, in order, the elements in the List `elements`. If `length` is 0, the empty string is returned.

The `length` property of the `fromCodePoint` function is 0.

15.5.3.4 String.raw (callSite, ...substitutions)

The `String.raw` function may be called with a variable number of arguments. The first argument is `callSite` and the remainder of the arguments form the rest parameter `substitutions`. The following steps are taken:

1. Assert: `substitutions` is a well-formed rest parameter object.
2. Let `cooked` be `ToObject(callSite)`.
3. ReturnIfAbrupt(`cooked`).
4. Let `rawValue` be the result of `Get(cooked, "raw")`.
5. Let `raw` be `ToObject(rawValue)`.
6. ReturnIfAbrupt(`raw`).

Comment [AWB9187]: Should we provide fromCodeUnit as an alias for this property and remove fromCharCode as obsolete.

Deleted: [

Deleted: `char0 [, char1 [, ...]]`

Deleted: Returns a String value containing as many characters as the number of arguments. Each argument specifies one character of the resulting String, with the first argument specifying the first character, and so on, from left to right. An argument is converted to a character by applying the operation `ToUint16` (9.7) and regarding the resulting 16-bit integer as the code unit value of a character. If no arguments are supplied, the result is the empty String.||

Deleted: ing

Deleted: calling the [[Get]] internal method of `codeUnits` with argument "`length`"

Deleted: calling the [[

Deleted:]] internal method of

Deleted::

Deleted: with argument

Deleted: CharCode

Deleted: Units

Deleted: ing

Deleted: calling the [[Get]] internal method of `codeUnitsPoints` with argument "`length`"

Deleted: calling the [[

Deleted:]] internal method of

Deleted: with argument

Deleted: v

Deleted: v

Comment [AWB9188]: Note this follows the ES6 convention for rest parameters rather than the precedent established by fromCharCode

Deleted: ing

Deleted: calling the [[

Deleted:]] internal method of

Deleted::

Deleted: with argument

7. Let `len` be the result of `Get(raw, "length")`.
 8. Let `literalSegments` be `ToUint(len)`.
 9. ReturnIfAbrupt(`literalSegments`).
 10. If `literalSegments` = 0, then return the empty string.
 11. Let `stringElements` be a new List.
 12. Let `nextIndex` be 0.
 13. Repeat

- a. Let `nextKey` be `ToString(nextIndex)`.
- b. Let `next` be the result of `Get(raw, nextKey)`.
- c. Let `nextSeg` be `ToString(next)`.
- d. ReturnIfAbrupt(`nextSeg`).
- e. Append in order the code unit elements of `nextSeg` to the end of `stringElements`.
- f. If `nextIndex + 1 = literalSegments`, then
 - i. Return the string value whose elements are, in order, the elements in the List `stringElements`. If length is 0, the empty string is returned.
- g. Let `next` be the result of `Get(substitutions, nextKey)`.
- h. Let `nextSub` be `ToString(next)`.
- i. ReturnIfAbrupt(`nextSub`).
- j. Append in order the code unit elements of `nextSub` to the end of `stringElements`.
- k. Let `nextIndex` be `nextIndex + 1`.

The `length` property of the `raw` function is 1.

NOTE String.raw is intended for use as a tag function of a Tagged Template String (11.2.6). When called as such the first argument will be a well formed template call site object and the rest parameter will contain the substitution values.

15.5.4 Properties of the String Prototype Object

The String prototype object is itself a String object whose value is an empty String. The String prototype object has the `[[BuiltinBrand]]` internal data property with value `BuiltinStringWrapper`.

The value of the `[[Prototype]]` internal data property of the String prototype object is the standard built-in Object prototype object (15.2.4).

15.5.4.1 String.prototype.constructor

The initial value of `String.prototype.constructor` is the built-in `String` constructor.

15.5.4.2 String.prototype.toString ()

Returns this String value. (Note that, for a String object, the `toString` method happens to return the same thing as the `valueOf` method.)

The `toString` function is not generic; it throws a **TypeError** exception if its `this` value is not a String or a String object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

15.5.4.3 String.prototype.valueOf ()

Returns this String value.

The `valueOf` function is not generic; it throws a **TypeError** exception if its `this` value is not a String or String object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

15.5.4.4 String.prototype.charAt (pos)

NOTE Returns a single element String containing the code unit at element position `pos` in the String value resulting from converting this object to a String. If there is no element at that position, the result is the empty String. The result is a String value, not a String object.

- Deleted:** `ing`
- Deleted:** calling the `[[Get]]` internal method of `raw` with argument `"length"`
- Comment [AWB10189]:** TODO: this is something we probably need if we are going to eliminate array usage `ToUint32`
- Deleted:** while `nextIndex < literalSegments`
- Deleted:** calling the `[[`
- Deleted:** `]]` internal method of
- Deleted:**
- Deleted:** with argument
- Deleted:** `elements`
- Deleted:** `elements`
- Deleted:** calling the `[[`
- Deleted:** `]]` internal method of
- Deleted:**
- Deleted:** with argument
- Deleted:** `elements`
- Deleted:** `Quasi`
- Deleted:** `quasi`

- Deleted:** (its `[[Class]]` is "String")
- Deleted:** `IsString`
- Deleted:** `NativeBrand`
- Deleted:** `StringWrapper`

- Comment [AWB9190]:** Perhaps `BMPCharAt` should be provided as an alias for this method and `charAt` should be marked as obsolete.
- Formatted:** Note
- Deleted:** `character`
- Deleted:** `String`
- Deleted:** `character`

If *pos* is a value of Number type that is an integer, then the result of `x.charAt(pos)` is equal to the result of `x.substring(pos, pos+1)`.

When the `charAt` method is called with one argument *pos*, the following steps are taken:

1. ReturnIfAbrupt(CheckObjectCoercible(this value)).
2. Let *S* be the result of calling `ToString`, giving it the `this` value as its argument.
3. ReturnIfAbrupt(*S*).
4. Let *position* be `ToInteger(pos)`.
5. ReturnIfAbrupt(*position*).
6. Let *size* be the number of elements in *S*.
7. If *position* < 0 or *position* ≥ *size*, return the empty String.
8. Return a String of length 1, containing one code unit from *S*, namely the code unit at position *position*, where the first (leftmost) code unit in *S* is considered to be at position 0, the next one at position 1, and so on.

Deleted: Call
Deleted: passing the
Deleted: as its argument
Deleted: *s*
Deleted: characters
Deleted: character
Deleted: character
Deleted: character

NOTE The `charAt` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.5 String.prototype.charCodeAt (pos)

NOTE Returns a Number (a nonnegative integer less than 2^{16}) that is the code unit value of the string element at position *pos* in the String resulting from converting this object to a String. If there is no element at that position, the result is **NaN**.

Formatted: Note
Deleted: representing
Deleted: character
Deleted: character

When the `charCodeAt` method is called with one argument *pos*, the following steps are taken:

1. ReturnIfAbrupt(CheckObjectCoercible(this value)).
2. Let *S* be the result of calling `ToString`, giving it the `this` value as its argument.
3. ReturnIfAbrupt(*S*).
4. Let *position* be `ToInteger(pos)`.
5. ReturnIfAbrupt(*position*).
6. Let *size* be the number of elements in *S*.
7. If *position* < 0 or *position* ≥ *size*, return **NaN**.
8. Return a value of Number type, whose value is the code unit value of the element at position *position* in the String *S*, where the first (leftmost) element in *S* is considered to be at position 0, the next one at position 1, and so on.

Deleted: Call CheckObjectCoercible passing the this value as its argument.

Deleted: characters
Deleted: character
Deleted: character

NOTE The `charCodeAt` function is intentionally generic; it does not require that its `this` value be a String object. Therefore it can be transferred to other kinds of objects for use as a method.

15.5.4.6 String.prototype.concat (...args)

NOTE When the `concat` method is called with zero or more arguments, it returns a String consisting of the string elements of this object (converted to a String) followed by the string elements of each of the arguments converted to a String. The result is a String value, not a String object.

Deleted: [*string1* [, *string2* [, ...]]]
Formatted: Note
Deleted: *string1*, *string2*, etc.
Deleted: characters
Deleted: characters
Deleted: *string1*, *string2*, etc. (where each argument is)
Deleted:)
Deleted: .
Deleted: strings
Deleted: Call CheckObjectCoercible passing the this value as its argument.

The following steps are taken:

1. Assert: *args* is a well-formed rest parameter object.
2. ReturnIfAbrupt(CheckObjectCoercible(this value)).
3. Let *S* be the result of calling `ToString`, giving it the `this` value as its argument.
4. ReturnIfAbrupt(*S*).
5. Let *args* be an internal list that is a copy of the argument list passed to this function.
6. Let *R* be *S*.
7. Repeat, while *args* is not empty
 - a. Remove the first element from *args* and let *next* be the value of that element.
 - b. Let *nextString* be `ToString(next)`
 - c. ReturnIfAbrupt(*nextString*).

- d. Let R be the String value consisting of the string elements in the previous value of R followed by the string elements of $nextString$.

8. Return R .

The `length` property of the `concat` method is **1**.

NOTE The `concat` function is intentionally generic; it does not require that its `this` value be a String object. Therefore it can be transferred to other kinds of objects for use as a method.

15.5.4.7 `String.prototype.indexOf (searchString, position)`

If `searchString` appears as a substring of the result of converting this object to a String, at one or more positions that are greater than or equal to `position`, then the index of the smallest such position is returned; otherwise, `-1` is returned. If `position` is `undefined`, `0` is assumed, so as to search all of the String.

The `indexOf` method takes two arguments, `searchString` and `position`, and performs the following steps:

1. ReturnIfAbrupt(CheckObjectCoercible(`this` value)).
2. Let S be the result of calling `ToString`, giving it the `this` value as its argument.
3. ReturnIfAbrupt(S).
4. Let `searchStr` be `ToString(searchString)`.
5. ReturnIfAbrupt(`searchString`).
6. Let `pos` be `ToInteger(position)`. (If `position` is `undefined`, this step produces the value `0`).
7. ReturnIfAbrupt(`pos`).
8. Let `len` be the number of elements in S .
9. Let `start` be `min(max(pos, 0), len)`.
10. Let `searchLen` be the number of elements in `searchStr`.
11. Return the smallest possible integer k not smaller than `start` such that $k + searchLen$ is not greater than `len`, and for all nonnegative integers j less than `searchLen`, the code unit at position $k+j$ of S is the same as the code unit at position j of `searchStr`; but if there is no such integer k , then return the value `-1`.

The `length` property of the `indexOf` method is **1**.

NOTE The `indexOf` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.8 `String.prototype.lastIndexOf (searchString, position)`

If `searchString` appears as a substring of the result of converting this object to a String at one or more positions that are smaller than or equal to `position`, then the index of the greatest such position is returned; otherwise, `-1` is returned. If `position` is `undefined`, the length of the String value is assumed, so as to search all of the String.

The `lastIndexOf` method takes two arguments, `searchString` and `position`, and performs the following steps:

1. ReturnIfAbrupt(CheckObjectCoercible(`this` value)).
2. Let S be the result of calling `ToString`, giving it the `this` value as its argument.
3. ReturnIfAbrupt(S).
4. Let `searchStr` be `ToString(searchString)`.
5. ReturnIfAbrupt(`searchString`).
6. Let `numPos` be `ToNumber(position)`. (If `position` is `undefined`, this step produces the value `NaN`).
7. ReturnIfAbrupt(`numPos`).
8. If `numPos` is `NaN`, let `pos` be `+∞`; otherwise, let `pos` be `ToInteger(numPos)`.
9. Let `len` be the number of elements in S .
10. Let `start` be `min(max(pos, 0), len)`.
11. Let `searchLen` be the number of elements in `searchStr`.
12. Return the largest possible nonnegative integer k not larger than `start` such that $k + searchLen$ is not greater than `len`, and for all nonnegative integers j less than `searchLen`, the code unit at position $k+j$ of S is the same as the code unit at position j of `searchStr`; but if there is no such integer k , then return the value `-1`.

Deleted: characters

Deleted: characters

Deleted: `ToString()`

Deleted: `)`

Deleted: Call `CheckObjectCoercible` passing the `this` value as its argument.

Deleted: characters

Deleted: characters

Deleted: character

Deleted: character

The `length` property of the `lastIndexOf` method is 1.

NOTE The `lastIndexOf` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.9 `String.prototype.localeCompare (that)`

When the `localeCompare` method is called with one argument `that`, it returns a Number other than `NaN` that represents the result of a locale-sensitive String comparison of the `this` value (converted to a String) with `that` (converted to a String). The two Strings are `S` and `That`. The two Strings are compared in an implementation-defined fashion. The result is intended to order String values in the sort order specified by the system default locale, and will be negative, zero, or positive, depending on whether `S` comes before `That` in the sort order, the Strings are equal, or `S` comes after `That` in the sort order, respectively.

Before perform the comparisons the following steps are performed to prepare the Strings:

1. ReturnIfAbrupt(CheckObjectCoercible(this value)).
2. Let `S` be the result of calling `ToString`, giving it the `this` value as its argument.
3. ReturnIfAbrupt(S).
4. Let `That` be `ToString(that)`.
5. ReturnIfAbrupt(That).

Deleted: Call `CheckObjectCoercible` passing the `this` value as its argument.

The `localeCompare` method, if considered as a function of two arguments `this` and `that`, is a consistent comparison function (as defined in 15.4.4.11) on the set of all Strings.

The actual return values are implementation-defined to permit implementers to encode additional information in the value, but the function is required to define a total ordering on all Strings and to return 0 when comparing Strings that are considered canonically equivalent by the Unicode standard.

If no language-sensitive comparison at all is available from the host environment, this function may perform a bitwise comparison.

NOTE 1 The `localeCompare` method itself is not directly suitable as an argument to `Array.prototype.sort` because the latter requires a function of two arguments.

NOTE 2 This function is intended to rely on whatever language-sensitive comparison functionality is available to the ECMAScript environment from the host environment, and to compare according to the rules of the host environment's current locale. It is strongly recommended that this function treat Strings that are canonically equivalent according to the Unicode standard as identical (in other words, compare the Strings as if they had both been converted to Normalised Form C or D first). It is also recommended that this function not honour Unicode compatibility equivalences or decompositions.

NOTE 3 The second parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

NOTE 4 The `localeCompare` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.10 `String.prototype.match (regexp)`

When the `match` method is called with argument `regexp`, the following steps are taken:

1. ReturnIfAbrupt(CheckObjectCoercible(this value)).
2. Let `S` be the result of calling `ToString`, giving it the `this` value as its argument.
3. ReturnIfAbrupt(S).
4. If `Type(regexp)` is Object and `regexp` has a `[[BuiltInBrand]]` internal data property whose value is `BuiltinRegExp`, then let `rx` be `regexp`;
5. Else, let `rx` be the result of the abstract operation `RegExpCreate` (15.10.4.1) with arguments `regexp` and `undefined`.
6. ReturnIfAbrupt(rx).

Deleted: Call `CheckObjectCoercible` passing the `this` value as its argument.

Deleted: the value of the `[[Class]]` internal property of

Deleted: is "RegExp"

Deleted: the

Deleted: IsRegExp

Deleted: NativeBrand

Deleted: NativeRegExp

Deleted: abstraction operation

Deleted: a new `RegExp` object created as if by the expression `new RegExp (regexp)` where `RegExp` is the standard built-in constructor with that name

7. Let *global* be the result of Get(rx, "global").
8. ReturnIfAbrupt(global).
9. If *global* is not **true**, then
 - a. Return the result of calling the abstract operation RegExpExec (see 15.10.6.2) with arguments *rx* and *S*.
10. Else, *global* is **true**.
 - a. Let putStatus be the result of Put(rx, "lastIndex", 0, true).
 - b. ReturnIfAbrupt(putStatus).
 - c. Let *A* be the result of the abstract operation ArrayCreate with argument 0.
 - d. Let *previousLastIndex* be 0.
 - e. Let *n* be 0.
 - f. Let *lastMatch* be **false**.
 - g. Repeat, while *lastMatch* is **true**
 - i. Let *result* be the result of calling the abstract operation RegExpExec (see 15.10.6.2), with arguments *rx* and *S*.
 - ii. ReturnIfAbrupt(result).
 - iii. If *result* is **null**, then set *lastMatch* to **false**.
 - iv. Else, *result* is not **null**
 1. Let *thisIndex* be the result of Get(rx, "lastIndex").
 2. ReturnIfAbrupt(thisIndex).
 3. If *thisIndex* = *previousLastIndex* then
 - a. Let putStatus be the result of Put(rx, "lastIndex", thisIndex+1, true).
 - b. ReturnIfAbrupt(putStatus).
 - c. Set *previousLastIndex* to *thisIndex*+1.
 4. Else
 - a. Set previousLastIndex to thisIndex.
 5. Let *matchStr* be the result of Get(result, "0").
 6. Let *defineStatus* be the result of calling the [[DefineOwnProperty]] internal method of *A* with arguments ToString(n) and the Property Descriptor {[[Value]]: matchStr, [[Writable]]: true, [[Enumerable]]: true, [[configurable]]: true}.
 7. ReturnIfAbrupt(defineStatus).
 8. Increment *n*.
 - h. If *n* = 0, then return **null**.
 - i. Return *A*.

NOTE The `match` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.11 `String.prototype.replace (searchValue, replaceValue)`

First set *string* according to the following steps:

1. ReturnIfAbrupt(CheckObjectCoercible(this value)).
2. Let *string* be the result of calling `ToString`, giving it the `this` value as its argument.
3. ReturnIfAbrupt(string).

If *searchValue* is a regular expression (an object that has a [[BuiltinBrand]] internal data property whose value is BuiltinRegExp), do the following: If *searchValue.global* is **false**, then search *string* for the first match of the regular expression *searchValue*. If *searchValue.global* is **true**, then search *string* for all matches of the regular expression *searchValue*. Do the search in the same manner as in `String.prototype.match`, including the update of *searchValue.lastIndex*. Let *m* be the number of left capturing parentheses in *searchValue* (using *NcapturingParens* as specified in 15.10.2.1).

If *searchValue* is not a regular expression, let *searchString* be `ToString(searchValue)` and search *string* for the first occurrence of *searchString*. Let *m* be 0.

If *replaceValue* is a function, then for each matched substring, call the function with the following *m* + 3 arguments. Argument 1 is the substring that matched. If *searchValue* is a regular expression, the next *m* arguments are all of the captures in the MatchResult (see 15.10.2.1). Argument *m* + 2 is the offset within *string* where the match occurred, and argument *m* + 3 is *string*. The result is a String value derived from the original

- Deleted:** calling the [[...et]] internal method of... ...x with
- Deleted:** <#>Let *exec* be the standard built-in function `RegExp.prototype.exec` (see 15.10.6.2)
- Deleted:** [[Call]] internal method of *exec*...bstract operation
- Deleted:** ,
- Deleted:** calling Call the [[...ut]] internal method of... ...x
- Deleted:** ... and
- Deleted:** and
- Deleted:** a new array created as if by the expression `new Array()` where `Array` is the standard built-in constructor with that name
- Deleted:** abstraction operation
- Deleted:** (15.4)
- Deleted:** [[Call]] internal method of *exec*...with arguments
- Deleted:** ,
- Deleted:** calling the [[...et]] internal method of... ...x with
- Deleted:** calling Call the [[...ut]] internal method of... ...x
- Deleted:** and
- Deleted:** and
- Deleted:** ,
- Deleted:** set
- Deleted:** calling the [[...et]] internal method of... ...result
- Deleted:** Call
- Deleted:**), ... and the Property Descriptor {[[Value]]:...

input by replacing each matched substring with the corresponding return value of the function call, converted to a String if need be.

Otherwise, let *newstring* denote the result of converting *replaceValue* to a String. The result is a String value derived from the original input String by replacing each matched substring with a String derived from *newstring* by replacing elements in *newstring* by replacement text as specified in Table 34. These \$ replacements are done left-to-right, and, once such a replacement is performed, the new replacement text is not subject to further replacements. For example, "\$1,\$2".replace(/(\\$(\d))/g, "\$\$1-\$1\$2") returns "\$1-\$11,\$1-\$22". A \$ in *newstring* that does not match any of the forms below is left as is.

Table 34— Replacement Text Symbol Substitutions

Code unit	Unicode Characters	Replacement text
0x0024, 0x0024	\$\$	\$
0x0024, 0x0026	\$&	The matched substring.
0x0024, 0x0060	\$`	The portion of <i>string</i> that precedes the matched substring.
0x0024, 0x0027	\$`	The portion of <i>string</i> that follows the matched substring.
0x0024, N where n is one of 0 1 2 3 4	\$n	The <i>n</i> th capture, where <i>n</i> is a single digit in the range 1 to 9 and \$ <i>n</i> is not followed by a decimal digit. If <i>n</i> ≤ <i>m</i> and the <i>n</i> th capture is undefined, use the empty String instead. If <i>n</i> > <i>m</i> , the result is implementation-defined.
0x0030< N ≤ 0x0039		5 6 7 8 9
0x0024, N, N where n is one of 0 1 2 3 4	\$nn	The <i>nn</i> th capture, where <i>nn</i> is a two-digit decimal number in the range 01 to 99. If <i>nn</i> ≤ <i>m</i> and the <i>nn</i> th capture is undefined, use the empty String instead. If <i>nn</i> > <i>m</i> , the result is implementation-defined.
0x0030< N ≤ 0x0039		5 6 7 8 9

NOTE The `replace` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.12 String.prototype.search (regexp)

When the search method is called with argument *regexp*, the following steps are taken:

1. ReturnIfAbrupt(CheckObjectCoercible(this value)).
2. Let *string* be the result of calling `ToString`, giving it the `this` value as its argument.
3. ReturnIfAbrupt(string).
4. If Type(*regexp*) is Object and *regexp* has a [[BuiltinBrand]] internal data property whose value is `BuiltinRegExp`, then,
 - a. Let *rx* be *regexp*;
5. Else,
 - a. Let *rx* be the result of the abstract operation `RegExpCreate` (15.10.4.1) with arguments *regexp* and undefined.
6. ReturnIfAbrupt(rx).
7. Search the value *string* from its beginning for an occurrence of the regular expression pattern *rx*. Let *result* be a Number indicating the offset within *string* where the pattern matched, or -1 if there was no match. If an abrupt completion occurs during the search, *result* is that Completion Record. The `lastIndex` and `global` properties of *regexp* are ignored when performing the search. The `lastIndex` property of *regexp* is left unchanged.
8. Return *result*.

NOTE The `search` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.13 String.prototype.slice (start, end)

The `slice` method takes two arguments, *start* and *end*, and returns a substring of the result of converting this object to a String, starting from element position *start* and running to, but not including, element position *end* (or through the end of the String if *end* is undefined). If *start* is negative, it is treated as *sourceLength*+*start*

Deleted: characters
Deleted:
Deleted: Table 30
Comment [AWB7191]: Needs a real algorithm and also completion record checks.
Deleted: 3230

Deleted: \$`
Deleted: '

Deleted: Call CheckObjectCoercible passing this value as its argument.
Deleted: *S*
Deleted: the value of the [[Class]] internal property of
Deleted: the
Deleted: IsRegExp
Deleted: NativeBrand
Deleted: NativeRegExp
Deleted: is "RegExp"
Deleted: 1
Deleted: ,
Deleted: let
Deleted: abstraction operation
Deleted: a new RegExp object created as if by the expression `new RegExp (regexp)` where `RegExp` is the standard built-in constructor with that name
Comment [AWB7192]: Needs better spec language
Deleted: character
Deleted: character

where *sourceLength* is the length of the String. If *end* is negative, it is treated as *sourceLength+end* where *sourceLength* is the length of the String. The result is a String value, not a String object. The following steps are taken:

1. ReturnIfAbrupt(CheckObjectCoercible(this value)).
2. Let *S* be the result of calling ToString, giving it the **this** value as its argument.
3. ReturnIfAbrupt(*S*).
4. Let *len* be the number of elements in *S*.
5. Let *intStart* be ToInteger(*start*).
6. If *end* is **undefined**, let *intEnd* be *len*; else let *intEnd* be ToInteger(*end*).
7. If *intStart* is negative, let *from* be max(*len* + *intStart*, 0); else let *from* be min(*intStart*, *len*).
8. If *intEnd* is negative, let *to* be max(*len* + *intEnd*, 0); else let *to* be min(*intEnd*, *len*).
9. Let *span* be max(*to* - *from*, 0).
10. Return a String value containing *span* consecutive elements from *S* beginning with the element at position *from*.

Deleted: Call CheckObjectCoercible passing the **this** value its argument.

Deleted: characters

Deleted: characters

Deleted: character

The **length** property of the **slice** method is **2**.

NOTE The **slice** function is intentionally generic; it does not require that its **this** value be a String object. Therefore it can be transferred to other kinds of objects for use as a method.

15.5.4.14 String.prototype.split (separator, limit)

Returns an Array object into which substrings of the result of converting this object to a String have been stored. The substrings are determined by searching from left to right for occurrences of *separator*; these occurrences are not part of any substring in the returned array, but serve to divide up the String value. The value of *separator* may be a String of any length or it may be a RegExp object (i.e., an object with a **[[BuiltinBrand]]** internal data property whose value is **BuiltinRegExp**, see 15.10).

Deleted: the

Deleted: IsRegExp

Deleted: NativeBrand

Deleted: NativeRegExp

Deleted: whose [[Class]] internal property is "RegExp"

Deleted: characters

Deleted: character

The value of *separator* may be an empty String, an empty regular expression, or a regular expression that can match an empty String. In this case, *separator* does not match the empty substring at the beginning or end of the input String, nor does it match the empty substring at the end of the previous separator match. (For example, if *separator* is the empty String, the String is split up into individual code unit elements; the length of the result array equals the length of the String, and each substring contains one code unit.) If *separator* is a regular expression, only the first match at a given position of the **this** String is considered, even if backtracking could yield a non-empty-substring match at that position. (For example, "*ab*".split(/a*?/) evaluates to the array `["a", "b"]`, while "*ab*".split(/a*/) evaluates to the array `["", "b"]`.)

If the **this** object is (or converts to) the empty String, the result depends on whether *separator* can match the empty String. If it can, the result array contains no elements. Otherwise, the result array contains one element, which is the empty String.

If *separator* is a regular expression that contains capturing parentheses, then each time *separator* is matched the results (including any **undefined** results) of the capturing parentheses are spliced into the output array. For example,

```
"A<B>bold</B>and<CODE>coded</CODE>".split(/<(\w)?([^\>]+)>/)
```

evaluates to the array

```
[ "A", undefined, "B", "bold", "/", "B", "and", undefined,  
"CODE", "coded", "/", "CODE", "" ]
```

If *separator* is **undefined**, then the result array contains just one String, which is the **this** value (converted to a String). If *limit* is not **undefined**, then the output array is truncated so that it contains no more than *limit* elements.

When the **split** method is called, the following steps are taken:

1. ReturnIfAbrupt(CheckObjectCoercible(this value)).
2. Let *S* be the result of calling ToString, giving it the **this** value as its argument.

Deleted: Call CheckObjectCoercible passing the **this** value its argument.

3. `ReturnIfAbrupt(S)`.
4. Let A be the result of the abstract operation `ArrayCreate` with argument 0.
5. Let $lengthA$ be 0.
6. If $limit$ is `undefined`, let $lim = 2^{32}-1$; else let $lim = \text{ToUint32}(limit)$.
7. Let s be the number of elements in S .
8. Let $p = 0$.
9. If `separator` has a `[[BuiltInBrand]]` internal data property whose value is `BuiltinRegExp`, let R be `separator`; otherwise let R be `ToString(separator)`.
10. `ReturnIfAbrupt(separator)`.
11. If $lim = 0$, return A .
12. If `separator` is `undefined`, then
 - a. Call the `[[DefineOwnProperty]]` internal method of A with arguments "0" and Property Descriptor `{[[Value]]: S, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 - b. Assert: the previous step will never result in an abrupt completion.
 - c. Return A .
13. If $s = 0$, then
 - a. Call `SplitMatch(S, 0, R)` and let z be its MatchResult result.
 - b. If z is `failure`, return A .
 - c. Call the `[[DefineOwnProperty]]` internal method of A with arguments "0" and Property Descriptor `{[[Value]]: S, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 - d. Assert: the previous step will never result in an abrupt completion.
 - e. Return A .
14. Let $q = p$.
15. Repeat, while $q \neq s$
 - a. Call `SplitMatch(S, q, R)` and let z be its MatchResult result.
 - b. If z is `failure`, then let $q = q+1$.
 - c. Else, z is not `failure`.
 - i. z must be a State. Let e be z 's endIndex and let cap be z 's captures array.
 - ii. If $e = p$, then let $q = q+1$.
 - iii. Else, $e \neq p$.
 1. Let T be a String value equal to the substring of S consisting of the elements at positions p (inclusive) through q (exclusive).
 2. Call the `[[DefineOwnProperty]]` internal method of A with arguments `ToString(lengthA)` and Property Descriptor `{[[Value]]: T, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 3. Assert: the previous step will never result in an abrupt completion.
 4. Increment $lengthA$ by 1.
 5. If $lengthA = lim$, return A .
 6. Let $p = e$.
 7. Let $i = 0$.
 8. Repeat, while i is not equal to the number of elements in cap .
 - a. Let $i = i+1$.
 - b. Call the `[[DefineOwnProperty]]` internal method of A with arguments `ToString(cap[i])` and Property Descriptor `{[[Value]]: cap[i], [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 - c. Assert: the previous step will never result in an abrupt completion.
 - d. Increment $lengthA$ by 1.
 - e. If $lengthA = lim$, return A .
 9. Let $q = p$.
 16. Let T be a String value equal to the substring of S consisting of the elements at positions p (inclusive) through s (exclusive).
 17. Call the `[[DefineOwnProperty]]` internal method of A with arguments `ToString(lengthA)` and Property Descriptor `{[[Value]]: T, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
 18. Assert: the previous step will never result in an abrupt completion.
 19. Return A .

Runtime Semantics: `SplitMatch` Abstract Operation

The abstract operation `SplitMatch` takes three parameters, a String S , an integer q , and a String or RegExp R , and performs the following in order to return a MatchResult (see 15.10.2.1):

Deleted: a new array created as if by the expression `new Array()` where `Array` is the standard built-in constructor with that name

Deleted: characters

Deleted: the

Deleted: `IsRegExp`

Deleted: `NativeBrand`

Deleted: `NativeRegExp`

Deleted: is a `RegExp` object (its `[[Class]]` is `"RegExp"`)

Deleted: =

Deleted: =

Deleted: `e`

Deleted: "

Deleted: , and false

Deleted: "

Deleted: , and false

Deleted: ,

Deleted: ,

Deleted: characters

Deleted:),

Deleted: , and false

Deleted:),

Deleted: , and false

Deleted: characters

Deleted:),

Deleted: , and false

1. If R has a `[[BuiltInBrand]]` internal data property whose value is `BuiltinRegExp`, then
 - a. Call the `[[Match]]` internal method of R giving it the arguments S and q , and return the `MatchResult` result.
2. $\text{Type}(R)$ must be `String`. Let r be the number of `elements` in R .
3. Let s be the number of `elements` in S .
4. If $q+r > s$ then return the `MatchResult` **failure**.
5. If there exists an integer i between 0 (inclusive) and r (exclusive) such that the `code unit` at position $q+i$ of S is different from the `code unit` at position i of R , then return **failure**.
6. Let cap be an empty array of captures (see 15.10.2.1).
7. Return the State $(q+r, cap)$. (see 15.10.2.1)

The `length` property of the `split` method is 2.

NOTE 1 The `split` method ignores the value of separator `.global` for separators that are `RegExp` objects.

NOTE 2 The `split` function is intentionally generic; it does not require that its `this` value be a `String` object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.15 String.prototype.substring (start, end)

The `substring` method takes two arguments, `start` and `end`, and returns a substring of the result of converting this object to a `String`, starting from `element position start` and running to, but not including, `element position end` of the `String` (or through the end of the `String` if `end` is `undefined`). The result is a `String` value, not a `String` object.

If either argument is `NaN` or negative, it is replaced with zero; if either argument is larger than the length of the `String`, it is replaced with the length of the `String`.

If `start` is larger than `end`, they are swapped.

The following steps are taken:

1. `ReturnIfAbrupt(CheckObjectCoercible(this value))`.
2. Let S be the result of calling `ToString`, giving it the `this` value as its argument.
3. `ReturnIfAbrupt(S)`.
4. Let len be the number of `elements` in S .
5. Let $intStart$ be `ToInteger(start)`.
6. If `end` is `undefined`, let $intEnd$ be len ; else let $intEnd$ be `ToInteger(end)`.
7. Let $finalStart$ be $\min(\max(intStart, 0), len)$.
8. Let $finalEnd$ be $\min(\max(intEnd, 0), len)$.
9. Let $from$ be $\min(finalStart, finalEnd)$.
10. Let to be $\max(finalStart, finalEnd)$.
11. Return a `String` whose length is $to - from$, containing `code units` from S , namely the `code units` with indices $from$ through $to - 1$, in ascending order.

The `length` property of the `substring` method is 2.

NOTE The `substring` function is intentionally generic; it does not require that its `this` value be a `String` object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.16 String.prototype.toLowerCase ()

This function interprets a string value as a sequence of code points, as described in 8.4. The following steps are taken:

1. `ReturnIfAbrupt(CheckObjectCoercible(this value))`.
2. Let S be the result of calling `ToString`, giving it the `this` value as its argument.
3. `ReturnIfAbrupt(S)`.

Deleted: the

Deleted: `IsRegExp`

Deleted: `NativeBrand`

Deleted: `NativeRegExp`

Deleted: is a `RegExp` object (its `[[Class]]` is "`RegExp`")

Deleted: `characters`

Deleted: `characters`

Deleted: `character`

Deleted: `character`

Comment [AWB7193]: TODO: Probably needs some Completion Record work, assume that `[[Match]]` can fail

Deleted: `character`

Deleted: `character`

Deleted: Call `CheckObjectCoercible` passing the `this` value and its argument.

Deleted: `characters`

Deleted: `characters`

Deleted: `characters`

4. Let *cpList* be a List containing in order the code points as defined in 8.4 of *S*, starting at the first element of *S*.
5. For each code point *c* in *cpList*, if the Unicode Character Database provides a language insensitive lower case equivalent of *c* then replace *c* in *cpList* with that equivalent code point(s).
6. Let *cuList* be a new List.
7. For each code point *c* in *cpList*, in order, append to *cuList* the elements of the UTF-16 Encoding (clause 6) of *c*.
8. Let *L* be a String whose elements are, in order, the elements of *cuList*.
9. Return *L*.

The result must be derived according to the case mappings in the Unicode character database (this explicitly includes not only the `UnicodeData.txt` file, but also the `SpecialCasings.txt` file that accompanies it).

NOTE 1 The case mapping of some code points may produce multiple code points. In this case the result String may not be the same length as the source String. Because both `toUpperCase` and `toLowerCase` have context-sensitive behaviour, the functions are not symmetrical. In other words, `s.toUpperCase().toLowerCase()` is not necessarily equal to `s.toLowerCase()`.

NOTE 2 The `toLowerCase` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

Deleted: replace

Deleted: where each character of *L* is either the Unicode lowercase equivalent of the corresponding character of *S* or the actual corresponding character of *S* if no Unicode lowercase equivalent exists

Deleted: For the purposes of this operation, the 16-bit code units of the Strings are treated as code points in the Unicode Basic Multilingual Plane. Surrogate code points are directly transferred from *S* to *L* without any mapping.

Deleted: in Unicode 2.1.8 and later

Deleted: characters

Deleted: characters

15.5.4.17 `String.prototype.toLocaleLowerCase ()`

This function interprets a string value as a sequence of code points, as described in 8.4.

This function works exactly the same as `toLowerCase` except that its result is intended to yield the correct result for the host environment's current locale, rather than a locale-independent result. There will only be a difference in the few cases (such as Turkish) where the rules for that language conflict with the regular Unicode case mappings.

NOTE 1 The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

NOTE 2 The `toLocaleLowerCase` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

Deleted: characters

15.5.4.18 `String.prototype.toUpperCase ()`

This function interprets a string value as a sequence of code points, as described in 8.4.

This function behaves in exactly the same way as `string.prototype.toLowerCase`, except that code points are mapped to their uppercase equivalents as specified in the Unicode Character Database.

NOTE The `toUpperCase` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.19 `String.prototype.toLocaleUpperCase ()`

This function interprets a string value as a sequence of code points, as described in 8.4.

This function works exactly the same as `toUpperCase` except that its result is intended to yield the correct result for the host environment's current locale, rather than a locale-independent result. There will only be a difference in the few cases (such as Turkish) where the rules for that language conflict with the regular Unicode case mappings.

NOTE 1 The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

NOTE 2 The `toLocaleUpperCase` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.20 String.prototype.trim ()

This function interprets a string value as a sequence of code points, as described in 8.4.

The following steps are taken:

1. ReturnIfAbrupt(CheckObjectCoercible(this value)).
2. Let S be the result of calling `ToString`, giving it the `this` value as its argument.
3. ReturnIfAbrupt(S).
4. Let T be a String value that is a copy of S with both leading and trailing white space removed. The definition of white space is the union of `WhiteSpace` and `LineTerminator`. When determining whether a Unicode character is in Unicode general category "Zs", code unit sequences are interpreted as UTF-16 encoded code point sequences as specified in 8.4.
5. Return T .

Deleted: Call `CheckObjectCoercible` passing the `this` value as its argument.

NOTE The `trim` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.21 String.prototype.repeat (count)

The following steps are taken:

1. ReturnIfAbrupt(CheckObjectCoercible(this value)).
2. Let S be the result of calling `ToString`, giving it the `this` value as its argument.
3. ReturnIfAbrupt(S).
4. Let n be the result of calling `ToInteger(count)`.
5. ReturnIfAbrupt(n).
6. If $n < 0$, then throw a `RangeError` exception.
7. If n is $+\infty$, then throw a `RangeError` exception.
8. Let T be a String value that is made from n copies of S appended together. If n is 0, T is the empty String.
9. Return T .

Deleted: \leq

Deleted: rh

Deleted: E

Deleted: characters

NOTE 1 This method creates a String consisting of the string elements of this object (converted to String) repeated `count` time.

NOTE 2 The `repeat` function is intentionally generic; it does not require that its `this` value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.22 String.prototype.startsWith (searchString [, position])

The following steps are taken:

1. ReturnIfAbrupt(CheckObjectCoercible(this value)).
2. Let S be the result of calling `ToString`, giving it the `this` value as its argument.
3. ReturnIfAbrupt(S).
4. Let $searchStr$ be `ToString(searchString)`.
5. ReturnIfAbrupt($searchStr$).
6. Let pos be `ToInteger(position)`. (If `position` is `undefined`, this step produces the value `0`.)
7. ReturnIfAbrupt(pos).
8. Let len be the number of elements in S .
9. Let $start$ be $\min(\max(pos, 0), len)$.
10. Let $searchLength$ be the number of elements in `searchString`.
11. If $searchLength + start$ is greater than len , return `false`.
12. If the `searchLength` sequence of elements of S starting at $start$ is the same as the full element sequence of `searchString`, return `true`.
13. Otherwise, return `false`.

Deleted: characters

Deleted: characters

Deleted: characters

Deleted: character

The `length` property of the `startsWith` method is 1.

NOTE 1 This method returns **true** if the sequence of elements of *searchString* converted to a String is the same as the corresponding elements of this object (converted to a String) starting at *position*. Otherwise returns **false**.

Deleted: characters

Deleted: characters

NOTE 2 The **startsWith** function is intentionally generic; it does not require that its **this** value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.23 String.prototype.endsWith (searchString [, endPosition])

The following steps are taken:

1. **ReturnIfAbrupt(CheckObjectCoercible(this value)).**
2. Let *S* be the result of calling **ToString**, giving it the **this** value as its argument.
3. **ReturnIfAbrupt(*S*).**
4. Let *searchStr* be **ToString(searchString)**.
5. **ReturnIfAbrupt(*searchStr*).**
6. Let *len* be the number of elements in *S*.
7. If *endPosition* is **undefined**, let *pos* be *len*, else let *pos* be **ToInteger(endPosition)**.
8. **ReturnIfAbrupt(*pos*).**
9. Let *end* be **min(max(*pos*, 0), *len*)**.
10. Let *searchLength* be the number of elements in *searchString*.
11. Let *start* be *end - searchLength*.
12. If *start* is less than 0, return **false**.
13. If the *searchLength* sequence of elements of *S* starting at *start* is the same as the full element sequence of *searchString*, return **true**.
14. Otherwise, return **false**.

The **length** property of the **endsWith** method is **1**.

NOTE 1 Returns **true** if the sequence of elements of *searchString* converted to a String is the same as the corresponding elements of this object (converted to a String) starting at *endPosition - length(this)*. Otherwise returns **false**.

Deleted: characters

Deleted: characters

NOTE 2 The **endsWith** function is intentionally generic; it does not require that its **this** value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.24 String.prototype.contains (searchString, position = 0)

The **contains** method takes two arguments, *searchString* and *position*, and performs the following steps:

1. **ReturnIfAbrupt(CheckObjectCoercible(this value)).**
2. Let *S* be the result of calling **ToString**, giving it the **this** value as its argument.
3. **ReturnIfAbrupt(*S*).**
4. Let *searchStr* be **ToString(searchString)**.
5. **ReturnIfAbrupt(*searchStr*).**
6. Let *pos* be **ToInteger(position)**. (If *position* is **undefined**, this step produces the value **0**).
7. **ReturnIfAbrupt(*pos*).**
8. Let *len* be the number of elements in *S*.
9. Let *start* be **min(max(*pos*, 0), *len*)**.
10. Let *searchLen* be the number of characters in *searchStr*.
11. If there exists any integer *k* not smaller than *start* such that *k + searchLen* is not greater than *len*, and for all nonnegative integers *j* less than *searchLen*, the character at position *k+j* of *S* is the same as the character at position *j* of *searchStr*, return **true**; but if there is no such integer *k*, return **false**.

Deleted: [

Deleted:]

Deleted: characters

The **length** property of the **contains** method is **1**.

NOTE 1 If *searchString* appears as a substring of the result of converting this object to a String, at one or more positions that are greater than or equal to *position*, then return **true**; otherwise, returns **false**. If *position* is **undefined**, 0 is assumed, so as to search all of the String.

NOTE 2 The **contains** function is intentionally generic; it does not require that its **this** value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

15.5.4.25 String.prototype.codePointAt (pos)

NOTE Returns a Number (a nonnegative integer less than 1114112) that is the UTF-16 encoded code point value starting at the string element at position *pos* in the String resulting from converting this object to a String. If there is no element at that position, the result is **NaN**. If a valid UTF-16 surrogate pair does not begin at *pos*, the result is the code unit at *pos*.

When the `codePointAt` method is called with one argument *pos*, the following steps are taken:

1. `ReturnIfAbrupt(CheckObjectCoercible(this value)).`
2. Let *S* be the result of calling `ToString`, giving it the `this` value as its argument.
3. `ReturnIfAbrupt(S).`
4. Let *position* be `ToInteger(pos).`
5. `ReturnIfAbrupt(position).`
6. Let *size* be the number of elements in *S*.
7. If *position* < 0 or *position* > *size*, return **undefined**.
8. Let *first* be the code unit value of the element at index *position* in the String *S*.
9. If *first* < 0xD800 or *first* > 0xDBFF or *position*+1 = *size*, then return *first*.
10. Let *second* be the code unit value of the element at index *position*+1 in the String *S*.
11. If *second* < 0xDC00 or *second* > 0xDFFF, then return *first*.
12. Return $((first - 0xD800) \times 1024) + (second - 0xDC00) + 0x10000$.

NOTE The `codePointAt` function is intentionally generic; it does not require that its `this` value be a String object. Therefore it can be transferred to other kinds of objects for use as a method.

15.5 Properties of String Instances

String instances are String exotic objects and have the internal methods and internal data properties specified for such objects. String instances inherit properties from the String prototype object. String instances also have a `length` property, and a set of enumerable properties with array index names.

15.5.5.1 length

The number of elements in the String value represented by this String object.

Once a String object is created, this property is unchanging. It has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

15.6 Boolean Objects

15.6.1 The Boolean Constructor Called as a Function

When `Boolean` is called as a function rather than as a constructor, it performs a type conversion.

15.6.1.1 Boolean (value)

Returns a Boolean value (not a Boolean object) computed by `ToBoolean(value)`.

15.6.2 The Boolean Constructor

When `Boolean` is called as part of a `new` expression it is a constructor: it initialises the newly created `ordinary` object.

15.6.2.1 new Boolean (value)

The `[[Prototype]]` internal data property of the newly constructed object is set to the original Boolean prototype object, the one that is the initial value of `Boolean.prototype` (15.6.3.1).

Comment [AWB9194]: Do we also need `UnicodeCharAt` that returns a string of length 1 or 2?

Deleted: dsa

Comment [AWB9195]: Note that this is inconsistent with the pre-existing behaviour of `charCodeAt` which returns `NaN` for out of bounds positions

Deleted: `NaN`

Deleted: `position`

Deleted: ., where the first (leftmost) element in *S* is considered to be at position 0, the next one at position 1, and on.

Deleted: `position`

Deleted: `first`

Deleted: `charCode`

Deleted: 15.5.4.25 `String.prototype.toArray()`
The following steps are taken:
`ReturnIfAbrupt(CheckObjectCoercible(this value)).`
Let *S* be the result of calling `ToString`, giving it the this value as its argument.
`ReturnIfAbrupt(S).¶`

Let *len* be the number of characters in *S*.
Let *array* be the result of the abstraction operation `ArrayCreate` (15.4) with argument *len*.
Let *n* be 0¶

Repeat, while *n* < *len*:
Let *c* be the character at position *n* in *S*.
Call the `[[DefineOwnProperty]]` internal method of *array* with arguments `ToString(n)`, the `PropertyDescriptor` { `[[Value]]: c, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true` }, and `false`.
Increment *n* by 1.¶

Return *array*.¶

The length property of the `toArray` method is 0.¶
NOTE 1 Returns an Array object with elements corresponding to the characters of this object (converted to a String).¶

NOTE 2 The `toArray` function is intentionally generic; it does not require that its this value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.¶

Deleted: and their `[[Class]]` have a `[[IsStringNativeBrand]]` internal property with value `StringWrapper`

Deleted: `value` is "String"

Deleted: .

Deleted: a `[[PrimitiveValue]]` internal property,

Deleted: The `[[PrimitiveValue]]` internal property is the String value represented by this String object. The array index named properties correspond to the individual characters elements of the String value. A special `[[GetOwnProperty]]` internal method is used to specify the number, values, and attributes of the array index name properties.¶

Deleted: characters

Deleted: 15.5.5.2 `[[GetOwnProperty]] (P)`
String objects use a variation of the `[[GetOwnProperty]]` internal method used for other native ECMAScript objects (8.12.1). This special internal method provides access to named properties corresponding to the individual characters elements of String objects.¶
Assume *S* is a String object and *P* is a String.¶

The newly constructed Boolean object has a [[BuiltinBrand]] internal data property with value BuiltinBooleanWrapper.

- Deleted:** [[Class]] internal property of the
- Deleted:** is set to "Boolean"
- Deleted:** IsBoolean
- Deleted:** NativeBrand
- Deleted:** BooleanWrapper
- Deleted:** PrimitiveValue
- Deleted:** Value

The [[BooleanData]] internal data property of the newly constructed Boolean object is set to ToBoolean(value).

The [[Extensible]] internal data property of the newly constructed object is set to **true**.

15.6.3 Properties of the Boolean Constructor

The value of the [[Prototype]] internal data property of the Boolean constructor is the Function prototype object (15.3.4).

Besides the length property (whose value is **1**), the Boolean constructor has the following property:

- Deleted:** the internal properties and

15.6.3.1 Boolean.prototype

The initial value of Boolean.prototype is the Boolean prototype object (15.6.4).

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.6.4 Properties of the Boolean Prototype Object

The Boolean prototype object is itself a Boolean object, whose [[BooleanData]] internal data property has the value **false**. The Boolean prototype object has a [[BuiltinBrand]] internal data property whose value is BuiltinBooleanWrapper.

- Deleted:** (its [[Class]] is "Boolean")
- Deleted:** value
- Deleted:** Value
- Deleted:** is
- Deleted:** IsBoolean
- Deleted:** NativeBrand
- Deleted:** BooleanWrapper

The value of the [[Prototype]] internal data property of the Boolean prototype object is the standard built-in Object prototype object (15.2.4).

15.6.4.1 Boolean.prototype.constructor

The initial value of Boolean.prototype.constructor is the built-in **Boolean** constructor.

15.6.4.2 Boolean.prototype.toString()

The following steps are taken:

1. Let *B* be the **this** value.
2. If Type(B) is Boolean, then let *b* be *B*.
3. Else if Type(B) is Object and *B* has a [[BooleanData]] internal data property, then let *b* be the value of the [[BooleanData]] internal data property of *B*.
4. Else throw a **TypeError** exception.
5. If *b* is **true**, then return "**true**"; else return "**false**".

- Deleted:** the value of the [[Class]] internal property of
- Deleted:** is "Boolean"
- Deleted:** IsBoolean
- Deleted:** NativeWrapper
- Deleted:** whose value is BooleanWrapper
- Deleted:** PrimitiveValue

15.6.4.3 Boolean.prototype.valueOf()

The following steps are taken:

1. Let *B* be the **this** value.
2. If Type(B) is Boolean, then let *b* be *B*.
3. Else if Type(B) is Object and *B* has a [[BooleanData]] internal data property, then let *b* be the value of the [[BooleanData]] internal data property of *B*.
4. Else throw a **TypeError** exception.
5. Return *b*.

- Deleted:** the value of the [[Class]] internal property of
- Deleted:** is "Boolean"
- Deleted:** IsBoolean
- Deleted:** NativeWrapper
- Deleted:** whose value is BooleanWrapper
- Deleted:** PrimitiveValue

15.6.5 Properties of Boolean Instances

Boolean instances are ordinary objects that inherit properties from the Boolean prototype object. Boolean instance objects have a `[[BuiltinBrand]]` internal data property whose value is `BuiltinBooleanWrapper`. Boolean instances also have a `[[BooleanData]]` internal data property.

The `[[BooleanData]]` internal data property is the Boolean value represented by this Boolean object.

- Deleted:** and
- Deleted:** their
- Deleted:** Class
- Deleted:** IsBoolean
- Deleted:** NativeBrand
- Deleted:** BooleanWrapper
- Deleted:** value is "Boolean"
- Deleted:** PrimitiveValue
- Deleted:** PrimitiveValue

15.7 Number Objects

15.7.1 The Number Constructor Called as a Function

When `Number` is called as a function rather than as a constructor, it performs a type conversion.

15.7.1.1 `Number([value])`

Returns a Number value (not a Number object) computed by `ToNumber(value)` if `value` was supplied, else returns `+0`.

15.7.2 The Number Constructor

When `Number` is called as part of a `new` expression it is a constructor: it initialises the newly created ordinary object.

15.7.2.1 `new Number([value])`

The `[[Prototype]]` internal data property of the newly constructed object is set to the original Number prototype object, the one that is the initial value of `Number.prototype` (15.7.3.1).

The newly constructed object has a `[[BuiltinBrand]]` internal data property whose value is `BuiltinNumberWrapper`.

The `[[NumberData]]` internal data property of the newly constructed object is set to `ToNumber(value)` if `value` was supplied, else to `+0`.

The `[[Extensible]]` internal data property of the newly constructed object is set to `true`.

- Deleted:** `[[Class]]` internal property of the
- Deleted:** is
- Deleted:** set to "Number"
- Deleted:** IsNumber
- Deleted:** NativeBrand
- Deleted:** NumberWrapper
- Deleted:** PrimitiveValue

15.7.3 Properties of the Number Constructor

The value of the `[[Prototype]]` internal data property of the Number constructor is the Function prototype object (15.3.4).

Besides the `length` property (whose value is `1`), the Number constructor has the following properties:

- Deleted:** the internal properties and

15.7.3.1 `Number.prototype`

The initial value of `Number.prototype` is the Number prototype object (15.7.4).

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

15.7.3.2 `Number.MAX_VALUE`

The value of `Number.MAX_VALUE` is the largest positive finite value of the Number type, which is approximately $1.7976931348623157 \times 10^{308}$.

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

15.7.3.3 Number.MIN_VALUE

The value of `Number.MIN_VALUE` is the smallest positive value of the Number type, which is approximately 5×10^{-324} .

In the IEEE-764 double precision binary representation, the smallest possible value is a denormalized number.
If an implementation does not support denormalized values, the value of `Number.MIN_VALUE` must be the
smallest non-zero positive value that can actually be represented by the implementation.

Deleted: precision

Deleted: ed

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

15.7.3.4 Number.NaN

The value of `Number.NaN` is `NaN`.

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

15.7.3.5 Number.NEGATIVE_INFINITY

The value of `Number.NEGATIVE_INFINITY` is $-\infty$.

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

15.7.3.6 Number.POSITIVE_INFINITY

The value of `Number.POSITIVE_INFINITY` is $+\infty$.

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

15.7.3.7 Number.EPSILON

The value of `Number.EPSILON` is the difference between 1 and the smallest value greater than 1 that is representable as a Number value, which is approximately $2.2204460492503130808472633361816 \times 10^{-16}$.

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

Deleted: 7

15.7.3.8 Number.MAX_INTEGER

The value of `Number.MAX_INTEGER` is the largest integer value that can be represented as a Number value without losing precision, which is 9007199254740991.

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

Deleted: 8

15.7.3.9 Number.parseInt (string, radix)

Same as 15.1.2.2.

Deleted: 9

15.7.3.10 Number.parseFloat (string)

Same as 15.1.2.3.

Deleted: 0

15.7.3.11 Number.isNaN (number)

When the `Number.isNaN` is called with one argument `number`, the following steps are taken:

1. If `Type(number)` is not `Number`, return `false`.
2. If `number` is `NaN`, return `true`.
3. Otherwise, return `false`.

NOTE This function differs from the global `isNaN` function (15.1.2.4) is that it does not convert its argument to a `Number` before determining whether it is `NaN`.

15.7.3.12 `Number.isFinite (number)`

When the `Number.isFinite` is called with one argument `number`, the following steps are taken:

1. If `Type(number)` is not `Number`, return `false`.
2. If `number` is `NaN`, $+\infty$, or $-\infty$, return `false`.
3. Otherwise, return `true`.

15.7.3.13 `Number.isInteger (number)`

When the `Number.isInteger` is called with one argument `number`, the following steps are taken:

1. If `Type(number)` is not `Number`, return `false`.
2. Let `integer` be `ToInteger(number)`.
3. If `integer` is not equal to `number`, return `false`.
4. Otherwise, return `true`.

15.7.3.14 `Number.toInt (number)`

When the `Number.toInt` is called with one argument `number`, the following steps are taken:

1. Return `ToInteger(number)`.

15.7.4 Properties of the Number Prototype Object

The `Number` prototype object is itself a `Number` object with a `[[BuiltinBrand]]` internal data property whose value is `BuiltinNumberWrapper`. Its value is `+0`.

The value of the `[[Prototype]]` internal data property of the `Number` prototype object is the standard built-in `Object` prototype object (15.2.4).

Unless explicitly stated otherwise, the methods of the `Number` prototype object defined below are not generic and the `this` value passed to them must be either a `Number` value or an object that has a `[[NumberData]]` internal data property.

In the following descriptions of functions that are properties of the `Number` prototype object, the phrase "this `Number` object" refers to either the object that is the `this` value for the invocation of the function or, if `Type(this value)` is `Number`, an object that is created as if by the expression `new Number(this value)` where `Number` is the standard built-in constructor with that name. Also, the phrase "this `Number` value" refers to either the `Number` value represented by this `Number` object, that is, the value of the `[[NumberData]]` internal data property of this `Number` object or the `this` value if its type is `Number`. A `TypeError` exception is thrown if the `this` value is neither an object that has a `[[NumberData]]` internal data property or a value whose type is `Number`.

15.7.4.1 `Number.prototype.constructor`

The initial value of `Number.prototype.constructor` is the built-in `Number` constructor.

15.7.4.2 `Number.prototype.toString ([radix])`

The optional `radix` should be an integer value in the inclusive range 2 to 36. If `radix` not present or is `undefined` the `Number` 10 is used as the value of `radix`. If `ToInteger(radix)` is the `Number` 10 then this `Number` value is given as an argument to the `ToString` abstract operation; the resulting `String` value is returned.

If `ToInteger(radix)` is not an integer between 2 and 36 inclusive throw a `RangeError` exception. If `ToInteger(radix)` is an integer from 2 to 36, but not 10, the result is a `String` representation of this `Number` value

Deleted: 1

Deleted: 2

Comment [AWB7198]: Name changed from `tolInt` at Marcdh 29 TC39 meeting

Deleted: 3

Deleted: eger

Deleted: (its `[[Class]]` is "Number")

Deleted: IsNumber

Deleted: NativeBrand

Deleted: NumberWrapper

Deleted: whose

Deleted: Object

Deleted: for which the value of

Deleted: the

Deleted: Class

Deleted: IsNumber

Deleted: NativeBrand

Deleted: whose value is NumberWrapper

Deleted: is "Number"

Deleted: PrimitiveValue

Deleted: for which the value of the

Deleted: n

Deleted: Class

Deleted: IsNumber

Deleted: NativeBrand

Deleted: is "Number"

Comment [AWB7199]: TODO: need to private algorithm that ordered abnormal completion detection

using the specified radix. Letters `a-z` are used for digits with values 10 through 35. The precise algorithm is implementation-dependent if the radix is not 10, however the algorithm should be a generalisation of that specified in 9.1.8.1.

The `toString` function is not generic; it throws a `TypeError` exception if its `this` value is not a Number or a Number object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

15.7.4.3 Number.prototype.toLocaleString()

Produces a String value that represents this Number value formatted according to the conventions of the host environment's current locale. This function is implementation-dependent, and it is permissible, but not encouraged, for it to return the same thing as `toString`.

NOTE The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.7.4.4 Number.prototype.valueOf()

1. Let `x` be this Number value.
2. Return `x`.

The `valueOf` function is not generic; it throws a `TypeError` exception if its `this` value is not a Number or a Number object. Therefore, it cannot be transferred to other kinds of objects for use as a method.

Deleted: Returns this Number value. ¶

15.7.4.5 Number.prototype.toFixed(fractionDigits)

Return a String containing this Number value represented in decimal fixed-point notation with `fractionDigits` digits after the decimal point. If `fractionDigits` is `undefined`, 0 is assumed. Specifically, perform the following steps:

1. Let `f` be `ToInteger(fractionDigits)`. (If `fractionDigits` is `undefined`, this step produces the value 0).
2. ReturnIfAbrupt(f).
3. If `f < 0` or `f > 20`, throw a `RangeError` exception.
4. Let `x` be this Number value.
5. ReturnIfAbrupt(x).
6. If `x` is `NaN`, return the String "`NaN`".
7. Let `s` be the empty String.
8. If `x < 0`, then
 - a. Let `s` be `"-"`.
 - b. Let `x = -x`.
9. If `x ≥ 1021`, then
 - a. Let `m = ToString(x)`.
10. Else `x < 1021`
 - a. Let `n` be an integer for which the exact mathematical value of $n \div 10^f - x$ is as close to zero as possible. If there are two such `n`, pick the larger `n`.
 - b. If `n = 0`, let `m` be the String "0". Otherwise, let `m` be the String consisting of the digits of the decimal representation of `n` (in order, with no leading zeroes).
 - c. If `f ≠ 0`, then
 - i. Let `k` be the number of elements in m.
 - ii. If `k ≤ f`, then
 1. Let `z` be the String consisting of $f+1-k$ occurrences of the code unit 0x0030.
 2. Let `m` be the concatenation of Strings `z` and `m`.
 3. Let `k = f + 1`.
 - iii. Let `a` be the first $k-f$ elements of m, and let `b` be the remaining f elements of m.
 - iv. Let `m` be the concatenation of the three Strings `a`, `"."`, and `b`.
11. Return the concatenation of the Strings `s` and `m`.

Deleted:,

Deleted: characters

Deleted: character

Deleted: '0'

Deleted: characters

Deleted: characters

The `length` property of the `toFixed` method is 1.

If the `toFixed` method is called with more than one argument, then the behaviour is undefined (see clause 15).

An implementation is permitted to extend the behaviour of `toFixed` for values of `fractionDigits` less than 0 or greater than 20. In this case `toFixed` would not necessarily throw `RangeError` for such values.

NOTE The output of `toFixed` may be more precise than `toString` for some values because `toString` only prints enough significant digits to distinguish the number from adjacent number values. For example, `(1000000000000000128).toString()` returns "1000000000000000100", while `(1000000000000000128).toFixed(0)` returns "1000000000000000128".

15.7.4.6 Number.prototype.toExponential (fractionDigits)

Return a String containing this Number value represented in decimal exponential notation with one digit before the significand's decimal point and `fractionDigits` digits after the significand's decimal point. If `fractionDigits` is `undefined`, include as many significand digits as necessary to uniquely specify the Number (just like in `ToString` except that in this case the Number is always output in exponential notation). Specifically, perform the following steps:

1. Let x be this Number value.
2. ReturnIfAbrupt(x).
3. Let f be `ToInteger(fractionDigits)`.
4. ReturnIfAbrupt(f).
5. If x is `NaN`, return the String "`NaN`".
6. Let s be the empty String.
7. If $x < 0$, then
 - a. Let s be `"-"`.
 - b. Let $x = -x$.
8. If $x = +\infty$, then
 - a. Return the concatenation of the Strings s and "`Infinity`".
9. If `fractionDigits` is not `undefined` and ($f < 0$ or $f > 20$), throw a `RangeError` exception.
10. If $x = 0$, then
 - a. If `fractionDigits` is `undefined`, then let $f = 0$.
 - b. Let m be the String consisting of $f+1$ occurrences of the code unit `0x0030`.
 - c. Let $e = 0$.
11. Else $x \neq 0$.
 - a. If `fractionDigits` is not `undefined`, then
 - i. Let e and n be integers such that $10^f \leq n < 10^{f+1}$ and for which the exact mathematical value of $n \times 10^{e-f} - x$ is as close to zero as possible. If there are two such sets of e and n , pick the e and n for which $n \times 10^{e-f}$ is larger.
 - b. Else `fractionDigits` is `undefined`,
 - i. Let e , n , and f be integers such that $f \geq 0$, $10^f \leq n < 10^{f+1}$, the number value for $n \times 10^{e-f}$ is x , and f is as small as possible. Note that the decimal representation of n has $f+1$ digits, n is not divisible by 10, and the least significant digit of n is not necessarily uniquely determined by these criteria.
 - c. Let m be the String consisting of the digits of the decimal representation of n (in order, with no leading zeroes).
12. If $f \neq 0$, then
 - a. Let a be the first element of m , and let b be the remaining elements of m .
 - b. Let m be the concatenation of the three Strings a , `". "`, and b .
13. If $e = 0$, then
 - a. Let $c = "+"$.
 - b. Let $d = "0"$.
14. Else
 - a. If $e > 0$, then let $c = "+"$.
 - b. Else $e \leq 0$,
 - i. Let $c = "-"$.
 - ii. Let $e = -e$.

Deleted: al
Deleted: Let
Deleted: character
Deleted: '0'
Deleted: ,

Deleted: ,

Deleted: character
Deleted: characters

Deleted: ,

- c. Let d be the String consisting of the digits of the decimal representation of e (in order, with no leading zeroes).
- 15. Let m be the concatenation of the four Strings m , "**e**", c , and d .
- 16. Return the concatenation of the Strings s and m .

The `length` property of the `toExponential` method is 1.

If the `toExponential` method is called with more than one argument, then the behaviour is undefined (see clause 15).

An implementation is permitted to extend the behaviour of `toExponential` for values of `fractionDigits` less than 0 or greater than 20. In this case `toExponential` would not necessarily throw `RangeError` for such values.

NOTE For implementations that provide more accurate conversions than required by the rules above, it is recommended that the following alternative version of step 9.b.i be used as a guideline:

- i. Let e , n , and f be integers such that $f \geq 0$, $10^f \leq n < 10^{f+1}$, the number value for $n \times 10^{e-f}$ is x , and f is as small as possible. If there are multiple possibilities for n , choose the value of n for which $n \times 10^{e-f}$ is closest in value to x . If there are two such possible values of n , choose the one that is even.

15.7.4.7 Number.prototype.toPrecision (precision)

Return a String containing this Number value represented either in decimal exponential notation with one digit before the significand's decimal point and `precision`-1 digits after the significand's decimal point or in decimal fixed notation with `precision` significant digits. If `precision` is `undefined`, call `ToString` (9.8.1) instead. Specifically, perform the following steps:

1. Let x be this Number value.
2. ReturnIfAbrupt(x).
3. If `precision` is `undefined`, return `ToString(x)`.
4. Let p be `ToInteger(precision)`.
5. ReturnIfAbrupt(p).
6. If x is `NaN`, return the String "`NaN`".
7. Let s be the empty String.
8. If $x < 0$, then
 - a. Let s be "`-`".
 - b. Let $x = -x$.
9. If $x = +\infty$, then
 - a. Return the concatenation of the Strings s and "`Infinity`".
10. If $p < 1$ or $p > 21$, throw a `RangeError` exception.
11. If $x = 0$, then
 - a. Let m be the String consisting of p occurrences of the code unit 0x0030 (the Unicode character ‘0’).
Deleted: character
 - b. Let $e = 0$.
12. Else $x \neq 0$,
 - a. Let e and n be integers such that $10^{p-1} \leq n < 10^p$ and for which the exact mathematical value of $n \times 10^{e-p+1} - x$ is as close to zero as possible. If there are two such sets of e and n , pick the e and n for which $n \times 10^{e-p+1}$ is larger.
 - b. Let m be the String consisting of the digits of the decimal representation of n (in order, with no leading zeroes).
 - c. If $e < -6$ or $e \geq p$, then
 - i. Let a be the first element of m , and let b be the remaining $p-1$ elements of m .
Deleted: character
 - ii. Let m be the concatenation of the three Strings a , "`.`", and b .
Deleted: characters
 - iii. If $e = 0$, then
 1. Let $c = "+"$ and $d = "0"$.
 - iv. Else $e \neq 0$,
 1. If $e > 0$, then
 - a. Let $c = "+"$.
 2. Else $e < 0$,

- a Let $c = "-"$.
 b Let $e = -e$.
3. Let d be the String consisting of the digits of the decimal representation of e (in order, with no leading zeroes).

v. Let m be the concatenation of the five Strings s , m , "e", c , and d .

13. If $e = p-1$, then return the concatenation of the Strings s and m .

14. If $e \geq 0$, then

- a. Let m be the concatenation of the first $e+1$ elements of m , the code unit 0x002E (Unicode character ‘.’), and the remaining $p-(e+1)$ elements of m .

15. Else $e < 0$,

a. Let m be the concatenation of the String "0.", $-(e+1)$ occurrences of code unit 0x0030 (the Unicode character ‘0’), and the String m .

16. Return the concatenation of the Strings s and m .

The `length` property of the `toPrecision` method is 1.

If the `toPrecision` method is called with more than one argument, then the behaviour is undefined (see clause 15).

An implementation is permitted to extend the behaviour of `toPrecision` for values of *precision* less than 1 or greater than 21. In this case `toPrecision` would not necessarily throw `RangeError` for such values.

15.7.4.8 Number.prototype.clz()

When the `Number.prototype.clz` is called with one argument *number*, the following steps are taken:

1. Let x be this `Number` value.
2. Let n be `ToUint32(x)`.
3. `ReturnIfAbrupt(n)`.
4. Let p be the number of leading zero bits in the 32-bit binary representation of n .
5. `Return p`.

NOTE If n is 0, p will be 32. If the most significant bit of the 32-bit binary encoding of n is 1, p will be 0.

15.7.5 Properties of Number Instances

Number instances are ordinary objects that inherit properties from the `Number` prototype object and have a `[[BuiltinBrand]]` internal data property whose value is `BuiltinNumberWrapper`. Number instances also have a `[[NumberData]]` internal data property.

The `[[NumberData]]` internal data property is the `Number` value represented by this `Number` object.

15.8 The Math Object

The `Math` object is a single ordinary object.

The value of the `[[Prototype]]` internal data property of the `Math` object is the standard built-in `Object` prototype object (15.2.4). The `Math` object has a `[[BuiltinBrand]]` internal data property whose value is `BuiltinMath`.

The `Math` is not a function object. It does not have a `[[Construct]]` internal method; it is not possible to use the `Math` object as a constructor with the `new` operator. The `Math` object also does not have a `[[Call]]` internal method; it is not possible to invoke the `Math` object as a function.

NOTE In this specification, the phrase “the `Number` value for x ” has a technical meaning defined in 8.5.

Deleted: characters

Deleted: s

Deleted: characters

Deleted: c

Comment [AWB7200]: Added at March 29 TC39 meeting

Deleted: 3

Deleted: 14

Comment [AWB7201]: Unsigned seems most generated values could be converted in a previous step.

Deleted: f

Deleted: their

Deleted: n

Deleted: Class

Deleted: IsNumber

Deleted: NativeBrand

Deleted: NumberWrapper

Deleted: value is "Number"

Deleted: PrimitiveValue

Deleted: Value

Deleted: Value

Deleted: PrimitiveValue

Deleted: that has some named properties, some of which are functions

Deleted: value of the `[[Class]]` internal property of the

Deleted: is "Math"

Deleted: the

Deleted: IsMath

Deleted: NativeBrand

Deleted: NativeMath

Deleted: object

Deleted: property

Deleted: ¶

Deleted: property

15.8.1 Value Properties of the Math Object

15.8.1.1 Math.E

The Number value for e , the base of the natural logarithms, which is approximately 2.7182818284590452354.

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.8.1.2 Math.LN10

The Number value for the natural logarithm of 10, which is approximately 2.302585092994046.

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.8.1.3 Math.LN2

The Number value for the natural logarithm of 2, which is approximately 0.6931471805599453.

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.8.1.4 Math.LOG2E

The Number value for the base-2 logarithm of e , the base of the natural logarithms; this value is approximately 1.4426950408889634.

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

NOTE The value of **Math.LOG2E** is approximately the reciprocal of the value of **Math.LN2**.

15.8.1.5 Math.LOG10E

The Number value for the base-10 logarithm of e , the base of the natural logarithms; this value is approximately 0.4342944819032518.

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

NOTE The value of **Math.LOG10E** is approximately the reciprocal of the value of **Math.LN10**.

15.8.1.6 Math.PI

The Number value for π , the ratio of the circumference of a circle to its diameter, which is approximately 3.1415926535897932.

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.8.1.7 Math.SQRT1_2

The Number value for the square root of $\frac{1}{2}$, which is approximately 0.7071067811865476.

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

NOTE The value of **Math.SQRT1_2** is approximately the reciprocal of the value of **Math.SQRT2**.

15.8.1.8 Math.SQRT2

The Number value for the square root of 2, which is approximately 1.4142135623730951.

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.8.2 Function Properties of the Math Object

Each of the following `Math` object functions applies the `ToNumber` abstract operation to each of its arguments (in left-to-right order if there is more than one). If `ToNumber` returns an abrupt completion, that completion record is immediately returned. Otherwise, `function` performs a computation on the resulting Number value(s).

Deleted: operator

Deleted: and then

In the function descriptions below, the symbols `Nan`, `-0`, `+0`, `-∞` and `+∞` refer to the Number values described in 8.5.

NOTE The behaviour of the functions `acos`, `asin`, `atan`, `atan2`, `cos`, `exp`, `log`, `pow`, `sin`, `sqrt`, and `tan` is not precisely specified here except to require specific results for certain argument values that represent boundary cases of interest. For other argument values, these functions are intended to compute approximations to the results of familiar mathematical functions, but some latitude is allowed in the choice of approximation algorithms. The general intent is that an implementer should be able to use the same mathematical library for ECMAScript on a given hardware platform that is available to C programmers on that platform.

Although the choice of algorithms is left to the implementation, it is recommended (but not specified by this standard) that implementations use the approximation algorithms for IEEE 754 arithmetic contained in `fdlibm`, the freely distributable mathematical library from Sun Microsystems (<http://www.netlib.org/fdlibm>).

15.8.2.1 `Math.abs (x)`

Returns the absolute value of x ; the result has the same magnitude as x but has positive sign.

- If x is `Nan`, the result is `Nan`.
- If x is `-0`, the result is `+0`.
- If x is `-∞`, the result is `+∞`.

15.8.2.2 `Math.acos (x)`

Returns an implementation-dependent approximation to the arc cosine of x . The result is expressed in radians and ranges from `+0` to `+π`.

- If x is `Nan`, the result is `Nan`.
- If x is greater than `1`, the result is `Nan`.
- If x is less than `-1`, the result is `Nan`.
- If x is exactly `1`, the result is `+0`.

15.8.2.3 `Math.asin (x)`

Returns an implementation-dependent approximation to the arc sine of x . The result is expressed in radians and ranges from `-π/2` to `+π/2`.

- If x is `Nan`, the result is `Nan`.
- If x is greater than `1`, the result is `Nan`.
- If x is less than `-1`, the result is `Nan`.
- If x is `+0`, the result is `+0`.
- If x is `-0`, the result is `-0`.

15.8.2.4 `Math.atan (x)`

Returns an implementation-dependent approximation to the arc tangent of x . The result is expressed in radians and ranges from `-π/2` to `+π/2`.

- If x is `Nan`, the result is `Nan`.
- If x is `+0`, the result is `+0`.
- If x is `-0`, the result is `-0`.

- If x is $+\infty$, the result is an implementation-dependent approximation to $+\pi/2$.
- If x is $-\infty$, the result is an implementation-dependent approximation to $-\pi/2$.

15.8.2.5 **Math.atan2 (y, x)**

Returns an implementation-dependent approximation to the arc tangent of the quotient y/x of the arguments y and x , where the signs of y and x are used to determine the quadrant of the result. Note that it is intentional and traditional for the two-argument arc tangent function that the argument named y be first and the argument named x be second. The result is expressed in radians and ranges from $-\pi$ to $+\pi$.

- If either x or y is NaN, the result is NaN.
- If $y > 0$ and x is $+0$, the result is an implementation-dependent approximation to $+\pi/2$.
- If $y > 0$ and x is -0 , the result is an implementation-dependent approximation to $-\pi/2$.
- If $y = +0$ and $x > 0$, the result is $+0$.
- If $y = +0$ and x is $+0$, the result is $+0$.
- If $y = +0$ and x is -0 , the result is an implementation-dependent approximation to $+\pi$.
- If $y = +0$ and $x < 0$, the result is an implementation-dependent approximation to $+\pi$.
- If $y = -0$ and $x > 0$, the result is -0 .
- If $y = -0$ and x is $+0$, the result is -0 .
- If $y = -0$ and x is -0 , the result is an implementation-dependent approximation to $-\pi$.
- If $y < 0$ and $x < 0$, the result is an implementation-dependent approximation to $-\pi$.
- If $y < 0$ and x is $+0$, the result is an implementation-dependent approximation to $-\pi/2$.
- If $y < 0$ and x is -0 , the result is an implementation-dependent approximation to $-\pi/2$.
- If $y > 0$ and y is finite and x is $+\infty$, the result is $+0$.
- If $y > 0$ and y is finite and x is $-\infty$, the result is an implementation-dependent approximation to $+\pi$.
- If $y < 0$ and y is finite and x is $+\infty$, the result is -0 .
- If $y < 0$ and y is finite and x is $-\infty$, the result is an implementation-dependent approximation to $-\pi$.
- If y is $+\infty$ and x is finite, the result is an implementation-dependent approximation to $+\pi/2$.
- If y is $-\infty$ and x is finite, the result is an implementation-dependent approximation to $-\pi/2$.
- If y is $+\infty$ and x is $+\infty$, the result is an implementation-dependent approximation to $+\pi/4$.
- If y is $+\infty$ and x is $-\infty$, the result is an implementation-dependent approximation to $+3\pi/4$.
- If y is $-\infty$ and x is $+\infty$, the result is an implementation-dependent approximation to $-\pi/4$.
- If y is $-\infty$ and x is $-\infty$, the result is an implementation-dependent approximation to $-3\pi/4$.

15.8.2.6 **Math.ceil (x)**

Returns the smallest (closest to $-\infty$) Number value that is not less than x and is equal to a mathematical integer. If x is already an integer, the result is x .

- If x is NaN, the result is NaN.
- If x is $+0$, the result is $+0$.
- If x is -0 , the result is -0 .
- If x is $+\infty$, the result is $+\infty$.
- If x is $-\infty$, the result is $-\infty$.
- If x is less than 0 but greater than -1 , the result is -0 .

The value of `Math.ceil (x)` is the same as the value of `-Math.floor (-x)`.

15.8.2.7 **Math.cos (x)**

Returns an implementation-dependent approximation to the cosine of x . The argument is expressed in radians.

- If x is NaN, the result is NaN.
- If x is $+0$, the result is 1.
- If x is -0 , the result is 1.
- If x is $+\infty$, the result is NaN.
- If x is $-\infty$, the result is NaN.

15.8.2.8 **Math.exp (x)**

Returns an implementation-dependent approximation to the exponential function of x (e raised to the power of x , where e is the base of the natural logarithms).

- If x is NaN, the result is NaN.
- If x is +0, the result is 1.
- If x is -0, the result is 1.
- If x is $+\infty$, the result is $+\infty$.
- If x is $-\infty$, the result is +0.

15.8.2.9 **Math.floor (x)**

Returns the greatest (closest to $+\infty$) Number value that is not greater than x and is equal to a mathematical integer. If x is already an integer, the result is x .

- If x is NaN, the result is NaN.
- If x is +0, the result is +0.
- If x is -0, the result is -0.
- If x is $+\infty$, the result is $+\infty$.
- If x is $-\infty$, the result is $-\infty$.
- If x is greater than 0 but less than 1, the result is +0.

NOTE The value of `Math.floor(x)` is the same as the value of `-Math.ceil(-x)`.

15.8.2.10 **Math.log (x)**

- Returns an implementation-dependent approximation to the natural logarithm of x .
- If x is NaN, the result is NaN.
- If x is less than 0, the result is NaN.
- If x is +0 or -0, the result is $-\infty$.
- If x is 1, the result is +0.
- If x is $+\infty$, the result is $+\infty$.

15.8.2.11 **Math.max ([value1 [, value2 [, ...]]])**

Given zero or more arguments, calls ToNumber on each of the arguments and returns the largest of the resulting values.

- If no arguments are given, the result is $-\infty$.
- If any value is NaN, the result is NaN.
- The comparison of values to determine the largest value is done using the Abstract Relational Comparison Algorithm (11.8.1) except that +0 is considered to be larger than -0.

The `length` property of the `max` method is 2.

Deleted: Comparision
Deleted: og
Deleted: as in
Deleted: 5

15.8.2.12 **Math.min ([value1 [, value2 [, ...]]])**

Given zero or more arguments, calls ToNumber on each of the arguments and returns the smallest of the resulting values.

- If no arguments are given, the result is $+\infty$.
- If any value is NaN, the result is NaN.
- The comparison of values to determine the smallest value is done using the Abstract Relational Comparison Algorithm (11.8.1) except that +0 is considered to be larger than -0.

The `length` property of the `min` method is 2.

Deleted: Comparision
Deleted: og
Deleted: as in
Deleted: 5

15.8.2.13 **Math.pow (x, y)**

Returns an implementation-dependent approximation to the result of raising x to the power y .

- If y is NaN, the result is NaN.
- If y is +0, the result is 1, even if x is NaN.
- If y is -0, the result is 1, even if x is NaN.
- If x is NaN and y is nonzero, the result is NaN.
- If $\text{abs}(x) > 1$ and y is $+\infty$, the result is $+\infty$.
- If $\text{abs}(x) > 1$ and y is $-\infty$, the result is +0.
- If $\text{abs}(x) \leq 1$ and y is $+\infty$, the result is NaN.
- If $\text{abs}(x) \leq 1$ and y is $-\infty$, the result is NaN.
- If $\text{abs}(x) < 1$ and y is $+\infty$, the result is +0.
- If $\text{abs}(x) < 1$ and y is $-\infty$, the result is $+\infty$.
- If x is $+\infty$ and $y > 0$, the result is $+\infty$.
- If x is $+\infty$ and $y < 0$, the result is +0.
- If x is $-\infty$ and $y > 0$ and y is an odd integer, the result is $-\infty$.
- If x is $-\infty$ and $y > 0$ and y is not an odd integer, the result is $+\infty$.
- If x is $-\infty$ and $y < 0$ and y is an odd integer, the result is -0.
- If x is $-\infty$ and $y < 0$ and y is not an odd integer, the result is +0.
- If x is +0 and $y > 0$, the result is +0.
- If x is +0 and $y < 0$, the result is $+\infty$.
- If x is -0 and $y > 0$ and y is an odd integer, the result is -0.
- If x is -0 and $y > 0$ and y is not an odd integer, the result is +0.
- If x is -0 and $y < 0$ and y is an odd integer, the result is $-\infty$.
- If x is -0 and $y < 0$ and y is not an odd integer, the result is $+\infty$.
- If $x < 0$ and x is finite and y is finite and y is not an integer, the result is NaN.

Deleted: $)==$

Deleted: $)==$

15.8.2.14 **Math.random ()**

Returns a Number value with positive sign, greater than or equal to 0 but less than 1, chosen randomly or pseudo randomly with approximately uniform distribution over that range, using an implementation-dependent algorithm or strategy. This function takes no arguments.

15.8.2.15 **Math.round (x)**

Returns the Number value that is closest to x and is equal to a mathematical integer. If two integer Number values are equally close to x , then the result is the Number value that is closer to $+\infty$. If x is already an integer, the result is x .

- If x is NaN, the result is NaN.
- If x is +0, the result is +0.
- If x is -0, the result is -0.
- If x is $+\infty$, the result is $+\infty$.
- If x is $-\infty$, the result is $-\infty$.
- If x is greater than 0 but less than 0.5, the result is +0.
- If x is less than 0 but greater than or equal to -0.5, the result is -0.

NOTE 1 `Math.round(3.5)` returns 4, but `Math.round(-3.5)` returns -3.

NOTE 2 The value of `Math.round(x)` is the same as the value of `Math.floor(x+0.5)`, except when x is -0 or is less than 0 but greater than or equal to -0.5; for these cases `Math.round(x)` returns -0, but `Math.floor(x+0.5)` returns +0.

15.8.2.16 **Math.sin (x)**

Returns an implementation-dependent approximation to the sine of x . The argument is expressed in radians.

- If x is NaN, the result is NaN.
- If x is +0, the result is +0.
- If x is -0, the result is -0.
- If x is $+\infty$ or $-\infty$, the result is NaN.

15.8.2.17 Math.sqrt (x)

Returns an implementation-dependent approximation to the square root of x .

- If x is NaN, the result is NaN.
- If x is less than 0, the result is NaN.
- If x is +0, the result is +0.
- If x is -0, the result is -0.
- If x is $+\infty$, the result is $+\infty$.

15.8.2.18 Math.tan (x)

Returns an implementation-dependent approximation to the tangent of x . The argument is expressed in radians.

- If x is NaN, the result is NaN.
- If x is +0, the result is +0.
- If x is -0, the result is -0.
- If x is $+\infty$ or $-\infty$, the result is NaN.

15.8.2.19 Math.log10 (x)

Returns an implementation-dependent approximation to the base 10 logarithm of x .

- If x is NaN, the result is NaN.
- If x is less than 0, the result is NaN.
- If x is +0, the result is $-\infty$.
- If x is -0, the result is $-\infty$.
- If x is 1, the result is +0.
- If x is $+\infty$, the result is $+\infty$.

15.8.2.20 Math.log2 (x)

Returns an implementation-dependent approximation to the base 2 logarithm of x .

- If x is NaN, the result is NaN.
- If x is less than 0, the result is NaN.
- If x is +0, the result is $-\infty$.
- If x is -0, the result is $-\infty$.
- If x is 1, the result is +0.
- If x is $+\infty$, the result is $+\infty$.

15.8.2.21 Math.log1p (x)

Returns an implementation-dependent approximation to the natural logarithm of $1 + x$. The result is computed in a way that is accurate even when the value of x is close to zero.

- If x is NaN, the result is NaN.
- If x is less than -1, the result is NaN.
- If x is -1, the result is $-\infty$.

- If x is $+0$, the result is $+0$.
- If x is -0 , the result is -0 .
- If x is $+\infty$, the result is $+\infty$.

15.8.2.22 Math.expm1(x)

Returns an implementation-dependent approximation to subtracting 1 from the exponential function of x (e raised to the power of x , where e is the base of the natural logarithms). The result is computed in a way that is accurate even when the value of x is close 0.

- If x is NaN , the result is NaN .
- If x is $+0$, the result is $+0$.
- If x is -0 , the result is -0 .
- If x is $+\infty$, the result is $+\infty$.
- If x is $-\infty$, the result is -1 .

15.8.2.23 Math.cosh(x)

Returns an implementation-dependent approximation to the hyperbolic cosine of x .

- If x is NaN , the result is NaN .
- If x is $+0$, the result is 1 .
- If x is -0 , the result is 1 .
- If x is $+\infty$, the result is $+\infty$.
- If x is $-\infty$, the result is $+\infty$.

NOTE The value of $\cosh(x)$ is the same as $(\exp(x) + \exp(-x))/2$.

15.8.2.24 Math.sinh(x)

Returns an implementation-dependent approximation to the hyperbolic sine of x .

- If x is NaN , the result is NaN .
- If x is $+0$, the result is $+0$.
- If x is -0 , the result is -0 .
- If x is $+\infty$, the result is $+\infty$.
- If x is $-\infty$, the result is $-\infty$.

NOTE The value of $\sinh(x)$ is the same as $(\exp(x) - \exp(-x))/2$.

15.8.2.25 Math.tanh(x)

Returns an implementation-dependent approximation to the hyperbolic tangent of x .

- If x is NaN , the result is NaN .
- If x is $+0$, the result is $+0$.
- If x is -0 , the result is -0 .
- If x is $+\infty$, the result is $+1$.
- If x is $-\infty$, the result is -1 .

NOTE The value of $\tanh(x)$ is the same as $(\exp(x) - \exp(-x))/(\exp(x) + \exp(-x))$.

15.8.2.26 Math.acosh(x)

Returns an implementation-dependent approximation to the inverse hyperbolic cosine of x .

- If x is NaN , the result is NaN .

- If x is less than 1, the result is NaN.
- If x is 1, the result is +0.
- If x is $+\infty$, the result is $+\infty$.

15.8.2.27 Math.asinh(x)

Returns an implementation-dependent approximation to the inverse hyperbolic sine of x .

- If x is NaN, the result is NaN.
- If x is +0, the result is +0.
- If x is -0, the result is -0.
- If x is $+\infty$, the result is $+\infty$.
- If x is $-\infty$, the result is $-\infty$.

15.8.2.28 Math.atanh(x)

Returns an implementation-dependent approximation to the inverse hyperbolic tangent of x .

- If x is NaN, the result is NaN.
- If x is less than -1, the result is NaN.
- If x is greater than 1, the result is NaN.
- If x is -1, the result is $-\infty$.
- If x is +1, the result is $+\infty$.
- If x is +0, the result is +0.
- If x is -0, the result is -0.

15.8.2.29 Math.hypot(value1 , value2 , value3 = 0)

Given two or three arguments, hypot returns an implementation-dependent approximation of the square root of the sum of squares of up to three arguments.

- If any argument is $+\infty$, the result is $+\infty$.
- If any argument is $-\infty$, the result is $+\infty$.
- If no argument is $+\infty$ or $-\infty$, and any argument is NaN, the result is NaN.
- If all arguments are either +0 or -0, the result is +0.

15.8.2.30 hypot2(value1 , value2 [, value3])

Given two or three arguments, hypot2 returns an implementation-dependent approximation of the sum of squares of its arguments.

- If no arguments are given, the result is +0.
- If any argument is $+\infty$, the result is $+\infty$.
- If any argument is $-\infty$, the result is $+\infty$.
- If no argument is $+\infty$ or $-\infty$, and any argument is NaN, the result is NaN.
- If all arguments are either +0 or -0, the result is +0.

15.8.2.30 Math.trunc(x)

Returns the integral part of the number x , removing any fractional digits. If x is already an integer, the result is x .

- If x is NaN, the result is NaN.
- If x is -0, the result is -0.
- If x is +0, the result is +0.
- If x is $+\infty$, the result is $+\infty$.

Deleted: [

Deleted:]

Deleted: its

Comment [AWB7202]: Concensus at March29 TCS meeting was to drop this function. See March29 meeting notes

- If x is $-\infty$, the result is $-\infty$.

15.8.2.31 Math.sign(x)

Returns the sign of the x , indicating whether x is positive, negative or zero.

- If x is NaN, the result is NaN.
- If x is -0 , the result is -0 .
- If x is $+0$, the result is $+0$.
- If x is negative and not -0 , the result is -1 .
- If x is positive and not $+0$, the result is $+1$.

15.8.2.32 Math.cbrt(x)

Returns an implementation-dependent approximation to the cube root of x .

- If x is NaN, the result is NaN.
- If x is $+0$, the result is $+0$.
- If x is -0 , the result is -0 .
- If x is $+\infty$, the result is $+\infty$.
- If x is $-\infty$, the result is $-\infty$.

15.9 Date Objects

15.9.1 Overview of Date Objects and Definitions of Abstract Operations

Deleted: Operators

The following functions are abstract operations that operate on time values (defined in 15.9.1.1). Note that, in every case, if any argument to one of these functions is NaN, the result will be NaN.

15.9.1.1 Time Values and Time Range

A Date object contains a Number indicating a particular instant in time to within a millisecond. Such a Number is called a *time value*. A time value may also be NaN, indicating that the Date object does not represent a specific instant of time.

Time is measured in ECMAScript in milliseconds since 01 January, 1970 UTC. In time values leap seconds are ignored. It is assumed that there are exactly 86,400,000 milliseconds per day. ECMAScript Number values can represent all integers from $-9,007,199,254,740,992$ to $9,007,199,254,740,992$; this range suffices to measure times to millisecond precision for any instant that is within approximately 285,616 years, either forward or backward, from 01 January, 1970 UTC.

The actual range of times supported by ECMAScript Date objects is slightly smaller: exactly $-100,000,000$ days to $100,000,000$ days measured relative to midnight at the beginning of 01 January, 1970 UTC. This gives a range of $8,640,000,000,000,000$ milliseconds to either side of 01 January, 1970 UTC.

The exact moment of midnight at the beginning of 01 January, 1970 UTC is represented by the value +0.

15.9.1.2 Day Number and Time within Day

A given time value t belongs to day number

$$\text{Day}(t) = \text{floor}(t / \text{msPerDay})$$

where the number of milliseconds per day is

$$\text{msPerDay} = 86400000$$

The remainder is called the time within the day:

$$\text{TimeWithinDay}(t) = t \bmod \text{msPerDay}$$

15.9.1.3 Year Number

ECMAScript uses an extrapolated Gregorian system to map a day number to a year number and to determine the month and date within that year. In this system, leap years are precisely those which are (divisible by 4) and ((not divisible by 100) or (divisible by 400)). The number of days in year number y is therefore defined by

$$\begin{aligned}\text{DaysInYear}(y) &= 365 \text{ if } (y \bmod 4) \neq 0 \\ &= 366 \text{ if } (y \bmod 4) = 0 \text{ and } (y \bmod 100) \neq 0 \\ &= 365 \text{ if } (y \bmod 100) = 0 \text{ and } (y \bmod 400) \neq 0 \\ &= 366 \text{ if } (y \bmod 400) = 0\end{aligned}$$

All non-leap years have 365 days with the usual number of days per month and leap years have an extra day in February. The day number of the first day of year y is given by:

$$\text{DayFromYear}(y) = 365 \times (y - 1970) + \text{floor}((y - 1969)/4) - \text{floor}((y - 1901)/100) + \text{floor}((y - 1601)/400)$$

The time value of the start of a year is:

$$\text{TimeFromYear}(y) = \text{msPerDay} \times \text{DayFromYear}(y)$$

A time value determines a year by:

$$\text{YearFromTime}(t) = \text{the largest integer } y \text{ (closest to positive infinity) such that } \text{TimeFromYear}(y) \leq t$$

The leap-year function is 1 for a time within a leap year and otherwise is zero:

$$\begin{aligned}\text{InLeapYear}(t) &= 0 \text{ if } \text{DaysInYear}(\text{YearFromTime}(t)) = 365 \\ &= 1 \text{ if } \text{DaysInYear}(\text{YearFromTime}(t)) = 366\end{aligned}$$

15.9.1.4 Month Number

Months are identified by an integer in the range 0 to 11, inclusive. The mapping $\text{MonthFromTime}(t)$ from a time value t to a month number is defined by:

$$\begin{aligned}\text{MonthFromTime}(t) &= 0 \quad \text{if } 0 \quad \leq \text{DayWithinYear}(t) < 31 \\ &= 1 \quad \text{if } 31 \quad \leq \text{DayWithinYear}(t) < 59 + \text{InLeapYear}(t) \\ &= 2 \quad \text{if } 59 + \text{InLeapYear}(t) \quad \leq \text{DayWithinYear}(t) < 90 + \text{InLeapYear}(t) \\ &= 3 \quad \text{if } 90 + \text{InLeapYear}(t) \quad \leq \text{DayWithinYear}(t) < 120 + \text{InLeapYear}(t) \\ &= 4 \quad \text{if } 120 + \text{InLeapYear}(t) \quad \leq \text{DayWithinYear}(t) < 151 + \text{InLeapYear}(t) \\ &= 5 \quad \text{if } 151 + \text{InLeapYear}(t) \quad \leq \text{DayWithinYear}(t) < 181 + \text{InLeapYear}(t) \\ &= 6 \quad \text{if } 181 + \text{InLeapYear}(t) \quad \leq \text{DayWithinYear}(t) < 212 + \text{InLeapYear}(t) \\ &= 7 \quad \text{if } 212 + \text{InLeapYear}(t) \quad \leq \text{DayWithinYear}(t) < 243 + \text{InLeapYear}(t) \\ &= 8 \quad \text{if } 243 + \text{InLeapYear}(t) \quad \leq \text{DayWithinYear}(t) < 273 + \text{InLeapYear}(t) \\ &= 9 \quad \text{if } 273 + \text{InLeapYear}(t) \quad \leq \text{DayWithinYear}(t) < 304 + \text{InLeapYear}(t) \\ &= 10 \quad \text{if } 304 + \text{InLeapYear}(t) \quad \leq \text{DayWithinYear}(t) < 334 + \text{InLeapYear}(t) \\ &= 11 \quad \text{if } 334 + \text{InLeapYear}(t) \quad \leq \text{DayWithinYear}(t) < 365 + \text{InLeapYear}(t)\end{aligned}$$

where

$$\text{DayWithinYear}(t) = \text{Day}(t) - \text{DayFromYear}(\text{YearFromTime}(t))$$

A month value of 0 specifies January; 1 specifies February; 2 specifies March; 3 specifies April; 4 specifies May; 5 specifies June; 6 specifies July; 7 specifies August; 8 specifies September; 9 specifies October; 10 specifies November; and 11 specifies December. Note that $\text{MonthFromTime}(0) = 0$, corresponding to Thursday, 01 January, 1970.

15.9.1.5 Date Number

A date number is identified by an integer in the range 1 through 31, inclusive. The mapping $\text{DateFromTime}(t)$ from a time value t to a month number is defined by:

$$\begin{aligned}\text{DateFromTime}(t) &= \text{DayWithinYear}(t) + 1 && \text{if } \text{MonthFromTime}(t) = 0 \\ &= \text{DayWithinYear}(t) - 30 && \text{if } \text{MonthFromTime}(t) = 1 \\ &= \text{DayWithinYear}(t) - 58 - \text{InLeapYear}(t) && \text{if } \text{MonthFromTime}(t) = 2\end{aligned}$$

```

= DayWithinYear( $t$ ) - 89 - InLeapYear( $t$ )
= DayWithinYear( $t$ ) - 119 - InLeapYear( $t$ )
= DayWithinYear( $t$ ) - 150 - InLeapYear( $t$ )
= DayWithinYear( $t$ ) - 180 - InLeapYear( $t$ )
= DayWithinYear( $t$ ) - 211 - InLeapYear( $t$ )
= DayWithinYear( $t$ ) - 242 - InLeapYear( $t$ )
= DayWithinYear( $t$ ) - 272 - InLeapYear( $t$ )
= DayWithinYear( $t$ ) - 303 - InLeapYear( $t$ )
= DayWithinYear( $t$ ) - 333 - InLeapYear( $t$ )

```

if MonthFromTime(t) = 3
if MonthFromTime(t) = 4
if MonthFromTime(t) = 5
if MonthFromTime(t) = 6
if MonthFromTime(t) = 7
if MonthFromTime(t) = 8
if MonthFromTime(t) = 9
if MonthFromTime(t) = 10
if MonthFromTime(t) = 11

15.9.1.6 Week Day

The weekday for a particular time value t is defined as

$$\text{WeekDay}(t) = (\text{Day}(t) + 4) \text{ modulo } 7$$

A weekday value of 0 specifies Sunday; 1 specifies Monday; 2 specifies Tuesday; 3 specifies Wednesday; 4 specifies Thursday; 5 specifies Friday; and 6 specifies Saturday. Note that $\text{WeekDay}(0) = 4$, corresponding to Thursday, 01 January, 1970.

15.9.1.7 Local Time Zone Adjustment

An implementation of ECMAScript is expected to determine the local time zone adjustment. The local time zone adjustment is a value LocalTZA measured in milliseconds which when added to UTC represents the local *standard* time. Daylight saving time is *not* reflected by LocalTZA .

NOTE It is recommended that implementations use the time zone information of the IANA Time Zone Database.

Deleted: The value LocalTZA does not vary with time but depends only on the geographic location.

Comment [AWB8203]: Need a reference

15.9.1.8 Daylight Saving Time Adjustment

An implementation of ECMAScript is expected to make its best effort to determine the local daylight saving time adjustment. An implementation dependent algorithm using best available information on time zones to determine the local daylight saving time adjustment $\text{DaylightSavingTA}(t)$, measured in milliseconds.

Deleted: algorithm

Deleted: The

Deleted: .

Deleted: must depend only on four things:
(1) the time since the beginning of the year $t - \text{TimeFromYear}(\text{YearFromTime}(t))$
(2) whether t is in a leap year $\text{InLeapYear}(t)$
(3) the week day of the beginning of the year $\text{WeekDay}(\text{TimeFromYear}(\text{YearFromTime}(t)))$
(4) the geographic location.

The implementation of ECMAScript should not try to determine whether the exact time was subject to daylight saving time, but just whether daylight saving time would have been in effect at the current daylight saving time algorithm had been used at the time. This avoids complications such as taking into account the years that the locale observed daylight saving time year round. If the host environment provides functionality determining daylight saving time, the implementation of ECMAScript is free to map the year in question to an equivalent year (same leap-year-ness and same starting week day for the year) for which the host environment provides daylight saving time information. The only restriction is that all equivalent years should produce the same result.

15.9.1.9 Local Time

Conversion from UTC to local time is defined by

$$\text{LocalTime}(t) = t + \text{LocalTZA} + \text{DaylightSavingTA}(t)$$

Conversion from local time to UTC is defined by

$$\text{UTC}(t) = t - \text{LocalTZA} - \text{DaylightSavingTA}(t - \text{LocalTZA})$$

Note that $\text{UTC}(\text{LocalTime}(t))$ is not necessarily always equal to t .

15.9.1.10 Hours, Minutes, Second, and Milliseconds

The following functions are useful in decomposing time values:

```

HourFromTime( $t$ ) = floor( $t / \text{msPerHour}$ ) modulo HoursPerDay
MinFromTime( $t$ ) = floor( $t / \text{msPerMinute}$ ) modulo MinutesPerHour
SecFromTime( $t$ ) = floor( $t / \text{msPerSecond}$ ) modulo SecondsPerMinute
msFromTime( $t$ ) =  $t$  modulo msPerSecond

```

where

HoursPerDay	= 24
MinutesPerHour	= 60
SecondsPerMinute	= 60
msPerSecond	= 1000

$\text{msPerMinute} = 60000 = \text{msPerSecond} \times \text{SecondsPerMinute}$
 $\text{msPerHour} = 3600000 = \text{msPerMinute} \times \text{MinutesPerHour}$

15.9.1.11 MakeTime (hour, min, sec, ms)

The operator MakeTime calculates a number of milliseconds from its four arguments, which must be ECMAScript Number values. This operator functions as follows:

1. If *hour* is not finite or *min* is not finite or *sec* is not finite or *ms* is not finite, return **NaN**.
2. Let *h* be $\text{ToInteger}(\text{hour})$.
3. Let *m* be $\text{ToInteger}(\text{min})$.
4. Let *s* be $\text{ToInteger}(\text{sec})$.
5. Let *milli* be $\text{ToInteger}(\text{ms})$.
6. Let *t* be $\text{h} * \text{msPerHour} + \text{m} * \text{msPerMinute} + \text{s} * \text{msPerSecond} + \text{milli}$, performing the arithmetic according to IEEE 754 rules (that is, as if using the ECMAScript operators ***** and **+**).
7. Return *t*.

15.9.1.12 MakeDay (year, month, date)

The operator MakeDay calculates a number of days from its three arguments, which must be ECMAScript Number values. This operator functions as follows:

1. If *year* is not finite or *month* is not finite or *date* is not finite, return **NaN**.
2. Let *y* be $\text{ToInteger}(\text{year})$.
3. Let *m* be $\text{ToInteger}(\text{month})$.
4. Let *dt* be $\text{ToInteger}(\text{date})$.
5. Let *ym* be *y* + $\text{floor}(m / 12)$.
6. Let *mn* be *m* modulo 12.
7. Find a value *t* such that $\text{YearFromTime}(t) \text{ is } ym$ and $\text{MonthFromTime}(t) \text{ is } mn$ and $\text{DateFromTime}(t) \text{ is } 1$; but if this is not possible (because some argument is out of range), return **NaN**.
8. Return $\text{Day}(t) + dt - 1$.

Deleted: ==

Deleted: ==

Deleted: ==

15.9.1.13 MakeDate (day, time)

The operator MakeDate calculates a number of milliseconds from its two arguments, which must be ECMAScript Number values. This operator functions as follows:

1. If *day* is not finite or *time* is not finite, return **NaN**.
2. Return $day \times \text{msPerDay} + time$.

15.9.1.14 TimeClip (time)

The operator TimeClip calculates a number of milliseconds from its argument, which must be an ECMAScript Number value. This operator functions as follows:

1. If *time* is not finite, return **NaN**.
2. If $\text{abs}(\text{time}) > 8.64 \times 10^{15}$, return **NaN**.
3. Return an implementation-dependent choice of either $\text{ToInteger}(\text{time})$ or $\text{ToInteger}(\text{time}) + (+0)$. (Adding a positive zero converts **-0** to **+0**.)

NOTE The point of step 3 is that an implementation is permitted a choice of internal representations of time values, for example as a 64-bit signed integer or as a 64-bit floating-point value. Depending on the implementation, this internal representation may or may not distinguish **-0** and **+0**.

15.9.1.15 Date Time String Format

ECMAScript defines a string interchange format for date-times based upon a simplification of the ISO 8601 Extended Format. The format is as follows: **YYYY-MM-DDTHH:mm:ss.sssZ**

Where the fields are as follows:

- YYYY** is the decimal digits of the year 0000 to 9999 in the Gregorian calendar.
- “-” (hyphen) appears literally twice in the string.
- MM** is the month of the year from 01 (January) to 12 (December).
- DD** is the day of the month from 01 to 31.
- T** “T” appears literally in the string, to indicate the beginning of the time element.
- HH** is the number of complete hours that have passed since midnight as two decimal digits from 00 to 24.
- :
- “:” (colon) appears literally twice in the string.
- mm** is the number of complete minutes since the start of the hour as two decimal digits from 00 to 59.
- ss** is the number of complete seconds since the start of the minute as two decimal digits from 00 to 59.
- .
- “.” (dot) appears literally in the string.
- sss** is the number of complete milliseconds since the start of the second as three decimal digits.
- z** is the time zone offset specified as “z” (for UTC) or either “+” or “-” followed by a time expression **HH:mm**

This format includes date-only forms:

YYYY
YYYY-MM
YYYY-MM-DD

It also includes “date-time” forms that consist of one of the above date-only forms immediately followed by one of the following time forms with an optional time zone offset appended:

THH : mm
THH : mm : ss
THH : mm : ss . sss

All numbers must be base 10. If the **MM** or **DD** fields are absent “01” is used as the value. If the **HH**, **mm**, or **ss** fields are absent “00” is used as the value and the value of an absent **sss** field is “000”. If the time zone offset is absent, the date-time is interpreted as a local time.

- Deleted:** The value of an
- Deleted:** absent
- Deleted:** in
- Deleted:** is “z”

Illegal values (out-of-bounds as well as syntax errors) in a format string means that the format string is not a valid instance of this format.

NOTE 1 As every day both starts and ends with midnight, the two notations 00:00 and 24:00 are available to distinguish the two midnights that can be associated with one date. This means that the following two notations refer to exactly the same point in time: 1995-02-04T24:00 and 1995-02-05T00:00

NOTE 2 There exists no international standard that specifies abbreviations for civil time zones like CET, EST, etc. and sometimes the same abbreviation is even used for two very different time zones. For this reason, ISO 8601 and this format specifies numeric representations of date and time.

15.9.1.15.1 Extended years

ECMAScript requires the ability to specify 6 digit years (extended years); approximately 285,426 years, either forward or backward, from 01 January, 1970 UTC. To represent years before 0 or after 9999, ISO 8601 permits the expansion of the year representation, but only by prior agreement between the sender and the receiver. In the simplified ECMAScript format such an expanded year representation shall have 2 extra year digits and is always prefixed with a + or – sign. The year 0 is considered positive and hence prefixed with a + sign.

NOTE Examples of extended years:

-283457-03-21T15:00:59.008Z 283458 B.C.
 -000001-01-01T00:00:00Z 2 B.C.
 +000000-01-01T00:00:00Z 1 B.C.
 +000001-01-01T00:00:00Z 1 A.D.
 +001970-01-01T00:00:00Z 1970 A.D.
 +002009-12-15T00:00:00Z 2009 A.D.
 +287396-10-12T08:59:00.992Z 287396 A.D.

15.9.2 The Date Constructor Called as a Function

When `Date` is called as a function rather than as a constructor, it returns a String representing the current time (UTC).

NOTE The function call `Date(...)` is not equivalent to the object creation expression `new Date(...)` with the same arguments.

15.9.2.1 `Date ([year [, month [, date [, hours [, minutes [, seconds [, ms]]]]]])`

All of the arguments are optional; any arguments supplied are accepted but are completely ignored. A String is created and returned as if by the expression `(new Date()).toString()` where `Date` is the standard built-in constructor with that name and `toString` is the standard built-in method `Date.prototype.toString`.

15.9.3 The Date Constructor

When `Date` is called as part of a `new` expression, it is a constructor: it initialises the newly created ordinary object.

15.9.3.1 `new Date (year, month [, date [, hours [, minutes [, seconds [, ms]]]])`

When `Date` is called with two to seven arguments, it computes the date from `year`, `month`, and (optionally) `date`, `hours`, `minutes`, `seconds` and `ms`.

The `[[Prototype]]` internal `data` property of the newly constructed object is set to the original Date prototype object, the one that is the initial value of `Date.prototype` (15.9.4.1).

The newly constructed object has a `[[BuiltInBrand]]` internal data property whose value is `BuiltinDate`.

The `[[Extensible]]` internal `data` property of the newly constructed object is set to `true`.

The `[[DateValue]]` internal `data` property of the newly constructed object is set as follows:

1. Let `y` be `ToNumber(year)`.
2. ReturnIfAbrupt(year).
3. Let `m` be `ToNumber(month)`.
4. ReturnIfAbrupt(month).
5. If `date` is supplied then let `dt` be `ToNumber(date)`; else let `dt` be `1`.
6. ReturnIfAbrupt(dt).
7. If `hours` is supplied then let `h` be `ToNumber(hours)`; else let `h` be `0`.
8. ReturnIfAbrupt(h).
9. If `minutes` is supplied then let `min` be `ToNumber(minutes)`; else let `min` be `0`.
10. ReturnIfAbrupt(min).
11. If `seconds` is supplied then let `s` be `ToNumber(seconds)`; else let `s` be `0`.
12. ReturnIfAbrupt(s).
13. If `ms` is supplied then let `milli` be `ToNumber(ms)`; else let `milli` be `0`.
14. ReturnIfAbrupt(milli).
15. If `y` is not `NaN` and $0 \leq \text{ToInteger}(y) \leq 99$, then let `yr` be $1900 + \text{ToInteger}(y)$; otherwise, let `yr` be `y`.
16. Let `finalDate` be `MakeDate(MakeDay(yr, m, dt), MakeTime(h, min, s, milli))`.
17. Set the `[[DateValue]]` internal `data` property of the newly constructed object to `TimeClip(UTC(finalDate))`.

Deleted: `[[Class]]` internal property of the
Deleted: is set to "Date"
Deleted: IsDate
Deleted: NativeBrand
Deleted: NativeDate
Deleted: PrimitiveValue

Deleted: PrimitiveValue

15.9.3.2 new Date (value)

The `[[Prototype]]` internal `data` property of the newly constructed object is set to the original Date prototype object, the one that is the initial value of `Date.prototype` (15.9.4.1).

The newly constructed object has a `[[BuiltInBrand]]` internal data property whose value is `BuiltinDate`.

The `[[Extensible]]` internal `data` property of the newly constructed object is set to `true`.

The `[[DateValue]]` internal `data` property of the newly constructed object is set as follows:

1. Let `v` be `ToPrimitive(value)`.
2. If `Type(v)` is String, then
 - a. Let `V` be the result of parsing `v` as a date, in exactly the same manner as for the `parse` method (15.9.4.2). If the parse resulted in an abrupt completion, `V` is the Completion Record.
3. Else
 - a. Let `V` be `ToNumber(v)`.
4. ReturnIfAbrupt(`V`).
5. Set the `[[DateValue]]` internal `data` property of the newly constructed object to `TimeClip(V)`.
6. Return the newly constructed object.

15.9.3.3 new Date ()

The `[[Prototype]]` internal `data` property of the newly constructed object is set to the original Date prototype object, the one that is the initial value of `Date.prototype` (15.9.4.1).

The newly constructed object has a `[[BuiltInBrand]]` internal data property whose value is `BuiltinDate`.

The `[[Extensible]]` internal `data` property of the newly constructed object is set to `true`.

The `[[DateValue]]` internal `data` property of the newly constructed object is set to the time value (UTC) identifying the current time.

15.9.4 Properties of the Date Constructor

The value of the `[[Prototype]]` internal `data` property of the Date constructor is the Function prototype object (15.3.4).

Besides the `length` property (whose value is 7), the Date constructor has the following properties:

15.9.4.1 Date.prototype

The initial value of `Date.prototype` is the built-in Date prototype object (15.9.5).

This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.9.4.2 Date.parse (string)

The `parse` function applies the `ToDateString` operator to its argument. If `ToDateString` results in an abrupt completion the Completion Record is immediately returned. Otherwise, `parse` interprets the resulting String as a date and time; it returns a Number, the UTC time value corresponding to the date and time. The String may be interpreted as a local time, a UTC time, or a time in some other time zone, depending on the contents of the String. The function first attempts to parse the format of the String according to the rules called out in Date Time String Format (15.9.1.15). If the String does not conform to that format the function may fall back to any implementation-specific heuristics or implementation-specific date formats. Unrecognisable Strings or dates containing illegal element values in the format String shall cause `Date.parse` to return `NaN`.

Deleted: IsDate

Deleted: NativeBrand

Deleted: NativeDate

Deleted: The `[[Class]]` internal property of the newly constructed object is set to "Date".

Deleted: PrimitiveValue

Deleted: Parse

Deleted: ; let `V` be the time value for this date

Deleted: return

Deleted: ,

Deleted: let

Deleted: Primitive

Deleted: Set the `[[PrimitiveValue]]` internal property of the newly constructed object to `TimeClip(V)` and return. ¶

Deleted: IsDate

Deleted: NativeBrand

Deleted: NativeDate

Deleted: The `[[Class]]` internal property of the newly constructed object is set to "Date".

Deleted: PrimitiveValue

Deleted: the internal properties and

Deleted:

Deleted: and

If x is any Date object whose milliseconds amount is zero within a particular implementation of ECMAScript, then all of the following expressions should produce the same numeric value in that implementation, if all the properties referenced have their initial values:

```
x.valueOf()
Date.parse(x.toString())
Date.parse(x.toUTCString())
Date.parse(x.toISOString())
```

However, the expression

```
Date.parse(x.toLocaleString())
```

is not required to produce the same Number value as the preceding three expressions and, in general, the value produced by `Date.parse` is implementation-dependent when given any String value that does not conform to the Date Time String Format (15.9.1.15) and that could not be produced in that implementation by the `toString` or `toUTCString` method.

15.9.4.3 Date.UTC (year, month [, date [, hours [, minutes [, seconds [, ms]]]]])

When the `UTC` function is called with fewer than two arguments, the behaviour is implementation-dependent. When the `UTC` function is called with two to seven arguments, it computes the date from *year*, *month* and (optionally) *date*, *hours*, *minutes*, *seconds* and *ms*. The following steps are taken:

1. Let y be `ToNumber(year)`.
2. ReturnIfAbrupt(y).
3. Let m be `ToNumber(month)`.
4. ReturnIfAbrupt(m).
5. If *date* is supplied then let dt be `ToNumber(date)`; else let dt be **1**.
6. ReturnIfAbrupt(dt).
7. If *hours* is supplied then let h be `ToNumber(hours)`; else let h be **0**.
8. ReturnIfAbrupt(h).
9. If *minutes* is supplied then let min be `ToNumber(minutes)`; else let min be **0**.
10. ReturnIfAbrupt(min).
11. If *seconds* is supplied then let s be `ToNumber(seconds)`; else let s be **0**.
12. ReturnIfAbrupt(s).
13. If *ms* is supplied then let $milli$ be `ToNumber(ms)`; else let $milli$ be **0**.
14. ReturnIfAbrupt(milli).
15. If y is not `NaN` and $0 \leq \text{ToInteger}(y) \leq 99$, then let yr be $1900 + \text{ToInteger}(y)$; otherwise, let yr be y .
16. Return `TimeClip(MakeDate(MakeDay(yr, m, dt), MakeTime(h, min, s, milli)))`.

Deleted: *s*

The `length` property of the `UTC` function is **7**.

NOTE The `UTC` function differs from the `Date` constructor in two ways: it returns a time value as a Number, rather than creating a Date object, and it interprets the arguments in UTC rather than as local time.

15.9.4.4 Date.now ()

The `now` function return a Number value that is the time value designating the UTC date and time of the occurrence of the call to `now`.

15.9.4.6 @@create ()

When the `Date` `@@create` method of an object F , the following steps are taken:

1. Let obj be the result of calling `OrdinaryCreateFromConstructor(F, "%DatePrototype%")`.
2. Add a `[[DateValue]]` internal data property to obj .
3. Add a `[[NativeBrand]]` internal data property to obj .
4. Set the `[[NativeBrand]]` internal data property of obj to `BuiltinDate`.
5. Return obj .

15.9.5 Properties of the Date Prototype Object

The Date prototype object is itself a Date object and has a `[[BuiltinBrand]]` internal data property whose value is `BuiltinDate`. Its `[[DateValue]]` is `Nan`.

The value of the `[[Prototype]]` internal `data` property of the Date prototype object is the standard built-in Object prototype object (15.2.4).

In following descriptions of functions that are properties of the Date prototype object, the phrase “this Date object” refers to the object that is the `this` value for the invocation of the function. Unless explicitly noted otherwise, none of these functions are generic; a `TypeError` exception is thrown if the `this` value is not an object with a `[[DateValue]]` internal `data` property. Also, the phrase “this time value” refers to the Number value for the time represented by this Date object, that is, the value of the `[[DateValue]]` internal `data` property of this Date object.

15.9.5.1 Date.prototype.constructor

The initial value of `Date.prototype.constructor` is the built-in `Date` constructor.

15.9.5.2 Date.prototype.toString ()

This function returns a String value. If this time value is `Nan`, the String value is `"Invalid Date"`, otherwise the contents of the String are implementation-dependent, but are intended to represent the Date in the current time zone in a convenient, human-readable form.

NOTE For any Date value `d` whose milliseconds amount is zero, the result of `Date.parse(d.toString())` is equal to `d.valueOf()`. See 15.9.4.2.

15.9.5.3 Date.prototype.toDateString ()

This function returns a String value. The contents of the String are implementation-dependent, but are intended to represent the “date” portion of the Date in the current time zone in a convenient, human-readable form.

15.9.5.4 Date.prototype.toTimeString ()

This function returns a String value. The contents of the String are implementation-dependent, but are intended to represent the “time” portion of the Date in the current time zone in a convenient, human-readable form.

15.9.5.5 Date.prototype.toLocaleString ()

This function returns a String value. The contents of the String are implementation-dependent, but are intended to represent the Date in the current time zone in a convenient, human-readable form that corresponds to the conventions of the host environment’s current locale.

NOTE The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.9.5.6 Date.prototype.toLocaleDateString ()

This function returns a String value. The contents of the String are implementation-dependent, but are intended to represent the “date” portion of the Date in the current time zone in a convenient, human-readable form that corresponds to the conventions of the host environment’s current locale.

NOTE The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

Deleted: (its `[[Class]]` is “`Date`”)
Deleted: `IsDate`
Deleted: `NativeBrand`
Deleted: `NativeDate`
Deleted: `whose`
Deleted: `PrimitiveValue`

Deleted: for which the value of the `[[Class]]`
Deleted: `IsDate`
Deleted: `NativeBrand`
Deleted: `is "Date"`
Deleted: `PrimitiveValue`

Deleted: The

15.9.5.7 Date.prototype.toLocaleTimeString ()

This function returns a String value. The contents of the String are implementation-dependent, but are intended to represent the “time” portion of the Date in the current time zone in a convenient, human-readable form that corresponds to the conventions of the host environment’s current locale.

NOTE The first parameter to this function is likely to be used in a future version of this standard; it is recommended that implementations do not use this parameter position for anything else.

15.9.5.8 Date.prototype.valueOf ()

The `valueOf` function returns a Number, which is this time value.

15.9.5.9 Date.prototype.getTime ()

1. Return this time value.

15.9.5.10 Date.prototype.getFullYear ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is `NAN`, return `NAN`.
4. Return `YearFromTime(LocalTime(t))`.

15.9.5.11 Date.prototype.getUTCFullYear ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is `NAN`, return `NAN`.
4. Return `YearFromTime(t)`.

15.9.5.12 Date.prototype.getMonth ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is `NAN`, return `NAN`.
4. Return `MonthFromTime(LocalTime(t))`.

15.9.5.13 Date.prototype.getUTCMonth ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is `NAN`, return `NAN`.
4. Return `MonthFromTime(t)`.

15.9.5.14 Date.prototype.getDate ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is `NAN`, return `NAN`.
4. Return `DateFromTime(LocalTime(t))`.

15.9.5.15 Date.prototype.getUTCDate ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is `NAN`, return `NAN`.
4. Return `DateFromTime(t)`.

15.9.5.16 Date.prototype.getDay ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is NaN, return NaN.
4. Return WeekDay(LocalTime(t)).

15.9.5.17 Date.prototype.getUTCDay ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is NaN, return NaN.
4. Return WeekDay(t).

15.9.5.18 Date.prototype.getHours ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is NaN, return NaN.
4. Return HourFromTime(LocalTime(t)).

15.9.5.19 Date.prototype.getUTCHours ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is NaN, return NaN.
4. Return HourFromTime(t).

15.9.5.20 Date.prototype.getMinutes ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is NaN, return NaN.
4. Return MinFromTime(LocalTime(t)).

15.9.5.21 Date.prototype.getUTCMinutes ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is NaN, return NaN.
4. Return MinFromTime(t).

15.9.5.22 Date.prototype.getSeconds ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is NaN, return NaN.
4. Return SecFromTime(LocalTime(t)).

15.9.5.23 Date.prototype.getUTCSSeconds ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is NaN, return NaN.
4. Return SecFromTime(t).

15.9.5.24 Date.prototype.getMilliseconds ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).

3. If t is **NAN**, return **NAN**.
4. Return $\text{msFromTime}(\text{LocalTime}(t))$.

15.9.5.25 Date.prototype.getUTCMilliseconds ()

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is **NAN**, return **NAN**.
4. Return $\text{msFromTime}(t)$.

15.9.5.26 Date.prototype.getTimezoneOffset ()

Returns the difference between local time and UTC time in minutes.

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. If t is **NAN**, return **NAN**.
4. Return $(t - \text{LocalTime}(t)) / \text{msPerMinute}$.

15.9.5.27 Date.prototype.setTime (time)

1. Let v be $\text{TimeClip}(\text{ToNumber}(time))$.
2. ReturnIfAbrupt(v).
3. Set the **[[DateValue]]** internal **data** property of this Date object to v .
4. Return v .

Deleted: PrimitiveValue

15.9.5.28 Date.prototype.setMilliseconds (ms)

1. Let t be the result of $\text{LocalTime}(\text{this time value})$.
2. Let $time$ be $\text{MakeTime}(\text{HourFromTime}(t), \text{MinFromTime}(t), \text{SecFromTime}(t), \text{ToNumber}(ms))$.
3. Let u be $\text{TimeClip}(\text{UTC}(\text{MakeDate}(\text{Day}(t), time)))$.
4. Set the **[[DateValue]]** internal **data** property of this Date object to u .
5. Return u .

Deleted: PrimitiveValue

15.9.5.29 Date.prototype.setUTCMilliseconds (ms)

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. Let $time$ be $\text{MakeTime}(\text{HourFromTime}(t), \text{MinFromTime}(t), \text{SecFromTime}(t), \text{ToNumber}(ms))$.
4. Let v be $\text{TimeClip}(\text{MakeDate}(\text{Day}(t), time))$.
5. Set the **[[DateValue]]** internal **data** property of this Date object to v .
6. Return v .

Deleted: PrimitiveValue

15.9.5.30 Date.prototype.setSeconds (sec [, ms])

If ms is not specified, this behaves as if ms were specified with the value **getMilliseconds ()**.

1. Let t be the result of $\text{LocalTime}(\text{this time value})$.
2. Let s be $\text{ToNumber}(sec)$.
3. If ms is not specified, then let $milli$ be $\text{msFromTime}(t)$; otherwise, let $milli$ be $\text{ToNumber}(ms)$.
4. Let $date$ be $\text{MakeDate}(\text{Day}(t), \text{MakeTime}(\text{HourFromTime}(t), \text{MinFromTime}(t), s, milli))$.
5. Let u be $\text{TimeClip}(\text{UTC}(date))$.
6. Set the **[[DateValue]]** internal **data** property of this Date object to u .
7. Return u .

Deleted: PrimitiveValue

The **length** property of the **setSeconds** method is **2**.

15.9.5.31 Date.prototype.setUTCSeconds (sec [, ms])

If *ms* is not specified, this behaves as if *ms* were specified with the value `getUTCMilliseconds()`.

1. Let *t* be this time value.
2. [ReturnIfAbrupt\(*t*\)](#).
3. Let *s* be `ToNumber(sec)`.
4. If *ms* is not specified, then let *milli* be `msFromTime(t)`; otherwise, let *milli* be `ToNumber(ms)`.
5. Let *date* be `MakeDate(Day(t), MakeTime(HourFromTime(t), MinFromTime(t), s, milli))`.
6. Let *v* be `TimeClip(date)`.
7. Set the `[[DateValue]]` internal `data` property of this Date object to *v*.
8. Return *v*.

Deleted: PrimitiveValue

The `length` property of the `setUTCSeconds` method is 2.

15.9.5.32 Date.prototype.setMinutes (min [, sec [, ms]])

If *sec* is not specified, this behaves as if *sec* were specified with the value `getSeconds()`.

If *ms* is not specified, this behaves as if *ms* were specified with the value `getMilliseconds()`.

1. Let *t* be the result of `LocalTime(this time value)`.
2. Let *m* be `ToNumber(min)`.
3. If *sec* is not specified, then let *s* be `SecFromTime(t)`; otherwise, let *s* be `ToNumber(sec)`.
4. If *ms* is not specified, then let *milli* be `msFromTime(t)`; otherwise, let *milli* be `ToNumber(ms)`.
5. Let *date* be `MakeDate(Day(t), MakeTime(HourFromTime(t), m, s, milli))`.
6. Let *u* be `TimeClip(UTC(date))`.
7. Set the `[[DateValue]]` internal `data` property of this Date object to *u*.
8. Return *u*.

Deleted: PrimitiveValue

The `length` property of the `setMinutes` method is 3.

15.9.5.33 Date.prototype.setUTCMinutes (min [, sec [, ms]])

If *sec* is not specified, this behaves as if *sec* were specified with the value `getUTCSeconds()`.

If *ms* is not specified, this function behaves as if *ms* were specified with the value return by `getUTCMilliseconds()`.

1. Let *t* be this time value.
2. [ReturnIfAbrupt\(*t*\)](#).
3. Let *m* be `ToNumber(min)`.
4. If *sec* is not specified, then let *s* be `SecFromTime(t)`; otherwise, let *s* be `ToNumber(sec)`.
5. If *ms* is not specified, then let *milli* be `msFromTime(t)`; otherwise, let *milli* be `ToNumber(ms)`.
6. Let *date* be `MakeDate(Day(t), MakeTime(HourFromTime(t), m, s, milli))`.
7. Let *v* be `TimeClip(date)`.
8. Set the `[[DateValue]]` internal `data` property of this Date object to *v*.
9. Return *v*.

Deleted: PrimitiveValue

The `length` property of the `setUTCMinutes` method is 3.

15.9.5.34 Date.prototype.setHours (hour [, min [, sec [, ms]]])

If *min* is not specified, this behaves as if *min* were specified with the value `getMinutes()`.

If *sec* is not specified, this behaves as if *sec* were specified with the value `getSeconds()`.

If *ms* is not specified, this behaves as if *ms* were specified with the value `getMilliseconds()`.

1. Let t be the result of LocalTime(this time value).
2. Let h be ToNumber($hour$).
3. If min is not specified, then let m be MinFromTime(t); otherwise, let m be ToNumber(min).
4. If sec is not specified, then let s be SecFromTime(t); otherwise, let s be ToNumber(sec).
5. If ms is not specified, then let $milli$ be msFromTime(t); otherwise, let $milli$ be ToNumber(ms).
6. Let $date$ be MakeDate(Day(t), MakeTime($h, m, s, milli$)).
7. Let u be TimeClip(UTC($date$)).
8. Set the `[[DateValue]]` internal `data` property of this Date object to u .
9. Return u .

Deleted: PrimitiveValue

The `length` property of the `setHours` method is 4.

15.9.5.35 Date.prototype.setUTCHours (hour [, min [, sec [, ms]]])

If min is not specified, this behaves as if min were specified with the value `getUTCMinutes()`.

If sec is not specified, this behaves as if sec were specified with the value `getUTCSeconds()`.

If ms is not specified, this behaves as if ms were specified with the value `getUTCMilliseconds()`.

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. Let h be ToNumber($hour$).
4. If min is not specified, then let m be MinFromTime(t); otherwise, let m be ToNumber(min).
5. If sec is not specified, then let s be SecFromTime(t); otherwise, let s be ToNumber(sec).
6. If ms is not specified, then let $milli$ be msFromTime(t); otherwise, let $milli$ be ToNumber(ms).
7. Let $newDate$ be MakeDate(Day(t), MakeTime($h, m, s, milli$)).
8. Let v be TimeClip($newDate$).
9. Set the `[[DateValue]]` internal `data` property of this Date object to v .
10. Return v .

Deleted: PrimitiveValue

The `length` property of the `setUTCHours` method is 4.

15.9.5.36 Date.prototype.setDate (date)

1. Let t be the result of LocalTime(this time value).
2. Let dt be ToNumber($date$).
3. Let $newDate$ be MakeDate(MakeDay(YearFromTime(t), MonthFromTime(t), dt), TimeWithinDay(t)).
4. Let u be TimeClip(UTC($newDate$)).
5. Set the `[[DateValue]]` internal `data` property of this Date object to u .
6. Return u .

Deleted: PrimitiveValue

15.9.5.37 Date.prototype.setUTCDate (date)

1. Let t be this time value.
2. ReturnIfAbrupt(t).
3. Let dt be ToNumber($date$).
4. Let $newDate$ be MakeDate(MakeDay(YearFromTime(t), MonthFromTime(t), dt), TimeWithinDay(t)).
5. Let v be TimeClip($newDate$).
6. Set the `[[DateValue]]` internal `data` property of this Date object to v .
7. Return v .

Deleted: PrimitiveValue

15.9.5.38 Date.prototype.setMonth (month [, date])

If $date$ is not specified, this behaves as if $date$ were specified with the value `getDate()`.

1. Let t be the result of LocalTime(this time value).
2. Let m be ToNumber($month$).
3. If $date$ is not specified, then let dt be DateFromTime(t); otherwise, let dt be ToNumber($date$).

4. Let *newDate* be MakeDate(MakeDay(YearFromTime(*t*), *m*, *dt*), TimeWithinDay(*t*)).
5. Let *u* be TimeClip(UTC(*newDate*)).
6. Set the **[[DateValue]]** internal **data** property of this Date object to *u*.
7. Return *u*.

Deleted: PrimitiveValue

The **length** property of the **setMonth** method is **2**.

15.9.5.39 Date.prototype.setUTCMonth (month [, date])

If *date* is not specified, this behaves as if *date* were specified with the value **getUTCDate()**.

1. Let *t* be this time value.
2. **ReturnIfAbrupt(*t*)**.
3. Let *m* be ToNumber(*month*).
4. If *date* is not specified, then let *dt* be DateFromTime(*t*); otherwise, let *dt* be ToNumber(*date*).
5. Let *newDate* be MakeDate(MakeDay(YearFromTime(*t*), *m*, *dt*), TimeWithinDay(*t*)).
6. Let *v* be TimeClip(*newDate*).
7. Set the **[[DateValue]]** internal **data** property of this Date object to *v*.
8. Return *v*.

Deleted: PrimitiveValue

The **length** property of the **setUTCMonth** method is **2**.

15.9.5.40 Date.prototype.setFullYear (year [, month [, date]])

If *month* is not specified, this behaves as if *month* were specified with the value **getMonth()**.

If *date* is not specified, this behaves as if *date* were specified with the value **getDate()**.

1. Let *t* be the result of LocalTime(this time value); but if this time value is **NaN**, let *t* be **+0**.
2. Let *y* be ToNumber(*year*).
3. If *month* is not specified, then let *m* be MonthFromTime(*t*); otherwise, let *m* be ToNumber(*month*).
4. If *date* is not specified, then let *dt* be DateFromTime(*t*); otherwise, let *dt* be ToNumber(*date*).
5. Let *newDate* be MakeDate(MakeDay(*y*, *m*, *dt*), TimeWithinDay(*t*)).
6. Let *u* be TimeClip(UTC(*newDate*)).
7. Set the **[[DateValue]]** internal **data** property of this Date object to *u*.
8. Return *u*.

Deleted: PrimitiveValue

The **length** property of the **setFullYear** method is **3**.

15.9.5.41 Date.prototype.setUTCFullYear (year [, month [, date]])

If *month* is not specified, this behaves as if *month* were specified with the value **getUTCMonth()**.

If *date* is not specified, this behaves as if *date* were specified with the value **getUTCDate()**.

1. Let *t* be this time value; but if this time value is **NaN**, let *t* be **+0**.
2. **ReturnIfAbrupt(*t*)**.
3. Let *y* be ToNumber(*year*).
4. If *month* is not specified, then let *m* be MonthFromTime(*t*); otherwise, let *m* be ToNumber(*month*).
5. If *date* is not specified, then let *dt* be DateFromTime(*t*); otherwise, let *dt* be ToNumber(*date*).
6. Let *newDate* be MakeDate(MakeDay(*y*, *m*, *dt*), TimeWithinDay(*t*)).
7. Let *v* be TimeClip(*newDate*).
8. Set the **[[DateValue]]** internal **data** property of this Date object to *v*.
9. Return *v*.

Deleted: PrimitiveValue

The **length** property of the **setUTCFullYear** method is **3**.

15.9.5.42 Date.prototype.toUTCString ()

This function returns a String value. The contents of the String are implementation-dependent, but are intended to represent the Date in a convenient, human-readable form in UTC.

NOTE The intent is to produce a String representation of a date that is more readable than the format specified in 15.9.1.15. It is not essential that the chosen format be unambiguous or easily machine parsable. If an implementation does not have a preferred human-readable format it is recommended to use the format defined in 15.9.1.15 but with a space rather than a "T" used to separate the date and time elements.

15.9.5.43 Date.prototype.toISOString ()

This function returns a String value representing the instance in time represented by this Date object. The format of the String is the Date Time string format defined in 15.9.1.15. All fields are present in the String. The time zone is always UTC, denoted by the suffix Z. If the time value of this object is not a finite Number a **RangeError** exception is thrown.

15.9.5.44 Date.prototype.toJSON (key)

This function provides a String representation of a Date object for use by **JSON.stringify** (15.12.3).

When the **toJSON** method is called with argument *key*, the following steps are taken:

1. Let *O* be the result of calling **ToObject**, giving it the **this** value as its argument.
2. Let *tv* be **ToPrimitive**(*O*, hint Number).
3. If *tv* is a Number and is not finite, return **null**.
4. Let *toISO* be the result of **Get**(*O*, "**toISOString**").
5. **ReturnIfAbrupt**(*toISO*).
6. If **IsCallable**(*toISO*) is **false**, throw a **TypeError** exception.
7. Return the result of calling the **[[Call]]** internal method of *toISO* with *O* as *thisArgument* and an empty List as *argumentsList*.

NOTE 1 The argument is ignored.

NOTE 2 The **toJSON** function is intentionally generic; it does not require that its **this** value be a Date object. Therefore, it can be transferred to other kinds of objects for use as a method. However, it does require that any such object have a **toISOString** method. An object is free to use the argument *key* to filter its stringification.

15.9.5.45 Date.prototype.@@ToPrimitive (hint)

This function is called by ECMAScript language operators to convert an object to a primitive value. The allowed values for *hint* are **"default"**, **"number"**, and **"string"**. Date objects are unique among built-in ECMAScript objects in that they treat **"default"** as being equivalent to **"string"**. All other built-in ECMAScript objects treat **"default"** as being equivalent to **"number"**.

When the **@@ToPrimitive** method is called with argument *hint*, the following steps are taken:

1. Let *O* be the **this**.
2. If **Type**(*O*) is not Object, then throw a **TypeError** exception.
3. If *hint* is **"string"** or **"default"**, then
 - a. Let *tryFirst* be **"string"**.
4. Else if *hint* is **"number"**, then
 - a. Let *tryFirst* be **"number"**.
5. Else, throw a **TypeError** exception.
6. Return the result of **OrdinaryToPrimitive**(*O*, *tryFirst*).

Deleted: calling the **[[Delete]]** internal method of
Deleted: with argument
Deleted: the **this** value
Deleted: argument l

Deleted: d

Deleted:
Deleted:
Deleted:
Deleted:

15.9.6 Properties of Date Instances

Date instances are ordinary objects that inherit properties from the Date prototype object and have a [[BuiltinBrand]] internal whose value is BuiltinDate. Date instances also have a [[DateValue]] internal data property.

The [[DateValue]] internal data property is the time value represented by this Date object.

- Deleted:** their
- Deleted:** Class
- Deleted:** IsDate
- Deleted:** NativeBrand
- Deleted:** NativeDate
- Deleted:** property value is "Date"
- Deleted:** PrimitiveValue
- Deleted:** PrimitiveValue

15.10 RegExp (Regular Expression) Objects

A RegExp object contains a regular expression and the associated flags.

NOTE The form and functionality of regular expressions is modelled after the regular expression facility in the Perl 5 programming language.

15.10.1 Patterns

The `RegExp` constructor applies the following grammar to the input pattern String. An error occurs if the grammar cannot interpret the String as an expansion of *Pattern*.

Syntax

Pattern ::
 Disjunction

Disjunction ::
 Alternative
 Alternative | *Disjunction*

Alternative ::
 [empty]
 Alternative *Term*

Term ::
 Assertion
 Atom
 Atom Quantifier

Assertion ::
 ^
 \$
 \ b
 \ B
 (? = *Disjunction*)
 (? ! *Disjunction*)

Quantifier ::
 QuantifierPrefix
 QuantifierPrefix ?

QuantifierPrefix ::
 *
 +
 ?
 { *DecimalDigits* }
 { *DecimalDigits* , }
 { *DecimalDigits* , *DecimalDigits* }

Atom ::

PatternCharacter

\ AtomEscape

CharacterClass

(Disjunction)

(? : Disjunction)

PatternCharacter ::

SourceCharacter but not one of

*^ \$ \ . * + ? () [] { } |*

AtomEscape ::

DecimalEscape

CharacterEscape

CharacterClassEscape

CharacterEscape ::

ControlEscape

c ControlLetter

HexEscapeSequence

UnicodeEscapeSequence

IdentityEscape

ControlEscape :: one of

f n r t v

ControlLetter :: one of

<i>a b c d e f g h i j k l m n o p q r s t u v w x y z</i>
<i>A B C D E F G H I J K L M N O P Q R S T U V W X Y Z</i>

IdentityEscape ::

SourceCharacter but not IdentifierPart

<ZWJ>

<ZWNJ>

DecimalEscape ::

DecimalIntegerLiteral [lookahead \notin DecimalDigit]

CharacterClassEscape :: one of

d D s S w W

CharacterClass ::

[[lookahead \notin {^}] ClassRanges]

[^ ClassRanges]

ClassRanges ::

[empty]

NonemptyClassRanges

NonemptyClassRanges ::

ClassAtom

ClassAtom NonemptyClassRangesNoDash

ClassAtom - ClassAtom ClassRanges

NonemptyClassRangesNoDash ::

ClassAtom

ClassAtomNoDash NonemptyClassRangesNoDash

ClassAtomNoDash - ClassAtom ClassRanges

ClassAtom ::

 -
 ClassAtomNoDash

ClassAtomNoDash ::

SourceCharacter **but not one of \ or] or -**
 \ *ClassEscape*

ClassEscape ::

DecimalEscape
 b
 CharacterEscape
 CharacterClassEscape

15.10.2 Pattern Semantics

A regular expression pattern is converted into an internal procedure using the process described below. An implementation is encouraged to use more efficient algorithms than the ones listed below, as long as the results are the same. The internal procedure is used as the value of a RegExp object's [[Match]] internal data property.

15.10.2.1 Notation

The descriptions below use the following variables:

- *Input* is the String being matched by the regular expression pattern. The notation *input*[*n*] means the *n*th character of *input*, where *n* can range between 0 (inclusive) and *InputLength* (exclusive).
- *InputLength* is the number of characters in the *Input* String.
- *NcapturingParens* is the total number of left capturing parentheses (i.e. the total number of times the *Atom* :: (*Disjunction*) production is expanded) in the pattern. A left capturing parenthesis is any (pattern character that is matched by the (terminal of the *Atom* :: (*Disjunction*) production.
- *IgnoreCase* is the setting of the RegExp object's *ignoreCase* property.
- *Multiline* is the setting of the RegExp object's property.

Furthermore, the descriptions below use the following internal data structures:

- A *CharSet* is a mathematical set of characters.
- A *State* is an ordered pair (*endIndex*, *captures*) where *endIndex* is an integer and *captures* is an internal array of *NcapturingParens* values. *States* are used to represent partial match states in the regular expression matching algorithms. The *endIndex* is one plus the index of the last input character matched so far by the pattern, while *captures* holds the results of capturing parentheses. The *n*th element of *captures* is either a String that represents the value obtained by the *n*th set of capturing parentheses or **undefined** if the *n*th set of capturing parentheses hasn't been reached yet. Due to backtracking, many *States* may be in use at any time during the matching process.
- A *MatchResult* is either a *State* or the special token **failure** that indicates that the match failed.
- A *Continuation* procedure is an internal closure (i.e. an internal procedure with some arguments already bound to values) that takes one *State* argument and returns a *MatchResult* result. If an internal closure references variables bound in the function that creates the closure, the closure uses the values that these variables had at the time the closure was created. The *Continuation* attempts to match the remaining portion (specified by the closure's already-bound arguments) of the pattern against the input String, starting at the intermediate state given by its *State* argument. If the match succeeds, the *Continuation* returns the final *State* that it reached; if the match fails, the *Continuation* returns **failure**.
- A *Matcher* procedure is an internal closure that takes two arguments -- a *State* and a *Continuation* -- and returns a *MatchResult* result. A *Matcher* attempts to match a middle subpattern (specified by the closure's already-bound arguments) of the pattern against the input String, starting at the intermediate state given by its *State* argument. The *Continuation* argument should be a closure that

matches the rest of the pattern. After matching the subpattern of a pattern to obtain a new *State*, the *Matcher* then calls *Continuation* on that new *State* to test if the rest of the pattern can match as well. If it can, the *Matcher* returns the *State* returned by *Continuation*; if not, the *Matcher* may try different choices at its choice points, repeatedly calling *Continuation* until it either succeeds or all possibilities have been exhausted.

- An *AssertionTester* procedure is an internal closure that takes a *State* argument and returns a Boolean result. The assertion tester tests a specific condition (specified by the closure's already-bound arguments) against the current place in the input String and returns **true** if the condition matched or **false** if not.
- An *EscapeValue* is either a character or an integer. An *EscapeValue* is used to denote the interpretation of a *DecimalEscape* escape sequence: a character *ch* means that the escape sequence is interpreted as the character *ch*, while an integer *n* means that the escape sequence is interpreted as a backreference to the *nth* set of capturing parentheses.

15.10.2.2 Pattern

The production *Pattern* :: *Disjunction* evaluates as follows:

1. Evaluate *Disjunction* to obtain a *Matcher* *m*.
2. Return an internal closure that takes two arguments, a String *str* and an integer *index*, and performs the following:
 1. Let *Input* be the given String *str*. This variable will be used throughout the algorithms in 15.10.2.
 2. Let *InputLength* be the length of *Input*. This variable will be used throughout the algorithms in 15.10.2.
 3. Let *c* be a *Continuation* that always returns its *State* argument as a successful *MatchResult*.
 4. Let *cap* be an internal array of *NcapturingParens* **undefined** values, indexed 1 through *NcapturingParens*.
 5. Let *x* be the *State* (*index*, *cap*).
 6. Call *m(x, c)* and return its result.

NOTE A *Pattern* evaluates ("compiles") to an internal procedure value. `RegExp.prototype.exec` can then apply this procedure to a String and an offset within the String to determine whether the pattern would match starting at exactly that offset within the String, and, if it does match, what the values of the capturing parentheses would be. The algorithms in 15.10.2 are designed so that compiling a pattern may throw a *SyntaxError* exception; on the other hand, once the pattern is successfully compiled, applying its result internal procedure to find a match in a String cannot throw an exception (except for any host-defined exceptions that can occur anywhere such as out-of-memory).

15.10.2.3 Disjunction

The production *Disjunction* :: *Alternative* evaluates by evaluating *Alternative* to obtain a *Matcher* and returning that *Matcher*.

The production *Disjunction* :: *Alternative* | *Disjunction* evaluates as follows:

1. Evaluate *Alternative* to obtain a *Matcher* *m1*.
2. Evaluate *Disjunction* to obtain a *Matcher* *m2*.
3. Return an internal *Matcher* closure that takes two arguments, a *State* *x* and a *Continuation* *c*, and performs the following:
 1. Call *m1(x, c)* and let *r* be its result.
 2. If *r* isn't **failure**, return *r*.
 3. Call *m2(x, c)* and return its result.

NOTE The | regular expression operator separates two alternatives. The pattern first tries to match the left *Alternative* (followed by the sequel of the regular expression); if it fails, it tries to match the right *Disjunction* (followed by the sequel of the regular expression). If the left *Alternative*, the right *Disjunction*, and the sequel all have choice points, all choices in the sequel are tried before moving on to the next choice in the left *Alternative*. If choices in the left *Alternative* are exhausted, the right *Disjunction* is tried instead of the left *Alternative*. Any capturing parentheses inside a portion of the pattern skipped by | produce **undefined** values instead of Strings. Thus, for example,

```
/a|ab/.exec("abc")
returns the result "a" and not "ab". Moreover,
/((a)|(ab))|((c)|(bc))/.exec("abc")
returns the array
["abc", "a", "a", undefined, "bc", undefined, "bc"]
and not
["abc", "ab", undefined, "ab", "c", "c", undefined]
```

15.10.2.4 Alternative

The production *Alternative* :: [empty] evaluates by returning a Matcher that takes two arguments, a State *x* and a Continuation *c*, and returns the result of calling *c(x)*.

The production *Alternative* :: *Alternative Term* evaluates as follows:

1. Evaluate *Alternative* to obtain a Matcher *m1*.
2. Evaluate *Term* to obtain a Matcher *m2*.
3. Return an internal Matcher closure that takes two arguments, a State *x* and a Continuation *c*, and performs the following:
 1. Create a Continuation *d* that takes a State argument *y* and returns the result of calling *m2(y, c)*.
 2. Call *m1(x, d)* and return its result.

NOTE Consecutive *Terms* try to simultaneously match consecutive portions of the input String. If the left *Alternative*, the right *Term*, and the sequel of the regular expression all have choice points, all choices in the sequel are tried before moving on to the next choice in the right *Term*, and all choices in the right *Term* are tried before moving on to the next choice in the left *Alternative*.

15.10.2.5 Term

The production *Term* :: *Assertion* evaluates by returning an internal Matcher closure that takes two arguments, a State *x* and a Continuation *c*, and performs the following:

1. Evaluate *Assertion* to obtain an AssertionTester *t*.
2. Call *t(x)* and let *r* be the resulting Boolean value.
3. If *r* is **false**, return **failure**.
4. Call *c(x)* and return its result.

The production *Term* :: *Atom* evaluates by evaluating *Atom* to obtain a Matcher and returning that Matcher.

The production *Term* :: *Atom Quantifier* evaluates as follows:

1. Evaluate *Atom* to obtain a Matcher *m*.
2. Evaluate *Quantifier* to obtain the three results: an integer *min*, an integer (or ∞) *max*, and Boolean *greedy*.
3. If *max* is finite and less than *min*, then throw a **SyntaxError** exception.
4. Let *parenIndex* be the number of left capturing parentheses in the entire regular expression that occur to the left of this production expansion's *Term*. This is the total number of times the *Atom* :: (*Disjunction*) production is expanded prior to this production's *Term* plus the total number of *Atom* :: (*Disjunction*) productions enclosing this *Term*.
5. Let *parenCount* be the number of left capturing parentheses in the expansion of this production's *Atom*. This is the total number of *Atom* :: (*Disjunction*) productions enclosed by this production's *Atom*.
6. Return an internal Matcher closure that takes two arguments, a State *x* and a Continuation *c*, and performs the following:
 1. Call *RepeatMatcher(m, min, max, greedy, x, c, parenIndex, parenCount)* and return its result.

Runtime Semantics: RepeatMatcher Abstract Operation

The abstract operation *RepeatMatcher* takes eight parameters, a Matcher *m*, an integer *min*, an integer (or ∞) *max*, a Boolean *greedy*, a State *x*, a Continuation *c*, an integer *parenIndex*, and an integer *parenCount*, and performs the following:

1. If *max* is zero, then call *c(x)* and return its result.
2. Create an internal Continuation closure *d* that takes one State argument *y* and performs the following:
 - 1.If *min* is zero and *y*'s *endIndex* is equal to *x*'s *endIndex*, then return **failure**.
 - 2.If *min* is zero then let *min2* be zero; otherwise let *min2* be *min*-1.
 - 3.If *max* is ∞ , then let *max2* be ∞ ; otherwise let *max2* be *max*-1.
 - 4.Call *RepeatMatcher(m, min2, max2, greedy, y, c, parenIndex, parenCount)* and return its result.
3. Let *cap* be a fresh copy of *x*'s *captures* internal array.
4. For every integer *k* that satisfies *parenIndex* < *k* and *k* ≤ *parenIndex+parenCount*, set *cap[k]* to **undefined**.
5. Let *e* be *x*'s *endIndex*.
6. Let *xr* be the State (*e, cap*).
7. If *min* is not zero, then call *m(xr, d)* and return its result.
8. If *greedy* is **false**, then
 - a. Call *c(x)* and let *z* be its result.
 - b. If *z* is not **failure**, return *z*.
 - c. Call *m(xr, d)* and return its result.
9. Call *m(xr, d)* and let *z* be its result.
10. If *z* is not **failure**, return *z*.
11. Call *c(x)* and return its result.

NOTE 1 An *Atom* followed by a *Quantifier* is repeated the number of times specified by the *Quantifier*. A *Quantifier* can be non-greedy, in which case the *Atom* pattern is repeated as few times as possible while still matching the sequel, or it can be greedy, in which case the *Atom* pattern is repeated as many times as possible while still matching the sequel. The *Atom* pattern is repeated rather than the input String that it matches, so different repetitions of the *Atom* can match different input substrings.

NOTE 2 If the *Atom* and the sequel of the regular expression all have choice points, the *Atom* is first matched as many (or as few, if non-greedy) times as possible. All choices in the sequel are tried before moving on to the next choice in the last repetition of *Atom*. All choices in the last (*n*th) repetition of *Atom* are tried before moving on to the next choice in the next-to-last (*n*-1)st repetition of *Atom*; at which point it may turn out that more or fewer repetitions of *Atom* are now possible; these are exhausted (again, starting with either as few or as many as possible) before moving on to the next choice in the (*n*-1)st repetition of *Atom* and so on.

Compare

```
/a[a-z]{2,4}/.exec("abcdefghijkl")
```

which returns "abcde" with

```
/a[a-z]{2,4}?/.exec("abcdefghijkl")
```

which returns "abc".

Consider also

```
/(aa|aabaaac|ba|b|c)*/.exec("aabaaac")
```

which, by the choice point ordering above, returns the array

```
["aaba", "ba"]
```

and not any of:

```
["aabaaac", "aabaaac"]
["aabaaac", "c"]
```

The above ordering of choice points can be used to write a regular expression that calculates the greatest common divisor of two numbers (represented in unary notation). The following example calculates the gcd of 10 and 15:

```
"aaaaaaaaaaa,aaaaaaaaaaaaaa".replace(/^(\a+)\1*/,$1)
```

which returns the gcd in unary notation "aaaaa".

NOTE 3 Step 4 of the *RepeatMatcher* clears *Atom*'s captures each time *Atom* is repeated. We can see its behaviour in the regular expression

```
/(z)((a+)?(b+)?(c))*/.exec("zaacbbbcac")
```

which returns the array

```
["zaacbbbcac", "z", "ac", "a", undefined, "c"]
```

and not

```
["zaacbbbcac", "z", "ac", "a", "bbb", "c"]
```

because each iteration of the outermost `*` clears all captured Strings contained in the quantified *Atom*, which in this case includes capture Strings numbered 2, 3, 4, and 5.

NOTE 4 Step 1 of the RepeatMatcher's *d* closure states that, once the minimum number of repetitions has been satisfied, any more expansions of *Atom* that match the empty String are not considered for further repetitions. This prevents the regular expression engine from falling into an infinite loop on patterns such as:

```
/ (a*) */ .exec("b")
```

or the slightly more complicated:

```
/ (a*)b\1+/.exec("baaaac")
```

which returns the array

```
["b", ""]
```

15.10.2.6 Assertion

The production *Assertion* :: `^` evaluates by returning an internal AssertionTester closure that takes a State argument *x* and performs the following:

1. Let *e* be *x*'s *endIndex*.
2. If *e* is zero, return **true**.
3. If *Multiline* is **false**, return **false**.
4. If the character *Input*[*e*-1] is one of *LineTerminator*, return **true**.
5. Return **false**.

The production *Assertion* :: `$` evaluates by returning an internal AssertionTester closure that takes a State argument *x* and performs the following:

1. Let *e* be *x*'s *endIndex*.
2. If *e* is equal to *InputLength*, return **true**.
3. If *Multiline* is **false**, return **false**.
4. If the character *Input*[*e*] is one of *LineTerminator*, return **true**.
5. Return **false**.

Deleted: multiline

The production *Assertion* :: `\ b` evaluates by returning an internal AssertionTester closure that takes a State argument *x* and performs the following:

1. Let *e* be *x*'s *endIndex*.
2. Call *IsWordChar*(*e*-1) and let *a* be the Boolean result.
3. Call *IsWordChar*(*e*) and let *b* be the Boolean result.
4. If *a* is **true** and *b* is **false**, return **true**.
5. If *a* is **false** and *b* is **true**, return **true**.
6. Return **false**.

The production *Assertion* :: `\ B` evaluates by returning an internal AssertionTester closure that takes a State argument *x* and performs the following:

1. Let *e* be *x*'s *endIndex*.
2. Call *IsWordChar*(*e*-1) and let *a* be the Boolean result.
3. Call *IsWordChar*(*e*) and let *b* be the Boolean result.
4. If *a* is **true** and *b* is **false**, return **false**.
5. If *a* is **false** and *b* is **true**, return **false**.
6. Return **true**.

The production *Assertion* :: `(? = Disjunction)` evaluates as follows:

1. Evaluate *Disjunction* to obtain a Matcher *m*.
2. Return an internal Matcher closure that takes two arguments, a State *x* and a Continuation *c*, and performs the following steps:
 1. Let *d* be a Continuation that always returns its State argument as a successful MatchResult.
 2. Call *m*(*x*, *d*) and let *r* be its result.

3. If r is **failure**, return **failure**.
4. Let y be r 's State.
5. Let cap be y 's *captures* internal array.
6. Let xe be x 's *endIndex*.
7. Let z be the State (xe, cap).
8. Call $c(z)$ and return its result.

The production *Assertion* :: (? ! *Disjunction*) evaluates as follows:

1. Evaluate *Disjunction* to obtain a Matcher m .
2. Return an internal Matcher closure that takes two arguments, a State x and a Continuation c , and performs the following steps:
 1. Let d be a Continuation that always returns its State argument as a successful MatchResult.
 2. Call $m(x, d)$ and let r be its result.
 3. If r isn't **failure**, return **failure**.
 4. Call $c(x)$ and return its result.

Runtime Semantics: IsWordChar Abstract Operation

The abstract operation *IsWordChar* takes an integer parameter e and performs the following:

1. If e is -1 or e is *InputLength*, return **false**.
2. Let c be the character $Input[e]$.
3. If c is one of the sixty-three characters below, return **true**.

a	b	c	d	e	f	g	h	i	j	k	l	m	n	o	p	q	r	s	t	u	v	w	x	y	z
A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z
0	1	2	3	4	5	6	7	8	9	_															
4. Return **false**.

Deleted: ==
Deleted: =
Deleted: =

15.10.2.7 Quantifier

The production *Quantifier* :: *QuantifierPrefix* evaluates as follows:

1. Evaluate *QuantifierPrefix* to obtain the two results: an integer min and an integer (or ∞) max .
2. Return the three results min , max , and **true**.

The production *Quantifier* :: *QuantifierPrefix* ? evaluates as follows:

1. Evaluate *QuantifierPrefix* to obtain the two results: an integer min and an integer (or ∞) max .
2. Return the three results min , max , and **false**.

The production *QuantifierPrefix* :: * evaluates by returning the two results 0 and ∞ .

The production *QuantifierPrefix* :: + evaluates by returning the two results 1 and ∞ .

The production *QuantifierPrefix* :: ? evaluates by returning the two results 0 and 1.

The production *QuantifierPrefix* :: { *DecimalDigits* } evaluates as follows:

1. Let i be the MV of *DecimalDigits* (see 7.8.3).
2. Return the two results i and i .

The production *QuantifierPrefix* :: { *DecimalDigits* , } evaluates as follows:

1. Let i be the MV of *DecimalDigits*.
2. Return the two results i and ∞ .

The production *QuantifierPrefix* :: { *DecimalDigits* , *DecimalDigits* } evaluates as follows:

1. Let i be the MV of the first *DecimalDigits*.
2. Let j be the MV of the second *DecimalDigits*.
3. Return the two results i and j .

15.10.2.8 Atom

The production *Atom :: PatternCharacter* evaluates as follows:

1. Let ch be the character represented by *PatternCharacter*.
2. Let A be a one-element CharSet containing the character ch .
3. Call *CharacterSetMatcher*(A , **false**) and return its Matcher result.

The production *Atom :: .* evaluates as follows:

1. Let A be the set of all characters except *LineTerminator*.
2. Call *CharacterSetMatcher*(A , **false**) and return its Matcher result.

The production *Atom :: \ AtomEscape* evaluates by evaluating *AtomEscape* to obtain a Matcher and returning that Matcher.

The production *Atom :: CharacterClass* evaluates as follows:

1. Evaluate *CharacterClass* to obtain a CharSet A and a Boolean *invert*.
2. Call *CharacterSetMatcher*(A , *invert*) and return its Matcher result.

The production *Atom :: (Disjunction)* evaluates as follows:

1. Evaluate *Disjunction* to obtain a Matcher m .
2. Let *parenIndex* be the number of left capturing parentheses in the entire regular expression that occur to the left of this production expansion's initial left parenthesis. This is the total number of times the *Atom :: (Disjunction)* production is expanded prior to this production's *Atom* plus the total number of *Atom :: (Disjunction)* productions enclosing this *Atom*.
3. Return an internal Matcher closure that takes two arguments, a State x and a Continuation c , and performs the following steps:
 1. Create an internal Continuation closure d that takes one State argument y and performs the following steps:
 1. Let cap be a fresh copy of y 's *captures* internal array.
 2. Let xe be x 's *endIndex*.
 3. Let ye be y 's *endIndex*.
 4. Let s be a fresh String whose characters are the characters of *Input* at positions xe (inclusive) through ye (exclusive).
 5. Set $cap[parenIndex+1]$ to s .
 6. Let z be the State (ye , cap).
 7. Call $c(z)$ and return its result.
 2. Call $m(x, d)$ and return its result.

The production *Atom :: (? : Disjunction)* evaluates by evaluating *Disjunction* to obtain a Matcher and returning that Matcher.

Runtime Semantics: CharacterSetMatcher Abstract Operation

The abstract operation *CharacterSetMatcher* takes two arguments, a CharSet A and a Boolean flag *invert*, and performs the following:

1. Return an internal Matcher closure that takes two arguments, a State x and a Continuation c , and performs the following steps:
 1. Let e be x 's *endIndex*.
 2. If e is *InputLength*, return **failure**.
 3. Let ch be the character *Input[e]*.

Deleted: ==

4. Let *cc* be the result of *Canonicalize(ch)*.
5. If *invert* is **false**, then
 - a. If there does not exist a member *a* of set *A* such that *Canonicalize(a)* is *cc*, return **failure**.
6. Else *invert* is **true**,
 - a. If there exists a member *a* of set *A* such that *Canonicalize(a)* is *cc*, return **failure**.
7. Let *cap* be *x*'s *captures* internal array.
8. Let *y* be the State (*e+1, cap*).
9. Call *c(y)* and return its result.

Deleted: ==

Deleted: ==

Runtime Semantics: Canonicalize Abstract Operation

The abstract operation *Canonicalize* takes a character parameter *ch* and performs the following steps:

1. If *IgnoreCase* is **false**, return *ch*.
2. Let *u* be *ch* converted to upper case as if by calling the standard built-in method **String.prototype.toUpperCase** on the one-character String *ch*.
3. If *u* does not consist of a single character, return *ch*.
4. Let *cu* be *u*'s character.
5. If *ch*'s code unit value is greater than or equal to decimal 128 and *cu*'s code unit value is less than decimal 128, then return *ch*.
6. Return *cu*.

NOTE 1 Parentheses of the form *(Disjunction)* serve both to group the components of the *Disjunction* pattern together and to save the result of the match. The result can be used either in a backreference (\ followed by a nonzero decimal number), referenced in a replace String, or returned as part of an array from the regular expression matching internal procedure. To inhibit the capturing behaviour of parentheses, use the form *(?: Disjunction)* instead.

NOTE 2 The form *(?= Disjunction)* specifies a zero-width positive lookahead. In order for it to succeed, the pattern inside *Disjunction* must match at the current position, but the current position is not advanced before matching the sequel. If *Disjunction* can match at the current position in several ways, only the first one is tried. Unlike other regular expression operators, there is no backtracking into a *(?=* form (this unusual behaviour is inherited from Perl). This only matters when the *Disjunction* contains capturing parentheses and the sequel of the pattern contains backreferences to those captures.

For example,

```
/(?:=(a+))/ .exec("baaabac")
```

matches the empty String immediately after the first **b** and therefore returns the array:

```
[ "", "aaa" ]
```

To illustrate the lack of backtracking into the lookahead, consider:

```
/(?:=(a+))a*b\1/.exec("baaabac")
```

This expression returns

```
[ "aba", "a" ]
```

and not:

```
[ "aaaba", "a" ]
```

NOTE 3 The form *(?! Disjunction)* specifies a zero-width negative lookahead. In order for it to succeed, the pattern inside *Disjunction* must fail to match at the current position. The current position is not advanced before matching the sequel. *Disjunction* can contain capturing parentheses, but backreferences to them only make sense from within *Disjunction* itself. Backreferences to these capturing parentheses from elsewhere in the pattern always return **undefined** because the negative lookahead must fail for the pattern to succeed. For example,

```
/(.*)?a(?! (a+)b\2c)\2(.*)/.exec("baaabaac")
```

looks for an **a** not immediately followed by some positive number *n* of **a**'s, a **b**, another *n* **a**'s (specified by the first \2) and a **c**. The second \2 is outside the negative lookahead, so it matches against **undefined** and therefore always succeeds. The whole expression returns the array:

```
[ "baaabaac", "ba", undefined, "abaac" ]
```

In case-insensitive matches all characters are implicitly converted to upper case immediately before they are compared. However, if converting a character to upper case would expand that character into more than one character (such as

converting "\s" (\u000D) into "ss"), then the character is left as-is instead. The character is also left as-is if it is not an ASCII character but converting it to upper case would make it into an ASCII character. This prevents Unicode characters such as \u0131 and \u017F from matching regular expressions such as /[a-z]/i, which are only intended to match ASCII letters. Furthermore, if these conversions were allowed, then /[^w]/i would match each of a, b, ..., h, but not i or s.

15.10.2.9 AtomEscape

The production *AtomEscape* :: *DecimalEscape* evaluates as follows:

1. Evaluate *DecimalEscape* to obtain an *EscapeValue* E.
2. If E is a character, then
 - a. Let *ch* be E's character.
 - b. Let A be a one-element CharSet containing the character *ch*.
 - c. Call *CharacterSetMatcher*(A, false) and return its Matcher result.
3. E must be an integer. Let n be that integer.
4. If n=0 or n>NCapturingParens then throw a **SyntaxError** exception.
5. Return an internal Matcher closure that takes two arguments, a State x and a Continuation c, and performs the following:
 1. Let *cap* be x's captures internal array.
 2. Let *s* be *cap*[n].
 3. If *s* is **undefined**, then call c(x) and return its result.
 4. Let *e* be x's endIndex.
 5. Let *len* be *s*'s length.
 6. Let *f* be *e*+*len*.
 7. If *f*>InputLength, return **failure**.
 8. If there exists an integer i between 0 (inclusive) and *len* (exclusive) such that *Canonicalize*(*s*[i]) is not the same character as *Canonicalize*(Input [e+i]), then return **failure**.
 9. Let y be the State (*f*, *cap*).
 10. Call c(y) and return its result.

Deleted: NCapturingParens

The production *AtomEscape* :: *CharacterEscape* evaluates as follows:

1. Evaluate *CharacterEscape* to obtain a character *ch*.
2. Let A be a one-element CharSet containing the character *ch*.
3. Call *CharacterSetMatcher*(A, false) and return its Matcher result.

The production *AtomEscape* :: *CharacterClassEscape* evaluates as follows:

1. Evaluate *CharacterClassEscape* to obtain a CharSet A.
2. Call *CharacterSetMatcher*(A, false) and return its Matcher result.

NOTE An escape sequence of the form \ followed by a nonzero decimal number n matches the result of the nth set of capturing parentheses (see 15.10.2.11). It is an error if the regular expression has fewer than n capturing parentheses. If the regular expression has n or more capturing parentheses but the nth one is **undefined** because it has not captured anything, then the backreference always succeeds.

15.10.2.10 CharacterEscape

The production *CharacterEscape* :: *ControlEscape* evaluates by returning the character according to [Table 35](#)

Table 35 — ControlEscape Character Values

ControlEscape	Code Unit	Name	Symbol
---------------	-----------	------	--------

Deleted: Table 33Table 31

Deleted: 3331

Formatted Table

t	\u0009	horizontal tab	<HT>
n	\u000A	line feed (new line)	<LF>
v	\u000B	vertical tab	<VT>
f	\u000C	form feed	<FF>
r	\u000D	carriage return	<CR>

The production *CharacterEscape :: c ControlLetter* evaluates as follows:

1. Let *ch* be the character represented by *ControlLetter*.
2. Let *i* be *ch*'s code unit value.
3. Let *j* be the remainder of dividing *i* by 32.
4. Return the character whose code unit value is *j*.

The production *CharacterEscape :: HexEscapeSequence* evaluates by evaluating the CV of the *HexEscapeSequence* (see 7.8.4) and returning its character result.

The production *CharacterEscape :: UnicodeEscapeSequence* evaluates by evaluating the CV of the *UnicodeEscapeSequence* (see 7.8.4) and returning its character result.

The production *CharacterEscape :: IdentityEscape* evaluates by returning the character represented by *IdentityEscape*.

15.10.2.11 DecimalEscape

The production *DecimalEscape :: DecimalIntegerLiteral* [lookahead \notin *DecimalDigit*] evaluates as follows:

1. Let *i* be the MV of *DecimalIntegerLiteral*.
2. If *i* is zero, return the EscapeValue consisting of a <NUL> character (Unicode value 0000).
3. Return the EscapeValue consisting of the integer *i*.

The definition of "the MV of *DecimalIntegerLiteral*" is in 7.8.3.

NOTE If \ is followed by a decimal number *n* whose first digit is not 0, then the escape sequence is considered to be a backreference. It is an error if *n* is greater than the total number of left capturing parentheses in the entire regular expression. \0 represents the <NUL> character and cannot be followed by a decimal digit.

15.10.2.12 CharacterClassEscape

The production *CharacterClassEscape :: d* evaluates by returning the ten-element set of characters containing the characters 0 through 9 inclusive.

The production *CharacterClassEscape :: D* evaluates by returning the set of all characters not included in the set returned by *CharacterClassEscape :: d*.

The production *CharacterClassEscape :: s* evaluates by returning the set of characters containing the characters that are on the right-hand side of the *WhiteSpace* (7.2) or *LineTerminator* (7.3) productions.

The production *CharacterClassEscape :: S* evaluates by returning the set of all characters not included in the set returned by *CharacterClassEscape :: s*.

The production *CharacterClassEscape :: w* evaluates by returning the set of characters containing the sixty-three characters:

```
a b c d e f g h i j k l m n o p q r s t u v w x y z
A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
```

```

a b c d e f g h i j k l m n o p q r s t u v w x y z
A B C D E F G H I J K L M N O P Q R S T U V W X Y Z
0 1 2 3 4 5 6 7 8 9 _

```

The production *CharacterClassEscape :: w* evaluates by returning the set of all characters not included in the set returned by *CharacterClassEscape :: w*.

15.10.2.13 CharacterClass

The production *CharacterClass :: [lookahead ≠ {}] ClassRanges* evaluates by evaluating *ClassRanges* to obtain a CharSet and returning that CharSet and the Boolean **false**.

The production *CharacterClass :: [^ ClassRanges]* evaluates by evaluating *ClassRanges* to obtain a CharSet and returning that CharSet and the Boolean **true**.

15.10.2.14 ClassRanges

The production *ClassRanges :: [empty]* evaluates by returning the empty CharSet.

The production *ClassRanges :: NonemptyClassRanges* evaluates by evaluating *NonemptyClassRanges* to obtain a CharSet and returning that CharSet.

15.10.2.15 NonemptyClassRanges

The production *NonemptyClassRanges :: ClassAtom* evaluates by evaluating *ClassAtom* to obtain a CharSet and returning that CharSet.

The production *NonemptyClassRanges :: ClassAtom NonemptyClassRangesNoDash* evaluates as follows:

1. Evaluate *ClassAtom* to obtain a CharSet *A*.
2. Evaluate *NonemptyClassRangesNoDash* to obtain a CharSet *B*.
3. Return the union of CharSets *A* and *B*.

The production *NonemptyClassRanges :: ClassAtom - ClassAtom ClassRanges* evaluates as follows:

1. Evaluate the first *ClassAtom* to obtain a CharSet *A*.
2. Evaluate the second *ClassAtom* to obtain a CharSet *B*.
3. Evaluate *ClassRanges* to obtain a CharSet *C*.
4. Call *CharacterRange(A, B)* and let *D* be the resulting CharSet.
5. Return the union of CharSets *D* and *C*.

Runtime Semantics: CharacterRange Abstract Operation

The abstract operation *CharacterRange* takes two CharSet parameters *A* and *B* and performs the following:

1. If *A* does not contain exactly one character or *B* does not contain exactly one character then throw a **SyntaxError** exception.
2. Let *a* be the one character in CharSet *A*.
3. Let *b* be the one character in CharSet *B*.
4. Let *i* be the code unit value of character *a*.
5. Let *j* be the code unit value of character *b*.
6. If *i > j* then throw a **SyntaxError** exception.
7. Return the set containing all characters numbered *i* through *j*, inclusive.

15.10.2.16 NonemptyClassRangesNoDash

The production *NonemptyClassRangesNoDash :: ClassAtom* evaluates by evaluating *ClassAtom* to obtain a CharSet and returning that CharSet.

The production `NonemptyClassRangesNoDash :: ClassAtomNoDash NonemptyClassRangesNoDash` evaluates as follows:

1. Evaluate `ClassAtomNoDash` to obtain a CharSet *A*.
2. Evaluate `NonemptyClassRangesNoDash` to obtain a CharSet *B*.
3. Return the union of CharSets *A* and *B*.

The production `NonemptyClassRangesNoDash :: ClassAtomNoDash - ClassAtom ClassRanges` evaluates as follows:

1. Evaluate `ClassAtomNoDash` to obtain a CharSet *A*.
2. Evaluate `ClassAtom` to obtain a CharSet *B*.
3. Evaluate `ClassRanges` to obtain a CharSet *C*.
4. Call `CharacterRange(A, B)` and let *D* be the resulting CharSet.
5. Return the union of CharSets *D* and *C*.

NOTE 1 `ClassRanges` can expand into single `ClassAtoms` and/or ranges of two `ClassAtoms` separated by dashes. In the latter case the `ClassRanges` includes all characters between the first `ClassAtom` and the second `ClassAtom`, inclusive; an error occurs if either `ClassAtom` does not represent a single character (for example, if one is `\w`) or if the first `ClassAtom`'s code unit value is greater than the second `ClassAtom`'s code unit value.

NOTE 2 Even if the pattern ignores case, the case of the two ends of a range is significant in determining which characters belong to the range. Thus, for example, the pattern `/[E-F]/i` matches only the letters E, F, e, and f, while the pattern `/[E-f]/i` matches all upper and lower-case ASCII letters as well as the symbols [, \,], ^, _, and `.

NOTE 3 A `-` character can be treated literally or it can denote a range. It is treated literally if it is the first or last character of `ClassRanges`, the beginning or end limit of a range specification, or immediately follows a range specification.

15.10.2.17 `ClassAtom`

The production `ClassAtom :: -` evaluates by returning the CharSet containing the one character `-`.

The production `ClassAtom :: ClassAtomNoDash` evaluates by evaluating `ClassAtomNoDash` to obtain a CharSet and returning that CharSet.

15.10.2.18 `ClassAtomNoDash`

The production `ClassAtomNoDash :: SourceCharacter but not one of \ or] or -` evaluates by returning a one-element CharSet containing the character represented by `SourceCharacter`.

The production `ClassAtomNoDash :: \ ClassEscape` evaluates by evaluating `ClassEscape` to obtain a CharSet and returning that CharSet.

15.10.2.19 `ClassEscape`

The production `ClassEscape :: DecimalEscape` evaluates as follows:

1. Evaluate `DecimalEscape` to obtain an `EscapeValue E`.
2. If *E* is not a character then throw a `SyntaxError` exception.
3. Let *ch* be *E*'s character.
4. Return the one-element CharSet containing the character *ch*.

The production `ClassEscape :: b` evaluates by returning the CharSet containing the one character `<BS>` (Unicode value 0008).

The production `ClassEscape :: CharacterEscape` evaluates by evaluating `CharacterEscape` to obtain a character and returning a one-element CharSet containing that character.

The production *ClassEscape* :: *CharacterClassEscape* evaluates by evaluating *CharacterClassEscape* to obtain a *CharSet* and returning that *CharSet*.

NOTE A *ClassAtom* can use any of the escape sequences that are allowed in the rest of the regular expression except for `\b`, `\B`, and backreferences. Inside a *CharacterClass*, `\b` means the backspace character, while `\B` and backreferences raise errors. Using a backreference inside a *ClassAtom* causes an error.

15.10.3 The RegExp Constructor Called as a Function

15.10.3.1 RegExp(pattern, flags)

The following steps are taken:

1. If *Type(pattern)* is *Object* and *pattern* has a `[[BuiltInBrand]]` internal data property whose value is `BuiltinRegExp` and *flags* is *undefined*, then return *pattern*.
2. Return the result of the abstract operation *RegExpCreate* with arguments *pattern* and *flags*.

15.10.4 The RegExp Constructor

When *RegExp* is called as part of a `new` expression, it is a constructor: it initialises the newly created object.

15.10.4.1 new RegExp(pattern, flags)

The following steps are taken:

1. Return the result of the abstract operation *RegExpCreate* with arguments *pattern* and *flags*.

Runtime Semantics: *RegExpCreate* Abstract Operation

The abstract operation *RegExpCreate* with arguments *pattern* and *flags* does the following:

If *pattern* is an object *R* that has a `[[BuiltInBrand]]` internal data property whose value is `BuiltinRegExp`, and *flags* is *undefined*, then let *P* be the pattern used to construct *R* and let *F* be the flags used to construct *R*. If *pattern* is an object *R* that has a `[[BuiltInBrand]]` internal data property whose value is `BuiltinRegExp`, and *flags* is not *undefined*, then throw a **TypeError** exception. Otherwise, let *P* be the empty String if *pattern* is *undefined* and *ToString(pattern)* otherwise, and let *F* be the empty String if *flags* is *undefined* and *ToString(flags)* otherwise.

If the characters of *P* do not have the syntactic form *Pattern*, then throw a **SyntaxError** exception. Otherwise let the newly constructed object have a `[[Match]]` internal data property obtained by evaluating ("compiling") the characters of *P* as a *Pattern* as described in 15.10.2.

If *F* contains any character other than "g", "i", or "m", or if it contains the same character more than once, then throw a **SyntaxError** exception.

If a **SyntaxError** exception is not thrown, then:

Let *S* be a String in the form of a *Pattern* equivalent to *P*, in which certain characters are escaped as described below. *S* may or may not be identical to *P* or *pattern*; however, the internal procedure that would result from evaluating *S* as a *Pattern* must behave identically to the internal procedure given by the constructed object's `[[Match]]` internal data property.

The characters / occurring in the pattern shall be escaped in *S* as necessary to ensure that the String value formed by concatenating the Strings "/", *S*, "/", and *F* can be parsed (in an appropriate lexical context) as a *RegularExpressionLiteral* that behaves identically to the constructed regular expression. For example, if *P* is "/", then *S* could be "\/" or "\u002F", among other possibilities, but not "/", because /// followed by *F* would be parsed as a *SingleLineComment* rather than a *RegularExpressionLiteral*. If *P* is the empty String, this specification can be met by letting *S* be "(?:)".

Deleted: o
Deleted: NativeBrand
Deleted: NativeRegExp
Deleted: abstraction operation
Deleted: If <i>pattern</i> is an object <i>R</i> whose <i>[[ClassIsRegExpNativeBrand]]</i> internal property whose value is <i>NativeRegExp</i> is "RegExp" and <i>flags</i> is <i>undefined</i> , then return <i>R</i> unchanged. Otherwise call the standard built-in <i>RegExp</i> constructor (15.10.4.1) as if by the expression <code>new RegExp(pattern, flags)</code> and return the object constructed by that constructor.
Deleted: abstraction operation
Deleted: n
Deleted: IsRegExp
Deleted: NativeBrand
Deleted: NativeRegExp
Deleted: whose <i>[[Class]]</i> internal property is "RegExp"
Deleted: n
Deleted: IsRegExp
Deleted: NativeBrand
Deleted: NativeRegExp
Deleted: whose <i>[[Class]]</i> internal property is "RegExp"

The following properties of the newly constructed object are data properties with the attributes that are specified in 15.10.7. The `[[Value]]` of each property is set as follows:

The `source` property of the newly constructed object is set to `S`.

The `global` property of the newly constructed object is set to a Boolean value that is `true` if `F` contains the character "`g`" and `false` otherwise.

The `ignoreCase` property of the newly constructed object is set to a Boolean value that is `true` if `F` contains the character "`i`" and `false` otherwise.

The multiline property of the newly constructed object is set to a Boolean value that is `true` if `F` contains the character "`m`" and `false` otherwise.

The `lastIndex` property of the newly constructed object is set to `0`.

The `[[Prototype]]` internal `data` property of the newly constructed object is set to the standard built-in `RegExp` prototype object as specified in 15.10.6.

The newly constructed object has a `[[BuiltinBrand]]` internal `data` property whose value is `BuiltinRegExp`.

NOTE If pattern is a *StringLiteral*, the usual escape sequence substitutions are performed before the String is processed by `RegExp`. If pattern must contain an escape sequence to be recognised by `RegExp`, any backslash \ characters must be escaped within the *StringLiteral* to prevent them being removed when the contents of the *StringLiteral* are formed.

15.10.5 Properties of the `RegExp` Constructor

The value of the `[[Prototype]]` internal `data` property of the `RegExp` constructor is the standard built-in `Function` prototype object (15.3.4).

Besides the `length` property (whose value is `2`), the `RegExp` constructor has the following properties:

15.10.5.1 `RegExp.prototype`

The initial value of `RegExp.prototype` is the `RegExp` prototype object (15.10.6).

This property shall have the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.10.6 Properties of the `RegExp` Prototype Object

The value of the `[[Prototype]]` internal `data` property of the `RegExp` prototype object is the standard built-in `Object` prototype object (15.2.4). The `RegExp` prototype object is itself a regular expression object; it has a `[[BuiltinBrand]]` internal `data` property whose value is `BuiltinRegExp`. The initial values of the `RegExp` prototype object's data properties (15.10.7) are set as if the object was created by the expression `new RegExp()` where `RegExp` is that standard built-in constructor with that name.

The `RegExp` prototype object does not have a `valueOf` property of its own; however, it inherits the `valueOf` property from the `Object` prototype object.

In the following descriptions of functions that are properties of the `RegExp` prototype object, the phrase "this `RegExp` object" refers to the object that is the `this` value for the invocation of the function; a `TypeError` exception is thrown if the `this` value is not an object that has a `[[BuiltinBrand]]` internal `data` property whose value is `BuiltinRegExp`.

15.10.6.1 `RegExp.prototype.constructor`

The initial value of `RegExp.prototype.constructor` is the standard built-in `RegExp` constructor.

Deleted: `[[Class]]` internal property of the
Deleted: `n`
Deleted: `IsRegExp`
Deleted: `NativeBrand`
Deleted: `NativeRegExp`
Deleted: is set to "`RegExp`".

Deleted: the internal properties and

Deleted: `s`
Deleted: `n`
Deleted: `IsRegExp`
Deleted: `NativeBrand`
Deleted: `NativeRegExp`
Deleted: `[[Class]]` is "`RegExp`"
Deleted: or an object for which the value of the
Deleted: `n`
Deleted: `Class`
Deleted: `IsRegExp`
Deleted: `NativeBrand`
Deleted: `NativeRegExp`
Deleted: is not "`RegExp`".

15.10.6.2 RegExp.prototype.exec(string)

Performs a regular expression match of *string* against the regular expression and returns an Array object containing the results of the match, or `null` if *string* did not match.

The String `ToString(string)` is searched for an occurrence of the regular expression pattern as follows:

1. Let *R* be this `RegExp` object.
2. ReturnIfAbrupt(*R*).
3. Let *S* be the value of `ToString(string)`
4. ReturnIfAbrupt(*S*).
5. Return the result of the `RegExpExec` abstract operation with arguments *R* and *S*.

Runtime Semantics: `RegExpExec` Abstract Operation

The abstract operation `RegExpExec` with arguments *R* (an object) and *S* (a string) performs the following steps:

1. Let *length* be the length of *S*.
2. Let *lastIndex* be the result of `Get(R, "lastIndex")`.
3. Let *i* be the value of `ToInteger(lastIndex)`.
4. ReturnIfAbrupt(*i*).
5. Let *global* be the result of `Get(R, "global")`.
6. ReturnIfAbrupt(*global*).
7. If *global* is `false`, then let *i* = 0.
8. Let *matchSucceeded* be `false`.
9. Repeat, while *matchSucceeded* is `false`
 - a. If *i* < 0 or *i* > *length*, then
 - i. Let `putStatus` be the result of `Put(R, "lastIndex", 0, true)`.
 - ii. ReturnIfAbrupt(`putStatus`).
 - iii. Return `null`.
 - b. Let *r* be the result of calling the `[[Match]]` internal method of *R* with arguments *S* and *i*.
 - c. If *r* is `failure`, then
 - i. Let *i* = *i* + 1.
 - d. else
 - i. Assert: *r* is a State.
 - ii. Set *matchSucceeded* to `true`.
10. Let *e* be *r*'s `endIndex` value.
11. If *global* is `true`,
 - a. Let `putStatus` be the result of `Put(R, "lastIndex", e, true)`.
 - b. ReturnIfAbrupt(`putStatus`).
12. Let *n* be the length of *r*'s `captures` array. (This is the same value as 15.10.2.1's `NCapturingParens`.)
13. Let *A* be the result of the abstract operation `ArrayCreate` with argument 0.
14. Let *matchIndex* be *i*.
15. Assert: The following `[[DefineOwnProperty]]` calls will not result in an abrupt completion.
16. Call the `[[DefineOwnProperty]]` internal method of *A* with arguments `"index"` and Property Descriptor `{[[Value]]: matchIndex, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
17. Call the `[[DefineOwnProperty]]` internal method of *A* with arguments `"input"` and Property Descriptor `{[[Value]]: S, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
18. Call the `[[DefineOwnProperty]]` internal method of *A* with arguments `"length"` and Property Descriptor `{[[Value]]: n + 1}`.
19. Let *matchedSubstr* be the matched substring (i.e. the portion of *S* between offset *i* inclusive and offset *e* exclusive).
20. Call the `[[DefineOwnProperty]]` internal method of *A* with arguments `"0"` and Property Descriptor `{[[Value]]: matchedSubstr, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.
21. For each integer *i* such that *i* > 0 and *i* ≤ *n*
 - a. Let *captureI* be *i*th element of *r*'s `captures` array.
 - b. Call the `[[DefineOwnProperty]]` internal method of *A* with arguments `ToString(i)` and Property Descriptor `{[[Value]]: captureI, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`.

Deleted: abstraction operation
Deleted: calling the <code>[[</code>
Deleted: <code>]]</code> internal method of
Deleted: with argument
Deleted: calling the <code>[[</code>
Deleted: <code>]]</code> internal method of
Deleted:
Deleted: with argument
Deleted: calling Call the <code>[[</code>
Deleted: <code>]]</code> internal method of
Deleted:
Deleted: with arguments
Deleted: and
Deleted: Call
Deleted: <code>[[Match]]</code> returned
Deleted: Let
Deleted: be the
Deleted: result of the call to <code>[[Match]]</code>
Deleted: calling Call the <code>[[</code>
Deleted: <code>]]</code> internal method of
Deleted:
Deleted: with arguments
Deleted: and
Deleted: <code>NCapturingParens</code>
Deleted: a new array created as if by the expression <code>new Array()</code> where <code>Array</code> is the standard built-in constructor with that name.
Deleted: ,
Deleted: , and true
Deleted: "
Deleted: , and true
Deleted: "
Deleted: , and true
Deleted: "
Deleted: , and true
Deleted:),
Deleted: , and true

22. Return *A*.

15.10.6.3 RegExp.prototype.test(string)

The following steps are taken:

1. Let *R* be this `RegExp` object.
2. ReturnIfAbrupt(*R*).
3. Let *S* be the value of `ToString(string)`
4. ReturnIfAbrupt(*S*).
5. Let *match* be the result of the `RegExpExec` abstract operation with arguments *R* and *S*.
6. ReturnIfAbrupt(*match*).
7. If *match* is not null, then return `true`; else return `false`.

15.10.6.4 RegExp.prototype.toString()

Return the String value formed by concatenating the Strings `"/"`, the String value of the `source` property of this `RegExp` object, and `"/"`; plus `"g"` if the `global` property is `true`, `"i"` if the `ignoreCase` property is `true`, and `"m"` if the `multiline` property is `true`.

NOTE The returned String has the form of a *RegularExpressionLiteral* that evaluates to another `RegExp` object with the same behaviour as this object.

15.10.7 Properties of `RegExp` Instances

`RegExp` instances inherit properties from the `RegExp` prototype object and have a `[[BuiltinBrand]]` internal data property whose value is `BuiltinRegExp`. `RegExp` instances also have a `[[Match]]` internal data property and a `length` property.

The value of the `[[Match]]` internal data property is an implementation dependent representation of the *Pattern* of the `RegExp` object.

`RegExp` instances also have the following properties.

15.10.7.1 source

The value of the `source` property is a String in the form of a *Pattern* representing the current regular expression. This property shall have the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.10.7.2 global

The value of the `global` property is a Boolean value indicating whether the flags contained the character `"g"`. This property shall have the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.10.7.3 ignoreCase

The value of the `ignoreCase` property is a Boolean value indicating whether the flags contained the character `"i"`. This property shall have the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.10.7.4 multiline

The value of the `multiline` property is a Boolean value indicating whether the flags contained the character `"m"`. This property shall have the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted: abstraction operation

Deleted: evaluating the `RegExp.prototype.exec` (15.10.6.2) algorithm upon this `RegExp` object using `string` as the argument

Comment [AWB7204]: Needs an algorithm

Deleted: their

Deleted: Class

Deleted: IsRegExp

Deleted: NativeBrand

Deleted: NativeRegExp

Deleted: value is "RegExp"

15.10.7.5 lastIndex

The value of the `lastIndex` property specifies the String position at which to start the next match. It is coerced to an integer when used (see 15.10.6.2). This property shall have the attributes { `[[Writable]]: true`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

NOTE Unlike the other standard built-in properties of RegExp instances, `lastIndex` is writable.

15.11 Error Objects

Instances of Error objects are thrown as exceptions when runtime errors occur. The Error objects may also serve as base objects for user-defined exception classes.

15.11.1 The Error Constructor Called as a Function

When `Error` is called as a function rather than as a constructor, it creates and initialises a new Error object. Thus the function call `Error(...)` is equivalent to the object creation expression `new Error(...)` with the same arguments.

15.11.1.1 Error (message)

The `[[Prototype]]` internal `data` property of the newly constructed object is set to the original Error prototype object, the one that is the initial value of `Error.prototype` (15.11.3.1).

The newly constructed object has a `[[BuiltinBrand]]` internal data property whose value is `BuiltinError`.

The `[[Extensible]]` internal `data` property of the newly constructed object is set to `true`.

If the argument `message` is not `undefined`, the `message` own property of the newly constructed object is set to `ToString(message)`.

15.11.2 The Error Constructor

When `Error` is called as part of a `new` expression, it is a constructor: it initialises the newly created object.

15.11.2.1 new Error (message)

The `[[Prototype]]` internal `data` property of the newly constructed object is set to the original Error prototype object, the one that is the initial value of `Error.prototype` (15.11.3.1).

The newly constructed object has a `[[BuiltinBrand]]` internal data property whose value is `BuiltinError`.

The `[[Extensible]]` internal `data` property of the newly constructed object is set to `true`.

If the argument `message` is not `undefined`, the `message` own property of the newly constructed object is set to `ToString(message)`.

15.11.3 Properties of the Error Constructor

The value of the `[[Prototype]]` internal `data` property of the Error constructor is the Function prototype object (15.3.4).

Besides the internal properties and the `length` property (whose value is `1`), the Error constructor has the following property:

15.11.3.1 Error.prototype

The initial value of `Error.prototype` is the Error prototype object (15.11.4).

- Deleted: `[[Class]]` internal property of the
- Deleted: is set to "`Error`"
- Deleted: `n`
- Deleted: `IsError`
- Deleted: `NativeBrand`
- Deleted: `NativeError`

- Deleted: `[[Class]]` internal property of the
- Deleted: `Error`
- Deleted: `n`
- Deleted: `IsError`
- Deleted: `NativeBrand`
- Deleted: `NativeError`
- Deleted: is set to "`Error`"

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.11.4 Properties of the Error Prototype Object

The Error prototype object is itself an Error object and has a [[BuiltinBrand]] internal data property whose value is `BuiltinError`.

The value of the [[Prototype]] internal data property of the Error prototype object is the standard built-in Object prototype object (15.2.4).

15.11.4.1 `Error.prototype.constructor`

The initial value of `Error.prototype.constructor` is the built-in `Error` constructor.

15.11.4.2 `Error.prototype.name`

The initial value of `Error.prototype.name` is "Error".

15.11.4.3 `Error.prototype.message`

The initial value of `Error.prototype.message` is the empty String.

15.11.4.4 `Error.prototype.toString()`

The following steps are taken:

1. Let O be the `this` value.
2. If `Type(O)` is not `Object`, throw a `TypeError` exception.
3. Let `name` be the result of `Get(O, "name")`.
4. ReturnIfAbrupt(name)
5. If `name` is `undefined`, then let `name` be "Error"; else let `name` be `ToString(name)`.
6. Let `msg` be the result of `Get(O, "message")`.
7. ReturnIfAbrupt(msg)
8. If `msg` is `undefined`, then let `msg` be the empty String; else let `msg` be `ToString(msg)`.
9. If `name` is the empty String, return `msg`.
10. If `msg` is the empty String, return `name`.
11. Return the result of concatenating `name`, ":" , a single space character, and `msg`.

15.11.5 Properties of Error Instances

Error instances are ordinary objects that inherit properties from the Error prototype object and have a [[BuiltinBrand]] internal data property whose value is `BuiltinError`.

15.11.6 Native Error Types Used in This Standard

One of the `BuiltinError` objects below is thrown when a runtime error is detected. All of these objects share the same structure, as described in 15.11.7.

15.11.6.1 `EvalError`

This exception is not currently used within this specification. This object remains for compatibility with previous editions of this specification.

15.11.6.2 `RangeError`

Indicates a numeric value has exceeded the allowable range. See 15.4.2.2, 15.4.5.1, 15.7.4.2, 15.7.4.5, 15.7.4.6, 15.7.4.7, and 15.9.5.43.

Deleted: n
Deleted: IsError
Deleted: NativeBrand
Deleted: NativeError
Deleted: (its [[Class]] is "Error")

Deleted: calling the [[]] internal method of
Deleted: with argument
Deleted: calling the [[]] internal method of
Deleted: If `msg` is the empty String; else let `msg` be `ToString(msg)`.
Deleted: n
Deleted: IsError
Deleted: NativeBrand
Deleted: NativeError
Deleted: their [[Class]] internal property value is "Error"
Deleted: . Error instances have no special properties
Deleted: NativeError

15.11.6.3 ReferenceError

Indicate that an invalid reference value has been detected. See 8.9.1, 8.9.2, 10.2.1, 10.2.1.1.4, 10.2.1.2.4, and 11.13.1.

Deleted: 7

Deleted: 7

15.11.6.4 SyntaxError

Indicates that a parsing error has occurred. See 11.1.5, 11.3.1, 11.3.2, 11.4.1, 11.4.4, 11.4.5, 11.13.1, 11.13.2, 12.2.1, 12.10.1, 12.14.1, 13.1, 15.1.2.1, 15.3.2.1, 15.10.2.2, 15.10.2.5, 15.10.2.9, 15.10.2.15, 15.10.2.19, 15.10.4.1, and 15.12.2.

15.11.6.5 TypeError

Indicates the actual type of an operand is different than the expected type. See 8.6.2, 8.9.2, 8.10.5, 8.12.5, 8.12.7, 8.12.8, 8.12.9, 9.9, 9.10, 10.2.1, 10.2.1.1.3, 10.6, 11.2.2, 11.2.3, 11.4.1, 11.8.6, 11.8.7, 11.3.1, 13.2, 13.2.3, 15, 15.2.3.2, 15.2.3.3, 15.2.3.4, 15.2.3.5, 15.2.3.6, 15.2.3.7, 15.2.3.8, 15.2.3.9, 15.2.3.10, 15.2.3.11, 15.2.3.12, 15.2.3.13, 15.2.3.14, 15.2.4.3, 15.3.4.2, 15.3.4.3, 15.3.4.4, 15.3.4.5, 15.3.4.5.2, 15.3.4.5.3, 15.3.5, 15.3.5.3, 15.3.5.4, 15.4.4.3, 15.4.4.11, 15.4.4.16, 15.4.4.17, 15.4.4.18, 15.4.4.19, 15.4.4.20, 15.4.4.21, 15.4.4.22, 15.4.5.1, 15.5.4.2, 15.5.4.3, 15.6.4.2, 15.6.4.3, 15.7.4, 15.7.4.2, 15.7.4.4, 15.9.5, 15.9.5.44, 15.10.4.1, 15.10.6, 15.11.4.4 and 15.12.3.

Deleted: 7

15.11.6.6 URIError

Indicates that one of the global URI handling functions was used in a way that is incompatible with its definition. See 15.1.3.

Comment [AWB10205]: Sectin references have not yet been updated to reflect ES6

15.11.7 NativeError Object Structure

When an ECMAScript implementation detects a runtime error, it throws an instance of one of the *NativeError* objects defined in 15.11.6. Each of these objects has the structure described below, differing only in the name used as the constructor name instead of *NativeError*, in the **name** property of the prototype object, and in the implementation-defined **message** property of the prototype object.

For each error object, references to *NativeError* in the definition should be replaced with the appropriate error object name from 15.11.6.

15.11.7.1 NativeError Constructors Called as Functions

When a *NativeError* constructor is called as a function rather than as a constructor, it creates and initialises a new object. A call of the object as a function is equivalent to calling it as a constructor with the same arguments.

15.11.7.2 NativeError (message)

The **[[Prototype]]** internal **data** property of the newly constructed object is set to the prototype object for this error constructor. The newly constructed object has a **[[BuiltinBrand]]** internal **data** property whose value is **BuiltinError**. The **[[Extensible]]** internal **data** property of the newly constructed object is set to **true**.

Deleted: **[[Class]]** internal property of the

Deleted: **n**

Deleted: **IsError**

Deleted: **NativeBrand**

Deleted: **NativeError**

Deleted: **is set to "Error"**

If the argument **message** is not **undefined**, the **message** own property of the newly constructed object is set to **ToString(message)**.

15.11.7.3 The NativeError Constructors

When a *NativeError* constructor is called as part of a **new** expression, it is a constructor: it initialises the newly created object.

15.11.7.4 new NativeError (message)

The [[Prototype]] internal data property of the newly constructed object is set to the prototype object for this *NativeError* constructor. The newly constructed object has a [[BuiltinBrand]] internal data property whose value is *BuiltinError*. The [[Extensible]] internal data property of the newly constructed object is set to **true**.

If the argument *message* is not **undefined**, the message own property of the newly constructed object is set to *ToString(message)*.

15.11.7.5 Properties of the NativeError Constructors

The value of the [[Prototype]] internal data property of a *NativeError* constructor is the Function prototype object (15.3.4).

Besides the length property (whose value is **1**), each *NativeError* constructor has the following property:

15.11.7.5.1 NativeError.prototype

The initial value of *NativeError.prototype* is a *NativeError* prototype object (15.11.7.7). Each *NativeError* constructor has a separate prototype object.

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.11.7.6 Properties of the NativeError Prototype Objects

Each *NativeError* prototype object is an Error object and has a [[BuiltinBrand]] internal data property whose value is *BuiltinError*.

The value of the [[Prototype]] internal data property of each *NativeError* prototype object is the standard built-in Error prototype object (15.11.4).

15.11.7.6.1 NativeError.prototype.constructor

The initial value of the constructor property of the prototype for a given *NativeError* constructor is the *NativeError* constructor function itself (15.11.7).

15.11.7.6.2 NativeError.prototype.name

The initial value of the name property of the prototype for a given *NativeError* constructor is the name of the constructor (the name used instead of *NativeError*).

15.11.7.6.3 NativeError.prototype.message

The initial value of the message property of the prototype for a given *NativeError* constructor is the empty String.

NOTE The prototypes for the *NativeError* constructors do not themselves provide a *toString* function, but instances of errors will inherit it from the Error prototype object.

15.11.7.8 Properties of NativeError Instances

NativeError instances inherit properties from their *NativeError* prototype object and have a [[BuiltinBrand]] internal data property whose value is *BuiltinError*. *NativeError* instances have no special properties.

15.12 The JSON Object

The **JSON** object is a single ordinary object that contains two functions, **parse** and **stringify**, that are used to parse and construct JSON texts. The JSON Data Interchange Format is described in RFC 4627

Deleted: [[Class]] internal property of the
Deleted: n
Deleted: IsError
Deleted: NativeBrand
Deleted: NativeError
Deleted: is set to "Error"

Deleted: the internal properties and
Deleted: 6

Deleted: 7
Deleted: n
Deleted: IsError
Deleted: NativeBrand
Deleted: NativeError
Deleted: (its [[Class]] is "Error")
Deleted: 8

Deleted: 9

Deleted: 10

Deleted: 11

Deleted: n
Deleted: IsError
Deleted: NativeBrand
Deleted: NativeError
Deleted: their [[Class]] internal property value is "Error"

<<http://www.ietf.org/rfc/rfc4627.txt>>. The JSON interchange format used in this specification is exactly that described by RFC 4627 with two exceptions:

- The top level *JSONText* production of the ECMAScript JSON grammar may consist of any *JSONValue* rather than being restricted to being a *JSONObject* or a *JSONArray* as specified by RFC 4627.
- Conforming implementations of **JSON.parse** and **JSON.stringify** must support the exact interchange format described in this specification without any deletions or extensions to the format. This differs from RFC 4627 which permits a JSON parser to accept non-JSON forms and extensions.

The value of the *[[Prototype]]* internal *data* property of the JSON object is the standard built-in Object prototype object (15.2.4). The ~~JSON object has a *[[BuiltinBrand]]* internal *data* property whose value is *BuiltinJSON*~~. The value of the *[[Extensible]]* internal *data* property of the JSON object is set to **true**.

The JSON object does not have a *[[Construct]]* internal *method*; it is not possible to use the JSON object as a constructor with the **new** operator.

The JSON object does not have a *[[Call]]* internal *method*; it is not possible to invoke the JSON object as a function.

15.12.1 The JSON Grammar

JSON.stringify produces a String that conforms to the following JSON grammar. *JSON.parse* accepts a String that conforms to the JSON grammar.

15.12.1.1 The JSON Lexical Grammar

JSON is similar to ECMAScript source text in that it consists of a sequence of *Unicode* characters conforming to the rules of *SourceCharacter*. The JSON Lexical Grammar defines the tokens that make up a JSON text similar to the manner that the ECMAScript lexical grammar defines the tokens of an ECMAScript source text. The JSON Lexical grammar only recognises the white space character specified by the production *JSONWhiteSpace*. The JSON lexical grammar shares some productions with the ECMAScript lexical grammar. All nonterminal symbols of the grammar that do not begin with the characters "JSON" are defined by productions of the ECMAScript lexical grammar.

Syntax

JSONWhiteSpace ::=

 <TAB>
 <CR>
 <LF>
 <SP>

JSONString ::=

 " *JSONStringCharacters*_{opt} "

JSONStringCharacters ::=

JSONStringCharacter *JSONStringCharacters*_{opt}

JSONStringCharacter ::=

SourceCharacter **but not one of** " or \ or U+0000 through U+001F
 \ *JSONEscapeSequence*

JSONEscapeSequence ::=

JSONEscapeCharacter
 u *HexDigit* *HexDigit* *HexDigit* *HexDigit*

JSONEscapeCharacter :: **one of**
 " / \ b f n r t

Deleted: value of the *[[Class]]* internal property of the
Deleted: n
Deleted: IsJSON
Deleted: NativeBrand
Deleted: NativeJSON
Deleted: is "JSON"
Deleted: property
Deleted: property

JSONNumber ::
 $\neg_{\text{opt}} \text{DecimalIntegerLiteral} \text{ JSONFraction}_{\text{opt}} \text{ ExponentPart}_{\text{opt}}$

JSONFraction ::
 $. \text{ DecimalDigits}$

JSONNullLiteral ::
 NullLiteral

JSONBooleanLiteral ::
 BooleanLiteral

15.12.1.2 The JSON Syntactic Grammar

The JSON Syntactic Grammar defines a valid JSON text in terms of tokens defined by the JSON lexical grammar. The goal symbol of the grammar is *JSONText*.

Syntax

JSONText :
 JSONValue

JSONValue :
 JSONNullLiteral
 $\text{JSONBooleanLiteral}$
 JSONObject
 JSONArray
 JSONString
 JSONNumber

JSONObject :
 $\{ \}$
 $\{ \text{JSONMemberList} \}$

JSONMember :
 $\text{JSONString} : \text{JSONValue}$

JSONMemberList :
 JSONMember
 $\text{JSONMemberList}, \text{JSONMember}$

JSONArray :
 $[]$
 $[\text{JSONElementList}]$

JSONElementList :
 JSONValue
 $\text{JSONElementList}, \text{JSONValue}$

15.12.2 JSON.parse (text [, reviver])

The `parse` function parses a JSON text (a JSON-formatted String) and produces an ECMAScript value. The JSON format is a restricted form of ECMAScript literal. JSON objects are realized as ECMAScript objects. JSON arrays are realized as ECMAScript arrays. JSON strings, numbers, booleans, and null are realized as ECMAScript Strings, Numbers, Booleans, and `null`. JSON uses a more limited set of white space characters than `WhiteSpace` and allows Unicode code points U+2028 and U+2029 to directly appear in `JSONString` literals without using an escape sequence. The process of parsing is similar to 11.1.4 and 11.1.5 as constrained by the JSON grammar.

The optional `reviver` parameter is a function that takes two parameters, (`key` and `value`). It can filter and transform the results. It is called with each of the `key/value` pairs produced by the `parse`, and its return value is

used instead of the original value. If it returns what it received, the structure is not modified. If it returns **`undefined`** then the property is deleted from the result.

1. Let *JText* be *ToString(text)*.
2. ReturnIfAbrupt(*text*).
3. Parse *JText* interpreted as **UTF-16 encoded Unicode characters** using the grammars in 15.12.1. Throw a **SyntaxError** exception if *JText* did not conform to the JSON grammar for the goal symbol ***JSONText***.
4. Let *scriptText* be the result of concatenating `"(", JText, and, ") ; "`.
5. Let *completion* be the result of parsing and evaluating *scriptText* as if it was the source text of an ECMAScript ***Script*** but using ***JSONString*** in place of ***StringLiteral***. Note that since *JText* conforms to the JSON grammar this result will be either a primitive value or an object that is defined by either an ***ArrayLiteral*** or an ***ObjectLiteral***.
6. Let *unfiltered* be *completion* **`[value]`**.
7. If *IsCallable(reviver)* is **true**, then
 - a. Let *root* be **the result of the abstract operation ObjectCreate**.
 - b. Call **CreateOwnProperty(*root*, the empty String, *unfiltered*)**.
 - c. Return the result of calling the abstract operation Walk, passing *root* and the empty String. The abstract operation Walk is described below.
8. Else
 - a. Return *unfiltered*.

Runtime Semantics: Walk Abstract Operation

The abstract operation Walk is a recursive abstract operation that takes two parameters: a ***holder*** object and the String ***name*** of a property in that object. Walk uses the value of ***reviver*** that was originally passed to the above parse function.

1. Let *val* be the result of **Get(*holder*, *name*)**.
2. ReturnIfAbrupt(*val*).
3. If *val* is an object, then
 - a. If *val* has a **`[[BuiltInBrand]]`** internal data property with value **BuiltinArray**, then
 - i. Set *I* to 0.
 - ii. Let *len* be the result of **Get(*val*, "length")**.
 - iii. Assert: *len* is not an abrupt completion and its value is a positive integer.
 - iv. Repeat while *I* < *len*,
 1. Let *newElement* be the result of calling the abstract operation Walk, passing *val* and ***ToString(I)***.
 2. If *newElement* is **`undefined`**, then
 - a. Let *status* be the result of calling the **`[[Delete]]`** internal method of *val* with ***ToString(I)*** as the argument.
 3. Else
 - a. Let *status* be the result of calling the **`[[DefineOwnProperty]]`** internal method of *val* with arguments ***ToString(I)*** and Property Descriptor **`{[[Value]]: newElement, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}`**.
 4. ReturnIfAbrupt(*status*).
 5. Add 1 to *I*.
 - b. Else
 - i. Let *keys* be an internal List of String values consisting of the names of all the own properties of *val* whose **`[[Enumerable]]`** attribute is **true**. The ordering of the Strings is the same as that used by the ***Object.keys*** standard built-in function.
 - ii. For each String *P* in *keys* do,
 1. Let *newElement* be the result of calling the abstract operation Walk, passing *val* and *P*.
 2. If *newElement* is **`undefined`**, then
 - a. Let *status* be the result of calling the **`[[Delete]]`** internal method of *val* with *P* as the argument.
 3. Else
 - a. Let *status* be the result of calling the **`[[DefineOwnProperty]]`** internal method of *val* with arguments *P* and Property Descriptor **`{[[Value]]:`**.

Deleted: er

Deleted: unfiltered

Deleted: *JText*

Deleted: Program

Deleted: abstraction operation

Deleted: (15.2)

Deleted: a new object created as if by the expression **`new Object()`**, where ***Object*** is the standard built-in constructor with that name

Deleted: the **`[[DefineOwnProperty]]`** internal method of

Deleted: with

Deleted: the **PropertyDescriptor** **`{[[Value]]:`**

Deleted: **`, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true`**, and **false** as arguments

Deleted: calling the **`[[`**

Deleted: **`]]`** internal method of

Deleted:

Deleted: with argument

Comment [AWB12206]: TODO make this more extensible condition to check

Deleted: the **`[[Class]]`** internal property of

Deleted: is **`"Array"`**

Deleted: **isArray**

Deleted: **NativeBrand**

Deleted: **NativeArray**

Deleted: calling the **`[[Get]]`** internal method of *val* with argument **`"length"`**

Deleted: **Call**

Deleted: and **false**

Deleted: **s**

Deleted: **Call**

Deleted: , the

Deleted: , and **false**

Deleted: should

Deleted: be

Deleted: **Call**

Deleted: and **false**

Deleted: arguments

Deleted: **Call**

Deleted: , the

newElement, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true},

4. ReturnIfAbrupt(status).

4. Return the result of calling the [[Call]] internal method of *reviver* passing *holder* as *thisArgument* and with a List containing *name* and *val* as *argumentsList*.

It is not permitted for a conforming implementation of `JSON.parse` to extend the JSON grammars. If an implementation wishes to support a modified or extended JSON interchange format it must do so by defining a different parse function.

NOTE In the case where there are duplicate name Strings within an object, lexically preceding values for the same key shall be overwritten.

15.12.3 `JSON.stringify (value [, replacer [, space]])`

The `stringify` function returns a String in `UTF-16 encoded JSON` format representing an ECMAScript value. It can take three parameters. The *value* parameter is an ECMAScript value, which is usually an object or array, although it can also be a String, Boolean, Number or `null`. The optional *replacer* parameter is either a function that alters the way objects and arrays are stringified, or an array of Strings and Numbers that acts as a white list for selecting the object properties that will be stringified. The optional *space* parameter is a String or Number that allows the result to have white space injected into it to improve human readability.

These are the steps in stringifying an object:

1. Let *stack* be an empty List.
2. Let *indent* be the empty String.
3. Let *PropertyList* and *ReplacerFunction* be `undefined`.
4. If `Type(replacer)` is Object, then
 - a. If `IsCallable(replacer)` is `true`, then
 - i. Let *ReplacerFunction* be *replacer*.
 - b. Else if *replacer* has a `[[BuiltInBrand]]` internal data property with value `BuiltinArray`, then
 - i. Let *PropertyList* be an empty internal List
 - ii. For each value *v* of a property of *replacer* that has an array index property name. The properties are enumerated in the ascending array index order of their names.
 1. Let *item* be `undefined`.
 2. If `Type(v)` is String then let *item* be *v*.
 3. Else if `Type(v)` is Number then let *item* be `ToString(v)`.
 4. Else if `Type(v)` is Object then,
 - a. If *v* has a `[[StringData]]` or `[[NumberData]]` internal data property, then let *item* be `ToString(v)`.
 5. If *item* is not `undefined` and *item* is not currently an element of *PropertyList* then,
 - a. Append *item* to the end of *PropertyList*.
 5. If `Type(space)` is Object then,
 - a. If *space* has a `[[NumberData]]` internal data property, then,
 - i. Let *space* be `ToNumber(space)`.
 - b. Else if *space* has a `[[StringData]]` internal data property, then,
 - i. Let *space* be `ToString(space)`.
 6. If `Type(space)` is Number
 - a. Let *space* be `min(10, ToInteger(space))`.
 - b. Set *gap* to a String containing *space* occurrences of code unit 0x0020 (the Unicode space character). This will be the empty String if *space* is less than 1.
 7. Else if `Type(space)` is String
 - a. If the number of *elements* in *space* is 10 or less, set *gap* to *space* otherwise set *gap* to a String consisting of the first 10 *elements* of *space*.
 8. Else
 - a. Set *gap* to the empty String.
 9. Let *wrapper* be the result of the abstract operation `ObjectCreate`.
 10. Call `CreateOwnProperty(wrapper, the empty String, value)`
 11. Return the result of calling the abstract operation `Str` with the empty String and *wrapper*.

Deleted: , and false

Deleted: the `this` value

Deleted: n

Deleted: argument l

Deleted: consisting

Deleted: of

Deleted: The first parameter is required.

Deleted: the `[[Class]]` internal property of

Deleted: IsArray

Deleted: NativeBrand

Deleted: NativeArray

Deleted: is "Array"

Deleted: the `[[Class]]` internal property of

Deleted: is "String" or "Number"

Deleted: either

Deleted: n

Deleted: IsString

Deleted: NativeBrand

Deleted: or an `[[IsNumber]]`

Deleted: whose value is either `StringWrapper` or `NumberWrapper`

Deleted: the `[[Class]]` internal property of

Deleted: IsNumber

Deleted: NativeBrand

Deleted: is "Number"

Deleted: the `[[Class]]` internal property of

Deleted: IsString

Deleted: NativeBrand

Deleted: is "String"

Deleted: occurrences

Deleted: characters

Deleted: characters

Deleted: characters

Deleted: be

Deleted: abstraction operation

Deleted: (15.2)

Deleted: a new object created as if by the expression `new Object()`, where `Object` is the standard built-in constructor with that name

Deleted: Call the `[[DefineOwnProperty]]` internal method

Deleted: with arguments the

Deleted: the Property Descriptor `{[[Value]]:`

Deleted: ,

Deleted: `[[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true`, and false.

Runtime Semantics: Str Abstract Operation

The abstract operation `Str(key, holder)` has access to `ReplacerFunction` from the invocation of the `stringify` method. Its algorithm is as follows:

1. Let `value` be the result of `Get(holder, key)`.
2. `ReturnIfAbrupt(value)`.
3. If `Type(value)` is Object, then
 - a. Let `toJSON` be the result of `Get(value, "toJSON")`.
 - b. If `IsCallable(toJSON)` is true
 - i. Let `value` be the result of calling the `[[Call]]` internal method of `toJSON` passing `value` as `thisArgument` and a List containing `key` as `argumentsList`.
 - ii. `ReturnIfAbrupt(value)`.
4. If `ReplacerFunction` is not `undefined`, then
 - a. Let `value` be the result of calling the `[[Call]]` internal method of `ReplacerFunction` passing `holder` as the `this` value and with an argument list consisting of `key` and `value`.
 - b. `ReturnIfAbrupt(value)`.
5. If `Type(value)` is Object then,
 - a. If `value` has an `[[NumberData]]` internal data property, then
 - i. Let `value` be `ToNumber(value)`.
 - b. Else if `value` has an `[[StringData]]` internal data property, then
 - i. Let `value` be `Tostring(value)`.
 - c. Else if `value` has an `[[BooleanData]]` internal data property, then
 - i. Let `value` be the value of the `[[BooleanData]]` internal data property of `value`.
6. If `value` is `null` then return `"null"`.
7. If `value` is `true` then return `"true"`.
8. If `value` is `false` then return `"false"`.
9. If `Type(value)` is String, then return the result of calling the abstract operation `Quote` with argument `value`.
10. If `Type(value)` is Number
 - a. If `value` is finite then return `ToString(value)`.
 - b. Else, return `"null"`.
11. If `Type(value)` is Object, and `IsCallable(value)` is false
 - a. If `value` has an `[[BuiltinBrand]]` internal data property with value `BuiltinArray`, then
 - i. Return the result of calling the abstract operation `J4` with argument `value`.
 - b. Else, return the result of calling the abstract operation `JO` with argument `value`.
12. `Return undefined`.

Runtime Semantics: Quote Abstract Operation

The abstract operation `Quote(value)` wraps a String value in double quotes and escapes characters within it.

1. Let `product` be code unit 0x0022 (the Unicode double quote character).
2. For each code unit `C` in `value`
 - a. If `C` is 0x0022 or 0x005C (the Unicode reverse solidus character)
 - i. Let `product` be the concatenation of `product` and code unit 0x005C.
 - ii. Let `product` be the concatenation of `product` and `C`.
 - b. Else if `C` is backspace, formfeed, newline, carriage return, or tab
 - i. Let `product` be the concatenation of `product` and code unit 0x005C (the Unicode backslash character).
 - ii. Let `abbrev` be the string value corresponding to the value of `C` as follows:

backspace	"\b"
formfeed	"\f"
newline	"\n"
carriage return	"\r"
tab	"\t"

 - iii. Let `product` be the concatenation of `product` and `abbrev`.
 - c. Else if `C` has a code unit value less than 0x0020 (the Unicode space character)
 - i. Let `product` be the concatenation of `product` and code unit 0x005C (the Unicode backslash character).

Deleted: calling the <code>[[</code>
Deleted: <code>]]</code> internal method of
Deleted: with argument
Deleted: calling the <code>[[</code>
Deleted: <code>]]</code> internal method of
Deleted:
Deleted: with argument
Deleted: the <code>this</code> value
Deleted: with an argument
Deleted: list
Deleted: consisting
Deleted: of
Deleted: the <code>[[Class]]</code> internal property of
Deleted: <code>IsNumber</code>
Deleted: <code>NativeBrand</code>
Deleted: <code>is "Number"</code>
Deleted: the <code>[[Class]]</code> internal property of
Deleted: <code>NativeBrand</code>
Deleted: <code>IsString</code>
Deleted: <code>is "String"</code>
Deleted: the <code>[[Class]]</code> internal property of
Deleted: <code>NativeBrand</code>
Deleted: <code>IsBoolean</code>
Deleted: <code>is "Boolean"</code>
Deleted: <code>PrimitiveValue</code>
Deleted: the <code>[[Class]]</code> internal property of
Deleted: <code>IsArray</code>
Deleted: <code>NativeBrand</code>
Deleted: <code>NativeArray</code>
Deleted: <code>is "Array"</code>
Deleted: character
Deleted: the double quote character
Deleted: or
Deleted: backslash
Deleted: (the Unicode backslash character)
Deleted: <code>product</code> and the backslash character.
Deleted: and
Deleted: character
Deleted: value
Deleted: is
Deleted: control character having a
Deleted: and

- ii. Let *product* be the concatenation of *product* and "u".
 - iii. Let *hex* be the string result of converting the numeric code unit value of *C* to a String of four hexadecimal digits. Alphabetic hexadecimal digits are presented as lowercase characters.
 - iv. Let *product* be the concatenation of *product* and *hex*.
 - d. Else
 - i. Let *product* be the concatenation of *product* and *C*.
3. Let *product* be the concatenation of *product* and code unit 0x0022 (the Unicode double quote character).
4. Return *product*.

Deleted: and the double quote character

Runtime Semantics: JO Abstract Operation

The abstract operation *JO(value)* serializes an object. It has access to the *stack*, *indent*, *gap*, and *PropertyList*, of the invocation of the *stringify* method.

- 1. If *stack* contains *value* then throw a **TypeError** exception because the structure is cyclical.
- 2. Append *value* to *stack*.
- 3. Let *stepback* be *indent*.
- 4. Let *indent* be the concatenation of *indent* and *gap*.
- 5. If *PropertyList* is not **undefined**, then
 - a. Let *K* be *PropertyList*.
- 6. Else
 - a. Let *K* be an internal List of Strings consisting of the keys of all the own properties of *value* whose [[Enumerable]] attribute is **true** and whose property key is a String value. The ordering of the Strings is the same as that used by the **Object.keys** standard built-in function.
- 7. Let *partial* be an empty List.
- 8. For each element *P* of *K*.
 - a. Let *strP* be the result of calling the abstract operation *Str* with arguments *P* and *value*.
 - b. ReturnIfAbrupt(strP).
 - c. If *strP* is not **undefined**
 - i. Let *member* be the result of calling the abstract operation *Quote* with argument *P*.
 - ii. Let *member* be the concatenation of *member* and the string ":".
 - iii. If *gap* is not the empty String
 - 1. Let *member* be the concatenation of *member* and code unit 0x0020 (the Unicode space character).
 - iv. Let *member* be the concatenation of *member* and *strP*.
 - v. Append *member* to *partial*.
- 9. If *partial* is empty, then
 - a. Let *final* be "{}".
- 10. Else
 - a. If *gap* is the empty String
 - i. Let *properties* be a String formed by concatenating all the element Strings of *partial* with each adjacent pair of Strings separated with code unit 0x002C (the Unicode comma character). A comma is not inserted either before the first String or after the last String.
 - ii. Let *final* be the result of concatenating "{}", *properties*, and "{}".
 - b. Else *gap* is not the empty String
 - i. Let *separator* be the result of concatenating code unit 0x002C (the comma character), code unit 0x000A (the line feed character), and *indent*.
 - ii. Let *properties* be a String formed by concatenating all the element Strings of *partial* with each adjacent pair of Strings separated with *separator*. The *separator* String is not inserted either before the first String or after the last String.
 - iii. Let *final* be the result of concatenating "{}", code unit 0x000A (the line feed character), *indent*, *properties*, code unit 0x000A, *stepback*, and "{}".
- 11. Remove the last element of *stack*.
- 12. Let *indent* be *stepback*.
- 13. Return *final*.

Deleted: ,

Deleted: *ReplacerFunction*, and *space*

Deleted: names

Deleted: should be

Deleted: colon character

Deleted: the line feed character

Runtime Semantics: JA Abstract Operation

The abstract operation $JA(value)$ serializes an array. It has access to the *stack*, *indent*, and *gap* of the invocation of the `stringify` method. The representation of arrays includes only the elements between zero and `array.length - 1` inclusive. Properties whose keys are not array indexes are excluded from the stringification. An array is stringified as an open left bracket, elements separated by comma, and a closing right bracket.

1. If *stack* contains *value* then throw a **TypeError** exception because the structure is cyclical.
2. Append *value* to *stack*.
3. Let *stepback* be *indent*.
4. Let *indent* be the concatenation of *indent* and *gap*.
5. Let *partial* be an empty List.
6. Assert: *value* is a standard array object and hence its "`length`" property is a non-negative integer.
7. Let *len* be the result of `Get(value, "length")`
8. Let *index* be 0.
9. Repeat while *index < len*
 - a. Let *strP* be the result of calling the abstract operation `Str` with arguments `ToString(index)` and *value*.
 - b. ReturnIfAbrupt(strP).
 - c. If *strP* is **undefined**
 - i. Append "`null`" to *partial*.
 - d. Else
 - i. Append *strP* to *partial*.
 - e. Increment *index* by 1.
10. If *partial* is empty ,then
 - a. Let *final* be "[]".
11. Else
 - a. If *gap* is the empty String
 - i. Let *properties* be a String formed by concatenating all the element Strings of *partial* with each adjacent pair of Strings separated with code unit 0x002C (the comma character). A comma is not inserted either before the first String or after the last String.
Let *final* be the result of concatenating "[", *properties*, and "]".
 - b. Else
 - i. Let *separator* be the result of concatenating code unit 0x002C (the comma character), code unit 0x000A (the line feed character), and *indent*.
 - ii. Let *properties* be a String formed by concatenating all the element Strings of *partial* with each adjacent pair of Strings separated with *separator*. The *separator* String is not inserted either before the first String or after the last String.
 - iii. Let *final* be the result of concatenating "[", code unit 0x000A (the line feed character), *indent*, *properties*, code unit 0x000A, *stepback*, and "]".
12. Remove the last element of *stack*.
13. Let *indent* be *stepback*.
14. Return *final*.

NOTE 1 JSON structures are allowed to be nested to any depth, but they must be acyclic. If *value* is or contains a cyclic structure, then the `stringify` function must throw a **TypeError** exception. This is an example of a value that cannot be stringified:

```
a = [];
a[0] = a;
my_text = JSON.stringify(a); // This must throw an TypeError.
```

NOTE 2 Symbolic primitive values are rendered as follows:

- The **null** value is rendered in JSON text as the String **null**.
- The **undefined** value is not rendered.
- The **true** value is rendered in JSON text as the String **true**.
- The **false** value is rendered in JSON text as the String **false**.

NOTE 3 String values are wrapped in double quotes. The characters " and \ are escaped with \ prefixes. Control characters are replaced with escape sequences \uHHHH, or with the shorter forms, \b (backspace), \f (formfeed), \n (newline), \r (carriage return), \t (tab).

Deleted: , and space

Deleted: Named p

Deleted: are

Deleted: nativ

Deleted: e

Deleted: of calling the [[Get]] internal method
value with argument "`length`".

Deleted: the line feed character

NOTE 4 Finite numbers are stringified as if by calling `ToString(number)`. `NaN` and `Infinity` regardless of sign are represented as the String `null`.

NOTE 5 Values that do not have a JSON representation (such as `undefined` and functions) do not produce a String. Instead they produce the `undefined` value. In arrays these values are represented as the String `null`. In objects an unrepresentable value causes the property to be excluded from stringification.

NOTE 6 An object is rendered as an opening left brace followed by zero or more properties, separated with commas, closed with a right brace. A property is a quoted String representing the key or property name, a colon, and then the stringified property value. An array is rendered as an opening left bracket followed by zero or more values, separated with commas, closed with a right bracket.

15.13 Binary Data Objects

15.13.1 The BinaryData Module

15.13.2 The BinaryData.Type Object

15.13.2.5 BinaryData.ScalarType Type Instance Objects

15.13.3 The BinaryData.ArrayType Object

15.13.4 The BinaryData.StructType Object

15.13.5 ArrayBuffer Objects

15.13.5.1 Abstract Operations For ArrayBuffer Objects

15.13.5.1.1 AllocateArrayBuffer(constructor)

The abstract operation `AllocateArrayBuffer` with argument `constructor` is used to create an uninitialized `ArrayBuffer` object. It performs the following steps:

1. Assert: `IsConstructor(constructor)` is `true`.
2. Let `obj` be the result of calling `OrdinaryCreateFromConstructor(constructor, "%ArrayBufferPrototype%")`.
3. Add a `[[ArrayBufferData]]` internal data property to `obj`.
4. Add a `[[ArrayBufferByteLength]]` internal data property to `obj`.
5. Set `obj`'s `[[ArrayBufferData]]` internal data property to `undefined`.
6. Set `obj`'s `[[ArrayBufferByteLength]]` internal data property to 0.
7. Return `obj`.

15.13.5.1.2 SetArrayBufferData(arrayBuffer, bytes)

The abstract operation `SetArrayBufferData` with arguments `arrayBuffer` and `bytes` is used to initialize the storage block encapsulated by an `ArrayBuffer` object. It performs the following steps:

1. Assert: `arrayBuffer` has an `[[ArrayBufferData]]` internal data property.
2. Assert: `bytes` is an Number value in the `Uint32` range.
3. Let `block` be the result of `CreateByteArrayBlock(bytes)`.
4. ReturnIfAbrupt(`block`).
5. Set `arrayBuffer`'s `[[ArrayBufferData]]` to `block`.
6. Set `arrayBuffer`'s `[[ArrayBufferByteLength]]` internal data property to `byteLength`.
7. Return `arrayBuffer`.

Deleted: ,

Comment [AWB10207]: This is a place holder for material in the Binary Data proposal
<http://wiki.ecmascript.org/doku.php?id=harmony:binaryata>

Comment [AWB13208]: TODO: need to define abstract operations for allocating data blocks. Should throw a `RangeError` if alloc fails.

15.13.5.1.3 GetValueFromBuffer (arrayBuffer, byteIndex, type, isBigEndian)

The internal operation `GetValueFromBuffer` takes four parameters, an `ArrayBuffer` `arrayBuffer`, an integer `byteIndex`, a String `valueType`, and optionally a Boolean `isBigEndian`. If `isBigEndian` is not present, its default value is `false`. This operation performs the follow steps:

1. Assert: There are sufficient bytes in `arrayBuffer` starting at `byteIndex` to represent a value of `valueType`.
2. Let `block` be `arrayBuffer`'s `[[ArrayBufferData]]` internal data property.
3. Let `elementSize` be the Number value of the Element Size value specified in Table 36 for `valueType`.
4. Let `rawValue` be the `elementSize` bytes starting at `byteIndex` of `block`.
5. If `isBigEndian` is `true`, reverse the order of the bytes of `rawValue`.
6. If `type` is "Float32", then
 - a. `rawValue` is interpreted, taking into account the value of `isBigEndian`, as a bit string encoding of an IEEE 754-208 binary32 value.
 - b. If `rawValue` is any an IEEE 754-208 binary32 NaN value, return the NaN Number value.
 - c. Return the Number value that is encoded by `rawValue` as
7. If `type` is "Float64", then
 - a. `rawValue` is interpreted, taking into account the value of `isBigEndian`, as a bit string encoding of an IEEE 754-208 binary64 value.
 - b. If `rawValue` is any an IEEE 754-208 binary64 NaN value, return the NaN Number value.
 - c. Return the Number value that is encoded by `rawValue` as
8. If the first character of `type` is "U", then
 - a. Let `intValue` be the positive integer that is the result of interpreting, taking into account the value of `isBigEndian`, `rawValue` as an unsigned binary number.
9. Else
 - a. Let `intValue` be the signed integer that is the result of interpreting, taking into account the value of `isBigEndian`, `rawValue` as a binary 2's complement number of bit length `elementSize` × 4.
10. Return `intValue`.

NOTE The default number storage formal for all implementation is little endian, regardless of the native endianness of the underlying hardware.

Formatted: Note

15.13.5.1.4 SetValueInBuffer (arrayBuffer, byteIndex, type, value, isBigEndian)

The internal operation `SetValueInBuffer` takes five parameters, an `ArrayBuffer` `arrayBuffer`, an integer `byteIndex`, a String `valueType`, a Number `value`, and optionally a Boolean `isBigEndian`. If `isBigEndian` is not present, its default value is `false`. This operation performs the follow steps:

1. Assert: There are sufficient bytes in `arrayBuffer` starting at `byteIndex` to represent a value of `valueType`.
2. Let `block` be `arrayBuffer`'s `[[ArrayBufferData]]` internal data property.
3. Let `elementSize` be the Number value of the Element Size value specified in Table 36 on the row with Element Type is `type`.
4. Let `rawValue` be the `elementSize` bytes starting at `byteIndex` of `arrayBuffer`.
5. If `isBigEndian` is `true`, reverse the order of the bytes of `rawValue`.
6. If `type` is "Float32", then
 - a. Set `rawValue` to the 4 bytes that are the result of converting `value` to IEEE-868-2005 binary32 format using "Round to nearest, ties to even" rounding mode. If `isBigEndian` is `true`, the bytes are arranged in big endian order. Otherwise, the bytes are arranged in little endian order. If `value` is NaN, `rawValue` is may be set of any implementation choosen non-signaling NaN encoding.
7. Else, if `type` is "Float64", then
 - a. Set `rawValue` to the 8 bytes that are IEEE-868-2005 binary64 format encoding of `value`. If `isBigEndian` is `true`, the bytes are arranged in big endian order. Otherwise, the bytes are arranged in little endian order. If `value` is NaN, `rawValue` is may be set of any implementation choosen non-signaling NaN encoding.
8. Else,
 - a. Let `n` be the Size Element value in Table 36 for the row containing the value of `type` as its Element Type entry.
 - b. Let `convOp` be the abstraction operation named in the Conversion Opoeration column in Table 36 for the row containing the value of `type` as its Element Type entry.
 - c. Let `intValue` be the result of calling `convOp` with `value` as its argument.

- d. If *intValue* ≥ 0 , then
 - i. Let *rawBytes* be the *n*-byte binary encoding of *intValue*. If *isBigEndian* is **true**, the bytes are arranged in big endian order. Otherwise, the bytes are arranged in little endian order.
 - e. Else,
 - i. Let *rawBytes* be the *n*-byte binary 2's complement encoding of *intValue*. If *isBigEndian* is **true**, the bytes are arranged in big endian order. Otherwise, the bytes are arranged in little endian order.
9. Store the individual bytes of *rawBytes* in order starting at position *byteIndex* of *block*.
10. Return `CompletionNormal(undefined)`.

15.13.5.1 The ArrayBuffer Object Called as a Function

When `ArrayBuffer` is called as a function rather than as a constructor, it initializes its `this` value with the internal state that supports the `ArrayBuffer.prototype` internal methods. This permits super invocation of the `ArrayBuffer` constructor by `ArrayBuffer` subclasses. If its `this` value is `undefined`, it creates and initialises a new `ArrayBuffer` object. Thus the function call `ArrayBuffer(...)` is equivalent to the object creation expression `new ArrayBuffer(...)` with the same arguments.

15.13.5.1.1 ArrayBuffer(length)

`ArrayBuffer` called as function with argument *length* performs the following steps:

1. Let *O* be the `this` value.
2. If `Type(O)` is neither `Object` or `Undefined`, then throw a **TypeError** exception
3. If *O* is `undefined` or does not have an `[[ArrayBufferData]]` internal data property, then
 - a. Let *F* be this function object.
 - b. Let *argumentsList* be the `argumentsList` argument of the `[[Call]]` internal method that invoked *F*.
 - c. Return the result of calling `OrdinaryCreate(F, argumentsList)`.
4. If the value of *O*'s `[[ArrayBufferData]]` internal data property is not `undefined`, then throw a **TypeError** exception.
5. Let *byteLength* be `ToUint32(length)`.
6. `ReturnIfAbrupt(byteLength)`.
7. Return the result of `SetArrayBufferData(O, byteLength)`.

15.13.5.2 The ArrayBuffer Constructor

When `ArrayBuffer` is called as part of a new expression, it is a constructor: it initialises the newly created object.

The `ArrayBuffer` constructor is designed to be subclassable. It may be used as the value of an `extends` clause of a class declaration. Subclass constructors that intended to inherit the specified `ArrayBuffer` behaviour must include a `super` call to `ArrayBuffer`.

15.13.5.2.1 new ArrayBuffer(len)

`ArrayBuffer` called as part of a new expression with argument *length* performs the following steps:

1. Let *F* be the `ArrayBuffer` function object on which the `new` operator was applied.
2. Let *argumentsList* be the `argumentsList` argument of the `[[Construct]]` internal method that was invoked by the `new` operator.
3. Return the result of `OrdinaryConstruct` with arguments *F* and *argumentsList*.

If `Map` is implemented as an ordinary function object, its `[[Construct]]` internal method will perform the above steps.

15.13.5.3 Properties of the ArrayBuffer Constructor

The value of the `[[Prototype]]` internal data property of the `ArrayBuffer` constructor is the Function prototype object (15.3.4).

Deleted: The `[[Prototype]]` internal data property of the newly constructed object is set to the original `ArrayBuffer` prototype object, the one that is the initial value of `ArrayBuffer.prototype` (16.1.3.1). The `[[Class]]` internal data property of the newly constructed object is set to "ArrayBuffer". The `[[Extensible]]` internal data property of the newly constructed object is set to **true**.
 The length property of the newly constructed object is set to `ToUint32(len)`.

A fresh native buffer `nativeBuffer` of length bytes is allocated. The contents of this native buffer are zero initialized. If the requested number of bytes could not be allocated, a **RangeError** is raised. The `[[NativeBuffer]]` internal data property of the newly constructed object is set to `nativeBuffer`.

Besides its `length` property (whose value is 1), the `ArrayBuffer` constructor has the following properties:

15.13.5.3.1 `ArrayBuffer.prototype`

The initial value of `ArrayBuffer.prototype` is the `ArrayBuffer` prototype object (15.13.5.4).

This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.13.5.3.2 `@@create()`

The `@@create` method of a `ArrayBuffer` function object F , performs the following steps:

1. Let F be the `this` value.
2. If `IsConstructor(F)` is `false`, then throw a `TypeError` exception.
3. Return the result of calling `AllocateArrayBuffer(F)`.

15.13.5.4 Properties of the `ArrayBuffer` Prototype Object

The value of the `[[Prototype]]` internal data property of the `ArrayBuffer` prototype object is the standard built-in `Object` prototype object (15.2.4). The `ArrayBuffer` prototype object is an ordinary object. It does not have a `[[ArrayBufferData]]` or `[[ArrayBufferByteLength]]` internal data property.

15.13.5.4.1 `ArrayBuffer.prototype.constructor`

The initial value of `ArrayBuffer.prototype.constructor` is the standard built-in `ArrayBuffer` constructor.

15.13.5.4.2 `get ArrayBuffer.prototype.byteLength`

`ArrayBuffer.prototype.size` is an accessor property whose set accessor function is `undefined`. Its get accessor function performs the following steps:

1. Let O be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(O)`.
3. If O does not have a `[[ArrayBufferByteLength]]` internal data property throw a `TypeError` exception.
4. Let $length$ be the value of O 's `[[ArrayBufferByteLength]]` internal data property.
5. Return $length$.

15.13.5.4.3 `ArrayBuffer.prototype.slice(start, end)`

The following steps are taken:

1. Let O be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(O)`.
3. If O does not have a `[[ArrayBufferData]]` internal data property throw a `TypeError` exception.
4. Let len be the value of O 's `[[ArrayBufferByteLength]]` internal data property.
5. Let $relativeStart$ be `ToInteger(start)`.
6. `ReturnIfAbrupt(relativeStart)`.
7. If $relativeStart$ is negative, let $first$ be $\max((len + relativeStart), 0)$; else let $first$ be $\min(relativeStart, len)$.
8. If end is `undefined`, let $relativeEnd$ be len ; else let $relativeEnd$ be `ToInteger(end)`.
9. `ReturnIfAbrupt(relativeEnd)`.
10. If $relativeEnd$ is negative, let $final$ be $\max((len + relativeEnd), 0)$; else let $final$ be $\min(relativeEnd, len)$.
11. Let $newLen$ be $final - first$.
12. Let $ctor$ be the result of `GetMethod(O , "constructor")`.
13. `ReturnIfAbrupt($ctor$)`.
14. If `IsConstructor($ctor$)` is `false`, then throw a `TypeError` exception.
15. Let new be the result of calling the `[[Construct]]` internal method of $ctor$ with a new List containing the single element $newLen$.
16. `ReturnIfAbrupt(new)`.
17. If new does not have a `[[ArrayBufferData]]` internal data property throw a `TypeError` exception.

Deleted: the internal properties are the

Deleted: 16

Deleted: 1

Deleted: The `[[Class]]` internal data property of the newly constructed object is set to "Object"

Deleted: The `[[Extensible]]` internal data property of the newly constructed object is set to true.

Comment [AWB13209]: byteLength needs to be an accessor both to comply with WebIDL requirements and to support the Kronos neutering strawman requirements.

18. Let `fromBuf` be the value of `O`'s `[[ArrayBufferData]]` internal data property.
19. Let `toBuf` be the value of `new`'s `[[ArrayBufferData]]` internal data property.
20. Let `status` be the result of `CopyBlockElements(fromBuf, first, toBuf, 0, newLen)`.
21. `ReturnIfAbrupt(status)`.
22. `Return new`.

Comment [AWB13210]: TODO: need to define abstract operations for allocating and manipulating data blocks.

15.13.5.4.4 `ArrayBuffer.prototype.@@toStringTag`

The initial value of the `@@toStringTag` property is the string value "ArrayBuffer".

15.13.5.5 Properties of the `ArrayBuffer` Instances

`ArrayBuffer` instances inherit properties from the `ArrayBuffer` prototype object. After initialisation by the `ArrayBuffer` constructor, `ArrayBuffer` instances also have a `[[ArrayBufferData]]` internal data property and a `[[ArrayBufferByteLength]]` internal data property.

15.13.6 `TypedArray` Object Structures

For each constructor in the Table 36 is a separate `TypedArray` constructor object, with corresponding prototype and instances. Each of these `TypedArray` constructor objects has the structure described below, differing only in the name used as the constructor name instead of `TypedArray`, in Table 36.

Table 36 – The `TypedArray` Constructors

Constructor Name	Element Type	Element Size	Conversion Operation	Description	Equivalent C Type
<code>Int8Array</code>	<code>Int8</code>	1	<code>ToInt8</code>	8-bit 2's complement signed integer	<code>signed char</code>
<code>Uint8Array</code>	<code>Uint8</code>	1	<code>ToUint8</code>	8-bit unsigned integer	<code>unsigned char</code>
<code>Uint8ClampedArray</code>	<code>Uint8C</code>	1	<code>ToUint8Clamp</code>	8-bit unsigned integer (clamped)	<code>unsigned char</code>
<code>Int16Array</code>	<code>Int16</code>	2	<code>ToInt16</code>	16-bit 2's complement signed integer	<code>Short</code>
<code>Uint16Array</code>	<code>Uint16</code>	2	<code>ToUint16</code>	16-bit unsigned integer	<code>unsigned short</code>
<code>Int32Array</code>	<code>Int32</code>	4	<code>ToInt32</code>	32-bit 2's complement signed integer	<code>Int</code>
<code>Uint32Array</code>	<code>Uint32</code>	4	<code>ToUint32</code>	32-bit unsigned integer	<code>unsigned int</code>
<code>Float32Array</code>	<code>Float32</code>	4		32-bit IEEE floating point	<code>Float</code>
<code>Float64Array</code>	<code>Float64</code>	8		64-bit IEEE floating point	<code>Double</code>

In the definitions below, references to `TypedArray` should be replaced with the appropriate constructor name from the above table. The phrase "the element size in bytes" refers to the value in the Element Size column of the table in the row corresponding to the constructor. The phrase "element Type" refers to the value in the Element Type column for that row.

15.13.6.1 `TypedArray` Constructors Called as a Function

When a `TypedArray` constructor is called as a function rather than as a constructor, it creates and initialises a new object. A call of the constructor as a function is equivalent to calling it as a constructor with the same arguments.

When a `TypedArray` constructor is called as a function rather than as a constructor, it initializes its `this` value with the internal state that supports the `TypedArray.prototype` internal methods. This permits super invocation of the `TypedArray` constructor by `TypedArray` subclasses. If the `this` value is `undefined`, it creates and initialises a new `TypedArray` object. Thus the function call `TypedArray (...)` is equivalent to the object creation expression `new TypedArray (...)` with the same arguments.

Deleted: and their `[[Class]]` internal data property value is "ArrayBuffer"

Deleted: `ArrayBuffer` instances also have the following properties.

Deleted: 15.13.5.5.1 `byteLength`

The `byteLength` property of this `ArrayBuffer` object is a data property whose value is the length of the `ArrayBuffer` in bytes, as fixed at construction time. The length property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

Deleted:

Deleted: following table

Deleted: `TypeArray`

Deleted: `TypeArray`

Deleted: `TypeArray`

Deleted:

Deleted: XXXXXXXX

Formatted Table

Deleted: `Element`

Deleted: `Size`

Comment [AWB13211]: TODO

Comment [AWB13212]: TODO

Comment [AWB13213]: Issue: this is a made up name. What should it be?

Comment [AWB13214]: TODO

Deleted: `TypeArray`

Deleted: `TypeArray`

Comment [AWB13215]: The BinaryData proposal, would like "called as a function" invocation of a `TypedArray` constructor to return a new `BinaryData` type rather than a `array` type instance. This could be accomplished by changing steps 5.a-5.c in the 15.13.6.1.1.

However, this seems like to be a breaking change for some current web apps.

15.13.6.1.1 TypedArray (length)

TypedArray called as function with argument *length* performs the following steps:

1. Assert: Type(*length*) is not Object.
2. Let *elementType* be the string value of the Element Type value in Table 36 for this *TypedArray* constructor.
3. Let *O* be the **this** value.
4. If Type(*O*) is neither Object or Undefined, then throw a **TypeError** exception
5. If *O* is **undefined** or does not have an **[[TypedArrayData]]** internal data property, then
 - a. Let *F* be this function object.
 - b. Let *argumentsList* be the **argumentsList** argument of the **[[Call]]** internal method that invoked *F*.
 - c. Return the result of calling *OrdinaryConstruct* (*F*, *argumentsList*).
6. If the value of *O*'s **[[TypedArrayData]]** internal data property is not **undefined**, then throw a **TypeError** exception.
7. Let *elementLength* be *ToInt32*(*length*).
8. ReturnIfAbrupt(*elementLength*).
9. Let *data* be the result of calling *AllocateArrayBuffer*(%*ArrayBuffer*%).
10. ReturnIfAbrupt(*data*).
11. Let *elementSize* be the Size Element value in Table 36 for this *TypedArray* constructor.
12. Let *byteLength* be *elementSize* × *elementLength*.
13. Let *status* be the result of *SetArrayBufferData*(*data*, *byteLength*)
14. ReturnIfAbrupt(*status*).
15. Set *O*'s **[[TypedArrayData]]** to *data*.
16. Set *O*'s **[[TypedArrayElementKind]]** internal data property to *elementType*.
17. Set *O*'s **[[ByteLength]]** internal data property to *byteLength*.
18. Set *O*'s **[[ByteOffset]]** internal data property to 0.
19. Set *O*'s **[[ArrayLength]]** internal data property to *elementLength*.
20. Return *O*.

Comment [AWB13216]: Issue: we need to decide whether we are going to fully apply WebIDL's complex set of overload resolution rules.

15.13.6.1.2 TypedArray (typedArray)

TypedArray called as function with argument *typedArray* performs the following steps:

1. Assert: Type(*typedArray*) is Object and *typedArray* has a **[[TypedArrayData]]** internal data property.
2. Let *srcArray* be *typedArray*.
3. Let *elementType* be the string value of the Element Type value in Table 36 for this *TypedArray* constructor.
4. Let *O* be the **this** value.
5. If Type(*O*) is neither Object or Undefined, then throw a **TypeError** exception
6. If *O* is **undefined** or does not have an **[[TypedArrayData]]** internal data property, then
 - a. Let *F* be this function object.
 - b. Let *argumentsList* be the **argumentsList** argument of the **[[Call]]** internal method that invoked *F*.
 - c. Return the result of calling *OrdinaryConstruct*(*F*, *argumentsList*).
7. If the value of *O*'s **[[TypedArrayData]]** internal data property is not **undefined**, then throw a **TypeError** exception.
8. Let *elementLength* be the value of *srcArray*'s **[[ArrayLength]]** internal data property.
9. Let *srcType* be the value of *srcArray*'s **[[TypedArrayElementKind]]** internal data property.
10. Let *srcData* be the value of *srcArray*'s **[[TypedArrayData]]** internal data property.
11. Let *data* be the result of calling *CloneArrayBuffer*(*srcData*, *srcType*, *elementType*, *elementLength*).
12. ReturnIfAbrupt(*data*).
13. Let *elementSize* be the Size Element value in Table 36 for this *TypedArray* constructor.
14. Let *byteLength* be *elementSize* × *elementLength*.
15. Let *data* be the result of *SetArrayBufferData*(*data*, *byteLength*).
16. ReturnIfAbrupt(*data*).
17. Set *O*'s **[[TypedArrayData]]** to *data*.
18. Set *O*'s **[[TypedArrayElementKind]]** internal data property to *elementType*.
19. Set *O*'s **[[ByteLength]]** internal data property to *byteLength*.
20. Set *O*'s **[[ByteOffset]]** internal data property to 0.
21. Set *O*'s **[[ArrayLength]]** internal data property to *elementLength*.
22. Return *O*.

Comment [AWB13217]: Issue: we need to decide whether we are going to fully apply WebIDL's complex set of overload resolution rules.

Comment [AWB13218]: TODO

15.13.6.1.3 `TypedArray (array)`

`TypedArray` called as function with argument `array` performs the following steps:

1. Assert: `Type(array)` is Object and `array` does not have either a `[[TypedArrayData]]` or a `[[ArrayBufferData]]` internal data property.
2. Let `O` be the `this` value.
3. If `Type(O)` is neither Object or Undefined, then throw a `TypeError` exception
4. Let `srcArray` be `array`.
5. Let `elementType` be the string value of the Element Type value in Table 36 for this `TypedArray` constructor.
6. If `O` is `undefined` or does not have an `[[TypedArrayData]]` internal data property, then
 - a. Let `F` be this function object.
 - b. Let `argumentsList` be the `argumentsList` argument of the `[[Call]]` internal method that invoked `F`.
 - c. Return the result of calling `OrdinaryConstruct(F, argumentsList)`.
7. If the value of `O`'s `[[TypedArrayData]]` internal data property is not `undefined`, then throw a `TypeError` exception.
8. Let `arrayLength` be the result of `Get(array, "length")`.
9. Let `elementLength` be `ToUint32(arrayLength)`.
10. ReturnIfAbrupt(elementLength).
11. Let `data` be the result of calling `AllocateArrayBuffer(%ArrayBuffer%)`.
12. ReturnIfAbrupt(data).
13. Let `elementSize` be the Size Element value in Table 36 for this `TypedArray` constructor.
14. Let `byteLength` be `elementSize × elementLength`.
15. Let `status` be the result of `SetArrayBufferData(data, byteLength)`
16. Let `k` be 0.
17. Repeat, while `k < elementLength`
 - a. Let `Pk` be `ToString(k)`.
 - b. Let `kValue` be the result of `Get(O, Pk)`.
 - c. Let `kNumber` be `ToNumber(kValue)`.
 - d. ReturnIfAbrupt(kNumber).
 - e. Perform `SetValueInBuffer(data, k × elementSize, elementType, kNumber)`.
 - f. Increase `k` by 1.
18. Set `O`'s `[[TypedArrayData]]` to `data`.
19. Set `O`'s `[[TypedArrayElementKind]]` internal data property to `elementType`.
20. Set `O`'s `[[ByteLength]]` internal data property to `byteLength`.
21. Set `O`'s `[[ByteOffset]]` internal data property to 0.
22. Set `O`'s `[[ArrayLength]]` internal data property to `elementLength`.
23. Return O.

15.13.6.1.4 `TypedArray (buffer, byteOffset=0, length=undefined)`

`TypedArray` called as function with arguments `length`, `byteOffset`, and `length` performs the following steps:

1. Assert: `Type(buffer)` is Object and `typedArray` has a `[[ArrayBufferData]]` internal data property.
2. Let `O` be the `this` value.
3. If `Type(O)` is neither Object or Undefined, then throw a `TypeError` exception
4. Let `elementType` be the String value of the Element Type value in Table 36 for this `TypedArray` constructor.
5. Let `elementSize` be the Number value of the Element Size value in Table 36 for this `TypedArray` constructor.
6. Let `offset` be `ToUint32(byteOffset)`.
7. ReturnIfAbrupt(offset).
8. If `offset` modulo `elementSize` ≠ 0, then throw a `RangeError` exception.
9. Let `bufferByteLength` be the value of `buffer`'s `[[ArrayBufferByteLength]]` internal data property.
10. If `length` is `undefined`, then
 - a. If `bufferByteLength` modulo `elementSize` ≠ 0, then throw a `RangeError` exception.
 - b. Let `newByteLength` be `bufferByteLength - offset`.
11. Else,
 - a. Let `newLength` be `ToUint32(length)`.
 - b. ReturnIfAbrupt(newLength).
 - c. Let `newByteLength` be `newLength × elementSize`.

Comment [AWB13219]: Issue: The khronos spec. allows array-likes here. Should we also recognize iterables and use `@@iterator` for them? This algorithm current doesn't deal with iterables.

Comment [AWB13220]: Issue: we need to decide whether we are going to fully apply WebIDL's complex of overload resolution rules.

Comment [AWB13221]: Issue: we need to decide whether we are going to fully apply WebIDL's complex of overload resolution rules.

Comment [AWB13222]: Issue, the order of exceptions that may be thrown during argument validation is probably not currently the same as would be produced WebIDL overloading plus Khronos validation rules (if the order is even well defined??). It isn't clear that this difference is very important..

- d. If `newByteLength > bufferByteLength`, then throw a **RangeError** exception.
12. If the value of O 's `[[TypedArrayData]]` internal data property is not `undefined`, then throw a **TypeError** exception.
13. Set O 's `[[TypedArrayData]]` to `buffer`.
14. Set O 's `[[TypedArrayElementKind]]` internal data property to `elementType`.
15. Set O 's `[[ByteLength]]` internal data property to `newByteLength`.
16. Set O 's `[[ByteOffset]]` internal data property to `offset`.
17. Set O 's `[[ArrayLength]]` internal data property to `newByteLength / elementSize`.
18. Return O .

15.13.6.1.5 TypedArray (binary data stuff)

15.13.6.2 The `TypedArray` Constructors

When a `TypedArray` function is called as part of a new expression, it is a constructor: it initialises the newly created object.

The `TypedArray` constructors is designed to be subclassable. They may be used as the value of an `extends` clause of a class declaration. Subclass constructors that intended to inherit the specified `TypedArray` behaviour must include a `super` call to the `TypedArray`.

15.13.5.2.1 new TypedArray (...args)

When a `TypedArray` function called as part of a new expression with argument lists `args` performs the following steps:

1. Let F be the `TypedArray` function object on which the `new` operator was applied.
2. Let `argumentsList` be the `argumentsList` argument of the `[[Construct]]` internal method that was invoked by the `new` operator.
3. Return the result of OrdinaryConstruct with arguments F and `argumentsList`.

If `TypedArray` is implemented as an ordinary function object, its `[[Construct]]` internal method will perform the above steps.

15.13.6.3 Properties of the `TypedArray` Constructors

The value of the `[[Prototype]]` internal data property of each `TypedArray` constructor is the Function prototype object (15.3.4).

Besides a `length` property (whose value is 3), each `TypedArray` constructor has the following properties:

15.13.6.3.1 `TypedArray.prototype`

The initial value of `TypedArray.prototype` is the corresponding `TypedArray` prototype object (15.13.5.4).

This property has the attributes { `[[Writable]]: false`, `[[Enumerable]]: false`, `[[Configurable]]: false` }.

15.13.6.3.2 `@@create ()`

The `@@create` method of a `TypedArray` function object F , performs the following steps:

1. Let F be the `this` value.
2. If `IsConstructor(F)` is `false`, then throw a **TypeError** exception.
3. Let `proto` be the result of `Get(F, "prototype")`.
4. ReturnIfAbrupt(`proto`).
5. If `Type(proto)` is not `Object`, then
 - a. If `constructor` has a `[[Realm]]` internal data property, let `realm` be F 's `[[Realm]]`.
 - b. Else,
 - i. Let `ctx` be the running execution context.
 - ii. Let `realm` be `ctx`'s `Realm`.

Comment [AWB13223]: TODO: this is a place holder assuming that we may need to construct `TypedArrays` from binary data objects.

Deleted: `TypedArray`

Deleted: When a `TypedArray` constructor is called as part of a new expression, it is a constructor: it initialises the newly created object.¶

15.13.6.2.1 new `TypedArray(arg0 [, arg1, ..., arg2])`

The `[[Prototype]]` internal data property of the newly constructed object is set to the original `TypedArray` prototype object, the one that is the initial value of `TypedArray.prototype` (16.2.3.1). The `[[Class]]` internal data property of the newly constructed object is set to "TypedArray". The `[[Extensible]]` internal data property of the newly constructed object is set to true.¶

The remaining properties of the newly constructed object are set as follows:¶

<#> If `Type(arg0)` is Number, then¶

<#> Let `length` be `ToUInt32(arg0)`.¶

<#> ReturnIfAbrupt(`length`).¶

<#> The `length` property of the newly constructed object is set to `length`.¶

<#> The `byteLength` property of the newly constructed object is set to `length` multiplied by the element size in bytes.¶

<#> Let `arrayBuffer` be an object constructed as in a call to the built-in `ArrayBuffer` constructor, a "new `ArrayBuffer(byteLength)`".¶

<#> The `buffer` property of the newly constructed object is set to `arrayBuffer`.¶

<#> The `byteOffset` property of the newly constructed object is set to 0.¶

<#> Else,¶

<#> Let O be the result of calling `ToObject(arg0)`.¶

<#> ReturnIfAbrupt(O).¶

<#> Let `class` be the value of the `[[Class]]` internal data property of O .¶

<#> If `class` is "ArrayBuffer", then¶

<#> Let `byteOffset` be the result of calling `ToUInt32` on `arg1`, if provided, or else 0.¶

<#> If `byteOffset` is not an integer multiple of the element size in bytes, throw a **RangeError** exception. data.¶

<#> Let `bufferLength` be the result of calling `[Get]` on O with property name, "`byteLength`".¶

<#> Let `byteLength` be the result of calling `ToUInt32` on `arg2`, if provided, or else `bufferLength - byteOffset`.¶

<#> If `byteOffset + byteLength` is greater than `bufferLength`, throw a **RangeError** exception.¶

<#> Let `length` be the result of dividing `byteLength` by the element size in bytes.¶

Deleted: `TypedArray`

Deleted: `TypedArray`

Deleted: the internal properties and the

Deleted: `TypedArray`

Deleted: `TypedArray`

Deleted: `TypedArray`

Deleted: `TypedArray`

Deleted: 2

- c. Let `proto` be `realm`'s intrinsic object named "`%TypedArrayPrototype%`".
6. Let `obj` be the result of calling `IndexedDelegatorCreate` (`proto`).
7. Add a `[[TypedArrayData]]` internal data property to `obj`.
8. Add a `[[TypedArrayElementKind]]` internal data property to `obj`.
9. Add a `[[ByteLength]]` internal data property to `obj`.
10. Add a `[[ByteOffset]]` internal data property to `obj`.
11. Add a `[[ArrayLength]]` internal data property to `obj`.
12. Set `obj`'s `[[TypedArrayData]]` internal data property to `undefined`.
13. Return `obj`.

Comment [AWB13224]: This should be abstracted

15.13.6.4 Properties of the `TypedArray` Prototype Object

The value of the `[[Prototype]]` internal data property of each `TypedArray` prototype object is the standard built-in `Object` prototype object (15.2.4). The `TypedArray` prototype objects are ordinary objects. They do not have a `[[TypedArrayData]]` or any other of the internal data properties that are specific to `TypedArray` instance objects..

15.13.6.4.1 `TypedArray.prototype.constructor`

The initial value of `TypedArray.prototype.constructor` is the standard built-in `TypedArray` constructor.

15.13.6.4.2 `TypedArray.prototype.BYTES_PER_ELEMENT`

The value of `TypedArray.prototype.BYTES_PER_ELEMENT` is the Number value of the Element Size value specified in Table 36 for `TypedArray`.

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

15.13.6.4.3 `|get| TypedArray.prototype.buffer`

`TypedArray.prototype.buffer` is an accessor property whose set accessor function is `undefined`. Its get accessor function performs the following steps:

1. Let `O` be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(`O`).
3. If `O` does not have a `[[TypedArrayData]]` internal data property throw a `TypeError` exception.
4. Let `buffer` be the value of `O`'s `[[TypedArrayData]]` internal data property.
5. If `buffer` is `undefined`, then throw a `TypeError` exception.
6. Return `buffer`.

Deleted: 15.13.6.3.2

TypeArray.BYTES_PER_ELEMENT

The initial value of `TypeArray.BYTES_PER_ELEMENT` is the element size in bytes. This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

Deleted: TypeArray

Deleted: TypeArray

Deleted: It's `[[Class]]` is "TypeArray".

Deleted: TypeArray

Deleted: TypeArray

Deleted: TypeArray

15.13.6.4.4 `|get| TypedArray.prototype.byteLength`

`TypedArray.prototype.byteLength` is an accessor property whose set accessor function is `undefined`. Its get accessor function performs the following steps:

1. Let `O` be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(`O`).
3. If `O` does not have a `[[TypedArrayData]]` internal data property throw a `TypeError` exception.
4. Let `buffer` be the value of `O`'s `[[TypedArrayData]]` internal data property.
5. If `buffer` is `undefined`, then throw a `TypeError` exception.
6. Let `size` be the value of `O`'s `[[ByteLength]]` internal data property.
7. Return `size`.

Comment [AWB13225]: buffer needs to be an accessor both to comply with WebIDL requirements and to support the Kronos neutering strawman requirement

15.13.6.6.5 `|get| TypedArray.prototype.byteOffset`

`TypedArray.prototype.byteOffset` is an accessor property whose set accessor function is `undefined`. Its get accessor function performs the following steps:

1. Let `O` be the result of calling `ToObject` with the `this` value as its argument.

Comment [AWB13226]: buffer needs to be an accessor both to comply with WebIDL requirements and to support the Kronos neutering strawman requirement

2. ReturnIfAbrupt(*O*).
3. If *O* does not have a ***[[TypedArrayData]]*** internal data property throw a **TypeError** exception.
4. Let *buffer* be the value of *O*'s ***[[TypedArrayData]]*** internal data property.
5. If *buffer* is ***undefined***, then throw a **TypeError** exception.
6. Let *offset* be the value of *O*'s ***[[ByteOffset]]*** internal data property.
7. Return *offset*.

15.13.6.6.6 get *TypedArray.prototype.length*

TypedArray.prototype.length is an accessor property whose set accessor function is ***undefined***. Its get accessor function performs the following steps:

1. Let *O* be the result of calling **ToObject** with the **this** value as its argument.
2. ReturnIfAbrupt(*O*).
3. If *O* does not have a ***[[TypedArrayData]]*** internal data property throw a **TypeError** exception.
4. Let *buffer* be the value of *O*'s ***[[TypedArrayData]]*** internal data property.
5. If *buffer* is ***undefined***, then throw a **TypeError** exception.
6. Let *length* be the value of *O*'s ***[[ArrayLength]]*** internal data property.
7. Return *length*.

15.13.6.6.7 *TypedArray.prototype.set(array, offset = 0)*

Set multiple values in this *TypedArray*, reading the values from the object *array*. The optional *offset* value indicates the first element index in this *TypedArray* where values are written. If omitted, it is assumed to be 0.

1. Assert: *typedArray* does not have a ***[[TypedArrayData]]*** internal data property. If it does, the definition in [15.13.6.6.8 applies](#).
2. Let *target* be the result of calling **ToObject** with the **this** value as its argument.
3. ReturnIfAbrupt(*target*).
4. If *target* does not have a ***[[TypedArrayData]]*** internal data property throw a **TypeError** exception.
5. Let *targetBuffer* be the value of *target*'s ***[[TypedArrayData]]*** internal data property.
6. If *targetBuffer* is ***undefined***, then throw a **TypeError** exception.
7. Let *targetLength* be the value of *target*'s ***[[ArrayLength]]*** internal data property.
8. Let *targetOffset* be ***ToInt32(offset)***.
9. ReturnIfAbrupt(*targetOffset*).
10. Let *targetType* be the value of *target*'s ***[[TypedArrayElementKind]]*** internal data property.
11. Let *targetElementSize* be the Number value of the Element Size value specified in Table 36 for *targetType*.
12. Let *targetByteOffset* be the value of *target*'s ***[[ByteOffset]]*** internal data property.
13. Let *src* be the result of ***ToObject(array)***.
14. ReturnIfAbrupt(*src*).
15. Let *srcLen* be the result of ***Get(src, "length")***.
16. Let *srcLength* be ***ToInt32(srcLen)***.
17. ReturnIfAbrupt(*srcLength*).
18. If *srcLength + targetOffset > targetLength*, then throw a **RangeError** exception.
19. Let *targetByteIndex* be *targetOffset × targetElementSize + targetByteOffset*.
20. Let *k* be 0.
21. Let *limit* be *targetByteIndex + targetElementSize × min(srcLength, targetLength - targetOffset)*.
22. Repeat, while *targetByteIndex < limit*
 - a. Let *Pk* be ***ToString(k)***.
 - b. Let *kValue* be the result of ***Get(src, Pk)***.
 - c. Let *kNumber* be ***ToNumber(kValue)***.
 - d. ReturnIfAbrupt(*kNumber*).
 - e. Perform ***SetValueInBuffer(data, k × elementSize, elementType, kNumber)***.
 - f. Set *k* to *k + 1*.
 - g. Set *targetByteIndex* to *targetByteIndex + targetElementSize*.
23. Return ***undefined***.

Comment [AWB13228]: buffer needs to be an accessor both to comply with WebIDL requirements and to support the Kronos neutering strawman requirements.

15.13.6.6.8 TypedArray.prototype.set(typedArray, offset = 0)

Set multiple values in this `TypedArray`, reading the values from the `typedArray` parameter object. The optional `offset` value indicates the first element index in this `TypedArray` where values are written. If omitted, it is assumed to be 0.

1. Assert: `typedArray` has a `[[TypedArrayData]]` internal data property. If it does not, the definition in 15.13.6.6.7 applies.
2. Let `target` be the result of calling `ToObject` with the `this` value as its argument.
3. ReturnIfAbrupt(`target`).
4. If `target` does not have a `[[TypedArrayData]]` internal data property throw a `TypeError` exception.
5. Let `targetBuffer` be the value of `target`'s `[[TypedArrayData]]` internal data property.
6. If `targetBuffer` is `undefined`, then throw a `TypeError` exception.
7. Let `targetLength` be the value of `target`'s `[[ArrayLength]]` internal data property.
8. Let `targetOffset` be `ToInt32(offset)`.
9. ReturnIfAbrupt(`targetOffset`).
10. Let `targetType` be the value of `target`'s `[[TypedArrayElementKind]]` internal data property.
11. Let `targetElementSize` be the Number value of the Element Size value specified in Table 36 for `targetType`.
12. Let `targetByteOffset` be the value of `target`'s `[[ByteOffset]]` internal data property.
13. Let `srcBuffer` be the value of `typedArray`'s `[[TypedArrayData]]` internal data property.
14. If `srcBuffer` is `undefined`, then throw a `TypeError` exception.
15. Let `srcType` be the value of `typedArray`'s `[[TypedArrayElementKind]]` internal data property.
16. Let `srcElementSize` be the Number value of the Element Size value specified in Table 36 for `srcType`.
17. Let `srcLength` be the value of `typedArray`'s `[[ArrayLength]]` internal data property.
18. Let `srcByteOffset` be the value of `typedArray`'s `[[ByteOffset]]` internal data property.
19. If `srcLength + targetOffset > targetLength`, then throw a `RangeError` exception.
20. If `SameValue(srcBuffer, targetBuffer)` is `true`, then
 - a. Let `srcBuffer` be the result of calling `CloneArrayBuffer(srcData, srcType, srcType, srcLength)`.
21. Let `targetByteIndex` be `targetOffset × targetElementSize + targetByteOffset`.
22. Let `srcByteIndex` be `srcByteOffset`.
23. Let `limit` be `targetByteIndex + targetElementSize × min(srcLength, targetLength - targetOffset)`.
24. Repeat, while `targetByteIndex < limit`
 - a. Let `value` the result of `GetValueFromBuffer(srcBuffer, srcByteIndex, srcType)`.
 - b. Let `status` be the result of `SetValueInBuffer(targetBuffer, targetByteIndex, targetType, value)`.
 - c. Set `srcByteIndex` to `srcByteIndex + srcElementSize` Return
 - d. Set `targetByteIndex` to `targetByteIndex + targetElementSize`.
25. Return `undefined`.

15.13.6.6.9 TypedArray.prototype.subarray(begin = 0, end = this.length)

Returns a new `TypedArray` object whose element types is the same as this `TypedArray` and whose `ArrayBuffer` is the same as the `ArrayBuffer` of this `TypedArray`, referencing the elements at `begin`, inclusive, up to `end`, exclusive. If either `begin` or `end` is negative, it refers to an index from the end of the array, as opposed to from the beginning.

1. Let `O` be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(`O`).
3. If `O` does not have a `[[TypedArrayData]]` internal data property throw a `TypeError` exception.
4. Let `buffer` be the value of `O`'s `[[TypedArrayData]]` internal data property.
5. If `buffer` is `undefined`, then throw a `TypeError` exception.
6. Let `srcLength` be the value of `O`'s `[[ArrayLength]]` internal data property.
7. Let `beginInt` be `ToInt32(begin)`
8. ReturnIfAbrupt(`beginInt`).
9. If `beginInt < 0`, then let `beginInt` be `srcLength + beginInt`.
10. Let `beginIndex` be `min(srcLength, max(0, beginInt))`.
11. If `end` is `undefined`, then let `end` be `srcLength`.
12. Let `endInt` be `ToInt32(end)`.
13. ReturnIfAbrupt(`endInt`).
14. If `endInt < 0`, then let `endInt` be `srcLength + endInt`.
15. Let `endIndex` be `max(0, min(srcLength, endInt))`.

- Deleted:** 4
- Deleted:** 2
- Deleted:** `TypeArray`
- Deleted:** `array [`
- Deleted:** `]`
- Deleted:** `the`
- Deleted:** `a`
- Deleted:** `input`
- Deleted:** `., reading input values from the array`
- Deleted:** `the`
- Deleted:** `current array`
- Deleted:** `#>If this does not have class "TypeArray", throw a TypeError exception.`
- Deleted:** `offsetIndex`
- Deleted:** `I`
- Deleted:** `#>Let O be the result of calling ToObject(array)`
 - `<#>Let srcLength be the result Get(O, "length") of calling [[Get]] on O with property name "length".`
 - `<#>Let targetLength be the result of calling [[Get]] on (this with property name, "length")."length"`
- Deleted:** `offset`
- Deleted:** `1`
- Comment [AWB13229]:** TODO
- Comment [AWB13230]:** TODO: not yet updated for wik
- Deleted:** `#>Let temp be a new TypeArray created as if by call to "new TypeArray(srcLength)"`
 - `<#>Let k be 0`
 - `<#>While k < srcLength`
 - `<#>Let v be the result of calling [[Get]] on (src with property name, ToString(k)).`
 - `<#>Call [[Put]] on (temp , with arguments ToString(k), v, a false).`
 - `<#>Let k be offset.`
 - `<#>While k < targetLength`
 - `<#>Let v be the result of calling [[Get]] on (temp with property name, ToString(k-offset)).`
 - `<#>Call [[Put]] on (temp with arguments ToString(k), v, a false).`
- Deleted:** 4
- Deleted:** 3
- Deleted:** `TypeArray`
- Deleted:** `[`
- Deleted:** `]`
- Deleted:** `view`
- Deleted:** `of the`
- Deleted:** `store for`
- Deleted:** `#>If this does not have class "TypeArray", throw a TypeError exception.`
- Deleted:** `Let srcLength be the result Get(this, "length")`
- Deleted:** `of calling [[Get]] on this with property name`
- Deleted:** `if end was provided, else srcLength`

16. If $endIndex < beginIndex$, then let $endIndex$ be $beginIndex$.
17. Let $newLength$ be $endIndex - beginIndex$.
18. Let $elementType$ be the value of O 's $\text{[[TypedArrayElementKind]]}$ internal data property.
19. Let $elementSize$ be the Number value of the Element Size value specified in Table 36 for $elementType$.
20. Let $srcByteOffset$ be the value of O 's [[ByteOffset]] internal data property.
21. Let $beginByteOffset$ be $srcByteOffset + beginIndex \times elementSize$.
22. Let $constructor$ be the result of $\text{Get}(O, \text{"constructor"})$.
23. ReturnIfAbrupt($constructor$).
24. If $\text{IsConstructor}(constructor)$ is **false**, then return a **TypeError** exception.
25. Let $argumentsList$ be a List consisting of $buffer$, $beginByteOffset$, and $newLength$.
26. Return the result of calling the [[Construct]] internal method of $constructor$ with $argumentsList$ as the argument.

15.13.6.6.10 TypedArray.prototype. $\text{@@elementGet}(index)$

1. Assert: $index$ is an array index value.
2. Let O be the result of calling ToObject with the **this** value as its argument.
3. ReturnIfAbrupt(O).
4. If O does not have a $\text{[[TypedArrayData]]}$ internal data property throw a **TypeError** exception.
5. Let $buffer$ be the value of O 's $\text{[[TypedArrayData]]}$ internal data property.
6. If $buffer$ is **undefined**, then throw a **TypeError** exception.
7. Let $length$ be the value of O 's [[ArrayLength]] internal data property.
8. Let $intIndex$ be $\text{ToUint32}(index)$.
9. ReturnIfAbrupt($intIndex$).
10. If $intIndex > length$, then return **undefined**.
11. Let $offset$ be the value of O 's [[ByteOffset]] internal data property.
12. Let $elementSize$ be the Number value of the Element Size value specified in Table 36 for *TypedArray*.
13. Let $indexedPosition = (intIndex \times elementSize) + offset$.
14. Let $elementType$ be the value of O 's $\text{[[TypedArrayElementKind]]}$ internal data property.
15. Return the result of $\text{GetArrayBuffer}(buffer, indexedPosition, elementType)$.

Comment [AWB13231]: If we make this a private symbol that is not exposed, then it is a specification device. If we make it an exposed symbol (whether private or not) it becomes a ES programmer extension point.

Deleted: <#>Return a new *TypeArray* with the following values for its properties:
 <#> The length property of the newly constructed object is set to $endIndex - beginIndex$.
 <#> The byteLength property of the newly constructed object is set to $length$ multiplied by the size in bytes of Type.¶
 <#> The buffer property of the newly constructed object is set to $this.buffer$.¶
 <#> The byteOffset property of the newly constructed object is set to $this.offset + beginIndex$.

15.13.6.6.11 TypedArray.prototype. $\text{@@elementSet}(index, value)$

1. Assert: $index$ is an array index value.
2. Let O be the result of calling ToObject with the **this** value as its argument.
3. ReturnIfAbrupt(O).
4. If O does not have a $\text{[[TypedArrayData]]}$ internal data property throw a **TypeError** exception.
5. Let $buffer$ be the value of O 's $\text{[[TypedArrayData]]}$ internal data property.
6. If $buffer$ is **undefined**, then throw a **TypeError** exception.
7. Let $length$ be the value of O 's [[ArrayLength]] internal data property.
8. Let $intIndex$ be $\text{ToUint32}(index)$.
9. ReturnIfAbrupt($intIndex$).
10. Let $numValue$ be $\text{ToNumber}(value)$.
11. ReturnIfAbrupt($numValue$).
12. If $intIndex > length$, then return $numValue$.
13. Let $offset$ be the value of O 's [[ByteOffset]] internal data property.
14. Let $elementSize$ be the Number value of the Element Size value specified in Table 36 for *TypedArray*.
15. Let $indexedPosition = (intIndex \times elementSize) + offset$.
16. Let $elementType$ be the value of O 's $\text{[[TypedArrayElementKind]]}$ internal data property.
17. Let $status$ be the result of $\text{SetArrayBuffer}(buffer, indexedPosition, elementType, numValue)$.
18. ReturnIfAbrupt($status$).
19. Return $numValue$.

Comment [AWB13232]: If we make this a private symbol that is not exposed, then it is a specification device. If we make it an exposed symbol (whether private or not) it becomes a ES programmer extension point.

15.13.6.4.11 TypedArray.prototype. @@toStringTag

The initial value of the @@toStringTag property is the string value of the name *TypedArray*.

15.13.6.5 Properties of TypedArray instances

TypedArray instances are exotic Index Delegation objects. Each *TypedArray* instances inherits properties from the corresponding *TypedArray* prototype object. After initialisation by a *TypedArray* constructor, *TypedArray* instances have the following internal data properties: *[[TypedArrayData]]*, *[[TypedArrayElementKind]]*, *[[ByteLength]]*, *[[ByteOffset]]*, and *[[ArrayLength]]*.

15.13.7 DataView Objects

The following sections define DaveViews is derived from the Kronos specification. This material is a very early draft based upon the strawman at <http://wiki.ecmascript.org/doku.php?id=strawman:typed arrays>. This material still needs significant work to fully integrate it into the ES6 spec. and also to integrate typed arrays with ES6 binary data.

Don't waste a lot of time reviewing this material until it is closer to a finished state.

15.13.7.1 The DataView Constructor Called as a Function

When *DataView* is called as a function rather than as a constructor, it creates and initialises a new *DataView* object. Thus the function call *DataView(...)* is equivalent to the object creation expression *new DataView(...)* with the same arguments.

15.13.7.2 The DataView Constructor

When *DataView* is called as part of a new expression, it is a constructor: it initialises the newly created object.

15.13.7.2.1 new DataView(buffer [, byteOffset [, byteLength]])

The *[[Prototype]]* internal data property of the newly constructed object is set to the original *DataView* prototype object, the one that is the initial value of *DataView.prototype* (15.13.3.3.1). The *[[Class]]* internal data property of the newly constructed object is set to "DataView". The *[[Extensible]]* internal data property of the newly constructed object is set to *true*.

The remaining properties are set as follows:

1. Let O be *ToObject(buffer)*.
2. If the *[[Class]]* internal data property of O is not "ArrayBuffer", throw a **TypeError** exception.
3. Let byteOffset be the result of calling *ToUInt32* on *byteOffset*, if provided, or else 0.
4. Let bufferLength be the result of *Get(O, "byteLength")*.
5. Let byteLength be the result of calling *ToUInt32* on *byteLength*, if provided, or else *bufferLength - byteOffset*.
6. If *byteOffset + byteLength* is greater than *bufferLength*, throw a **RangeError** exception.
7. The *byteLength* property of the newly constructed object is set to *byteLength*.
8. The *buffer* property of the newly constructed object is set to O.
9. The *byteOffset* property of the newly constructed object is set to *byteOffset*.

15.13.7.3 Properties of the DataView Constructor

The value of the *[[Prototype]]* internal data property of the *DataView* constructor is the Function prototype object (15.3.4).

Deleted: *TypeArray*

Comment [AWB10233]: This entire section has been copied from the strawman with only minor formatting fix. It has not yet had any technical review or integration.

Deleted: *TypeArray* instances inherit properties from the *TypeArray* prototype object and their *[[Class]]* internal data property value is "TypeArray". *TypeArray* instances also have the following properties.¶

15.13.6.5.1 [[DefineOwnProperty]] (p, desc, throw)

TypeArray objects use a variation of the *[[DefineOwnProperty]]* internal method used for other native ECMAScript objects (8.12.9).¶ When the *[[DefineOwnProperty]]* internal method of A is called with property P, Property Descriptor Desc and Boolean flag Throw, the following steps are taken.¶

- <#> Let succeeded be the result of calling the default *[[DefineOwnProperty]]* internal method (8.12.9) on A passing P, Desc, and Throw as arguments.¶
- <#> If succeeded is *false*, return *false*.¶
- <#> If Desc contains a Value field, let newValue be Desc.Value.¶
- <#> Let convertedValue to *ToType(newValue)*.¶
- <#> Let index be *ToUInt32(P)*.¶
- <#> Call the *SetValueInBuffer* internal operation with arguments A.buffer, *[[NativeBuffer]]*, A.byteOffset, index, convertedValue, and Type.¶
- <#> Return *true*.¶

The internal operation *SetValueInBuffer* takes five parameters, a native buffer nativeBuffer, an integer byteOffset, an integer index, a value of type Type newValue, and a Type valueType. It operates as follows.¶

- <#> Let size be the size in bytes of the type valueType.¶
- <#> Let bytes be the array of bytes from nativeBuffer between offset byteOffset+(index*size) and offset byteOffset+(index+1)*size-1 inclusive.¶
- <#> Let newValueBytes be the result of converting newValue to an array of bytes, using the platform endianness.¶
- <#> Set each byte of bytes from the corresponding byte of newValueBytes.¶

15.13.6.5.2 [[GetOwnProperty]] (P)¶

TypeArray objects use a variation of the *[[GetOwnProperty]]* internal method used for other native ECMAScript objects (8.12.1). This special internal method provides access to named properties corresponding to the individual index values of the *TypeArray* objects.¶ When the *[[GetOwnProperty]]* internal method of A is called with property name P, the following steps are taken.¶

- <#> Let desc be the result of calling the default *[[GetOwnProperty]]* internal method (8.12.1) on A with argument P.¶
- <#> If desc is not *undefined* return desc.¶

Deleted: proeprties

Comment [AWB10234]: Not yet audited

Deleted: raise

Deleted: calling [[

Deleted:]] on

Deleted:

Deleted: with property name

Deleted: "

Deleted: "

Deleted: raise

Deleted: Proeprties

Besides the internal properties and the length property (whose value is 3), the DataView constructor has the following properties:

15.13.7.3.1 DataView.prototype

The initial value of DataView.prototype is the DataView prototype object (15.13.3.4).

This property has the attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.13.7.4 Properties of the DataView Prototype Object

The value of the [[Prototype]] internal data property of the DataView prototype object is the standard built-in Object prototype object (15.2.4). The [[Class]] internal data property of the newly constructed object is set to "Object". The [[Extensible]] internal data property of the newly constructed object is set to **true**.

The abstract operation GetValue(byteOffset, isLittleEndian, type) used by functions on DataView instances is defined as follows:

1. Let byteOffsetInt be ToUInt32(byteOffset)
2. Let totalOffset be byteOffsetInt plus the result of Get(this, "byteOffset").
3. Let byteLength be the result of Get(this, "byteLength").
4. If totalOffset > byteLength, throw a **RangeError** exception.
5. Let value be the result of calling the GetValueFromBuffer internal operation (2.5.2) with arguments this.buffer.[[NativeBuffer]], totalOffset, 0 and type.
6. Return value

Deleted: internal

The internal operation SetValue(byteOffset, isLittleEndian, type, value) used by functions on DataView instances is defined as follows:

1. Let byteOffsetInt be ToUInt32(byteOffset)
2. Let totalOffset be byteOffsetInt plus the result of Get(this, "byteOffset").
3. Let byteLength be the result of Get(this, "byteLength").
4. If totalOffset > byteLength, throw a **RangeError** exception.
5. Let value be the result of calling the SetValueInBuffer internal operation (2.5.2) with arguments this.buffer.[[NativeBuffer]], totalOffset, 0, value and type.
6. Return value

Deleted: calling [[

Deleted:]] on

Deleted:

Deleted: with parameter

Deleted: "

Deleted: "

Deleted: calling [[

Deleted:]] on

Deleted:

Deleted: with parameter

Deleted: "

Deleted: "

Deleted: >=

Deleted: raise

Deleted: calling [[

Deleted: Get]] on this with parameter "byteOff

Deleted: calling [[Get]] on this with parameter "byteLength"

Deleted: >=

Deleted: raise

Deleted: raise

15.13.7.4.1 DataView.prototype.constructor

The initial value of DataView.prototype.constructor is the standard built-in DataView constructor.

15.13.7.4.2 DataView.prototype.getInt8(byteOffset)

Gets the Int8 value at offset byteOffset in the DataView.

1. Let O be ToObject(this)
2. If the [[Class]] internal data property of O is not "DataView", throw a **TypeError** exception.
3. Return GetValue(byteOffset, **true**, Int8)

Deleted: raise

15.13.7.4.3 DataView.prototype.getUint8(byteOffset)

Gets the UInt8 value at offset byteOffset in the DataView.

1. Let O be ToObject(this)
2. If the [[Class]] internal data property of O is not "DataView", throw a **TypeError** exception.
3. Return GetValue(byteOffset, **true**, UInt8)

Deleted: raise

15.13.7.4.4 DataView.prototype.getInt16(byteOffset, littleEndian)

Gets the Int16 value at offset byteOffset in the DataView, using the provided endianness.

1. Let O be ToObject(this)
2. Let isLittleEndian be ToBoolean(littleEndian) if provided, else **false**
3. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
4. Return GetValue(byteOffset, isLittleEndian, Int16)

Deleted: raise

15.13.7.4.5 DataView.prototype.getUint16(byteOffset, littleEndian)

Gets the Uint16 value at offset byteOffset in the DataView, using the provided endianness.

1. Let O be ToObject(this)
2. Let isLittleEndian be ToBoolean(littleEndian) if provided, else **false**
3. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
4. Return GetValue(byteOffset, isLittleEndian, Uint16)

Deleted: raise

15.13.7.4.6 DataView.prototype.getInt32(byteOffset, littleEndian)

Gets the Int32 value at offset byteOffset in the DataView, using the provided endianness.

1. Let O be ToObject(this)
2. Let isLittleEndian be ToBoolean(littleEndian) if provided, else **false**
3. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
4. Return GetValue(byteOffset, isLittleEndian, Int32)

Deleted: raise

15.13.7.4.7 DataView.prototype.getUint32(byteOffset, littleEndian)

Gets the Uint32 value at offset byteOffset in the DataView, using the provided endianness.

1. Let O be ToObject(this)
2. Let isLittleEndian be ToBoolean(littleEndian) if provided, else **false**
3. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
4. Return GetValue(byteOffset, isLittleEndian, Uint32)

Deleted: raise

15.13.7.4.8 DataView.prototype.getFloat32(byteOffset, littleEndian)

Gets the Float32 value at offset byteOffset in the DataView, using the provided endianness.

1. Let O be ToObject(this)
2. Let isLittleEndian be ToBoolean(littleEndian) if provided, else **false**
3. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
4. Return GetValue(byteOffset, isLittleEndian, Float32)

Deleted: raise

15.13.7.4.9 DataView.prototype.getFloat64(byteOffset, littleEndian)

Gets the Float64 value at offset byteOffset in the DataView, using the provided endianness.

1. Let O be ToObject(this)
2. Let isLittleEndian be ToBoolean(littleEndian) if provided, else **false**
3. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
4. Return GetValue(byteOffset, isLittleEndian, Float64)

Deleted: raise

15.13.7.4.10 DataView.prototype.setInt8(byteOffset, value)

Sets the Int8 value at offset byteOffset in the DataView.

1. Let O be ToObject(this)

2. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
3. Return SetValue(byteOffset, true, Int8,ToInt8(value))

Deleted: raise**Deleted:** G

15.13.7.4.11 DataView.prototype.setUint8(byteOffset, value)

Sets the Uint8 value at offset byteOffset in the DataView.

4. Let O be ToObject(this)
5. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
6. Return SetValue(byteOffset, true, Uint8,ToUint8(value))

Deleted: raise**Deleted:** G

15.13.7.4.12 DataView.prototype.setInt16(byteOffset, value, littleEndian)

Sets the Int16 value at offset byteOffset in the DataView.

1. Let O be ToObject(this)
2. Let isLittleEndian be ToBoolean(littleEndian) if provided, else **false**
3. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
4. Return SetValue(byteOffset, isLittleEndian, Int16,ToInt16(value))

Deleted: raise**Deleted:** G

15.13.7.4.13 DataView.prototype.setUint16(byteOffset, value, littleEndian)

Sets the Uint16 value at offset byteOffset in the DataView.

1. Let O be ToObject(this)
2. Let isLittleEndian be ToBoolean(littleEndian) if provided, else **false**
3. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
4. Return SetValue(byteOffset, isLittleEndian, Uint16,ToUint16(value))

Deleted: raise**Deleted:** G

15.13.7.4.14 DataView.prototype.setInt32(byteOffset, value, littleEndian)

Sets the Int32 value at offset byteOffset in the DataView.

1. Let O be ToObject(this)
2. Let isLittleEndian be ToBoolean(littleEndian) if provided, else **false**
3. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
4. Return SetValue(byteOffset, isLittleEndian, Int32,ToInt32(value))

Deleted: raise**Deleted:** G

15.13.7.4.15 DataView.prototype.setUint32(byteOffset, value, littleEndian)

Sets the Uint32 value at offset byteOffset in the DataView.

1. Let O be ToObject(this)
2. Let isLittleEndian be ToBoolean(littleEndian) if provided, else **false**
3. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
4. Return GetValue(byteOffset, isLittleEndian, Uint32,ToUint32(value))

Deleted: raise**Deleted:** G

15.13.7.4.16 DataView.prototype.setFloat32(byteOffset, value, littleEndian)

Sets the Float32 value at offset byteOffset in the DataView.

1. Let O be ToObject(this)
2. Let isLittleEndian be ToBoolean(littleEndian) if provided, else **false**
3. If the [[Class]] internal data property of O is not “DataView”, throw a **TypeError** exception.
4. Return SetValue(byteOffset, isLittleEndian, Float32,ToFloat32(value))

Deleted: raise**Deleted:** G

15.13.7.4.17 DataView.prototype.setUint16(byteOffset, value, littleEndian)

Sets the Float64 value at offset byteOffset in the DataView.

1. Let O be ToObject(this)
2. Let isLittleEndian be ToBoolean(littleEndian) if provided, else **false**
3. If the [[Class]] internal data property of O is not "DataView", throw a **TypeError** exception.
4. Return SetValue(byteOffset, isLittleEndian, Float64, ToFloat64(value))

Deleted: raise

Deleted: G

15.13.7.5 Properties of DataView Instances

DataView instances inherit properties from the DataView prototype object and their [[Class]] internal data property value is "DataView". DataView instances also have the following properties.

15.13.7.5.1 byteLength

The value of the byteLength property is the length of the DataView object, which was fixed at creation. This property has attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.13.7.5.2 buffer

The value of the buffer property is the length of the DataView object, which was fixed at creation. This property has attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.13.7.5.3 byteOffset

The value of the byteOffset property is the length of the DataView object, which was fixed at creation. This property has attributes { [[Writable]]: **false**, [[Enumerable]]: **false**, [[Configurable]]: **false** }.

15.14 Map Objects

Map objects are collections of key/value pairs where both the keys and values may be arbitrary ECMAScript language values. A Map object can also iterate its elements in insertion order. Map object must be implemented using hash tables or other mechanisms that, on average, provide access times that are sublinear on the number of elements in the collection. The data structures used in this Map objects specification is only intended to describe the required observable semantics of Map objects. It is not intended to be a viable implementation model.

15.14.1 Abstract Operations For Map Objects

15.14.1.1 MapInitialisation

The abstract operation MapInitialisation with arguments *obj* and *iterable* is used to initialize an object as a map. It performs the following steps:

1. If Type(*obj*) is not Object, throw a **TypeError** exception.
2. If *obj* does not have a [[MapData]] internal data property, throw a **TypeError** exception.
3. If the result of calling the [[IsExtensible]] internal method of *obj* is **false**, throw a **TypeError** exception.
4. If *iterable* is not **undefined**, then
 - a. Let *iterable* be ToObject(*iterable*).
 - b. ReturnIfAbrupt(*iterable*)
 - c. Let *iterator* be the intrinsic symbol @@iterator.
 - d. Let *itr* be the result of Invoke(*iterable*, *iterator*).
 - e. ReturnIfAbrupt(*itr*).
 - f. Let *adder* be the result of Get(*obj*, "set").
 - g. ReturnIfAbrupt(*adder*).
 - h. If IsCallable(*adder*) is **false**, throw a **TypeError** Exception.
5. If *iterable* is **undefined**, return *obj*.
6. Repeat
 - a. Let *next* be the result of Invoke(*itr*, "next").
 - b. If IteratorComplete(*next*) is **true**, then return NormalCompletion(*obj*).
 - c. Let *next* be ToObject(*next*).
 - d. ReturnIfAbrupt(*next*).

Deleted: e

Deleted: z

Deleted: z

Deleted: ect

Deleted: already

Deleted: has

Deleted: Get

Deleted: property

Deleted: calling the

Deleted: *obj*

Deleted: abstraction operation with

Deleted: , *obj*, and an empty List as arguments

Deleted: calling the [[

Deleted:]] internal method of

Deleted:

Deleted: with argument

Deleted: *addr*

Deleted: *addr*

Deleted: <#>Add a [[MapData]] internal data property to *obj*.
<#>Set *obj*'s [[MapData]] internal data methodproperty to a new empty List.
||

Deleted: performing

Deleted: with arguments

Deleted: , *itr*, and an empty arguments List

Comment [AWB7235]: TODO: need to define

- e. Let k be the result of $\text{Get}(next, "0")$.
- f. ReturnIfAbrupt(k).
- g. Let v be the result of $\text{Get}(next, "1")$.
- h. ReturnIfAbrupt(v).
- i. Let $status$ be the result of calling the $[[\text{Call}]]$ internal method of $adder$ with obj as $thisArgument$ and a List whose elements are k and v as $argumentsList$.
- j. ReturnIfAbrupt($status$).

15.14.2 The Map Constructor Called as a Function

When **Map** is called as a function rather than as a constructor, it initializes its **this** value with the internal state necessary to support the **Map.prototype** internal methods. This permits super invocation of the **Map** constructor by **Map** subclasses.

15.14.2.1 Map (iterable = undefined)

1. Let m be the **this** value.
2. Let map be the result of $\text{ToObject}(m)$.
3. ReturnIfAbrupt(map).
4. If **iterable** is not present, let **iterable** be **undefined**.
5. Let $status$ be the result of **MapInitialisation** with map and **iterable** as arguments.
6. ReturnIfAbrupt($status$).
7. Return map .

NOTE If the parameter **iterable** is present, it is expected to be an object that implements an **@@iterator** method that returns an iterator object that produces two element array-like objects whose first element is a value that will be used as an **Map** key and whose second element is the value to associate with that key.

15.14.3 The Map Constructor

When **Map** is called as part of a **new** expression it is a constructor: it initialises a newly created object.

The **Map** constructor is designed to be subclassable. It may be used as the value of an **extends** clause of a class declaration. Subclass constructors that intended to inherit the specified **Map** behaviour must include a **super** call to **Map**.

15.14.3.1 new Map (iterable = undefined)

4. Let F be the **Map** function object on which the **new** operator was applied.
5. Let $argumentsList$ be the **argumentsList** argument of the $[[\text{Construct}]]$ internal method that was invoked by the **new** operator.
6. Return the result of **OrdinaryConstruct** with arguments F and $argumentsList$.

If **Map** is implemented as an ordinary function object, its $[[\text{Construct}]]$ internal method will perform the above steps.

NOTE If the parameter **iterable** is present, it is expected to be an object that implements an **@@iterator** method that returns an iterator object that produces two element array-like objects whose first element is a value that will be used as an **Map** key and whose second element is the value to associate with that key.

15.14.4 Properties of the Map Constructor

The value of the $[[\text{Prototype}]]$ internal data property of the **Map** constructor is the Function prototype object (15.3.4).

Besides the **length** property (whose value is **0**), the **Map** constructor has the following property:

15.14.4.1 Map.prototype

The initial value of **Map.prototype** is the **Map** prototype object (15.14.4).

Deleted: calling the $[[$
Deleted: $]]$ internal method of
Deleted:
Deleted: with argument
Deleted:,
Deleted: calling the $[[$
Deleted: $]]$ internal method of
Deleted:
Deleted: with argument
Deleted: $addr$
Deleted: arguments
Deleted: premits
Deleted: $[]$
Deleted: <#>If m is **undefined** or the intrinsic %MapPrototype%
<#>Let map be the result of the abstract operation ObjectCreate (15.2) with the intrinsic %MapPrototype% as the argument.
<#> Else
Deleted: z
Deleted: r
Deleted: the

Deleted: <#>Let map be the result of the abstract operation ObjectCreate (15.2) with the intrinsic %MapPrototype% as the argument.
<#>If **iterable** is not present, let **iterable** be **undefined**.
<#>Let $status$ be the result of **MapInitialisation** with map and **iterable** as arguments.
<#>ReturnIfAbrupt($status$).
<#>Return map .

Deleted: internal properties and the

This property has the attributes { `[[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false` }.

15.14.4.2 @@create ()

The `@@create` method of a Map function object *F*, performs the following steps:

1. Let *F* be the `this` value.
2. Let *obj* be the result of calling `OrdinaryCreateFromConstructor(F, "%MapPrototype%")`.
3. Add a `[[MapData]]` internal data property to *obj*.
4. Set *obj*'s `[[MapData]]` internal data property to a new empty List.
5. Return *obj*.

15.14.5 Properties of the Map Prototype Object

The value of the `[[Prototype]]` internal data property of the Map prototype object is the standard built-in Object prototype object (15.2.4). The Map prototype object is an ordinary object. It does not have a `[[MapData]]` internal data property.

15.14.5.1 Map.prototype.constructor

The initial value of `Map.prototype.constructor` is the built-in `Map` constructor.

15.14.5.2 Map.prototype.clear ()

The following steps are taken:

1. Let *M* be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(*M*).
3. If *M* does not have a `[[MapData]]` internal data property throw a `TypeError` exception.
4. Set the value of *M*'s `[[MapData]]` internal data property to a new empty List.
5. Return `undefined`.

15.14.5.3 Map.prototype.delete (key)

Deleted: 2

The following steps are taken:

1. Let *M* be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(*M*).
3. If *M* does not have a `[[MapData]]` internal data property throw a `TypeError` exception.
4. Let *entries* be the List that is the value of *M*'s `[[MapData]]` internal data property.
5. Repeat for each Record `{[[key]], [[value]]}` *p* that is an element of *entries*.
 - a. If `SameValue(p.[[key]], key)`, then
 - i. Set *p.[[key]]* to empty.
 - ii. Set *p.[[value]]* to empty.
 - iii. Return `true`.
6. Return `false`.

15.14.5.4 Map.prototype.forEach (callbackfn , thisArg = undefined)

Deleted: 3

`callbackfn` should be a function that accepts three arguments. `forEach` calls `callbackfn` once for each key/value pair present in the map object, in key insertion order. `callbackfn` is called only for keys of the map which actually exist; it is not called for keys that have been deleted from the map.

If a `thisArg` parameter is provided, it will be used as the `this` value for each invocation of `callbackfn`. If it is not provided, `undefined` is used instead.

NOTE If `callbackfn` is an Arrow Function, `this` was lexically bound when the function was created so `thisArg` will have no effect.

callbackfn is called with three arguments: the value of the item, the key of the item, and the Map object being traversed.

forEach does not directly mutate the object on which it is called but the object may be mutated by the calls to callbackfn.

NOTE Each key is visited only once with the value that is current at the time of the visit. If the value associated with a key is modified after it has been visited, it is not re-visited. Keys that are deleted after the call to forEach begins and before being visited are not visited. New keys added, after the call to forEach begins are visited.

When the forEach method is called with one or two arguments, the following steps are taken:

1. Let M be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(M)`.
3. If M does not have a `[[MapData]]` internal data property throw a `TypeError` exception.
4. If `IsCallable(callbackfn)` is `false`, throw a `TypeError` exception.
5. If `thisArg` was supplied, let T be `thisArg`; else let T be `undefined`.
6. Let $entries$ be the List that is the value of M 's `[[MapData]]` internal data property.
7. Repeat for each Record $\{[[key]], [[value]]\}$ e that is an element of $entries$, in original key insertion order
 - a. If $e.[[key]]$ is not `empty`, then
 - i. Let $funcResult$ be the result of calling the `[[Call]]` internal method of $callbackfn$ with T as `thisArgument` and a `List` containing $e.[[value]]$, $e.[[key]]$, and M as `argumentsList`.
 - ii. `ReturnIfAbrupt(funcResult)`.
8. Return `undefined`.

Deleted: the `this` value

Deleted: argument

Deleted: l

Deleted: 4

The `length` property of the forEach method is **1**.

15.14.5.5 Map.prototype.get (key)

The following steps are taken:

1. Let M be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(M)`.
3. If M does not have a `[[MapData]]` internal data property throw a `TypeError` exception.
4. Let $entries$ be the List that is the value of M 's `[[MapData]]` internal data property.
5. Repeat for each Record $\{[[key]], [[value]]\}$ p that is an element of $entries$,
 - a. If `SameValue(p.[[key]], key)`, then return $p.[[value]]$
6. Return `undefined`.

Deleted: 5

15.14.5.6 Map.prototype.has (key)

The following steps are taken:

1. Let M be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(M)`.
3. If M does not have a `[[MapData]]` internal data property throw a `TypeError` exception.
4. Let $entries$ be the List that is the value of M 's `[[MapData]]` internal data property.
5. Repeat for each Record $\{[[key]], [[value]]\}$ p that is an element of $entries$,
 - a. If `SameValue(p.[[key]], key)`, then return `true`.
6. Return `false`.

Deleted: 6

Deleted: items

15.14.5.7 Map.prototype.entries ()

The following steps are taken:

1. Let M be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(M)`.
3. Return the result of calling the `CreateMapIterator` abstract operation with arguments M and `"key+value"`.

Deleted: 0

15.14.5.8 Map.prototype.keys ()

Deleted: 7

The following steps are taken:

1. Let M be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(M).
3. Return the result of calling the `CreateMapIterator` abstract operation with arguments M and "key".

Deleted: 0

15.14.5.9 Map.prototype.set (key , value)

Deleted: 8

The following steps are taken:

23. Let M be the result of calling `ToObject` with the `this` value as its argument.
24. ReturnIfAbrupt(M).
25. If M does not have a `[[MapData]]` internal data property throw a `TypeError` exception.
26. Let $entries$ be the List that is the value of M 's `[[MapData]]` internal data property.
27. Repeat for each Record $\{[[key]], [[value]]\}$ p that is an element of $entries$.
 - a. If `SameValue`($p.[[key]]$, key), then
 - i. Set $p.[[value]]$ to $value$.
 - ii. Return `undefined`.
28. Let p be the Record $\{[[key]]: key, [[value]]: value\}$.
29. Append p as the last element of $entries$.
30. Return `undefined`.

15.14.5.10 get Map.prototype.size

Deleted: 9

`Map.prototype.size` is an accessor property whose set accessor function is `undefined`. Its get accessor function performs the following steps:

Deleted: (key)

Deleted: The

Deleted: are taken

20. Let M be the result of calling `ToObject` with the `this` value as its argument.
21. ReturnIfAbrupt(M).
22. If M does not have a `[[MapData]]` internal data property throw a `TypeError` exception.
23. Let $entries$ be the List that is the value of M 's `[[MapData]]` internal data property.
24. Let $count$ be 0.
25. For each Record $\{[[key]], [[value]]\}$ p that is an element of $entries$
 - a. If $p.[[key]]$ is not empty then
 - i. Set $count$ to $count+1$.
26. Return $count$.

Deleted: Is

15.14.5.11 Map.prototype.values ()

Deleted: 10

The following steps are taken:

1. Let M be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(M).
3. Return the result of calling the `CreateMapIterator` abstract operation with arguments M and "value".

Deleted: 0

15.14.5.12 Map.prototype[@@iterator] ()

The initial value of the `@@iterator` property is the same function object as the initial value of the `entries` property.

Comment [AWB10236]: This is how we identify a property whose key is a built-in Symbol

Deleted: 1

Deleted: items

15.14.5.13 Map.prototype[@@toStringTag]

The initial value of the `@@toStringTag` property is the string value "Map".

Comment [AWB10237]: Do we really want to do this sort of method sharing. It has a bad smell.

Deleted: 2

Deleted: ()

15.14.6 Properties of Map Instances

Map instances inherit properties from the Map prototype. After initialisation by the Map constructor, Map instances also have a `[[MapData]]` internal data property.

Deleted: z

15.14.7 Map Iterator Object Structure

A Map Iterator is an object, with the structure defined below, that represent a specific iteration over some specific Map instance object. There is not a named constructor for Map Iterator objects. Instead, map iterator objects are created by calling certain methods of Map instance objects.

Deleted:

Deleted: s

15.14.7.1 CreateMapIterator Abstract Operation

Several methods of Map objects return iterator objects. The abstract operation `CreateMapIterator` with arguments `map` and `kind` is used to create such iterator objects. It performs the following steps:

1. Let `M` be the result of calling `ToObject(map)`.
2. ReturnIfAbrupt(`M`).
3. If `M` does not have a `[[MapData]]` internal data property throw a `TypeError` exception.
4. Let `entries` be the List that is the value of `M`'s `[[MapData]]` internal data property.
5. Let `itr` be the result of the abstract operation `ObjectCreate` with the intrinsic object `%MapIteratorPrototype%` as its argument.
6. Add a `[[Map]]` internal data property to `itr` with value `M`.
7. Add a `[[MapNextIndex]]` internal data property to `itr` with value `0`.
8. Add a `[[MapIterationKind]]` internal data property of `itr` with value `kind`.
9. Return `itr`.

15.14.7.2 The Map Iterator Prototype

All Map Iterator Objects inherit properties from a common Map Iterator Prototype object. The `[[Prototype]]` internal data property of the Map Iterator Prototype is the `%ObjectPrototype%` intrinsic object. In addition, the Map Iterator Prototype has the following properties:

Deleted: s

15.14.7.2.1 MapIterator.prototype.constructor

15.14.7.2.2 MapIterator.prototype.next()

1. Let `O` be the `this` value.
2. If `Type(O)` is not `Object`, throw a `TypeError` exception.
3. If `O` does not have all of the internal properties of a Map Iterator Instance (15.14.7.1.2), throw a `TypeError` exception.
4. Let `m` be the value of the `[[Map]]` internal data property of `O`.
5. Let `index` be the value of the `[[MapNextIndex]]` internal data property of `O`.
6. Let `itemKind` be the value of the `[[MapIterationKind]]` internal data property of `O`.
7. Assert: `m` has a `[[MapData]]` internal data property.
8. Let `entries` be the List that is the value of the `[[MapData]]` internal data property of `m`.
9. Repeat while `index` is less than the total number of elements of `entries`. The number of elements must be redetermined each time this method is evaluated.
 - a. Let `e` be the Record `{[[key]], [[value]]}` at 0-originated insertion position `index` of `entries`.
 - b. Set `index` to `index+1`.
 - c. Set the `[[MapNextIndex]]` internal data property of `O` to `index`.
 - d. If `e.[[key]]` is not empty, then
 - i. If `itemKind` is `"key"` then, let `result` be `e.[[key]]`.
 - ii. Else if `itemKind` is `"value"` then, let `result` be `e.[[value]]`.
 - iii. Else,
 1. Assert: `itemKind` is `"key+value"`.
 2. Let `result` be the result of the abstract operation `ArrayCreate` with argument 2.
 3. Assert: `result` is a new, well-formed Array object so the following operations will never fail.

Comment [AWB10238]: TODO: need to decide what to use for a constructor for these sort of objects. Probably we should try to consistently follow the "class model" wherever we can.

Deleted: Object

4. Call CreateOwnProperty(*result*, "0", *e*.[[key]]).
 5. Call CreateOwnProperty(*result*, "1", Property Descriptor *e*.[[value]]).
 iv. Return *result*.

10. Return Completion {[[type]]: throw, [[value]]: %StopIteration%, [[target]]: empty}.

15.14.7.2.3 MapIterator.prototype.[@@iterator]()

The following steps are taken:

1. Return the **this** value.

15.14.7.2.4 MapIterator.prototype.[@@toStringTag]

The initial value of the @@toStringTag property is the string value "**Map Iterator**".

15.14.7.3 Properties of Map Iterator Instances

Map Iterator instances inherit properties from the Map Iterator prototype (the intrinsic, %MapIteratorPrototype%). Map Iterator instances are initially created with the internal properties described in [Table 37](#).

Table 37 — Internal Data Properties of Map Iterator Instances

Internal Data Property Name	Description
[[Map]]	The Map object that is being iterated.
[[MapNextIndex]]	The integer index of the next Map data element to be examined by this iteration.
[[MapIterationKind]]	A string value that identifies what is to be returned for each element of the iteration. The possible values are: "key", "value", "key+value".

15.15 WeakMap Objects

WeakMap objects are collections of key/value pairs where the keys are ECMAScript objects and values may be arbitrary ECMAScript language values. A WeakMap may be queried to see if it contains an key/value pair with a specific key, but no mechanisms is provided for enumerating the objects it holds as keys. If an object that is being used as the key of a WeakMap key/value pair is only reachable by following a chain of references that start within that WeakMap, then that key/value pair is inaccessible and is automatically removed from the WeakMap. WeakMap implementations must detect and remove such key/value pairs and any associated resources.

An implementation may impose an arbitrarily determined latency between the time a key/value pair of a WeakMap becomes inaccessible and the time when the key/value pair is removed from the WeakMap. If this latency was observable to ECMAScript program, it would be a source of indeterminacy that could impact program execution. For that reason, an ECMAScript implementation must not provide any means to directly test for the presence of any specific key value.

WeakMap objects must be implemented using either hash tables or other mechanisms that, on average, provide access times that are sublinear on the number of key/value pairs in the collection. The data structures used in this WeakMap objects specification are only intended to describe the required observable semantics of WeakMap objects. It is not intended to be a viable implementation model.

NOTE WeakMap are intended to provide a mechanism for dynamically associating state with an object in a manner that does not "leak" memory resources if, in the absence of the WeakMap, the object otherwise became inaccessible and

- Deleted:** the [[DefineOwnProperty]] internal method of
- Deleted:** with arguments
- Deleted:** Property Descriptor {[[Value]]:}
- Deleted:** , [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true,)
- Deleted:** and false
- Deleted:** the [[DefineOwnProperty]] internal method of
- Deleted:**
- Deleted:** with arguments
- Deleted:** {[[Value]]:}
- Deleted:** , [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true)
- Deleted:** , and false
- Comment [AWB10239]:** We may need to elaborate this??
- Comment [AWB10240]:** This is how we identify a property whose key is a built-in Symbol
- Deleted:** 5
- Deleted:** 11
- Deleted:** 3
- Deleted:**
- Deleted:** following
- Deleted:** Table 34Table 32Table 33
- Deleted:** 343233

- Deleted:** queried
- Deleted:** specific
- Deleted:** mechanisms
- Deleted:**
- Deleted:** s
- Deleted:** should
- Deleted:** make
- Deleted:** m
- Deleted:** m
- Deleted:** presence

- Deleted:** the object would
- Deleted:**
- Deleted:** become

subject to resource reclamation by the implementation's garbage collection mechanisms. Achieving this characteristic requires coordination between the WeakMap implementation and the garbage collector. The following references describe mechanism that may be useful to implementations of WeakMap:

Barry Hayes. 1997. Ephemeros: a new finalization mechanism. In *Proceedings of the 12th ACM SIGPLAN conference on Object-oriented programming, systems, languages, and applications (OOPSLA '97)*, A. Michael Berman (Ed.), ACM, New York, NY, USA, 176–183. <http://doi.acm.org/10.1145/263698.263733>

Alexandra Barros, Roberto Ierusalimschy. Eliminating Cycles in Weak Tables. *Journal of Universal Computer Science - J.UCS*, vol. 14, no. 21, pp. 3481-3497, 2008. http://www.jucs.org/jucs_14_21/eliminating_cycles_in_weak

15.15.1 Abstract Operations For WeakMap Objects

15.15.1.1 WeakMapInitialisation

The abstract operation WeakMapInitialisation with arguments *obj* and *iterable* is used to initialize an object as a map. It performs the following steps:

1. If Type(*obj*) is not Object, throw a **TypeError** exception.
2. If *obj* does not have a **[[WeakMapData]]** internal data property, throw a **TypeError** exception.
3. If the result of calling the **[[IsExtensible]]** internal method of *obj* is **false**, throw a **TypeError** exception.
4. If *iterable* is not **undefined**, then
 - a. Let *iterable* be **ToObject**(*iterable*).
 - b. **ReturnIfAbrupt**(*iterable*)
 - c. Let *iterator* be the intrinsic symbol **@@iterator**.
 - d. Let *itr* be the result of **Invoke**(*iterable*, *iterator*).
 - e. **ReturnIfAbrupt**(*itr*).
 - f. Let *adder* be the result of **Get**(*obj*, **"set"**).
 - g. **ReturnIfAbrupt**(*adder*).
 - h. If **IsCallable**(*adder*) is **false**, throw a **TypeError** Exception.
5. If *iterable* is **undefined**, return *obj*.
6. Repeat
 - a. Let *next* be the result of **Invoke**(*itr*, **"next"**).
 - b. If **IteratorComplete**(*next*) is **true**, then return **NormalCompletion**(*obj*).
 - c. Let *next* be **ToObject**(*next*).
 - d. **ReturnIfAbrupt**(*next*).
 - e. Let *k* be the result of **Get**(*next*, **"0"**).
 - f. **ReturnIfAbrupt**(*k*).
 - g. Let *v* be the result of **Get**(*next*, **"1"**).
 - h. **ReturnIfAbrupt**(*v*).
 - i. Let *status* be the result of calling the **[[Call]]** internal method of *adder* with *obj* as *thisArgument* and a List whose elements are *k* and *v* as *argumentsList*.
 - j. **ReturnIfAbrupt**(*status*).

Deleted: reclamation

Deleted: ion

Deleted: s

Deleted: already has

Deleted: Get

Deleted: property

Deleted: calling the

Deleted: *obj*

Deleted: abstraction operation with

Deleted: , *obj*, and an empty List as arguments

Deleted: calling the **[[**

Deleted: **]]** internal method of

Deleted:

Deleted: with argument

Deleted: <#>Add a **[[WeakMapData]]** internal data property to *obj*.
<#>Set *obj*'s **[[WeakMapData]]** internal data property to a new empty List.
¶

Deleted: performing

Deleted: with arguments

Deleted: , *itr*, and an empty arguments List

Comment [AWB7241]: TODO: need to define
¶

Deleted: calling the **[[**

Deleted: **]]** internal method of

Deleted:

Deleted: with argument

Deleted: calling the **[[**

Deleted: **]]** internal method of

Deleted:

Deleted: with argument

Comment [AWB12242]: Note that using a method call for inserting pairs during initialization provides allows subclasses to be more expressive.
¶

Deleted: premits

Deleted: *m*

Deleted: <#>If *m* is **undefined** or the intrinsic **%WeakMapPrototype%**
¶

<#>Let *map* be the result of the abstract operation **ObjectCreate** (15.2) with the intrinsic **%WeakWeakMapPrototype%** as the argument.
¶

<#>Else¶

15.15.2 The WeakMap Constructor Called as a Function

When **WeakMap** is called as a function rather than as a constructor, it initializes its **this** value with the internal state necessary to support the **WeakMap.prototype** internal methods. This permits super invocation of the **WeakMap** constructor by **WeakMap** subclasses.

15.15.2.1 WeakMap (*iterable* = **undefined**)

1. Let *m* be the **this** value.
2. Let *map* be the result of **ToObject**(*m*).
3. **ReturnIfAbrupt**(*map*).
4. If *iterable* is not present, let *iterable* be **undefined**.
5. Let *status* be the result of **MapInitialisation** with *map* and *iterable* as arguments.
6. **ReturnIfAbrupt**(*status*).
7. **Return** *map*.

NOTE If the parameter `iterable` is present, it is expected to be an object that implements an `@@iterator` method that returns an iterator object that produces two element array-like objects whose first element is a value that will be used as a `WeakMap` key and whose second element is the value to associate with that key.

15.15.3 The WeakMap Constructor

When `WeakMap` is called as part of a `new` expression it is a constructor: it initialises a newly created object.

Deleted: the

The `WeakMap` constructor is designed to be subclassable. It may be used as the value of an `extends` clause of a class declaration. Subclass constructors that intended to inherit the specified `WeakMap` behaviour must include a `super` call to `WeakMap`.

15.15.3.1 new WeakMap (iterable = undefined)

1. Let `F` be the `WeakMap` function object on which the `new` operator was applied.
2. Let `argumentsList` be the `argumentsList` argument of the `[[Construct]]` internal method that was invoked by the `new` operator.
3. Return the result of `OrdinaryConstruct` with arguments `F` and `argumentsList`.

If `WeakMap` is implemented as an ordinary function object, its `[[Construct]]` internal method will perform the above steps.

NOTE If the parameter `iterable` is present, it is expected to be an object that implements an `@@iterator` method that returns an iterator object that produces two element array-like objects whose first element is a value that will be used as a `WeakMap` key and whose second element is the value to associate with that key.

15.15.4 Properties of the WeakMap Constructor

The value of the `[[Prototype]]` internal data property of the `WeakMap` constructor is the Function prototype object (15.3.4).

Deleted: <#>Let `map` be the result of the abstract operation `ObjectCreate` (15.2) with the intrinsic `%WeakMapPrototype%` as the argument.
 <#>If `iterable` is not present, let `iterable` be `undefined`.
 <#>Let `status` be the result of `WeakMapInitialisation` with `map` and `iterable` as arguments.
 <#>Return `IfAbrupt(status)`.
 <#>Return `map`.

Besides the `length` property (whose value is `0`), the `WeakMap` constructor has the following property:

Deleted: the internal properties and

15.15.4.1 WeakMap.prototype

The initial value of `WeakMap.prototype` is the `WeakMap` prototype object (15.15.4).

This property has the attributes `{ [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }`.

15.15.4.2 @@create ()

The `@@create` method of a `WeakMap` object `F`, performs the following steps:

1. Let `F` be the `this` value.
2. Let `obj` be the result of calling `OrdinaryCreateFromConstructor(F, "%WeakMapPrototype%")`.
3. Add a `[[WeakMapData]]` internal data property to `obj`.
4. Set `obj`'s `[[WeakMapData]]` internal data property to a new empty List.
5. Return `obj`.

15.15.5 Properties of the WeakMap Prototype Object

The value of the `[[Prototype]]` internal data property of the `WeakMap` prototype object is the standard built-in `Object` prototype object (15.2.4). The `WeakMap` prototype object is an ordinary object. It does not have a `[[WeakMapData]]` internal data property.

15.15.5.1 WeakMap.prototype.constructor

The initial value of `WeakMap.prototype.constructor` is the built-in `WeakMap` constructor.

15.15.5.2 WeakMap.prototype.clear ()

The following steps are taken:

1. Let M be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(M)`.
3. If M does not have a `[[WeakMapData]]` internal data property throw a `TypeError` exception.
4. Set the value of M 's `[[WeakMapData]]` internal data property to a new empty List.
5. Return `undefined`.

15.15.5.3 WeakMap.prototype.delete (key)

The following steps are taken:

1. Let M be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(M)`.
3. If M does not have a `[[WeakMapData]]` internal data property throw a `TypeError` exception.
4. Let $entries$ be the List that is the value of M 's `[[WeakMapData]]` internal data property.
5. Repeat for each Record $\{[[key]], [[value]]\}$ p that is an element of $entries$.
 - a. If `SameValue($p.[[key]]$, key)`, then
 - i. Set $p.[[key]]$ to empty.
 - ii. Set $p.[[value]]$ to empty.
 - iii. Return `true`.
6. Return `false`.

Deleted: <#>Let k be `ToObject(key)`.
<#>`ReturnIfAbrupt(k)`.

Deleted: k

15.15.5.4 WeakMap.prototype.get (key)

The following steps are taken:

1. Let M be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(M)`.
3. If M does not have a `[[WeakMapData]]` internal data property throw a `TypeError` exception.
4. Let $entries$ be the List that is the value of M 's `[[WeakMapData]]` internal data property.
5. Repeat for each Record $\{[[key]], [[value]]\}$ p that is an element of $entries$.
 - a. If `SameValue($p.[[key]]$, key)`, then return $p.[[value]]$
6. Return `undefined`.

Deleted: <#>Let k be `ToObject(key)`.
<#>`ReturnIfAbrupt(k)`.

Deleted: k

Deleted: 4

15.15.5.5 WeakMap.prototype.has (key)

The following steps are taken:

1. Let M be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(M)`.
3. If M does not have a `[[WeakMapData]]` internal data property throw a `TypeError` exception.
4. Let $entries$ be the List that is the value of M 's `[[WeakMapData]]` internal data property.
5. Repeat for each Record $\{[[key]], [[value]]\}$ p that is an element of $entries$.
 - a. If `SameValue($p.[[key]]$, key)`, then return `true`.
6. Return `false`.

Deleted: <#>Let k be `ToObject(key)`.
<#>`ReturnIfAbrupt(k)`.

Deleted: 4

15.15.5.6 WeakMap.prototype.set (key , value)

The following steps are taken:

1. Let M be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(M)`.
3. If M does not have a `[[WeakMapData]]` internal data property throw a `TypeError` exception.
4. Let $entries$ be the List that is the value of M 's `[[WeakMapData]]` internal data property.
5. If `Type(key)` is not `Object`, then throw a `TypeError` exception.
6. Repeat for each Record $\{[[key]], [[value]]\}$ p that is an element of $entries$.
 - a. If `SameValue($p.[[key]]$, key)`, then

Deleted: <#>Let k be `ToObject(key)`.
<#>`ReturnIfAbrupt(k)`.

- i. Set $p.[[value]]$ to $value$.
 - ii. Return **undefined**.
7. Let p be the Record $\{[[key]]: key, [[value]]: value\}$
8. Append p as the last element of $entries$.
9. Return **undefined**.

Deleted: k

15.15.5.7 WeakMap.prototype.@@toStringTag

The initial value of the `@@toStringTag` property is the string value "`WeakMap`".

15.15.6 Properties of WeakMap Instances

WeakMap instances inherit properties from the WeakMap prototype. After initialisation by the `WeakMap` constructor, WeakMap instances also have a `[[WeakMapData]]` internal data property.

Deleted: Weak

15.16 Set Objects

Set objects are collections of arbitrary ECMAScript language values. Each distinct value, as determined using the `SameValue` algorithm, may only occur once within a Set. A Set object can also iterate its elements in insertion order. Set objects must be implemented using hash tables or other mechanisms that, on average, provide access times that are sublinear on the number of elements in the collection. The data structures used in this Set objects specification is only intended to describe the required observable semantics of Set objects. It is not intended to be a viable implementation model.

Deleted: of arbitrary

Deleted: v

15.16.1 Abstract Operations For Set Objects

15.16.1.1 SetInitialisation

The abstract operation `SetInitialisation` with arguments obj and $iterable$ is used to initialize an object as a set instance. It performs the following steps:

1. If `Type(obj)` is not `Object`, throw a `TypeError` exception.
2. If obj does not have a `[[SetData]]` internal data property, throw a `TypeError` exception.
3. If the result of calling the `[[IsExtensible]]` internal method of obj is `false`, throw a `TypeError` exception.
4. If $iterable$ is not **undefined**, then
 - a. Let $iterable$ be `ToObject(iterable)`.
 - b. ReturnIfAbrupt($iterable$)
 - c. Let $hasValues$ be the result of `HasProperty(iterable, "values")`.
 - d. ReturnIfAbrupt($hasValues$)
 - e. If $hasValues$ is **true**, then
 - i. Let itr be the result of `Invoke(obj, "values")`.
 - f. Else,
 - i. Let $iterator$ be the `@@iterator` symbol.
 - ii. Let itr be the result of `Invoke(iterable, iterator)`.
 - g. ReturnIfAbrupt(itr)
 - h. Let $adder$ be the result of `Get(obj, "add")`.
 - i. ReturnIfAbrupt($adder$)
 - j. If `IsCallable(adder)` is **false**, throw a `TypeError` Exception.
5. If $iterable$ is **undefined**, return obj .
6. Repeat
 - a. Let $next$ be the result of `Invoke(itr, "next")`.
 - b. If `IteratorComplete(next)` is **true**, then return `NormalCompletion(obj)`.
 - c. ReturnIfAbrupt($next$)
 - d. Let $status$ be the result of calling the `[[Call]]` internal method of $adder$ with obj as `thisArgument` and a List whose sole element is $next$ as `argumentsList`.
 - e. ReturnIfAbrupt($status$).

Deleted: already has

Deleted: Get

Deleted: property

Deleted: calling the `[[HasProperty]]` internal method of

Deleted: with argument

Deleted: calling the

Deleted: abstraction operation with

Deleted: , obj , and an empty List as arguments

Deleted: of calling the

Deleted: obj

Deleted: abstraction operation with

Deleted: , obj , and an empty List as arguments

Deleted: calling the `[[`

Deleted: `]]` internal method of

Deleted:

Deleted: with argument

Deleted: <#>Add a `[[SetData]]` internal data property to obj
Deleted: <#>Set obj 's `[[SetData]]` internal data property to a new empty List.

Deleted: performing

Deleted: with arguments

Deleted: , itr , and an empty arguments List

Comment [AWB7243]: TODO: need to define

Deleted: <#>Let $next$ be `ToObject(next)`.
Deleted: <#>ReturnIfAbrupt($next$).
Deleted: v

15.16.2 The Set Constructor Called as a Function

When `set` is called as a function rather than as a constructor, it initializes its `this` value with the internal state necessary to support the `set.prototype` internal methods. This permits super invocation of the `Set` constructor by `Set` subclasses.

Deleted: premits

15.16.2.1 Set (iterable = undefined)

1. Let O be the `this` value.
2. Let set be the result of `ToObject(O)`.
3. ReturnIfAbrupt(set).
4. If `iterable` is not present, let `iterable` be `undefined`.
5. Let `status` be the result of `SetInitialisation` with `set` and `iterable` as arguments.
6. ReturnIfAbrupt(`status`).
7. Return `set`.

NOTE If the parameter `iterable` is present, it is expected to be an object that implements an `@@iterator` method that returns an iterator object that produces two element array-like objects whose first element is a value that will be used as an Map key and whose second element is the value to associate with that key.

Deleted: <#>If O is `undefined` or the intrinsic %SetPrototype%
<#>Let set be the result of the abstract operation ObjectCreate (15.2) with the intrinsic %SetPrototype% as the argument.
<#>Else

Deleted: map

15.16.3 The Set Constructor

When `set` is called as part of a `new` expression it is a constructor: it initialises a newly created object.

Deleted: the

The `Set` constructor is designed to be subclassable. It may be used as the value of an `extends` clause of a class declaration. Subclass constructors that intended to inherit the specified `Set` behaviour must include a `super` call to `Set`.

Deleted: <#>Let set be the result of the abstract operation ObjectCreate (15.2) with the intrinsic %SetPrototype% as the argument.
<#>If `iterable` is not present, let `iterable` be `undefined`.
<#>Let `status` be the result of `SetInitialisation` with `set` and `iterable` as arguments.
<#>ReturnIfAbrupt(`status`).
<#>Return `set`.

15.16.3.1 new Set (iterable = undefined)

1. Let F be the `Set` function object on which the `new` operator was applied.
2. Let `argumentsList` be the `argumentsList` argument of the `[[Construct]]` internal method that was invoked by the `new` operator.
3. Return the result of `OrdinaryConstruct` with arguments F and `argumentsList`.

If `Set` is implemented as an ordinary function object, its `[[Construct]]` internal method will perform the above steps.

NOTE If the parameter `iterable` is present, it is expected to be an object that implements either a `values` method or an `@@iterator` method. Either method is expected to return an iterator object that returns the values that will be the initial elements of the set.

Deleted: the internal properties and

15.16.4 Properties of the Set Constructor

The value of the `[[Prototype]]` internal data property of the `Set` constructor is the Function prototype object (15.3.4).

Besides the `length` property (whose value is `0`), the `Set` constructor has the following property:

15.16.4.1 Set.prototype

The initial value of `set.prototype` is the intrinsic %SetPrototype% object (15.16.4).

This property has the attributes `{ [[Writable]]: false, [[Enumerable]]: false, [[Configurable]]: false }`.

15.16.4.2 @@create ()

The `@@create` method of a `Set` function object F , performs the following steps:

1. Let F be the `this` value.

2. Let *obj* be the result of calling OrdinaryCreateFromConstructor(*F*, "%SetPrototype%").
3. Add a [[SetData]] internal data property to *obj*.
4. Set *obj*'s [[SetData]] internal data property to a new empty List.
5. Return *obj*.

15.16.5 Properties of the Set Prototype Object

The value of the [[Prototype]] internal data property of the Set prototype object is the standard built-in Object prototype object (15.2.4). The set prototype object is an ordinary object. It does not have a [[SetData]] internal data property.

15.16.5.1 Set.prototype.constructor

The initial value of `Set.prototype.constructor` is the built-in `Set` constructor.

15.16.5.2 Set.prototype.add (value)

The following steps are taken:

1. Let *S* be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(*S*).
3. If *S* does not have a [[SetData]] internal data property throw a `TypeError` exception.
4. Let *entries* be the List that is the value of *S*'s [[SetData]] internal data property.
5. Repeat for each *p* that is an element of *entries*.
 - a. If *p* is not empty and `SameValue(p, value)` is `true`, then
 - i. Return `undefined`.
6. Append *value* as the last element of *entries*.
7. Return `undefined`.

Deleted: *p*

Deleted: 4

15.16.5.3 Set.prototype.clear ()

The following steps are taken:

1. Let *S* be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(*S*).
3. If *S* does not have a [[SetData]] internal data property throw a `TypeError` exception.
4. Set the value of *S*'s [[SetData]] internal data property to a new empty List.
5. Return `undefined`.

Deleted: data

15.16.5.4 Set.prototype.delete (value)

The following steps are taken:

1. Let *S* be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(*S*).
3. If *S* does not have a [[SetData]] internal data property throw a `TypeError` exception.
4. Let *entries* be the List that is the value of *S*'s [[SetData]] internal data property.
5. Repeat for each *e* that is an element of *entries*, in original insertion order
 - a. If *e* is not empty and `SameValue(e, value)` is `true`, then
 - i. Replace the element of *entries* whose value is *e* with an element whose value is `empty`.
 - ii. Return `true`.
6. Return `false`.

Deleted: Map

15.16.5.5 Set.prototype.forEach (callbackfn ,thisArg = undefined)

callbackfn should be a function that accepts three arguments. `forEach` calls *callbackfn* once for each value present in the set object, in value insertion order. *callbackfn* is called only for values of the Set which actually exist; it is not called for keys that have been deleted from the set.

Deleted: two

Deleted: map

If a `thisArg` parameter is provided, it will be used as the `this` value for each invocation of `callbackfn`. If it is not provided, `undefined` is used instead.

NOTE If `callbackfn` is an Arrow Function, `this` was lexically bound when the function was created so `thisArg` will have no effect.

`callbackfn` is called with three arguments: the first two arguments are a value contained in the Set. The same value is passed for both arguments. The Set object being traversed is passed as the third argument.

Deleted: two

Deleted: value of the item

Deleted: and t

NOTE The `callbackfn` is called with three arguments to be consistent with the call back functions used by `forEach` methods for Map and Array. For Sets, each item value is considered to be both the key and the value.

Deleted: if

`forEach` does not directly mutate the object on which it is called but the object may be mutated by the calls to `callbackfn`.

NOTE Each value is normally visited only once. However, a value will be revisited if it is deleted after it has been visited and then re-added before the to `forEach` call completes. Values that are deleted after the call to `forEach` begins and before being visited are not visited unless the value is added again before the to `forEach` call completes. New values added, after the call to `forEach` begins are visited.

When the `forEach` method is called with one or two arguments, the following steps are taken:

1. Let `S` be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(S)`.
3. If `S` does not have a `[[SetData]]` internal data property throw a `TypeError` exception.
4. If `IsCallable(callbackfn)` is `false`, throw a `TypeError` exception.
5. If `thisArg` was supplied, let `T` be `thisArg`; else let `T` be `undefined`.
6. Let `entries` be the List that is the value of `S`'s `[[SetData]]` internal data property.
7. Repeat for each `e` that is an element of `entries`, in original insertion order
 - a. If `e` is not empty, then
 - i. Let `funcResult` be the result of calling the `[[Call]]` internal method of `callbackfn` with `T` as `thisArgument` and a List containing `e` and `S` as `argumentsList`.
 - ii. `ReturnIfAbrupt(funcResult)`.
8. `Return undefined`.

The `length` property of the `forEach` method is 1.

15.16.5.6 Set.prototype.has (value)

The following steps are taken:

1. Let `S` be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(S)`.
3. If `S` does not have a `[[SetData]]` internal data property throw a `TypeError` exception.
4. Let `entries` be the List that is the value of `S`'s `[[SetData]]` internal data property.
5. Repeat for each `e` that is an element of `entries`.
 - a. If `e` is not empty and `SameValue(e, value)`, then return `true`.
6. `Return false`.

15.16.5.7 get Set.prototype.size

`Set.prototype.size` is an accessor property whose set accessor function is `undefined`. Its get accessor function performs the following steps are taken:

1. Let `S` be the result of calling `ToObject` with the `this` value as its argument.
2. `ReturnIfAbrupt(S)`.
3. If `S` does not have a `[[SetData]]` internal data property throw a `TypeError` exception.
4. Let `entries` be the List that is the value of `S`'s `[[SetData]]` internal data property.
5. Let `count` be 0.
6. For each `e` that is an element of `entries`

- a. If e is not empty then
 - i. Set $count$ to $count+1$.
7. Return $count$.

15.16.5.8 Set.prototype.values ()

The following steps are taken:

1. Let S be the result of calling `ToObject` with the `this` value as its argument.
2. ReturnIfAbrupt(S).
3. Return the result of calling the `CreateSetIterator` abstract operation with argument S .

15.16.5.9 Set.prototype.[@@iterator] ()

The initial value of the `[@@iterator]` property is the same function object as the initial value of the `values` property.

15.16.5.10 Set.prototype.[@@toStringTag]

The initial value of the `[@@toStringTag]` property is the string value "Set".

15.16.6 Properties of Set Instances

Set instances inherit properties from the `Set` prototype. After initialisation by the `Set` constructor, Set instances also have a `[[SetData]]` internal data property.

15.16.7 Set Iterator Object Structure

A Set Iterator is an ordinary object, with the structure defined below, that represents a specific iteration over some specific Set instance object. There is not a named constructor for Set Iterator objects. Instead, set iterator objects are created by calling certain methods of Set instance objects.

15.16.7.1 CreateSetIterator Abstract Operation

The `value` and `[@@iterator]` methods of `Set` objects return iterator objects. The abstract operation `CreateSetIterator` with argument set is used to create such iterator objects. It performs the following steps:

1. Let S be the result of calling `ToObject(set)`.
2. ReturnIfAbrupt(S).
3. If S does not have a `[[SetData]]` internal data property throw a `TypeError` exception.
4. Let $entries$ be the List that is the value of S 's `[[SetData]]` internal data property.
5. Let itr be the result of the abstract operation `ObjectCreate` with the intrinsic object `%SetIteratorPrototype%` as its argument.
6. Add a `[[IteratedSet]]` internal data property to itr with value S .
7. Add a `[[SetNextIndex]]` internal data property to itr with value 0 .
8. Return itr .

15.16.7.2 The Set Iterator Prototype

All Set Iterator Objects inherit properties from a common Set Iterator Prototype object. The `[[Prototype]]` internal data property of the Set Iterator Prototype is the `%ObjectPrototype%` intrinsic object. In addition, the Set Iterator Prototype has the following properties:

15.16.7.2.1 SetIterator.prototype.constructor

15.16.7.2.2 SetIterator.prototype.next()

1. Let O be the `this` value.
2. If `Type(O)` is not `Object`, throw a `TypeError` exception.

Deleted: Map

Comment [AWB10244]: This is how we identify a property whose key is a built-in Symbol

Deleted: Map

Comment [AWB10245]: Do we really want to do this sort of method sharing. It has a bad smell.

Deleted: Map

Comment [AWB10246]: TODO: need to decide what to use for a constructor for these sort of objects.

3. If O does not have all of the internal properties of a Set Iterator Instance (15.16.7.1.2), throw a **TypeError** exception.
4. Let s be the value of the **[[IteratedSet]]** internal data property of O .
5. Let $index$ be the value of the **[[SetNextIndex]]** internal data property of O .
6. Assert: s has a **[[SetData]]** internal data property.
7. Let $entries$ be the List that is the value of the **[[SetData]]** internal data property of s .
8. Repeat while $index$ is less than the total number of elements of $entries$. The number of elements must be redetermined each time this method is evaluated.
 - a. Let e be the element at 0-originated insertion position $index$ of $entries$.
 - b. Set $index$ to $index+1$.
 - c. Set the **[[SetNextIndex]]** internal data property of O to $index$.
 - d. If e is not empty, then
 - i. Return e .
9. Return Completion {[[type]]: throw, [[value]]: **%StopIteration%**, [[target]]: empty}.

Deleted:

15.16.7.2.3 **SetIterator.prototype.[@@iterator]()**

The following steps are taken:

1. Return the **this** value.

15.16.7.2.4 **SetIterator.prototype.[@@toStringTag]**

The initial value of the **[@@toStringTag]** property is the string value "**Set Iterator**".

15.16.7.3 Properties of Set Iterator Instances

Set Iterator instances inherit properties from the Set Iterator prototype (the intrinsic, **%SetIteratorPrototype%**). Set Iterator instances are initially created with the internal properties specified in [Table 38](#).

Deleted: Table 35Table 33

Deleted: 3533

Table 38 — Internal Data Properties of Set Iterator Instances

Internal Data Property Name	Description
[[IteratedSet]]	The Set object that is being iterated.
[[SetNextIndex]]	The integer index of the next Set data element to be examined by this iteration.

15.17 The Reflect Module

This is a place holder for the material in http://wiki.ecmascript.org/doku.php?id=harmony:reflect_api

Comment [AWB10249]: TODO

15.17.1 Exported Function Properties Reflecting the Essential Internal Methods

15.17.1.1 **Reflect.getPrototypeOf (target)**

When the **getPrototypeOf** function is called with argument $target$ the following steps are taken:

1. Let obj be **ToObject**($target$).
2. ReturnIfAbrupt(obj).
3. Return the result of calling the **[[GetInheritance]]** internal method of obj .

Deleted: e

15.17.1.2 **Reflect.setPrototypeOf (target, proto)**

When the **setPrototypeOf** function is called with arguments $target$ and $proto$, the following steps are taken:

1. Let *obj* be `ToObject(target)`.
2. ReturnIfAbrupt(*obj*).
3. If `Type(proto)` is not `Object` and `proto` is not `null`, then throw a `TypeError` exception.
4. Return the result of calling the `[[SetInheritance]]` internal method of *obj* with argument *proto*.

15.17.1.3 Reflect.isExtensible (target)

When the `isExtensible` function is called with argument *target* the following steps are taken:

1. Let *obj* be `ToObject(target)`.
2. ReturnIfAbrupt(*obj*).
3. Return the result of calling the `[[IsExtensible]]` internal method of *obj*.

15.17.1.4 Reflect.preventExtensions (target)

When the `preventExtensions` function is called with argument *target*, the following steps are taken:

5. Let *obj* be `ToObject(target)`.
6. ReturnIfAbrupt(*obj*).
7. Return the result of calling the `[[PreventExtensions]]` internal method of *obj*.

15.17.1.5 Reflect.has (target, propertyKey)

When the `hasOwn` function is called with arguments *target* and *propertyKey*, the following steps are taken:

1. Let *obj* be `ToObject(target)`.
2. ReturnIfAbrupt(*obj*).
3. Let *key* be `ToPropertyKey(propertyKey)`.
4. ReturnIfAbrupt(*key*).
5. Return the result of calling the `[[HasProperty]]` internal method of *obj* with argument *key*.

15.17.1.6 Reflect.hasOwn (target, propertyKey)

When the `hasOwn` function is called with arguments *target* and *propertyKey*, the following steps are taken:

6. Let *obj* be `ToObject(target)`.
7. ReturnIfAbrupt(*obj*).
8. Let *key* be `ToPropertyKey(propertyKey)`.
9. ReturnIfAbrupt(*key*).
10. Return the result of calling the `[[HasOwnProperty]]` internal method of *obj* with argument *key*.

Deleted: 5

15.17.1.7 Reflect.getOwnPropertyDescriptor(target, propertyKey)

When the `getOwnPropertyDescriptor` function is called with arguments *target* and *propertyKey*, the following steps are taken:

1. Let *obj* be `ToObject(target)`.
2. ReturnIfAbrupt(*obj*).
3. Let *key* be `ToPropertyKey(propertyKey)`.
4. ReturnIfAbrupt(*key*).
5. Return the result of calling the `[[GetOwnProperty]]` internal method of *obj* with argument *key*.

Deleted: 6

15.17.1.8 Reflect.get (target, propertyKey, receiver=target)

When the `get` function is called with arguments *target*, *propertyKey*, and *receiver* the following steps are taken:

1. Let *obj* be `ToObject(target)`.
2. ReturnIfAbrupt(*obj*).
3. Let *key* be `ToPropertyKey(propertyKey)`.

Deleted: 7

4. ReturnIfAbrupt(key).
5. If receiver is not present, then
 - a. Let receiver be target.
6. Return the result of calling the [[GetP]] internal method of obj with arguments key, and receiver.

15.17.1.9 Reflect.set (target, propertyKey, V, receiver=target)

Deleted: 8

When the set function is called with arguments target, V, propertyKey, and receiver the following steps are taken:

1. Let obj be ToObject(target).
2. ReturnIfAbrupt(obj).
3. Let key be ToPropertyKey(propertyKey).
4. ReturnIfAbrupt(key).
5. If receiver is not present, then
 - a. Let receiver be target.
6. Return the result of calling the [[SetP]] internal method of obj with arguments key, V, and receiver.

15.17.1.10 Reflect.deleteProperty (target, propertyKey)

Deleted: 9

When the deleteProperty function is called with arguments target and propertyKey, the following steps are taken:

1. Let obj be ToObject(target).
2. ReturnIfAbrupt(obj).
3. Let key be ToPropertyKey(propertyKey).
4. ReturnIfAbrupt(key).
5. Return the result of calling the [[Delete]] internal method of obj with argument key.

15.17.1.11 Reflect.defineProperty(target, propertyKey, attributes)

Deleted: 0

Deleted: A

Deleted: A

When the defineProperty function is called with arguments target, propertyKey, and attributes the following steps are taken:

7. Let obj be ToObject(target).
8. ReturnIfAbrupt(obj).
9. Let key be ToPropertyKey(propertyKey).
10. ReturnIfAbrupt(key).
11. Let desc be the result of calling ToPropertyDescriptor with attributes as the argument.
12. ReturnIfAbrupt(desc).
13. Return the result of calling the [[DefineOwnProperty]] internal method of obj with arguments key, and desc.

Deleted: A

15.17.1.12 Reflect.enumerate (target)

Deleted: 1

When the enumerate function is called with argument target the following steps are taken:

1. Let obj be ToObject(target).
2. ReturnIfAbrupt(obj).
3. Let itr be the result of calling the [[Enumerate]] internal method of obj.
4. Return itr.

15.17.1.13 Reflect.ownKeys (target)

When the ownKeys function is called with argument target the following steps are taken:

1. Let obj be ToObject(target).
2. ReturnIfAbrupt(obj).
3. Let keys be the result of calling the [[OwnPropertyKeys]] internal method of obj.

Deleted: 15.17.1.12 Reflect.keys (target)
 When the keys function is called with argument target the following steps are taken:
 <#> Let obj be ToObject(target).
 <#> ReturnIfAbrupt(obj).
 <#> Let keys be the result of calling the [[Keys]] internal method of obj.
 <#> ReturnIfAbrupt(keys).
 <#> Return CreateArrayFromList(keys).
Deleted: getOwnPropertyNames

Deleted: getO

Deleted: PropertyNames

Deleted: <#> Let keys be the result of calling the [[OwnPropertyKeys]] internal method of obj.
 <#> ReturnIfAbrupt(keys).
Deleted: Return CreateArrayFromList(keys).

15.17.1.14 Reflect.freeze (target)

When the `freeze` function is called with argument `target` the following steps are taken:

1. Let `obj` be `ToObject(target)`.
2. ReturnIfAbrupt(`obj`).
3. Return the result of calling the `[[Freeze]]` internal method of `obj`.

15.17.1.15 Reflect.seal (target)

When the `seal` function is called with argument `target` the following steps are taken:

1. Let `obj` be `ToObject(target)`.
2. ReturnIfAbrupt(`obj`).
3. Return the result of calling the `[[Seal]]` internal method of `obj`.

Deleted: Freeze

15.17.1.16 Reflect.isFrozen (target)

When the `isFrozen` function is called with argument `target` the following steps are taken:

1. Let `obj` be `ToObject(target)`.
2. ReturnIfAbrupt(`obj`).
3. Return the result of calling the `[[IsFrozen]]` internal method of `obj`.

15.17.1.17 Reflect.isSealed (target)

When the `isSealed` function is called with argument `target` the following steps are taken:

1. Let `obj` be `ToObject(target)`.
2. ReturnIfAbrupt(`obj`).
3. Return the result of calling the `[[IsSealed]]` internal method of `obj`.

15.18 Proxy Objects

16 Errors

An implementation must report most errors at the time the relevant ECMAScript language construct is evaluated. An *early error* is an error that can be detected and reported prior to the evaluation of any construct in the *Script* containing the error. An implementation must report early errors in a *Script* prior to the first evaluation of that *Script*. Early errors in `eval` code are reported at the time `eval` is called but prior to evaluation of any construct within the `eval` code. All errors that are not early errors are runtime errors.

An implementation must treat any instance of the following kinds of errors as an early error:

- Any syntax error.
- Attempts to define an *ObjectLiteral* that has multiple `get` property assignments with the same name or multiple `set` property assignments with the same name.
- Attempts to define an *ObjectLiteral* that has both a data property assignment and a `get` or `set` property assignment with the same name.
- Errors in regular expression literals that are not implementation-defined syntax extensions.
- Attempts in strict mode code to define an *ObjectLiteral* that has multiple data property assignments with the same name.
- The occurrence of a *WithStatement* in strict mode code.
- The occurrence of an *Identifier* value appearing more than once within a *FormalParameterList* of an individual strict mode *FunctionDeclaration* or *FunctionExpression*.
- Improper uses of `return`, `break`, and `continue`.
- Attempts to call `PutValue` on any value for which an early determination can be made that the value is not a Reference (for example, executing the assignment statement `3=4`).

Deleted: 15.17.2 Exported Function Properties Derived from the Essential Internal Methods

15.17.2.1 Reflect.has (target, propertyKey)
 When the `has` function is called with arguments `target` and `propertyKey`, the following steps are taken:
 <#>Let `obj` be `ToObject(target)`.
 <#>ReturnIfAbrupt(`obj`).
 <#>Let `key` be `ToPropertyKey(propertyKey)`.
 <#>ReturnIfAbrupt(`key`).
 <#>Return the result of `HasProperty(obj, key)`.

15.17.2.1 Reflect.instanceOf (target, O)
 When the `instanceOf` function is called with arguments `target` and `O`, the following steps are taken:
 <#>Return the result of `OrdinaryInstanceOf(target, O)`.

Deleted: ¶

Deleted: Program

Deleted: Program

Deleted: Program

An implementation shall not treat other kinds of errors as early errors even if the compiler can prove that a construct cannot execute without error under any circumstances. An implementation may issue an early warning in such a case, but it should not report the error until the relevant construct is actually executed.

An implementation shall report all errors as specified, except for the following:

- An implementation may extend script syntax and regular expression pattern or flag syntax. To permit this, all operations (such as calling `eval`, using a regular expression literal, or using the `Function` or `RegExp` constructor) that are allowed to throw `SyntaxError` are permitted to exhibit implementation-defined behaviour instead of throwing `SyntaxError` when they encounter an implementation-defined extension to the script syntax or regular expression pattern or flag syntax. Deleted: program
- An implementation may provide additional types, values, objects, properties, and functions beyond those described in this specification. This may cause constructs (such as looking up a variable in the global scope) to have implementation-defined behaviour instead of throwing an error (such as `ReferenceError`). Deleted: program
- An implementation may define behaviour other than throwing `RangeError` for `toFixed`, `toExponential`, and `toPrecision` when the `fractionDigits` or `precision` argument is outside the specified range.

DRAFT

DRAFT

Annex A (informative)

Grammar Summary

Field Code Changed
Field Code Changed
Field Code Changed

A.1 Lexical Grammar

SourceCharacter ::
any Unicode code unit

InputElementDiv ::
WhiteSpace
LineTerminator
Comment
Token
DivPunctuator

InputElementRegExp ::
WhiteSpace
LineTerminator
Comment
Token
RegularExpressionLiteral

WhiteSpace ::
<TAB>
<VT>
<FF>
<SP>
<NBSP>
<BOM>
<USP>

LineTerminator ::
<LF>
<CR>
<LS>
<PS>

LineTerminatorSequence ::
<LF>
<CR> [lookahead \notin <LF>]
<LS>
<PS>
<CR> <LF>

Comment ::
MultiLineComment
SingleLineComment

See clause 6

See clause 7

See clause 7

See 7.2

See 7.3

See 7.3

See 7.4

MultiLineComment ::
/ MultiLineCommentChars_{opt} */*

See 7.4

MultiLineCommentChars ::
MultiLineNotAsteriskChar MultiLineCommentChars_{opt}
** PostAsteriskCommentChars_{opt}*

See 7.4

PostAsteriskCommentChars ::
MultiLineNotForwardSlashOrAsteriskChar MultiLineCommentChars_{opt}
** PostAsteriskCommentChars_{opt}*

See 7.4

MultiLineNotAsteriskChar ::
*SourceCharacter but not **

See 7.4

MultiLineNotForwardSlashOrAsteriskChar ::
*SourceCharacter but not one of / or **

See 7.4

SingleLineComment ::
// SingleLineCommentChars_{opt}

See 7.4

SingleLineCommentChars ::
SingleLineCommentChar SingleLineCommentChars_{opt}

See 7.4

SingleLineCommentChar ::
SourceCharacter but not LineTerminator

See 7.4

Token ::
IdentifierName
Punctuator
NumericLiteral
StringLiteral

See 7.5

Identifier ::
IdentifierName but not ReservedWord

See 7.6

IdentifierName ::
IdentifierStart
IdentifierName IdentifierPart

See 7.6

IdentifierStart ::
UnicodeLetter
\$

See 7.6

\ UnicodeEscapeSequence

IdentifierPart ::

IdentifierStart
UnicodeCombiningMark
UnicodeDigit
UnicodeConnectorPunctuation
<ZWNJ>
<ZWJ>

See 7.6

UnicodeLetter ::

any character in the Unicode categories “Uppercase letter (Lu)”, “Lowercase letter (Ll)”, “Titlecase letter (Lt)”, “Modifier letter (Lm)”, “Other letter (Lo)”, or “Letter number (Ni)”. See 7.6

UnicodeCombiningMark ::

any character in the Unicode categories “Non-spacing mark (Mn)” or “Combining spacing mark (Mc)” See 7.6

UnicodeDigit ::

any character in the Unicode category “Decimal number (Nd)” See 7.6

UnicodeConnectorPunctuation ::

any character in the Unicode category “Connector punctuation (Pc)” See 7.6

ReservedWord ::

Keyword
FutureReservedWord
NullLiteral
BooleanLiteral

See 7.6.1

Keyword :: one of

break
case
catch
continue
debugger
default
delete
do
else
finally
for
function
if
in

instanceof
new
return
switch
this
throw
try

typeof
var
void
while
with

See 7.6.1.1

FutureReservedWord :: one of

class
const
enum
export

extends
import
super

See 7.6.1.2

The following tokens are also considered to be *FutureReservedWords* when parsing strict mode code (see 10.1.1).

implements
interface
yield

let
package

private
protected

public
static

<i>Punctuator :: one of</i>						See 7.7
{	}	()	[]	
.	;	,	<	>	<=	
>=	==	!=	====	!==		
+	-	*	%	++	--	
<<	>>	>>>	&		^	
!	~	&&	 	?	:	
=	+=	-=	*=	%=	<<=	
>>=	>>>=	&=	 =	^=		
<i>DivPunctuator :: one of</i>						See 7.7
/	/=					
<i>Literal ::</i>						See 7.8
<i>NullLiteral</i>						
<i>BooleanLiteral</i>						
<i>NumericLiteral</i>						
<i>StringLiteral</i>						
<i>RegularExpressionLiteral</i>						
<i>NullLiteral ::</i>						See 7.8.1
null						
<i>BooleanLiteral ::</i>						See 7.8.2
true						
false						
<i>NumericLiteral ::</i>						See 7.8.3
<i>DecimalLiteral</i>						
<i>HexIntegerLiteral</i>						
<i>DecimalLiteral ::</i>						See 7.8.3
<i>DecimalIntegerLiteral</i>	.	<i>DecimalDigits_{opt}</i>	<i>ExponentPart_{opt}</i>			
.	<i>DecimalDigits</i>	<i>ExponentPart_{opt}</i>				
<i>DecimalIntegerLiteral</i>			<i>ExponentPart_{opt}</i>			
<i>DecimalIntegerLiteral ::</i>						See 7.8.3
0						
<i>NonZeroDigit DecimalDigits_{opt}</i>						
<i>DecimalDigits ::</i>						See 7.8.3
<i>DecimalDigit</i>						
<i>DecimalDigits DecimalDigit</i>						
<i>DecimalDigit :: one of</i>						See 7.8.3
0	1	2	3	4	5	
6	7	8	9			

<i>NonZeroDigit</i> :: one of 1 2 3 4 5 6 7 8 9	See 7.8.3
<i>ExponentPart</i> :: <i>ExponentIndicator</i> <i>SignedInteger</i>	See 7.8.3
<i>ExponentIndicator</i> :: one of e E	See 7.8.3
<i>SignedInteger</i> :: DecimalDigits + DecimalDigits - DecimalDigits	See 7.8.3
<i>HexIntegerLiteral</i> :: 0x HexDigit 0X HexDigit HexIntegerLiteral HexDigit	See 7.8.3
<i>HexDigit</i> :: one of 0 1 2 3 4 5 6 7 8 9 a b c d e f A B C D E F	See 7.8.3
<i>StringLiteral</i> :: " DoubleStringCharacters _{opt} " ' SingleStringCharacters _{opt} '	See 7.8.4
<i>DoubleStringCharacters</i> :: DoubleStringCharacter DoubleStringCharacters _{opt}	See 7.8.4
<i>SingleStringCharacters</i> :: SingleStringCharacter SingleStringCharacters _{opt}	See 7.8.4
<i>DoubleStringCharacter</i> :: SourceCharacter but not one of " or \ or LineTerminator \ EscapeSequence LineContinuation	See 7.8.4
<i>SingleStringCharacter</i> :: SourceCharacter but not one of ' or \ or LineTerminator \ EscapeSequence LineContinuation	See 7.8.4
<i>LineContinuation</i> :: \ LineTerminatorSequence	See 7.8.4
<i>EscapeSequence</i> :: CharacterEscapeSequence 0 [lookahead ≠ DecimalDigit] HexEscapeSequence UnicodeEscapeSequence	See 7.8.4
<i>CharacterEscapeSequence</i> :: SingleEscapeCharacter NonEscapeCharacter	See 7.8.4
<i>SingleEscapeCharacter</i> :: one of ' " \ b f n r t v	See 7.8.4

<i>NonEscapeCharacter</i> ::		See 7.8.4
<i>SourceCharacter</i> but not one of <i>EscapeCharacter</i> or <i>LineTerminator</i>		
<i>EscapeCharacter</i> ::		See 7.8.4
<i>SingleEscapeCharacter</i>		
<i>DecimalDigit</i>		
x		
u		
<i>HexEscapeSequence</i> ::		See 7.8.4
x <i>HexDigit HexDigit</i>		
<i>UnicodeEscapeSequence</i> ::		See 7.8.4
u <i>HexDigit HexDigit HexDigit HexDigit</i>		
<i>RegularExpressionLiteral</i> ::		See 7.8.5
/ <i>RegularExpressionBody</i> / <i>RegularExpressionFlags</i>		
<i>RegularExpressionBody</i> ::		See 7.8.5
<i>RegularExpressionFirstChar</i> <i>RegularExpressionChars</i>		
<i>RegularExpressionChars</i> ::		See 7.8.5
[empty]		
<i>RegularExpressionChars</i> <i>RegularExpressionChar</i>		
<i>RegularExpressionFirstChar</i> ::		See 7.8.5
<i>RegularExpressionNonTerminator</i> but not one of * or \ or / or [
<i>RegularExpressionBackslashSequence</i>		
<i>RegularExpressionClass</i>		
<i>RegularExpressionChar</i> ::		See 7.8.5
<i>RegularExpressionNonTerminator</i> but not \ or / or [
<i>RegularExpressionBackslashSequence</i>		
<i>RegularExpressionClass</i>		
<i>RegularExpressionBackslashSequence</i> ::		See 7.8.5
\ <i>RegularExpressionNonTerminator</i>		
<i>RegularExpressionNonTerminator</i> ::		See 7.8.5
<i>SourceCharacter</i> but not <i>LineTerminator</i>		
<i>RegularExpressionClass</i> ::		See 7.8.5
[<i>RegularExpressionClassChars</i>]		
<i>RegularExpressionClassChars</i> ::		See 7.8.5
[empty]		
<i>RegularExpressionClassChars</i> <i>RegularExpressionClassChar</i>		
<i>RegularExpressionClassChar</i> ::		See 7.8.5
<i>RegularExpressionNonTerminator</i> but not] or \		
<i>RegularExpressionBackslashSequence</i>		

RegularExpressionFlags ::=
[empty]
RegularExpressionFlags IdentifierPart

See 7.8.5

A.2 Number Conversions

StringNumericLiteral ::=
StrWhiteSpace_{opt}
StrWhiteSpace_{opt} StrNumericLiteral StrWhiteSpace_{opt}

See 9.1.3.1

StrWhiteSpace ::=
StrWhiteSpaceChar StrWhiteSpace_{opt}

See 9.1.3.1

StrWhiteSpaceChar ::=
WhiteSpace
LineTerminator

See 9.1.3.1

StrNumericLiteral ::=
StrDecimalLiteral
HexIntegerLiteral

See 9.1.3.1

StrDecimalLiteral ::=
StrUnsignedDecimalLiteral
+ *StrUnsignedDecimalLiteral*
- *StrUnsignedDecimalLiteral*

See 9.1.3.1

StrUnsignedDecimalLiteral ::=
infinity
DecimalDigits . DecimalDigits_{opt} ExponentPart_{opt}
. *DecimalDigits ExponentPart_{opt}*
DecimalDigits ExponentPart_{opt}

See 9.1.3.1

DecimalDigits ::=
DecimalDigit
DecimalDigits DecimalDigit

See 9.1.3.1

DecimalDigit :: **one of**
0 1 2 3 4 5 6 7 8 9

See 9.1.3.1

ExponentPart ::=
ExponentIndicator SignedInteger

See 9.1.3.1

ExponentIndicator :: **one of**
e E

See 9.1.3.1

SignedInteger ::=
DecimalDigits
+ *DecimalDigits*
- *DecimalDigits*

See 9.1.3.1

| *HexIntegerLiteral* ::=
 0x *HexDigit*
 0X *HexDigit*
HexIntegerLiteral *HexDigit*

See 9.1.3.1

| *HexDigit* ::=
 one of
 0 1 2 3 4 5 6 7 8 9 a b c d e f A B C D E F

See 9.1.3.1

A.3 Expressions

PrimaryExpression :
 this
 Identifier
 Literal
 ArrayLiteral
 ObjectLiteral
 (Expression)

See 11.1

ArrayLiteral :
 [Elision_{opt}]
 [ElementList]
 [ElementList , Elision_{opt}]

See 11.1.4

ElementList :
 Elision_{opt} AssignmentExpression
 ElementList , Elision_{opt} AssignmentExpression

See 11.1.4

Elision :
 ' Elision ,

See 11.1.4

ObjectLiteral :
 { }
 { PropertyDefinitionList }
 { PropertyDefinitionList , }

See 11.1.5

Deleted: PropertyNameAndValueList

Deleted: PropertyNameAndValueList

PropertyDefinitionList :
 PropertyDefinition
 PropertyDefinitionList , PropertyDefinition

See 11.1.5

Deleted: PropertyNameAndValueList

Deleted: PropertyAssignment

Deleted: PropertyNameAndValueList

Deleted: PropertyAssignment

Deleted: PropertyAssignment

PropertyDefinition :
 PropertyName : AssignmentExpression
 get PropertyName () { FunctionBody }
 set PropertyName (PropertySetParameterList) { FunctionBody }

See 11.1.5

PropertyName :
 IdentifierName
 StringLiteral
 NumericLiteral

See 11.1.5

PropertySetParameterList :
 Identifier

See 11.1.5

MemberExpression :

- PrimaryExpression*
- FunctionExpression*
- MemberExpression [Expression]*
- MemberExpression . IdentifierName*
- new MemberExpression Arguments**

See 11.2

NewExpression :

- MemberExpression*
- new NewExpression**

See 11.2

CallExpression :

- MemberExpression Arguments*
- CallExpression Arguments*
- CallExpression [Expression]*
- CallExpression . IdentifierName*

See 11.2

Arguments :

- ()*
- (ArgumentList)*

See 11.2

ArgumentList :

- AssignmentExpression*
- ArgumentList , AssignmentExpression*

See 11.2

LeftHandSideExpression :

- NewExpression*
- CallExpression*

See 11.2

PostfixExpression :

- LeftHandSideExpression*
- LeftHandSideExpression [no LineTerminator here] ++*
- LeftHandSideExpression [no LineTerminator here] --*

See 11.3

UnaryExpression :

- PostfixExpression*
- delete UnaryExpression**
- void UnaryExpression**
- typeof UnaryExpression**
- ++ UnaryExpression**
- UnaryExpression**
- + UnaryExpression**
- UnaryExpression**
- ~ UnaryExpression**
- ! UnaryExpression**

See 11.4

MultiplicativeExpression :

- UnaryExpression*
- MultiplicativeExpression * UnaryExpression*
- MultiplicativeExpression / UnaryExpression*
- MultiplicativeExpression % UnaryExpression*

See 11.5

AdditiveExpression :
MultiplicativeExpression
AdditiveExpression + MultiplicativeExpression
AdditiveExpression - MultiplicativeExpression

See 11.6

ShiftExpression :
AdditiveExpression
ShiftExpression << AdditiveExpression
ShiftExpression >> AdditiveExpression
ShiftExpression >>> AdditiveExpression

See 11.7

RelationalExpression :
ShiftExpression
RelationalExpression < ShiftExpression
RelationalExpression > ShiftExpression
RelationalExpression <= ShiftExpression
RelationalExpression >= ShiftExpression
RelationalExpression instanceof ShiftExpression
RelationalExpression in ShiftExpression

See 11.8

RelationalExpressionNoIn :
ShiftExpression
RelationalExpressionNoIn < ShiftExpression
RelationalExpressionNoIn > ShiftExpression
RelationalExpressionNoIn <= ShiftExpression
RelationalExpressionNoIn >= ShiftExpression
RelationalExpressionNoIn instanceof ShiftExpression

See 11.8

EqualityExpression :
RelationalExpression
EqualityExpression == RelationalExpression
EqualityExpression != RelationalExpression
EqualityExpression === RelationalExpression
EqualityExpression !== RelationalExpression

See 11.9

EqualityExpressionNoIn :
RelationalExpressionNoIn
EqualityExpressionNoIn == RelationalExpressionNoIn
EqualityExpressionNoIn != RelationalExpressionNoIn
EqualityExpressionNoIn === RelationalExpressionNoIn
EqualityExpressionNoIn !== RelationalExpressionNoIn

See 11.9

BitwiseANDExpression :
EqualityExpression
BitwiseANDExpression & EqualityExpression

See 11.10

BitwiseANDExpressionNoIn :
EqualityExpressionNoIn
BitwiseANDExpressionNoIn & EqualityExpressionNoIn

See 11.10

BitwiseXORExpression :
BitwiseANDExpression
BitwiseXORExpression ^ BitwiseANDExpression

See 11.10

BitwiseXORExpressionNoIn :
BitwiseANDExpressionNoIn
BitwiseXORExpressionNoIn ^ BitwiseANDExpressionNoIn

See 11.10

BitwiseORExpression :
BitwiseXORExpression
BitwiseORExpression | BitwiseXORExpression

See 11.10

BitwiseORExpressionNoIn :
BitwiseXORExpressionNoIn
BitwiseORExpressionNoIn | BitwiseXORExpressionNoIn

See 11.10

LogicalANDExpression :
BitwiseORExpression
LogicalANDExpression && BitwiseORExpression

See 11.11

LogicalANDExpressionNoIn :
BitwiseORExpressionNoIn
LogicalANDExpressionNoIn && BitwiseORExpressionNoIn

See 11.11

LogicalORExpression :
LogicalANDExpression
LogicalORExpression || LogicalANDExpression

See 11.11

LogicalORExpressionNoIn :
LogicalANDExpressionNoIn
LogicalORExpressionNoIn || LogicalANDExpressionNoIn

See 11.11

ConditionalExpression :
LogicalORExpression
LogicalORExpression ? AssignmentExpression : AssignmentExpression

See 11.12

ConditionalExpressionNoIn :
LogicalORExpressionNoIn
LogicalORExpressionNoIn ? AssignmentExpression : AssignmentExpressionNoIn

See 11.12

AssignmentExpression :
ConditionalExpression
LeftHandSideExpression = AssignmentExpression
LeftHandSideExpression AssignmentOperator AssignmentExpression

See 11.13

AssignmentExpressionNoIn :
ConditionalExpressionNoIn
LeftHandSideExpression = AssignmentExpressionNoIn
LeftHandSideExpression AssignmentOperator AssignmentExpressionNoIn

See 11.13

AssignmentOperator : **one of**
 $\ast=$ $/=$ $\%=$ $+=$ $-=$ $<=$ $>=$ $>>=$ $\&=$ $\wedge=$ $|=$

See 11.13

Expression :
AssignmentExpression
Expression , *AssignmentExpression*

See 11.14

ExpressionNoIn :
AssignmentExpressionNoIn
ExpressionNoIn , *AssignmentExpressionNoIn*

See 11.14

A.4 Statements

Statement :
Block
VariableStatement
EmptyStatement
ExpressionStatement
IfStatement
IterationStatement
ContinueStatement
BreakStatement
ReturnStatement
WithStatement
LabelledStatement
SwitchStatement
ThrowStatement
TryStatement
DebuggerStatement

See clause 12

Block :
 $\{ \text{StatementList}_{\text{opt}} \}$

See 12.1

StatementList :
Statement
StatementList Statement

See 12.1

VariableStatement :
 $\text{var } \text{VariableDeclarationList} ;$

See 12.2

VariableDeclarationList :
VariableDeclaration
VariableDeclarationList , VariableDeclaration

See 12.2

VariableDeclarationListNoIn :
VariableDeclarationNoIn
VariableDeclarationListNoIn , VariableDeclarationNoIn

See 12.2

VariableDeclaration :
Identifier Initialiser_{opt}

See 12.2

VariableDeclarationNoIn :
Identifier InitialiserNoIn_{opt}

See 12.2

<i>Initialiser :</i>	<i>= AssignmentExpression</i>	See 12.2
<i>InitialiserNoIn :</i>	<i>= AssignmentExpressionNoIn</i>	See 12.2
<i>EmptyStatement :</i>	<i>;</i>	See 12.3
<i>ExpressionStatement :</i>	<i>[lookahead $\notin \{\!, \text{function}\}$] Expression ;</i>	See 12.4
<i>IfStatement :</i>	<i>if (Expression) Statement else Statement</i> <i>if (Expression) Statement</i>	See 12.5
<i>IterationStatement :</i>	<i>do Statement while (Expression) ;</i> <i>while (Expression) Statement</i> <i>for (ExpressionNoIn_{opt}; Expression_{opt}; Expression_{opt}) Statement</i> <i>for (var VariableDeclarationListNoIn; Expression_{opt}; Expression_{opt}) Statement</i> <i>for (LeftHandSideExpression in Expression) Statement</i> <i>for (var VariableDeclarationNoIn in Expression) Statement</i>	See 12.6
<i>ContinueStatement :</i>	<i>continue ;</i> <i>continue [no LineTerminator here] Identifier ;</i>	See 12.7
<i>BreakStatement :</i>	<i>break ;</i> <i>break [no LineTerminator here] Identifier ;</i>	See 12.8
<i>ReturnStatement :</i>	<i>return ;</i> <i>return [no LineTerminator here] Expression ;</i>	See 12.9
<i>WithStatement :</i>	<i>with (Expression) Statement</i>	See 12.10
<i>SwitchStatement :</i>	<i>switch (Expression) CaseBlock</i>	See 12.11
<i>CaseBlock :</i>	<i>{ CaseClauses_{opt} }</i> <i>{ CaseClauses_{opt} DefaultClause CaseClauses_{opt} }</i>	See 12.11
<i>CaseClauses :</i>	<i>CaseClause</i> <i>CaseClauses CaseClause</i>	See 12.11

CaseClause : **case** Expression : StatementList_{opt} See 12.11

DefaultClause : **default** : StatementList_{opt} See 12.11

LabelledStatement : Identifier : Statement See 12.12

ThrowStatement : **throw** [no LineTerminator here] Expression ; See 12.13

TryStatement :
try Block *Catch*
try Block *Finally*
try Block *Catch Finally* See 12.14

Catch : **catch** (Identifier) Block See 12.14

Finally : **finally** Block See 12.14

DebuggerStatement : **debugger** ; See 12.15

A.5 Functions and Scripts

FunctionDeclaration : **function** Identifier (FormalParameterList_{opt}) { FunctionBody } See clause 13

FunctionExpression : **function** Identifier_{opt} (FormalParameterList_{opt}) { FunctionBody } See clause 13

FormalParameterList : Identifier
 FormalParameterList , Identifier See clause 13

FunctionBody : SourceElements_{opt} See clause 13

Program : SourceElements_{opt} See clause 14

SourceElements : SourceElement
 SourceElements SourceElement See clause 14

Deleted: Programs

SourceElement :
Statement
FunctionDeclaration

See clause 14

A.6 Universal Resource Identifier Character Classes

uri ::=

uriCharacters_{opt}

See 15.1.3

uriCharacters ::=
uriCharacter uriCharacters_{opt}

See 15.1.3

uriCharacter ::=
uriReserved
uriUnescaped
uriEscaped

See 15.1.3

uriReserved ::= one of
; */* *?* *:* *@* *&* *=* *+* *\$* *,*

See 15.1.3

uriUnescaped ::=
uriAlpha
DecimalDigit
uriMark

See 15.1.3

uriEscaped ::=
% HexDigit HexDigit

See 15.1.3

uriAlpha ::= one of
a b c d e f g h i j k l m n o p q r s t u v w x y z
A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

See 15.1.3

uriMark ::= one of
*- _ . ! ~ * ' ()*

See 15.1.3

A.7 Regular Expressions

Pattern ::=

Disjunction

See 15.10.1

Disjunction ::=

Alternative

Alternative | Disjunction

See 15.10.1

Alternative ::=

[empty]

Alternative Term

See 15.10.1

Term ::=

Assertion

Atom

Atom Quantifier

See 15.10.1

Assertion ::

\wedge
 $\$$
 $\backslash b$
 $\backslash B$
 $(? = Disjunction)$
 $(? ! Disjunction)$

See 15.10.1

Quantifier ::

QuantifierPrefix
 $QuantifierPrefix \ ?$

See 15.10.1

QuantifierPrefix ::

$*$
 $+$
 $?$
 $\{ DecimalDigits \}$
 $\{ DecimalDigits , \}$
 $\{ DecimalDigits , DecimalDigits \}$

See 15.10.1

Atom ::

PatternCharacter
 $.$
 $\backslash AtomEscape$
CharacterClass
 $(Disjunction)$
 $(?: Disjunction)$

See 15.10.1

PatternCharacter ::

SourceCharacter but not one of
 $\wedge \ \$ \ \backslash \ . \ * \ + \ ? \ (\) \ [\] \ { \ } \ |$

See 15.10.1

AtomEscape ::

DecimalEscape
CharacterEscape
CharacterClassEscape

See 15.10.1

CharacterEscape ::

ControlEscape
 $\text{\c} ControlLetter$
HexEscapeSequence
UnicodeEscapeSequence
IdentityEscape

See 15.10.1

ControlEscape :: one of

$f \ n \ r \ t \ v$

See 15.10.1

ControlLetter :: one of

$a \ b \ c \ d \ e \ f \ g \ h \ i \ j \ k \ l \ m \ n \ o \ p \ q \ r \ s \ t \ u \ v \ w \ x \ y \ z$	See 15.10.1
$A \ B \ C \ D \ E \ F \ G \ H \ I \ J \ K \ L \ M \ N \ O \ P \ Q \ R \ S \ T \ U \ V \ W \ X \ Y \ Z$	

IdentityEscape :: See 15.10.1
SourceCharacter but not IdentifierPart

<ZWJ>
<ZWNJ>

DecimalEscape :: See 15.10.1
DecimalIntegerLiteral [lookahead \notin *DecimalDigit*]

CharacterClassEscape :: one of See 15.10.1
 d D s S w W

CharacterClass :: See 15.10.1
 [[lookahead \notin {^}] *ClassRanges*]
 [^ *ClassRanges*]

ClassRanges :: See 15.10.1
 [empty]
NonemptyClassRanges

NonemptyClassRanges :: See 15.10.1
ClassAtom
ClassAtom NonemptyClassRangesNoDash
ClassAtom – *ClassAtom ClassRanges*

NonemptyClassRangesNoDash :: See 15.10.1
ClassAtom
ClassAtomNoDash NonemptyClassRangesNoDash
ClassAtomNoDash – *ClassAtom ClassRanges*

ClassAtom :: See 15.10.1
 –
ClassAtomNoDash

ClassAtomNoDash :: See 15.10.1
SourceCharacter but not one of \ or] or -
 \ *ClassEscape*

ClassEscape :: See 15.10.1
DecimalEscape
b
CharacterEscape
CharacterClassEscape

A.8 JSON

A.8.1 JSON Lexical Grammar

JSONWhiteSpace :: See 15.12.1.1
 <TAB>
 <CR>

<LF>
<SP>

JSONString ::
 " *JSONStringCharacters_{opt}* "

See 15.12.1.1

JSONStringCharacters ::
 JSONStringCharacter *JSONStringCharacters_{opt}*

See 15.12.1.1

JSONStringCharacter ::
 SourceCharacter **but not one of " or \ or U+0000 through U+001F**
 \ *JSONEscapeSequence*

See 15.12.1.1

JSONEscapeSequence ::
 JSONEscapeCharacter
 UnicodeEscapeSequence

See 15.12.1.1

JSONEscapeCharacter :: **one of**
 " / \ b f n r t

See 15.12.1.1

JSONNumber ::
 -_{opt} *DecimalIntegerLiteral* *JSONFraction_{opt}* *ExponentPart_{opt}*

See 15.12.1.1

JSONFraction ::
 . *DecimalDigits*

See 15.12.1.1

JSONNullLiteral ::
 NullLiteral

See 15.12.1.1

JSONBooleanLiteral ::
 BooleanLiteral

See 15.12.1.1

A.8.2 JSON Syntactic Grammar

JSONText ::
 JSONValue

See 15.12.1.2

JSONValue ::
 JSONNullLiteral
 JSONBooleanLiteral
 JSONObject
 JSONArray
 JSONString
 JSONNumber

See 15.12.1.2

JSONObject ::
 { }
 { *JSONMemberList* }

See 15.12.1.2

JSONMember ::
 JSONString : *JSONValue*

See 15.12.1.2

JSONMemberList ::
 JSONMember
 JSONMemberList , *JSONMember*

See 15.12.1.2

JSONArray ::
 []
 [*JSONElementList*]

See 15.12.1.2

JSONElementList :
 JSONValue
 JSONElementList , JSONValue

See 15.12.1.2

DRAFT

DRAFT

Annex B (normative)

Additional ECMAScript Features for Web Browsers

The ECMAScript language syntax and semantics defined in this annex are required when the ECMAScript host is a web browser. The content of this annex is normative but optional if the ECMAScript host is not a web browser.

B.1 Additional Syntax

B.1.1 Numeric Literals

The syntax and semantics of 7.8.3 is extended as follows except that this extension is not allowed for strict mode code:

Syntax

NumericLiteral ::
DecimalLiteral
BinaryIntegerLiteral
OctalIntegerLiteral
HexIntegerLiteral
LegacyOctalIntegerLiteral

LegacyOctalIntegerLiteral ::
0 OctalDigit
LegacyOctalIntegerLiteral OctalDigit

Static Semantics

- The MV of *LegacyOctalIntegerLiteral* :: *0 OctalDigit* is the MV of *OctalDigit*.
- The MV of *LegacyOctalIntegerLiteral* :: *LegacyOctalIntegerLiteral OctalDigit* is (the MV of *LegacyOctalIntegerLiteral* times 8) plus the MV of *OctalDigit*.

B.1.2 String Literals

The syntax and semantics of 7.8.4 is extended as follows except that this extension is not allowed for strict mode code:

Syntax

EscapeSequence ::
CharacterEscapeSequence
OctalEscapeSequence
HexEscapeSequence
UnicodeEscapeSequence

OctalEscapeSequence ::
OctalDigit [lookahead \notin *DecimalDigit*]
ZeroToThree OctalDigit [lookahead \notin *DecimalDigit*]
FourToSeven OctalDigit
ZeroToThree OctalDigit OctalDigit

ZeroToThree :: one of
0 1 2 3

Comment [AW250]: Need to add new material that is not in previous versions of annex B

Deleted: informative

Deleted: Compatibility

Deleted: is

Deleted: s

Deleted: It

Deleted: <#> Past editions of ECMAScript have included additional syntax and semantics for specifying octal literals and octal escape sequences. These have been removed from this edition of ECMAScript. This non-normative annex presents uniform syntax and semantics for octal literals and octal escape sequences for compatibility with some older ECMAScript programs. ¶

Deleted: can be

Deleted: *OctalDigit* :: one of
0 1 2 3 4 5 6 7 ¶

Deleted: <#> The MV of *NumericLiteral* :: *OctalIntegerLiteral* is the MV of *OctalIntegerLiteral*. ¶
<#> The MV of *OctalDigit* :: 0 is 0. ¶
<#> The MV of *OctalDigit* :: 1 is 1. ¶
<#> The MV of *OctalDigit* :: 2 is 2. ¶
<#> The MV of *OctalDigit* :: 3 is 3. ¶
<#> The MV of *OctalDigit* :: 4 is 4. ¶
<#> The MV of *OctalDigit* :: 5 is 5. ¶
<#> The MV of *OctalDigit* :: 6 is 6. ¶
<#> The MV of *OctalDigit* :: 7 is 7. ¶

Deleted: can be

FourToSeven :: one of

4 5 6 7

Static Semantics

- The CV of *EscapeSequence :: OctalEscapeSequence* is the CV of the *OctalEscapeSequence*.
- The CV of *OctalEscapeSequence :: OctalDigit* [*lookahead* \notin *DecimalDigit*] is the character whose code unit value is the MV of the *OctalDigit*.
- The CV of *OctalEscapeSequence :: ZeroToThree OctalDigit* [*lookahead* \notin *DecimalDigit*] is the character whose code unit value is (8 times the MV of the *ZeroToThree*) plus the MV of the *OctalDigit*.
- The CV of *OctalEscapeSequence :: FourToSeven OctalDigit* is the character whose code unit value is (8 times the MV of the *FourToSeven*) plus the MV of the *OctalDigit*.
- The CV of *OctalEscapeSequence :: ZeroToThree OctalDigit OctalDigit* is the character whose code unit value is (64 (that is, 8^2) times the MV of the *ZeroToThree*) plus (8 times the MV of the first *OctalDigit*) plus the MV of the second *OctalDigit*.
- The MV of *ZeroToThree :: 0* is 0.
- The MV of *ZeroToThree :: 1* is 1.
- The MV of *ZeroToThree :: 2* is 2.
- The MV of *ZeroToThree :: 3* is 3.
- The MV of *FourToSeven :: 4* is 4.
- The MV of *FourToSeven :: 5* is 5.
- The MV of *FourToSeven :: 6* is 6.
- The MV of *FourToSeven :: 7* is 7.

B.2 Additional Properties

When the `ECMAScript host` is a web browser the following additional properties of the standard built-in objects are defined.

B.2.1 Additional Properties of the Global Object

B.2.1.1 `escape (string)`

The `escape` function is a property of the global object. It computes a new version of a String value in which certain characters have been replaced by a hexadecimal escape sequence.

For those characters being replaced whose code unit value is `0xFF` or less, a two-digit escape sequence of the form `%xx` is used. For those characters being replaced whose code unit value is greater than `0xFF`, a four-digit escape sequence of the form `%uxxxx` is used.

When the `escape` function is called with one argument `string`, the following steps are taken:

1. Call `ToString(string)`.
2. Compute the number of characters in `Result(1)`.
3. Let `R` be the empty string.
4. Let `k` be 0.
5. If `k` equals `Result(2)`, return `R`.
6. Get the character (represented as a 16-bit unsigned integer) at position `k` within `Result(1)`.
7. If `Result(6)` is one of the 69 nonblank characters
`"ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz0123456789*_+-./"`
then go to step 13.
8. If `Result(6)` is less than 256, go to step 11.
9. Let `S` be a String containing six characters "`%uvwxyz`" where `wxyz` are four hexadecimal digits encoding the value of `Result(6)`.
10. Go to step 14.
11. Let `S` be a String containing three characters "`%xy`" where `xy` are two hexadecimal digits encoding the value of `Result(6)`.

Deleted: Some implementations of

Deleted: have included

Deleted: these

Deleted: for some

Deleted: native

Deleted: This non-normative annex suggests uniform semantics for such properties without making the properties or their semantics part of this standard.

Deleted:,

12. Go to step 14.
13. Let *S* be a String containing the single character Result(6).
14. Let *R* be a new String value computed by concatenating the previous value of *R* and *S*.
15. Increase *k* by 1.
16. Go to step 5.

NOTE The encoding is partly based on the encoding described in RFC 1738, but the entire encoding specified in this standard is described above without regard to the contents of RFC 1738. This encoding does not reflect changes to RFC 1738 made by RFC 3986.

B.2.1.2 `unescape (string)`

The `unescape` function is a property of the global object. It computes a new version of a String value in which each escape sequence of the sort that might be introduced by the `escape` function is replaced with the character that it represents.

When the `unescape` function is called with one argument *string*, the following steps are taken:

1. Call `Tostring(string)`.
2. Compute the number of characters in Result(1).
3. Let *R* be the empty String.
4. Let *k* be 0.
5. If *k* equals Result(2), return *R*.
6. Let *c* be the character at position *k* within Result(1).
7. If *c* is not %, go to step 18.
8. If *k* is greater than Result(2)–6, go to step 14.
9. If the character at position *k*+1 within Result(1) is not u, go to step 14.
10. If the four characters at positions *k*+2, *k*+3, *k*+4, and *k*+5 within Result(1) are not all hexadecimal digits, go to step 14.
11. Let *c* be the character whose code unit value is the integer represented by the four hexadecimal digits at positions *k*+2, *k*+3, *k*+4, and *k*+5 within Result(1).
12. Increase *k* by 5.
13. Go to step 18.
14. If *k* is greater than Result(2)–3, go to step 18.
15. If the two characters at positions *k*+1 and *k*+2 within Result(1) are not both hexadecimal digits, go to step 18.
16. Let *c* be the character whose code unit value is the integer represented by two zeroes plus the two hexadecimal digits at positions *k*+1 and *k*+2 within Result(1).
17. Increase *k* by 2.
18. Let *R* be a new String value computed by concatenating the previous value of *R* and *c*.
19. Increase *k* by 1.
20. Go to step 5.

B.2.2 Additional Properties of the `String.prototype` Object

B.2.2.1 `String.prototype.substr (start, length)`

The `substr` method takes two arguments, *start* and *length*, and returns a substring of the result of converting the `this` object to a String, starting from character position *start* and running for *length* characters (or through the end of the String if *length* is `undefined`). If *start* is negative, it is treated as $(sourceLength+start)$ where *sourceLength* is the length of the String. The result is a String value, not a String object. The following steps are taken:

1. `ReturnIfAbrupt(CheckObjectCoercible(this value))`.
2. Let *S* be the result of performing `ToString`, giving it the `this` value as its argument.
3. Let *intStart* be `ToInteger(start)`.
4. `ReturnIfAbrupt(intStart)`.
5. If *length* is `undefined`, let *end* be $+\infty$; otherwise let *end* be `ToInteger(length)`.
6. `ReturnIfAbrupt(end)`.

Deleted: Call

Deleted: Call

Deleted: use

Deleted: call

7. Let *size* be the number of characters in *S*.
8. If *intStart* is negative, then let *intStart* be *max(size + intStart, 0)*.
9. Let *resultLength* be *min(max(end, 0), size - intStart)*.
10. If *resultLength* ≤ 0, return the empty String " ".
11. Return a String containing *resultLength* consecutive characters from *S* beginning with the character at position *intStart*.

The **length** property of the **substr** method is **2**.

NOTE The **substr** function is intentionally generic; it does not require that its **this** value be a String object. Therefore it can be transferred to other kinds of objects for use as a method.

B.2.2.2 **String.prototype.anchor (name)**

When the **anchor** method is called with argument *name*, the following steps are taken:

1. Let *S* be the **this** value.
2. Return the result of performing the abstract operation **CreateHTML** with arguments *S*, "a", "name" and *name*.

The abstract operation **CreateHTML** is called with arguments *string*, *tag*, *attribute*, and *value*. The arguments *tag* and *attribute* must be string values. The following steps are taken:

1. ReturnIfAbrupt(CheckObjectCoercible(string)).
2. Let *S* be the result of performing **ToString(string)**.
3. ReturnIfAbrupt(*S*).
4. Let *p1* be the string value that is the concatenation of "<" and *tag*.
5. If *attribute* is not the empty String, then
 - a. Let *V* be the result of performing **ToString(value)**.
 - b. ReturnIfAbrupt(*V*).
 - c. Let *escapedV* be the string value that is the same as *V* except that each occurrence of the character " " (code unit value 0x0020) in *V* has been replaced with the six character sequence """.
 - d. Let *p1* be the string value that is the concatenation of the following string values:
 - *p1*
 - a single space code unit 0x0020
 - *attribute*
 - "="
 - " "
 - *escapedV*
 - " "
6. Let *p2* be the string value that is the concatenation of *p1* and ">".
7. Let *p3* be the string value that is the concatenation of *p2*, "</", *tag*, and ">".
8. Return *p3*.

B.2.2.3 **String.prototype.big ()**

When the **big** method is called with no arguments, the following steps are taken:

1. Let *S* be the **this** value.
2. Return the result of performing the abstract operation **CreateHTML** with arguments *S*, "big", " " and " ".

B.2.2.4 **String.prototype.blink ()**

When the **blink** method is called with no arguments, the following steps are taken:

1. Let *S* be the **this** value.
2. Return the result of performing the abstract operation **CreateHTML** with arguments *S*, "blink", " " and " ".

- Deleted:** Compute
- Deleted:** Result(1)
- Deleted:** Result(2)
- Deleted:** positive or zero
- Deleted:** use Result(2); else
- Deleted:** use
- Deleted:** Result(4)
- Deleted:** Result(2)
- Deleted:** Compute
- Deleted:** Result(3)
- Deleted:** Result(4)
- Deleted:** Result(5)
- Deleted:** Result(6)
- Deleted:** " "
- Deleted:** Result(6)
- Deleted:** Result(1)
- Deleted:** Result(5)

Deleted: <#>If *attribute* is not the empty String, then
<#>Let *V* be the result of performing **ToString(value)**.¶
<#>ReturnIfAbrupt(*V*).¶

Deleted: character

Deleted: *V*

Deleted: c

B.2.2.5 String.prototype.bold ()

When the **bold** method is called with no arguments, the following steps are taken:

1. Let S be the **this** value.
2. Return the result of performing the abstract operation CreateHTML with arguments S , "b", "" and "".

Deleted: S

B.2.2.6 String.prototype.fixed ()

When the **fixed** method is called with no arguments, the following steps are taken:

1. Let S be the **this** value.
2. Return the result of performing the abstract operation CreateHTML with arguments S , "tt", "" and "".

Deleted: A

B.2.2.7 String.prototype.fontcolor (color)

When the **fontcolor** method is called with argument *color*, the following steps are taken:

1. Let S be the **this** value.
2. Return the result of performing the abstract operation CreateHTML with arguments S , "font", "color" and *color*.

Deleted: S

B.2.2.8 String.prototype.fontSize (size)

When the **fontSize** method is called with argument *size*, the following steps are taken:

1. Let S be the **this** value.
2. Return the result of performing the abstract operation CreateHTML with arguments S , "font", "size" and *size*.

Deleted: A

B.2.2.9 String.prototype.italics ()

When the **italics** method is called with no arguments, the following steps are taken:

1. Let S be the **this** value.
2. Return the result of performing the abstract operation CreateHTML with arguments S , "i", "" and "".

Deleted: S

B.2.2.10 String.prototype.link (url)

When the **link** method is called with argument *url*, the following steps are taken:

1. Let S be the **this** value.
2. Return the result of performing the abstract operation CreateHTML with arguments S , "a", "href" and *url*.

Deleted: A

B.2.2.11 String.prototype.small ()

When the **small** method is called with no arguments, the following steps are taken:

1. Let S be the **this** value.
2. Return the result of performing the abstract operation CreateHTML with arguments S , "small", "" and "".

Deleted: S

Deleted: s

B.2.2.12 String.prototype.strike ()

When the **strike** method is called with no arguments, the following steps are taken:

1. Let S be the **this** value.

Deleted: A

Deleted: S

2. Return the result of performing the abstract operation `CreateHTML` with arguments *S*, `"strike"`, `" "` and `" "`.

Deleted: return

Deleted: *s*

Deleted: A

B.2.2.13 `String.prototype.sub()`

When the `sub` method is called with no arguments, the following steps are taken:

1. Let *S* be the `this` value.
2. Return the result of performing the abstract operation `CreateHTML` with arguments *S*, `"sub"`, `" "` and `" "`.

Deleted: *S*

Deleted: return

Deleted: *s*

Deleted: A

B.2.2.14 `String.prototype.sup()`

When the `sup` method is called with no arguments, the following steps are taken:

1. Let *S* be the `this` value.
2. Return the result of performing the abstract operation `CreateHTML` with arguments *S*, `"sup"`, `" "` and `" "`.

Deleted: *S*

Deleted: return

Deleted: *s*

B.2.3 Additional Properties of the `Date.prototype` Object

B.2.3.1 `Date.prototype.getYear()`

NOTE The `getFullYear` method is preferred for nearly all purposes, because it avoids the “year 2000 problem.”

When the `getYear` method is called with no arguments, the following steps are taken:

1. Let *t* be this time value.
2. ReturnIfAbrupt(*t*).
3. If *t* is `NAN`, return `NAN`.
4. Return `YearFromTime(LocalTime(t)) - 1900`.

Deleted: *S*

Deleted: return

B.2.3.2 `Date.prototype.setYear(year)`

NOTE The `setFullYear` method is preferred for nearly all purposes, because it avoids the “year 2000 problem.”

When the `setYear` method is called with one argument *year*, the following steps are taken:

1. Let *t* be the result of `LocalTime(this time value)`; but if this time value is `NAN`, let *t* be `+0`.
2. Let *y* be `ToNumber(year)`.
3. If *y* is `NAN`, set the `[[DateValue]]` internal data property of this `Date` object to `NAN` and return `NAN`.
4. If *y* is not `NAN` and $0 \leq \text{ToInteger}(y) \leq 99$ then let *yyyy* be `ToInteger(y) + 1900`. Otherwise, let *yyyy* be *y*.
5. Let *d* be `MakeDay(yyyy, MonthFromTime(t), DateFromTime(t))`.
6. Let *date* be `UTC(MakeDate(d, TimeWithinDay(t)))`.
7. Set the `[[DateValue]]` internal data property of this `Date` object to `TimeClip(date)`.
8. Return the value of the `[[DateValue]]` internal data property of this `Date` object.

Deleted: Call

Deleted: Result(2)

Deleted: PrimitiveValue

Deleted: the `this` value

Deleted: Result(2)

Deleted: Result(2)

Deleted: Result(4)

Deleted: is

Deleted: Result(2)

Deleted: Result(4)

Deleted: is

Deleted: Result(2)

Deleted: Compute

Deleted: Result(4)

Deleted: Compute

Deleted: Result(5)

Deleted: PrimitiveValue

Deleted: the `this` value

Deleted: Result(6)

Deleted: PrimitiveValue

Deleted: the `this` value

B.2.3.3 `Date.prototype.toGMTString()`

NOTE The property `toUTCString` is preferred. The `toGMTString` property is provided principally for compatibility with old code. It is recommended that the `toUTCString` property be used in new ECMAScript code.

The Function object that is the initial value of `Date.prototype.toGMTString` is the same Function object that is the initial value of `Date.prototype.toUTCString`.

B.3 Other Additional Features

B.3.1 The proto pseudo property.

B.3.1.1 Object.prototype. proto

The initial value of the proto property of the Object prototype object is a data property whose initial value is null. This property initially has the attributes { [[Writable]]: true, [[Enumerable]]: false, [[Configurable]]: true }.

Manipulations of this property as tracked by the Boolean valued primordial internal variable UnderscoreProtoEnabled. The default initial value of UnderscoreProtoEnabled is true only if this property is initially present on the primordial Object prototype object.

NOTE Any modification of this property or its attributes causes UnderscoreProtoEnabled to be set to false.

B.3.1.2 Changes To Internal Methods

The definition of the [[GetP]] internal method given in 8.12.3 is replaced with the following:

1. If P is the string value "proto" and UnderscoreProtoEnabled is true, then
 - a. Let desc be the result of calling the [[GetProperty]] internal method of O with property name P.
 - b. If desc is not undefined and was created by step 1.a to describe the property defined in B.3.1.1 then,
 - i. Return the value of the [[Prototype]] internal data property of O.
2. Continue by executing the steps of 8.12.3 starting with step 1.

The definition of the [[Put]] internal method given in 8.12.5 is replaced with the following:

1. If P is the string value "proto" and UnderscoreProtoEnabled is true and O is not the standard built-in Object prototype object, then
 - a. Let desc be the result of calling the [[GetProperty]] internal method of O with property name P.
 - b. If desc is not undefined and was created by step 1.a to describe the property defined in B.3.1.1 then,
 - i. If the type of V is neither Object or Null, return
 - ii. Set the value of the [[Prototype]] internal data property of O to V.
 - iii. Return.
2. Continue by executing the steps of 8.12.5 starting with step 1.

The definition of the [[Delete]] internal method given in 8.12.7 is replaced with the following:

1. If UnderscoreProtoEnabled is true and P is the string value "proto" and O is the standard built-in Object prototype object, then
 - a. Set UnderscoreProtoEnabled to false.
2. Continue by executing the steps of 8.12.7 starting with step 1.

The definition of the [[DefineOwnProperty]] internal method given in 8.12.9 is replaced with the following:

1. If UnderscoreProtoEnabled is true and P is the string value "proto" and O is the standard built-in Object prototype object, then
 - a. If any attribute contained in Desc is not present or has a different value from the corresponding attribute in { [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true } then,
 - i. Set UnderscoreProtoEnabled to false.
2. Continue by executing the steps of 8.12.9 starting with step 1.

Comment [AWB251]: The section and algorithm reference in this draft are based up the ES5.1 spec. When the corresponding sections of this document are stable, this section will need to be updated.

Comment [AWB8252]: This material is going to be made mandatory and integrated into the main body of the spec.

Comment [AWB253]: This is anticipating new specification material related to Module loader and establishing a primordial environment. The basic assumption is that a module loader must be able to disable this feature. This seems to suggest that the ability to do so must exist in module loader APIs even if this feature is not present in an implementation.

Comment [AWB12254]: This how thing needs to be rewritten, and in the process we will eliminate using [[GetProperty]]

Deleted:

Comment [AWB12255]: Need to be updated to use [[SetP]]

Comment [AWB12256]: This how thing needs to be rewritten, and in the process we will eliminate using [[GetProperty]]

Comment [AWB257]: Note that Object.defineProperty(obj, 'proto', desc) nor any other call of [[DefineOwnProperty]] does not modify [[Prototype]].

B.3.1.3 proto Object Initialisers

Definitions of two algorithms in 11.1.5 are replaced with the following:

The production *PropertyDefinitionList : PropertyDefinition* is evaluated as follows:

1. Let *obj* be the result of the abstract operation *ObjectCreate*.
2. Let *propId* be the result of evaluating *PropertyDefinition*.
3. If *propId.name* is the string value "proto" and *UnderscoreProtoEnabled* is **true** and *IsDataDescriptor(propId.descriptor)* is **true**, then
 - a. Let *v* be *propId.descriptor.value*.
 - b. If *desc* be *propId.descriptor*
 - c. If the type of *v* is either *Object* or *Null*,
 - i. Set the value of the *[[Prototype]]* internal data property of *obj* to *v*.
 - d. Return *obj*.
4. Call the *[[DefineOwnProperty]]* internal method of *obj* with arguments *propId.name*, *propId.descriptor*, and **false**.
5. Return *obj*.

The production

PropertyDefinitionList : PropertyDefinitionList , PropertyDefinition
is evaluated as follows:

1. Let *obj* be the result of evaluating *PropertyDefinitionList*.
2. Let *propId* be the result of evaluating *PropertyDefinition*.
3. Let *previous* be the result of calling the *[[GetOwnProperty]]* internal method of *obj* with argument *propId.name*.
4. If *previous* is not **undefined** then throw a **SyntaxError** exception if any of the following conditions are true
 - a. This production is contained in strict code and *IsDataDescriptor(previous)* is **true** and *IsDataDescriptor(propId.descriptor)* is **true**.
 - b. *IsDataDescriptor(previous)* is **true** and *IsAccessorDescriptor(propId.descriptor)* is **true**.
 - c. *IsAccessorDescriptor(previous)* is **true** and *IsDataDescriptor(propId.descriptor)* is **true**.
 - d. *IsAccessorDescriptor(previous)* is **true** and *IsAccessorDescriptor(propId.descriptor)* is **true** and either both *previous* and *propId.descriptor* have *[[Get]]* fields or both *previous* and *propId.descriptor* have *[[Set]]* fields
5. If *propId.name* is the string value "proto" and *UnderscoreProtoEnabled* is **true** and *IsDataDescriptor(propId.descriptor)* is **true**, then
 - a. Let *v* be *propId.descriptor.value*.
 - b. If *desc* be *propId.descriptor*
 - c. If the type of *v* is either *Object* or *Null*,
 - i. Set the value of the *[[Prototype]]* internal data property of *obj* to *v*.
 - d. Return *obj*.
5. Call the *[[DefineOwnProperty]]* internal method of *obj* with arguments *propId.name*, *propId.descriptor*, and **false**.
6. Return *obj*.

Deleted: *PropertyNameAndValueList*

Deleted: *PropertyAssignment*

Deleted: creating a new object as if by the expression *new Object()* where *Object* is the standard built-in constructor with that name

Deleted: *PropertyAssignment*

Deleted: *O*

Deleted: *V*

Deleted: *PropertyNameAndValueList*

Deleted: *PropertyNameAndValueList*

Deleted: *PropertyAssignment*

Deleted: *PropertyNameAndValueList*

Deleted: *PropertyAssignment*

Deleted: *O*

Deleted: *V*

Annex C (informative)

The Strict Mode of ECMAScript

Field Code Changed
Field Code Changed
Field Code Changed

The strict mode restriction and exceptions

- The identifiers "implements", "interface", "let", "package", "private", "protected", "public", "static", and "yield" are classified as *FutureReservedWord* tokens within strict mode code. (7.6.12).
- A conforming implementation, when processing strict mode code, may not extend the syntax of *NumericLiteral* (7.8.3) to include *OctalIntegerLiteral* as described in B.1.1.
- A conforming implementation, when processing strict mode code (see 10.1.1), may not extend the syntax of *EscapeSequence* to include *OctalEscapeSequence* as described in B.1.2.
- Assignment to an undeclared identifier or otherwise unresolvable reference does not create a property in the global object. When a simple assignment occurs within strict mode code, its *LeftHandSide* must not evaluate to an unresolvable Reference. If it does a **ReferenceError** exception is thrown (8.9.2). The *LeftHandSide* also may not be a reference to a data property with the attribute value `{[[Writable]]:false}`, to an accessor property with the attribute value `{[[Set]]:undefined}`, nor to a non-existent property of an object whose `[[Extensible]]` internal `data` property has the value `false`. In these cases a **TypeError** exception is thrown (11.13.1). Deleted: 7
- The identifier `eval` or `arguments` may not appear as the *LeftHandSideExpression* of an Assignment operator (11.13) or of a *PostfixExpression* (11.3) or as the *UnaryExpression* operated upon by a Prefix Increment (11.4.4) or a Prefix Decrement (11.4.5) operator.
- Arguments objects for strict mode functions define non-configurable accessor properties named "`caller`" and "`callee`" which throw a **TypeError** exception on access (10.6).
- Arguments objects for strict mode functions do not dynamically share their array indexed property values with the corresponding formal parameter bindings of their functions. (10.6).
- For strict mode functions, if an arguments object is created the binding of the local identifier `arguments` to the arguments object is immutable and hence may not be the target of an assignment expression. (10.5).
- It is a **SyntaxError** if strict mode code contains an *ObjectLiteral* with more than one definition of any data property (11.1.5).
- It is a **SyntaxError** if the Identifier "`eval`" or the Identifier "`arguments`" occurs as the Identifier in a *PropertySetParameterList* of a *PropertyDefinition* that is contained in strict code or if its *FunctionBody* is strict code (11.1.5). Deleted: PropertyAssignment
- Strict mode eval code cannot instantiate variables or functions in the variable environment of the caller to eval. Instead, a new variable environment is created and that environment is used for declaration binding instantiation for the eval code (10.4.2).
- If `this` is evaluated within strict mode code, then the `this` value is not coerced to an object. A `this` value of `null` or `undefined` is not converted to the global object and primitive values are not converted to wrapper objects. The `this` value passed via a function call (including calls made using `Function.prototype.apply` and `Function.prototype.call`) do not coerce the passed `this` value to an object (10.4.3, 11.1.1, 15.3.4.3, 15.3.4.4).
- When a `delete` operator occurs within strict mode code, a **SyntaxError** is thrown if its *UnaryExpression* is a direct reference to a variable, function argument, or function name(11.4.1).

- When a `delete` operator occurs within strict mode code, a **TypeError** is thrown if the property to be deleted has the attribute `{ [[Configurable]]:false }` (11.4.1).
- It is a **SyntaxError** if a *VariableDeclaration* or *VariableDeclarationNoIn* occurs within strict code and its *Identifier* is `eval` or `arguments` (12.2.1).
- Strict mode code may not include a *WithStatement*. The occurrence of a *WithStatement* in such a context is an **SyntaxError** (12.10).
- It is a **SyntaxError** if a *TryStatement* with a *Catch* occurs within strict code and the *Identifier* of the *Catch* production is `eval` or `arguments` (12.14.1)
- It is a **SyntaxError** if the identifier `eval` or `arguments` appears within a *FormalParameterList* of a strict mode *FunctionDeclaration* or *FunctionExpression* (13.1)
- A strict mode function may not have two or more formal parameters that have the same name. An attempt to create such a function using a *FunctionDeclaration*, *FunctionExpression*, or *Function* constructor is a **SyntaxError** (13.1, 15.3.2).
- An implementation may not extend, beyond that defined in this specification, the meanings within strict mode functions of properties named `caller` or `arguments` of function instances. ECMAScript code may not create or modify properties with these names on function objects that correspond to strict mode functions (10.6, 13.6, 15.3.4.5.3).
- It is a **SyntaxError** to use within strict mode code the identifiers `eval` or `arguments` as the *Identifier* of a *FunctionDeclaration* or *FunctionExpression* or as a formal parameter name (13.1). Attempting to dynamically define such a strict mode function using the *Function* constructor (15.3.2) will throw a **SyntaxError** exception.

Deleted: 2

Annex D
 (informative)
Corrections and Clarifications with Possible Compatibility Impact

Deleted: in the 5th Edition
Deleted: 3rd Edition

Deleted: the 6th

In Edition 6

15.9.1.15: If a time zone offset is not present, the local time zone is used. Edition 5.1 incorrectly stated that a missing time zone should be interpreted as “z”.

15.9.5.2: Previous editions did not specify the value returned by `Date.prototype.toString` when this time value is NaN. The 6th Edition specifies the result to be the String value is “**Invalid Date**”

In 5.1 Edition 5.1

7.8.4: CV definitions added for `DoubleStringCharacter :: LineContinuation` and `SingleStringCharacter :: LineContinuation`.

10.2.1.1.3: The argument S is not ignored. It controls whether an exception is thrown when attempting to set an immutable binding.

10.2.1.2.2: In algorithm step 5, `true` is passed as the last argument to `[[DefineOwnProperty]]`.

10.5: Former algorithm step 5.e is now 5.f and a new step 5.e was added to restore compatibility with 3rd Edition when redefining global functions.

11.5.3: In the final bullet item, use of IEEE 754 round-to-nearest mode is specified.

12.6.3: Missing `ToBoolean` restored in step 3.a.ii of both algorithms.

12.6.4: Additional final sentences in each of the last two paragraphs clarify certain property enumeration requirements.

12.7, 12.8, 12.9: BNF modified to clarify that a `continue` or `break` statement without an `Identifier` or a `return` statement without an `Expression` may have a `LineTerminator` before the semi-colon.

12.14: Step 3 of algorithm 1 and step 2.a of algorithm 3 are corrected such that the value field of B is passed as a parameter rather than B itself.

15.1.2.2: In step 2 of algorithm, clarify that S may be the empty string.

15.1.2.3: In step 2 of algorithm clarify that `trimmedString` may be the empty string.

15.1.3: Added notes clarifying that ECMAScript’s URI syntax is based upon RFC 2396 and not the newer RFC 3986. In the algorithm for `Decode`, a step was removed that immediately preceded the current step 4.d.vii.10.a because it tested for a condition that cannot occur.

15.2.3.7: Corrected use of variable P in steps 5 and 6 of algorithm.

15.2.4.2: Edition 5 handling of `undefined` and `null` as `this` value caused existing code to fail. Specification modified to maintain compatibility with such code. New steps 1 and 2 added to the algorithm.

15.3.4.3: Steps 5 and 7 of Edition 5 algorithm have been deleted because they imposed requirements upon the `argArray` argument that are inconsistent with other uses of generic array-like objects.

15.4.4.12: In step 9.a, incorrect reference to `relativeStart` was replaced with a reference to `actualStart`.

15.4.4.15: Clarified that the default value for `fromIndex` is the length minus 1 of the array.

15.4.4.18: In step 9 of the algorithm, `undefined` is now the specified return value.

15.4.4.22: In step 9.c.ii the first argument to the `[[Call]]` internal method has been changed to `undefined` for consistency with the definition of `Array.prototype.reduce`.

15.4.5.1: In Algorithm steps 3.I.ii and 3.I.iii the variable name was inverted resulting in an incorrectly inverted test.

15.5.4.9: Normative requirement concerning canonically equivalent strings deleted from paragraph following algorithm because it is listed as a recommendation in NOTE 2.

15.5.4.14: In `split` algorithm step 11.a and 13.a, the positional order of the arguments to `SplitMatch` was corrected to match the actual parameter signature of `SplitMatch`. In step 13.a.iii.7.d, `lengthA` replaces `A.length`.

15.5.5.2: In first paragraph, removed the implication that the individual character property access had "array index" semantics. Modified algorithm steps 3 and 5 such that they do not enforce "array index" requirement.

15.9.1.15: Specified legal value ranges for fields that lacked them. Eliminated "time-only" formats. Specified default values for all optional fields.

15.10.2.2: The step numbers of the algorithm for the internal closure produced by step 2 were incorrectly numbered in a manner that implied that they were steps of the outer algorithm.

15.10.2.6: In the abstract operation `IsWordChar` the first character in the list in step 3 is "a" rather than "A".

15.10.2.8: In the algorithm for the closure returned by the abstract operation `CharacterSetMatcher`, the variable defined by step 3 and passed as an argument in step 4 was renamed to `ch` in order to avoid a name conflict with a formal parameter of the closure.

15.10.6.2: Step 9.e was deleted because it performed an extra increment of `i`.

15.11.1.1: Removed requirement that the `message` own property is set to the empty String when the `message` argument is `undefined`.

15.11.1.2: Removed requirement that the `message` own property is set to the empty String when the `message` argument is `undefined`.

15.11.4.4: Steps 6-10 modified/added to correctly deal with missing or empty `message` property value.

15.11.1.2: Removed requirement that the `message` own property is set to the empty String when the `message` argument is `undefined`.

15.12.3: In step 10.b.iii of the `J/A` internal operation, the last element of the concatenation is "1".

B.2.1: Added to NOTE that the encoding is based upon RFC 1738 rather than the newer RFC 3986.

Annex C: An item was added corresponding to 7.6.12 regarding `FutureReservedWords` in strict mode.

In 5th Edition 5

Deleted: the

Throughout: In the Edition 3 specification the meaning of phrases such as "as if by the expression `new Array()`" are subject to misinterpretation. In the Edition 5 specification text for all internal references and invocations of standard built-in objects and methods has been clarified by making it explicit that the intent is

that the actual built-in object is to be used rather than the current dynamically resolved value of the correspondingly identifier binding.

Deleted: named property

11.8.1: ECMAScript generally uses a left to right evaluation order, however the Edition 3 specification language for the `>` and `<=` operators resulted in a partial right to left order. The specification has been corrected for these operators such that it now specifies a full left to right evaluation order. However, this change of order is potentially observable if side-effects occur during the evaluation process.

Deleted: 2

Deleted: , 11.8.3, 11.8.5

11.1.4: Edition 5 clarifies the fact that a trailing comma at the end of an *ArrayInitialiser* does not add to the length of the array. This is not a semantic change from Edition 3 but some implementations may have previously misinterpreted this.

11.2.3: Edition 5 reverses the order of steps 2 and 3 of the algorithm. The original order as specified in Editions 1 through 3 was incorrectly specified such that side-effects of evaluating *Arguments* could affect the result of evaluating *MemberExpression*.

12.4: In Edition 3, an object is created, as if by `new Object()` to serve as the scope for resolving the name of the exception parameter passed to a `catch` clause of a `try` statement. If the actual exception object is a function and it is called from within the `catch` clause, the scope object will be passed as the `this` value of the call. The body of the function can then define new properties on its `this` value and those property names become visible identifiers bindings within the scope of the `catch` clause after the function returns. In Edition 5, when an exception parameter is called as a function, `undefined` is passed as the `this` value.

13: In Edition 3, the algorithm for the production *FunctionExpression* with an *Identifier* adds an object created as if by `new Object()` to the scope chain to serve as a scope for looking up the name of the function. The identifier resolution rules (10.1.4 in Edition 3) when applied to such an object will, if necessary, follow the object's prototype chain when attempting to resolve an identifier. This means all the properties of `Object.prototype` are visible as identifiers within that scope. In practice most implementations of Edition 3 have not implemented this semantics. Edition 5 changes the specified semantics by using a Declarative Environment Record to bind the name of the function.

14: In Edition 3, the algorithm for the production *SourceElements : SourceElements SourceElement* did not correctly propagate statement result values in the same manner as *Block*. This could result in the `eval` function producing an incorrect result when evaluating a *Program* text. In practice most implementations of Edition 3 have implemented the correct propagation rather than what was specified in Edition 5.

15.10.6: `RegExp.prototype` is now a `RegExp` object rather than an instance of `Object`. The value of its `[[Class]]` internal `data` property which is observable using `Object.prototype.toString` is now "RegEx" rather than "Object".

DRAFT

Annex E (informative)

Additions and Changes that Introduce Incompatibilities with Prior Editions

Field Code Changed
Field Code Changed
Field Code Changed
Deleted: in the 5th Edition
Deleted: the 3rd

In the 6th Edition

12.6: In Edition 6, a terminating semi-colon is no longer required at the end of a do-while statement.

12.14: In Edition 6, it is an early error for a *Catch* clause to contain a `var` declaration for the same *Identifier* that appears as the *Catch* clause parameter. In previous editions, such a variable declaration would be instantiated in the enclosing variable environment but the declaration's *Initializer* value would be assigned to the *Catch* parameter.

13.3 In Edition 6, the function objects that are created as the values of the `[[Get]]` or `[[Set]]` attribute of accessor properties in an *ObjectLiteral* are not constructor functions. In Edition 5, they were constructors.

15.2.3.5 and 15.2.3.7: In Edition 6, all property additions and changes are processed, even if one of them throws an exception. If an exception occurs during such processing, the first such exception is thrown after all properties are processed. In Edition 5, processing of property additions and changes immediately terminated when the first exception occurred.

Deleted:

Deleted: t

Deleted: I

In the 5th Edition

7.1: Unicode format control characters are no longer stripped from ECMAScript source text before processing. In Edition 5, if such a character appears in a *StringLiteral* or *RegularExpressionLiteral* the character will be incorporated into the literal where in Edition 3 the character would not be incorporated into the literal.

7.2: Unicode character <BOM> is now treated as whitespace and its presence in the middle of what appears to be an identifier could result in a syntax error which would not have occurred in Edition 3

7.3: Line terminator characters that are preceded by an escape sequence are now allowed within a string literal token. In Edition 3 a syntax error would have been produced.

7.8.5: Regular expression literals now return a unique object each time the literal is evaluated. This change is detectable by any programs that test the object identity of such literal values or that are sensitive to the shared side effects.

7.8.5: Edition 5 requires early reporting of any possible RegExp constructor errors that would be produced when converting a *RegularExpressionLiteral* to a RegExp object. Prior to Edition 5 implementations were permitted to defer the reporting of such errors until the actual execution time creation of the object.

7.8.5: In Edition 5 unescaped "/" characters may appear as a *CharacterClass* in a regular expression literal. In Edition 3 such a character would have been interpreted as the final character of the literal.

10.4.2: In Edition 5, indirect calls to the `eval` function use the global environment as both the variable environment and lexical environment for the eval code. In Edition 3, the variable and lexical environments of the caller of an indirect `eval` was used as the environments for the eval code.

15.4.4: In Edition 5 all methods of `Array.prototype` are intentionally generic. In Edition 3 `toString` and `toLocaleString` were not generic and would throw a `TypeError` exception if applied to objects that were not instances of `Array`.

10.6: In Edition 5 the array indexed properties of argument objects that correspond to actual formal parameters are enumerable. In Edition 3, such properties were not enumerable.

10.6: In Edition 5 the value of the `[[Class]]` internal `data` property of an arguments object is "`Arguments`". In Edition 3, it was "`Object`". This is observable if `toString` is called as a method of an arguments object.

12.6.4: for-in statements no longer throw a `TypeError` if the `in` expression evaluates to `null` or `undefined`. Instead, the statement behaves as if the value of the expression was an object with no enumerable properties.

15: In Edition 5, the following new properties are defined on built-in objects that exist in Edition 3:

```
Object.getPrototypeOf, Object.getOwnPropertyDescriptor, Object.getOwnPropertyNames,
Object.create, Object.defineProperty, Object.defineProperties, Object.seal,
Object.freeze, Object.preventExtensions, Object.isSealed, Object.isFrozen,
Object.isExtensible, Object.keys, Function.prototype.bind, Array.prototype.indexOf,
Array.prototype.lastIndexOf, Array.prototype.every, Array.prototype.some,
Array.prototype.forEach, Array.prototype.map, Array.prototype.filter,
Array.prototype.reduce, Array.prototype.reduceRight, String.prototype.trim, Date.now,
Date.prototype.toISOString, Date.prototype.toJSON.
```

15: Implementations are now required to ignore extra arguments to standard built-in methods unless otherwise explicitly specified. In Edition 3 the handling of extra arguments was unspecified and implementations were explicitly allowed to throw a `TypeError` exception.

15.1.1: The value properties `NaN`, `Infinity`, and `undefined` of the Global Object have been changed to be read-only properties.

15.1.2.1: Implementations are no longer permitted to restrict the use of `eval` in ways that are not a direct call. In addition, any invocation of `eval` that is not a direct call uses the global environment as its variable environment rather than the caller's variable environment.

15.1.2.2: The specification of the function `parseInt` no longer allows implementations to treat Strings beginning with a `0` character as octal values.

15.3.4.3: In Edition 3, a `TypeError` is thrown if the second argument passed to `Function.prototype.apply` is neither an array object nor an arguments object. In Edition 5, the second argument may be any kind of generic array-like object that has a valid `length` property.

15.3.4.3, 15.3.4.4: In Edition 3 passing `undefined` or `null` as the first argument to either `Function.prototype.apply` or `Function.prototype.call` causes the global object to be passed to the indirectly invoked target function as the `this` value. If the first argument is a primitive value the result of calling `ToObject` on the primitive value is passed as the `this` value. In Edition 5, these transformations are not performed and the actual first argument value is passed as the `this` value. This difference will normally be unobservable to existing ECMAScript Edition 3 code because a corresponding transformation takes place upon activation of the target function. However, depending upon the implementation, this difference may be observable by host object functions called using `apply` or `call`. In addition, invoking a standard built-in function in this manner with `null` or `undefined` passed as the `this` value will in many cases cause behaviour in Edition 5 implementations that differ from Edition 3 behaviour. In particular, in Edition 5 built-in functions that are specified to actually use the passed `this` value as an object typically throw a `TypeError` exception if passed `null` or `undefined` as the `this` value.

15.3.5.2: In Edition 5, the `prototype` property of Function instances is not enumerable. In Edition 3, this property was enumerable.

15.5.5.2: In Edition 5, the individual characters of a String object's `[[StringData]]` may be accessed as array indexed properties of the String object. These properties are non-writable and non-configurable and shadow any inherited properties with the same names. In Edition 3, these properties did not exist and ECMAScript code could dynamically add and remove writable properties with such names and could access inherited properties with such names.

Deleted: PrimitiveValue

15.9.4.2: `Date.parse` is now required to first attempt to parse its argument as an ISO format string. Programs that use this format but depended upon implementation specific behaviour (including failure) may behave differently.

15.10.2.12: In Edition 5, `\s` now additionally matches <BOM>.

15.10.4.1: In Edition 3, the exact form of the String value of the `source` property of an object created by the `RegExp` constructor is implementation defined. In Edition 5, the String must conform to certain specified requirements and hence may be different from that produced by an Edition 3 implementation.

15.10.6.4: In Edition 3, the result of `RegExp.prototype.toString` need not be derived from the value of the `RegExp` object's `source` property. In Edition 5 the result must be derived from the `source` property in a specified manner and hence may be different from the result produced by an Edition 3 implementation.

15.11.2.1, 15.11.4.3: In Edition 5, if an initial value for the `message` property of an `Error` object is not specified via the `Error` constructor the initial value of the property is the empty String. In Edition 3, such an initial value is implementation defined.

15.11.4.4: In Edition 3, the result of `Error.prototype.toString` is implementation defined. In Edition 5, the result is fully specified and hence may differ from some Edition 3 implementations.

15.12: In Edition 5, the name `JSON` is defined in the global environment. In Edition 3, testing for the presence of that name will show it to be `undefined` unless it is defined by the program or implementation.

DRAFT

DRAFT

Annex F (informative)

Static Semantic Rule Cross Reference

Field Code Changed
Field Code Changed
Field Code Changed
Deleted: Technically Significant Corrections and Clarifications in the 5.1 Edition

<u>BoundNames</u>	<u>Produces a list of the Identifiers bound by a production. Does not include Identifiers that are bound within inner environments associated with the production.</u>	<u>12.2.1, 12.2.2, 12.2.4, 12.6.4, 13.1, 13.2, 13.5</u>	
<u>ConstructorMethod</u>	<u>From a <i>ClassBody</i> return the first <i>ClassElement</i> whose PropName is "constructor". Returns empty if the <i>ClassBody</i> does not contain one.</u>	<u>13.5</u>	
<u>Contains</u>	<u>Determine if a grammar production either directly or indirectly includes a grammar symbol.</u>	<u>5.3, 13.1, 13.2, 13.5</u>	
<u>CoveredFormalsList</u>	<u>Reparse a covered <i>Expression</i> using <i>FormalsList</i> as the goal symbol.</u>	<u>13.2</u>	
<u>CV</u>	<u>Determines the "character value" of a component of a <i>StringLiteral</i>.</u>	<u>7.8.4</u>	
<u>Elision Width</u>	<u>Determine the number of commas in an <i>Elision</i>.</u>	<u>11.1.4.1</u>	
<u>ExpectedArgumentCount</u>	<u>Determine the "length" of an argument list for the purpose of initializing the "length" property of a function object.</u>	<u>13.1, 13.2, 13.3</u>	
<u>HasInitialiser</u>	<u>Determines whether the production contains an <i>Initialiser</i> production.</u>	<u>12.2.4, 13.1</u>	
<u>IsConstantDeclaration</u>	<u>Determines whether the production introduces a immutable environment record binding</u>	<u>12.2, 13.1, 13.5</u>	
<u>IsValidAssignmentPattern</u>	<u>Determines if a <i>LeftHandSideExpression</i> is a valid assignment target. Primarily for dealing with destructuring assignment targets.</u>	<u>11.2</u>	
<u>LexicalDeclarations</u>	<u>Return a List containing the components of a production that are processed as lexical declarations</u>	<u>12.1, 12.11, 12.5</u>	
<u>LexicallyDeclaredNames</u>	<u>Returns a list of the lexically scoped identifiers declared by a production.</u>	<u>12.1, 13.1, 13.2, 13.5</u>	
<u>MethodDefinitions</u>	<u>Return a list of the <i>MethodDefinition</i> productions that are part of a <i>ClassElementList</i>.</u>	<u>13.5</u>	
<u>MV</u>	<u>Determines the "mathematical value" of a numeric</u>	<u>7.8.3</u>	

	<u>lirteral or component of a numeric literal.</u>		
<u>PropName</u>	Determines the string value of the property name referenced by a production.	<u>11.1.5.1,</u> <u>13.3, 13.5</u>	
<u>PropNameList</u>	Returns a List of the string values of the property names referenced by a production. The list reflects the order of the references in the source text. The list may contain duplicate elements.	<u>11.5.1, 13.5</u>	
<u>ReferencesSuper</u>	Determine if a <u>MethodDefinition</u> contains any references to the <u>ReservedWord super</u> .	<u>13.3</u>	
<u>SpecialMethod</u>	Determine if a <u>MethodDefinition</u> defines a generator method or an accessor property.	<u>13.3</u>	
<u>SV</u>	Determines the "string value" of a <u>StringLiteral</u> or component of a <u>StringLiteral</u> .	<u>7.8.4</u>	
<u>VarDeclaredNames</u>	Returns a list of the local top-level scoped identifiers declared by a production. These are identifier that are scoped as if by a var statement.	<u>12.1, 12.5,</u> <u>12.6.1,</u> <u>12.6.2,</u> <u>12.6.3,</u> <u>12.6.4,</u> <u>12.12, 13.1,</u> <u>13.5</u>	

Formatted: Heading 1

Scrap Heap

A place to temporarily hand on to stuff that's been deleted

MemberExpression :

MemberExpression <| TriangleLiteral

TriangleLiteral :

SealedArrayLiteral
SealedObjectLiteral
FunctionExpression
ArrowFunction
ValueLiteral

CallExpression :

CallExpression <| TriangleLiteral

15.2.3.15 Object.isObject (O)

When the **isObject** function is called with argument *O*, the following steps are taken:

1. If Type(*O*) is Object return **true**.
2. Return **false**.

15.5.4.25 String.prototype.toArray()

The following steps are taken:

1. ReturnIfAbrupt(CheckObjectCoercible(this value)).
2. Let *S* be the result of calling **ToString**, giving it the **this** value as its argument.
3. ReturnIfAbrupt(*S*).
4. Let *len* be the number of characters in *S*.
5. Let *array* be the result of the abstract operation **ArrayCreate** with argument *len*.
6. Let *n* be 0
7. Repeat, while *n* < *len*:
 - a. Let *c* be the character at position *n* in *S*.
 - b. Call the **[[DefineOwnProperty]]** internal method of *array* with arguments **ToString(*n*)**, the **PropertyDescriptor** **{[[Value]]: *c*, [[Writable]]: true, [[Enumerable]]: true, [[Configurable]]: true}**, and **false**.
 - c. Increment *n* by 1.
8. Return *array*.

Deleted: (15.4)

The **length** property of the **toArray** method is **0**.

NOTE 1 Returns an Array object with elements corresponding to the characters of this object (converted to a String).

NOTE 2 The **toArray** function is intentionally generic: it does not require that its **this** value be a String object. Therefore, it can be transferred to other kinds of objects for use as a method.

Static Semantics: TopLevelLexicallyDeclaredNames

OuterStatementList : OuterStatementList OuterItem

1. Let *names* be *TopLevelLexicallyDeclaredNames* of *OuterStatementList*.
2. Append to *names* the elements of the *TopLevelLexicallyDeclaredNames* of *OuterItem*.
3. Return *names*.

OuterItem : StatementListItem

1. Return a new empty List.

StatementListItem : Declaration

1. If *Declaration* is *Declaration : FunctionDeclaration*, then return a new empty List.
2. Return the *BoundNames* of *Declaration*.

8.3.10 [[Enumerate]] (includePrototype, onlyEnumerable)

When the [[Enumerate]] internal method of *O* is called with Boolean arguments *includePrototype* and *onlyEnumerable*, the following steps are taken:

1. Return an Iterator object (reference xxxx) whose next method iterates over all the keys of enumerable property keys of *O*. If *includePrototype* is **false**, then only own properties of *O* are included. If *onlyEnumerable* is **false**, then all properties that do not have private name keys are included. The mechanics and order of enumerating the properties is not specified but must conform to the rules specified below.

Enumerated properties do not include properties whose property key is a private name. Properties of the object being enumerated may be deleted during enumeration. If a property that has not yet been visited during enumeration is deleted, then it will not be visited. If new properties are added to the object being enumerated during enumeration, the newly added properties are not guaranteed to be visited in the active enumeration. A property name must not be visited more than once in any enumeration.

Enumerating the properties of an object includes enumerating properties of its prototype, and the prototype of the prototype, and so on, recursively; but a property of a prototype is not enumerated if it is “shadowed” because some previous object in the prototype chain has a property with the same name. The values of [[Enumerable]] attributes are not considered when determining if a property of a prototype object is shadowed by a previous object on the prototype chain.

The following is an informative algorithm that conforms to these rules

1. Let *obj* be *O*.
2. Let *proto* be the value of the [[Prototype]] internal data property of *O*.
3. If *includePrototype* is **false** or *proto* is the value **null**, then
 - a. Let *propList* be a new empty List.
4. Else
 - a. Let *propList* be the result of calling the [[Enumerate]] internal method of *proto* with arguments **true** and **onlyEnumerable**.
5. For each string *name* that is the property key of an own property of *O*
 - a. Let *desc* be the result of calling the [[GetOwnProperty]] internal method of *O* with argument *name*.
 - b. If *name* is an element of *propList*, then remove *name* as an element of *propList*.
 - c. If *onlyEnumerable* is **false** or *desc*.[[Enumerable]] is **true**, then add *name* as an element of *propList*.
6. Order the elements of *propList* in an implementation defined order.
7. Return *propList*.

Comment [AWB6258]: This is an experiment to see we can use this internal method to define Object.keys, Object.getOwnPropertyNames, and perhaps some other things

Comment [AWB6259]: TODO

Formatted: Outline numbered + Level: 1 + NumberingStyle: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.25" + Indent at: 0.25"

Comment [AWB6260]: TODO: Finish this up, and turn it into iterator definition include a next method

Formatted: Outline numbered + Level: 1 + NumberingStyle: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.25" + Indent at: 0.25"

Formatted: Outline numbered + Level: 2 + NumberingStyle: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.5" + Tab after: 0.75" + Indent at: 0.75"

Formatted: Outline numbered + Level: 1 + NumberingStyle: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.25" + Indent at: 0.25"

Formatted: Outline numbered + Level: 2 + NumberingStyle: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.5" + Tab after: 0.75" + Indent at: 0.75"

Formatted: Outline numbered + Level: 1 + NumberingStyle: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.25" + Indent at: 0.25"

Formatted: Outline numbered + Level: 2 + NumberingStyle: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.5" + Tab after: 0.75" + Indent at: 0.75"

Formatted: Outline numbered + Level: 1 + NumberingStyle: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0" + Tab after: 0.25" + Indent at: 0.25"

Formatted: Outline numbered + Level: 2 + NumberingStyle: a, b, c, ... + Start at: 1 + Alignment: Left + Aligned at: 0.5" + Tab after: 0.75" + Indent at: 0.75"

This follow version places function body declarations in scope of parameter initializers

10.5.3 Function Declaration Instantiation

NOTE When an execution context is established for evaluating function code a new Declarative Environment Record is created and bindings for each formal parameter, and each function level variable, constant, or function declared in the function are instantiated in the environment record. Formal parameters and functions are initialized as part of this process. All other bindings are initialized during execution of the function code.

Function Declaration Instantiation is performed as follows using arguments *func*, *argumentsList*, and *env*. *func* is the function object that for which the execution context is being established. *env* is the declarative environment record in which bindings are to be created.

1. Let *code* be the value of the **[[Code]]** internal property of *func*.
2. Let *strict* be the value of the **[[Strict]]** internal property of *func*.
3. Let *formals* be the value of the **[[FormalParameterList]]** internal property of *func*.
4. Let *parameterNames* be the *BoundNames* of *formals*.
5. Let *varDeclarations* be the *VarScopedDeclarations* of *code*.
6. Let *functionsToInitialize* be an emptyList.
7. Let *argumentsObjectNotNeeded* be **false**.
8. For each *d* in *varDeclarations*, in reverse list order do
 - a. If *d* is a *FunctionDeclaration* then
 - i. **NOTE** If there are multiple *FunctionDeclarations* for the same name, the last declaration is used.
 - ii. Let *fn* be the sole element of the *BoundNames* of *d*.
 - iii. If *fn* is "**arguments**", then let *argumentsObjectNotNeeded* be **true**.
 - iv. Let *alreadyDeclared* be the result of calling *env*'s *HasBinding* concrete method passing *fn* as the argument.
 - v. If *alreadyDeclared* is **false**, then
 1. Let *status* be the result of calling *env*'s *CreateMutableBinding* concrete method passing *fn* as the argument.
 2. Assert: *status* is never an Abrupt Completion.
 3. Append *d* to *functionsToInitialize*.
9. For each String *paramName* in *parameterNames*, do
 - a. Let *alreadyDeclared* be the result of calling *env*'s *HasBinding* concrete method passing *paramName* as the argument.
 - b. **NOTE** Duplicate parameter names can only occur in non-strict functions. Parameter names that are the same as function declaration names do not get initialized to **undefined**.
 - c. If *alreadyDeclared* is **false**, then
 - i. If *paramName* is "**arguments**", then let *argumentsObjectNotNeeded* be **true**.
 - ii. Let *status* be the result of calling *env*'s *CreateMutableBinding* concrete method passing *paramName* as the argument.
 - iii. Assert: *status* is never an Abrupt Completion.
 - iv. Call *env*'s *InitializeBinding* concrete method passing *paramName*, and **undefined** as the arguments.
10. **NOTE** If there is a function declaration or formal parameter with the name "**arguments**" then an argument object is not created.
11. If *argumentsObjectNotNeeded* is **false**, then
 - a. If *strict* is **true**, then
 - i. Call *env*'s *CreateImmutableBinding* concrete method passing the String "**arguments**" as the argument.
 - b. Else,
 - i. Call *env*'s *CreateMutableBinding* concrete method passing the String "**arguments**" as the argument.
12. Let *varNames* be the *VarDeclaredNames* of *code*.
13. For each String *varName* in *varNames*, in list order do
 - a. Let *alreadyDeclared* be the result of calling *env*'s *HasBinding* concrete method passing *varName* as the argument.
 - b. **NOTE** A *VarDeclaredNames* is only instantiated and initialized here if it is not also the name of a formal parameter or a *FunctionDeclarations*.

Comment [AWB7261]: TODO: don't create an arguments binding for arrow functions (and perhaps for concise methods)

- c. If *alreadyDeclared* is **false**, then
- Call *env*'s `CreateMutableBinding` concrete method passing *varName* as the argument.
14. Let *lexDeclarations* be the `LexicalDeclarations` of *code*.
15. For each element *d* in *lexDeclarations* do
- NOTE** A lexically declared name can not be the same as a function declaration, formal parameter, or a var name. Lexically declared names are only instantiated here but not initialized.
 - For each element *dn* of the `BoundNames` of *d* do
 - If `IsConstantDeclaration` of *d* is **true**, then
 - Call *env*'s `CreateImmutableBinding` concrete method passing *dn* as the argument.
 - Else,
 - Call *env*'s `CreateMutableBinding` concrete method passing *dn* and **false** as the arguments.
16. For each `FunctionDeclaration` *f* in *functionsToInitialize*, do
- Let *fn* be the sole element of the `BoundNames` of *f*.
 - Let *fo* be the result of performing `InstantiateFunctionObject` for *f* with argument *env*.
 - Call *env*'s `SetMutableBinding` concrete method passing *fn*, *fo*, and **false** as the arguments.
17. **NOTE** Function declarations are initialised prior to parameter initialisation so that default value expressions may reference them. It is not extended code. "`arguments`" is not initialised until after parameter initialisation.
18. Let *ao* be the result of `InstantiateArgumentsObject` with argument *argumentsList*.
19. **NOTE** If `argumentsObjectNotNeeded` is **true** then the value of *ao* is not directly observable to ECMAScript code and need not actually exist. In that case, its use in the above steps is strictly as a device for specifying formal parameter initialisation semantics.
20. If `argumentsObjectNotNeeded` is **false**, then
- If *strict* is **true**, then
 - Perform the abstract operation `CompleteStrictArgumentsObject` with argument *ao*.
 - Else,
 - Perform the abstract operation `CompleteMappedArgumentsObject` with arguments *ao*, *func*, *formals*, and *env*.
 - Call *env*'s `InitializeBinding` concrete method passing "`arguments`" and *ao* as arguments.
21. Let *formalStatus* be the result of performing Binding Initialisation for *formals* with *ao* and **undefined** as arguments.
22. `ReturnIfAbrupt(formalStatus)`.
23. `ReturnNormalCompletion(empty)`.

Comment [AWB7262]: TODO: don't create an arguments binding for arrow functions (and perhaps for concise methods)

Deleted: ..

DRAFT

Table 1— Internal Properties Only Defined for Some Objects

<i>Internal Property</i>	<i>Value Type Domain</i>	<i>Description</i>
<u>[[BuiltinBrand]]</u>	<u>The <code>BuiltinBrand</code> enumeration.</u>	A tag value used by this specification to categorize various kinds of ECMAScript objects defined in this specification.
<u>[[PrimitiveValue]]</u>	<u>primitive</u>	Internal state information associated with this object. Of the standard built-in ECMAScript objects, only Boolean, Date, Number, and String objects implement <u>[[PrimitiveValue]]</u> .
<u>[[Scope]]</u>	<u>Lexical Environment</u>	A lexical environment that is the environment in which a Function object is executed. Of the standard built-in ECMAScript objects, only Function objects implement <u>[[Scope]]</u> .
<u>[[FormalParameters]]</u>	<u>Parse Tree</u>	A parse tree for ECMAScript code parsed with <i>FormalParameterList</i> as the goal symbol. Of the standard built-in ECMAScript objects, only Function objects implement <u>[[FormalParameters]]</u> .
<u>[[Code]]</u>	<u>Parse Tree</u>	A parse tree for ECMAScript code parsed with <i>FunctionBody</i> as the goal symbol. Of the standard built-in ECMAScript objects, only Function objects implement <u>[[Code]]</u> .
<u>[[Strict]]</u>	<u>Boolean</u>	<u>true</u> if a Function object is a strict mode function. Of the standard built-in ECMAScript objects, only Function objects implement <u>[[Strict]]</u> .
<u>[[BoundTargetFunction]]</u>	<u>Object</u>	The target function of a function object created using the standard built-in <code>Function.prototype.bind</code> method. Only ECMAScript objects created using <code>Function.prototype.bind</code> have a <u>[[BoundTargetFunction]]</u> internal property.
<u>[[BoundThis]]</u>	<u>any</u>	The pre-bound this value of a function Object created using the standard built-in <code>Function.prototype.bind</code> method. Only ECMAScript objects created using <code>Function.prototype.bind</code> have a <u>[[BoundThis]]</u> internal property.
<u>[[BoundArguments]]</u>	<u>List of any</u>	The pre-bound argument values of a function Object created by the standard built-in <code>Function.prototype.bind</code> method. Only objects created by <code>Function.prototype.bind</code> have a <u>[[BoundArguments]]</u> internal property.
<u>[[Match]]</u>	<u>SpecOp(<i>String, index</i>) → <i>MatchResult</i></u>	Tests for a regular expression match and returns a <code>MatchResult</code> value (see 15.10.2.1). Of the standard built-in ECMAScript objects, only <code>RegExp</code> objects implement <u>[[Match]]</u> .
<u>[[ParameterMap]]</u>	<u>Object</u>	Provides a mapping between the properties of an arguments object (see 10.6) and the formal parameters of the associated function. Only objects that are arguments objects have a <u>[[ParameterMap]]</u> internal property.

Deleted: 19

Deleted: NativeBrand

Deleted: Members of t

Deleted: NativeBrand

Deleted: native

Deleted: True if

Formatted: Font: (Default) Arial, Complex Script Font Arial

DRAFT

Bibliography

- [1] IEEE Std 754-2008: IEEE Standard for Floating-Point Arithmetic. Institute of Electrical and Electronic Engineers, New York (2008)
- [2] The Unicode Consortium. The Unicode Standard, Version 3.0, defined by: The Unicode Standard, Version 3.0 (Reading, MA, Addison-Wesley, 2000. ISBN 0-201-61633-5)
- [3] Unicode Inc. (2010), Unicode Technical Report #15: Unicode Normalization Forms
- [4] ISO 8601:2004(E) *Data elements and interchange formats – Information interchange -- Representation of dates and times*
- [5] RFC 1738 "Uniform Resource Locators (URL)", available at <<http://tools.ietf.org/html/rfc1738>>
- [6] RFC 2396 "Uniform Resource Identifiers (URI): Generic Syntax", available at <<http://tools.ietf.org/html/rfc2396>>
- [7] RFC 3629 "UTF-8, a transformation format of ISO 10646", available at <<http://tools.ietf.org/html/rfc3629>>
- [8] RFC 4627 "The application/json Media Type for JavaScript Object Notation (JSON)" , available at <<http://tools.ietf.org/html/rfc4627>>

DRAFT