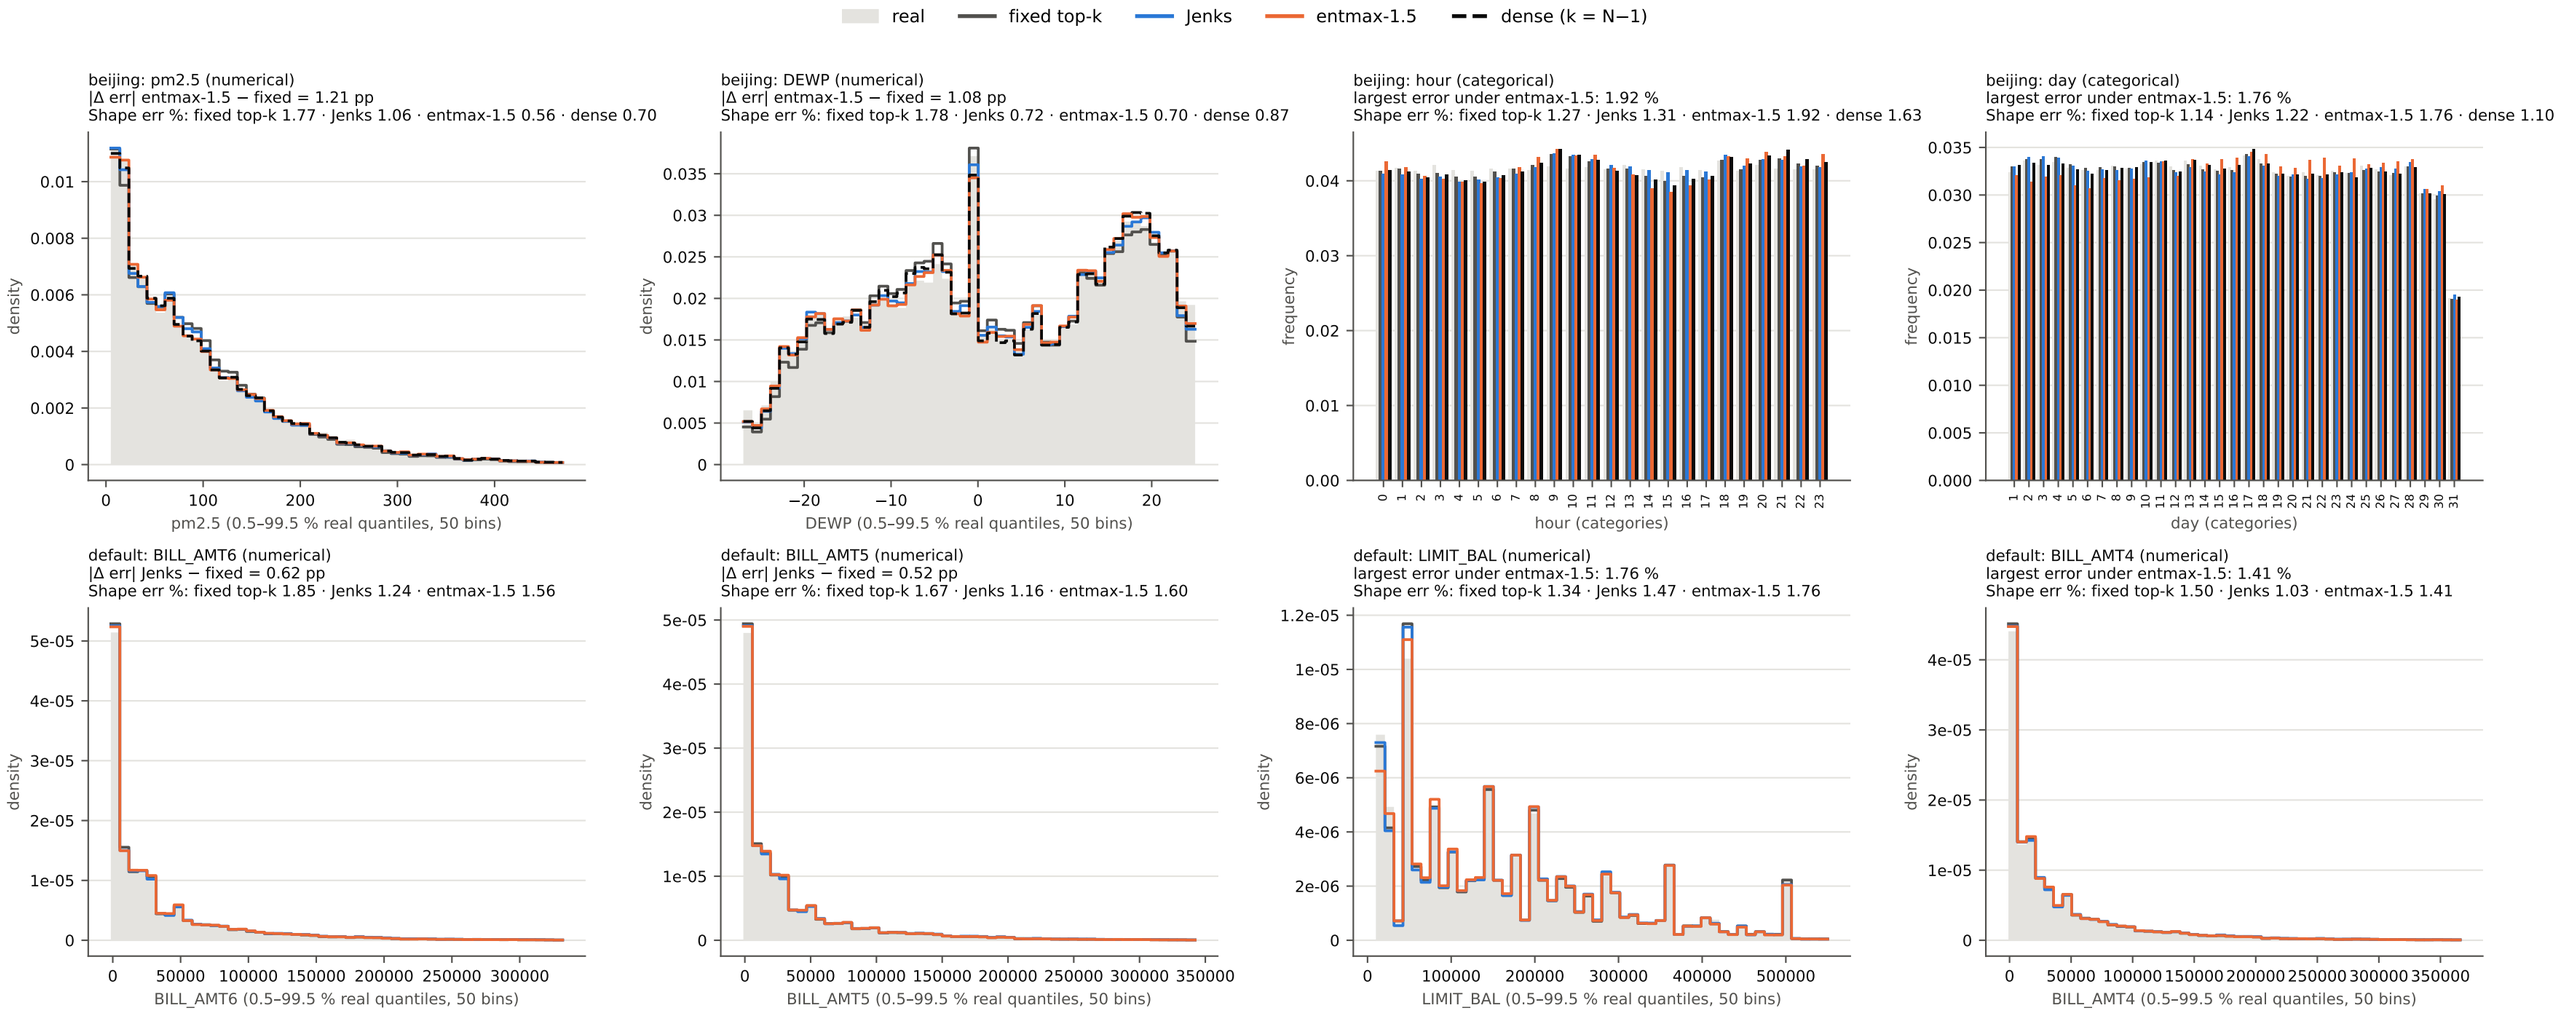

Route A, training seed 0. Columns chosen automatically from column_shape_error.csv — beijing: pm2.5, DEWP, hour, day; default: BILL_AMT6, BILL_AMT5, LIMIT_BAL, BILL_AMT4: per dataset the 2 numerical columns with the largest |Shape error(rule) − Shape error(fixed)| (rule = entmax-1.5 on beijing, Jenks on default), then the 2 other columns with the largest Shape error under the best rule (lowest mean Shape error: beijing entmax-1.5, default entmax-1.5). Numerical: 50 bins between the real 0.5 % and 99.5 % quantiles, real counted once, synthetic summed over the 20 tables, both divided by (all rows × bin width). Categorical: frequencies, synthetic = mean over the 20 tables. Shape error = 100 × (1 − KS / TV complement), mean over the 20 tables.