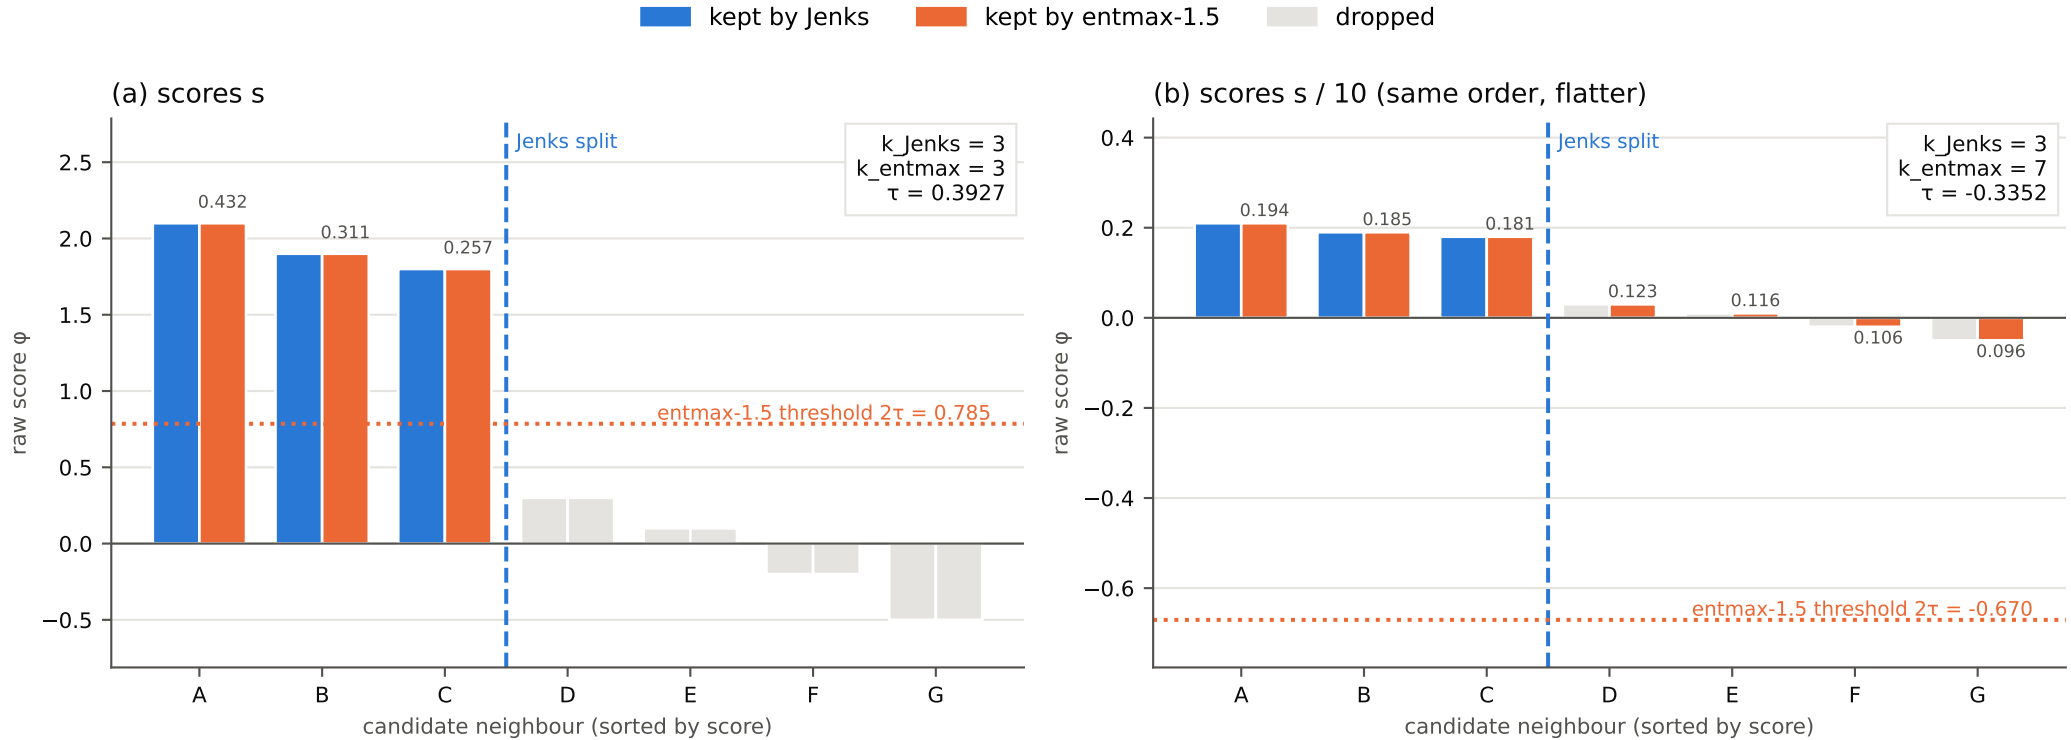

One node, 7 candidate neighbours; left bar of each pair = Jenks, right bar = entmax-1.5. Kept sets computed by the model's DynamicAdjacency (eval mode) on these scores. Jenks: 2-class natural-breaks split of the sorted scores (dashed line). entmax-1.5: $p_j = [s_j/2 - \tau]_+^2$, kept iff $s_j > 2\tau$ (dotted line); numbers above the bars = p_j. Dividing every score by 10 keeps the Jenks split (it depends only on the shape of the row) but entmax keeps all 7.