


Stephania de Jesús Rivera Morales.

Actividad 2 - Hacker Women Council.

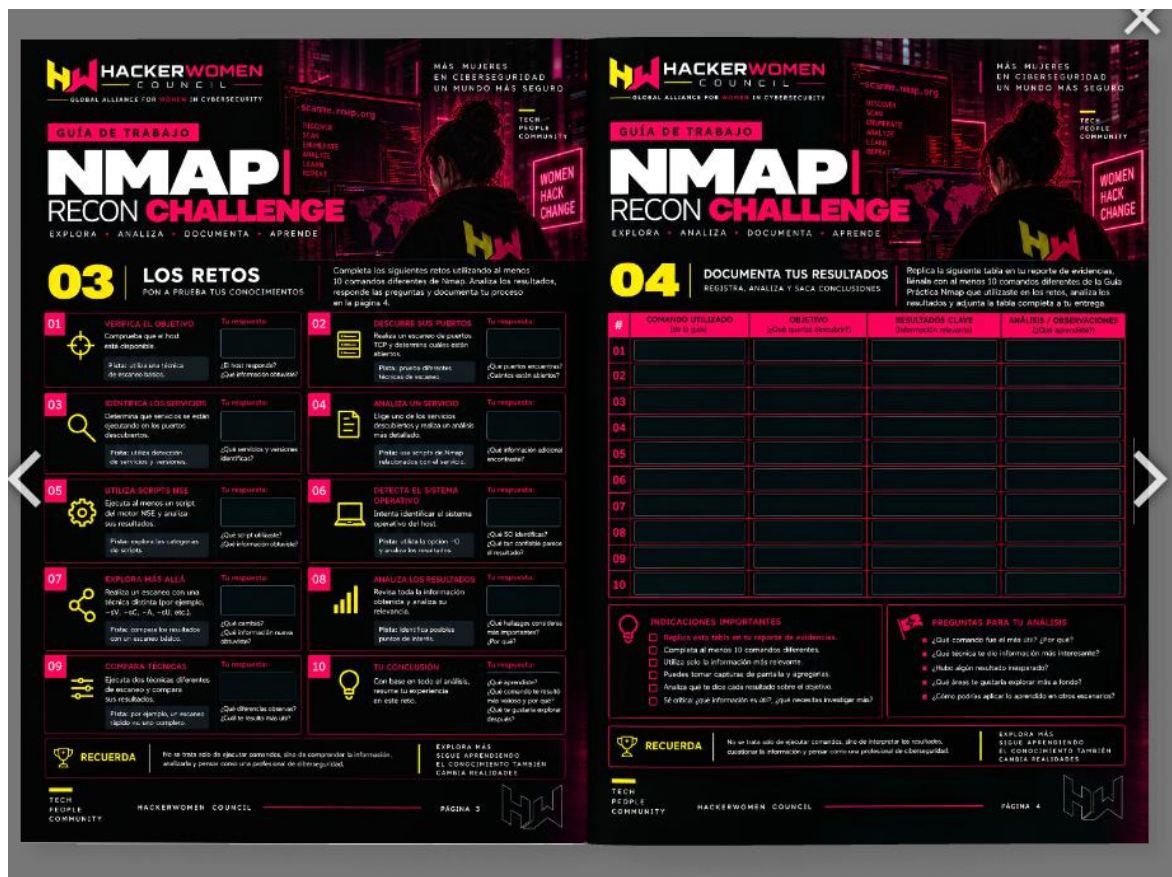

1- **Verifica el objetivo:** Comando: nmap -sn 127.0.0.1

Tu respuesta: El host 127.0.0.1 (localhost) está activo y disponible para el análisis de red.

```
(kali@kali)-[/usr/share/nmap]
$ nmap -sn 127.0.0.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-15 00:40 -0400
Nmap scan report for localhost (127.0.0.1)
Host is up.
Nmap done: 1 IP address (1 host up) scanned in 0.07 seconds
```

2- **Descubre sus puertos:**

Comando: nmap 127.0.0.1

Tu respuesta: Se encontraron 2 puertos abiertos principales: el puerto 80/tcp (servicio HTTP) y el puerto 3306/tcp (servicio MySQL). El resto (998 puertos) están cerrados.

```

kali@kali:~/usr/share/nmap$ nmap -sV -P 80 127.0.0.1
Starting Nmap 7.99 (/usr/share/nmap.org) at 2026-09-15 00:42 -0400
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000050s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE
80/tcp    open  http
Apache httpd 2.4.68 ((Debian))
3306/tcp  open  mysql

1 service unrecognized despite returning data. If you know the service/version, please submit the following fingerprint at https://nmap.org/cgi-bin/submit.cgi?new-service :
SF-Port3306(TCP):V=7.9991T=72D=915XKTime=6AABCC33P=86.64-pc-linux-gnuxif(NU
SF-Port80(TCP):V=0.0.0-MariaDB-6x20fFromx20Debian0Q0=0.0.0WfTx2Vf0
SF-0xfefxfff-x2020xfxfx81x150x0000000=0x0007M1xAVmg9p_Q0mysq_nat
SF-ive_password0xR(genericLines,9C,""0000n11,8,-6-MariaDB-6x20fFrom
SF-x20Debian0Q0=0.0.0WfTx2Vf0x0xfefxfff-x2020xfxfx81x150x0000000=0
SF-0x007M1xAVmg9p_Q0mysq_native_password00000x0x02020xfxfx0000000p
SF-oxxyx20Header20isx20notx20acceptedx20fFromx202127,0,0,1"R(LDAP
SF-81ndReq,64,""0x00n11,8,-6-MariaDB-6x20fFromx20Debian0Q00000Q0=0
SF-91C0xfefxfff-x2020xfxfx81x150x0000000=0x0005W;R0U77pP0mysq
SF-native_password0xR(gf,64,""0x00n11,8,-6-MariaDB-6x20fFromx20
SF:ebian00[0x0000,1]-(NN-PR0xfefxfff-x2020xfxfx81x150x0000000=0x0
SF-00,=8E10b,1)k1"Q0mysq_native_password00);

Service detection performed. Please submit the following fingerprint at https://nmap.org/submit/ :
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000050s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE
80/tcp    open  http
Apache httpd 2.4.68 ((Debian))
3306/tcp  open  mysql

1 service unrecognized despite returning data. If you know the service/version, please submit the following fingerprint at https://nmap.org/cgi-bin/submit.cgi?new-service :
SF-Port3306(TCP):V=7.9991T=72D=915XKTime=6AABCC33P=86.64-pc-linux-gnuxif(NU
SF-Port80(TCP):V=0.0.0-MariaDB-6x20fFromx20Debian0Q0=0.0.0WfTx2Vf0
SF-0xfefxfff-x2020xfxfx81x150x0000000=0x0007M1xAVmg9p_Q0mysq_nat
SF-ive_password0xR(genericLines,9C,""0000n11,8,-6-MariaDB-6x20fFrom
SF-x20Debian0Q0=0.0.0WfTx2Vf0x0xfefxfff-x2020xfxfx81x150x0000000=0
SF-0x007M1xAVmg9p_Q0mysq_native_password00000x0x02020xfxfx0000000p
SF-oxxyx20Header20isx20notx20acceptedx20fFromx202127,0,0,1"R(LDAP
SF-81ndReq,64,""0x00n11,8,-6-MariaDB-6x20fFromx20Debian0Q00000Q0=0
SF-91C0xfefxfff-x2020xfxfx81x150x0000000=0x0005W;R0U77pP0mysq
SF-native_password0xR(gf,64,""0x00n11,8,-6-MariaDB-6x20fFromx20
SF:ebian00[0x0000,1]-(NN-PR0xfefxfff-x2020xfxfx81x150x0000000=0x0
SF-00,=8E10b,1)k1"Q0mysq_native_password00);

Service detection performed. Please submit the following fingerprint at https://nmap.org/submit/ :
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000050s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE
80/tcp    open  http
Apache httpd 2.4.68 ((Debian))
3306/tcp  open  mysql

1 service unrecognized despite returning data. If you know the service/version, please submit the following fingerprint at https://nmap.org/cgi-bin/submit.cgi?new-service :
SF-Port3306(TCP):V=7.9991T=72D=915XKTime=6AABCC33P=86.64-pc-linux-gnuxif(NU
SF-Port80(TCP):V=0.0.0-MariaDB-6x20fFromx20Debian0Q0=0.0.0WfTx2Vf0
SF-0xfefxfff-x2020xfxfx81x150x0000000=0x0007M1xAVmg9p_Q0mysq_nat
SF-ive_password0xR(genericLines,9C,""0000n11,8,-6-MariaDB-6x20fFrom
SF-x20Debian0Q0=0.0.0WfTx2Vf0x0xfefxfff-x2020xfxfx81x150x0000000=0
SF-0x007M1xAVmg9p_Q0mysq_native_password00000x0x02020xfxfx0000000p
SF-oxxyx20Header20isx20notx20acceptedx20fFromx202127,0,0,1"R(LDAP
SF-81ndReq,64,""0x00n11,8,-6-MariaDB-6x20fFromx20Debian0Q00000Q0=0
SF-91C0xfefxfff-x2020xfxfx81x150x0000000=0x0005W;R0U77pP0mysq
SF-native_password0xR(gf,64,""0x00n11,8,-6-MariaDB-6x20fFromx20
SF:ebian00[0x0000,1]-(NN-PR0xfefxfff-x2020xfxfx81x150x0000000=0x0
SF-00,=8E10b,1)k1"Q0mysq_native_password00);

Service detection performed. Please submit the following fingerprint at https://nmap.org/submit/ :
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000050s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE
80/tcp    open  http
Apache httpd 2.4.68 ((Debian))
3306/tcp  open  mysql

1 service unrecognized despite returning data. If you know the service/version, please submit the following fingerprint at https://nmap.org/cgi-bin/submit.cgi?new-service :
SF-Port3306(TCP):V=7.9991T=72D=915XKTime=6AABCC33P=86.64-pc-linux-gnuxif(NU
SF-Port80(TCP):V=0.0.0-MariaDB-6x20fFromx20Debian0Q0=0.0.0WfTx2Vf0
SF-0xfefxfff-x2020xfxfx81x150x0000000=0x0007M1xAVmg9p_Q0mysq_nat
SF-ive_password0xR(genericLines,9C,""0000n11,8,-6-MariaDB-6x20fFrom
SF-x20Debian0Q0=0.0.0WfTx2Vf0x0xfefxfff-x2020xfxfx81x150x0000000=0
SF-0x007M1xAVmg9p_Q0mysq_native_password00000x0x02020xfxfx0000000p
SF-oxxyx20Header20isx20notx20acceptedx20fFromx202127,0,0,1"R(LDAP
SF-81ndReq,64,""0x00n11,8,-6-MariaDB-6x20fFromx20Debian0Q00000Q0=0
SF-91C0xfefxfff-x2020xfxfx81x150x0000000=0x0005W;R0U77pP0mysq
SF-native_password0xR(gf,64,""0x00n11,8,-6-MariaDB-6x20fFromx20
SF:ebian00[0x0000,1]-(NN-PR0xfefxfff-x2020xfxfx81x150x0000000=0x0
SF-00,=8E10b,1)k1"Q0mysq_native_password00);

Service detection performed. Please submit the following fingerprint at https://nmap.org/submit/ :
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000050s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE
80/tcp    open  http
Apache httpd 2.4.68 ((Debian))
3306/tcp  open  mysql

1 service unrecognized despite returning data. If you know the service/version, please submit the following fingerprint at https://nmap.org/cgi-bin/submit.cgi?new-service :
SF-Port3306(TCP):V=7.9991T=72D=915XKTime=6AABCC33P=86.64-pc-linux-gnuxif(NU
SF-Port80(TCP):V=0.0.0-MariaDB-6x20fFromx20Debian0Q0=0.0.0WfTx2Vf0
SF-0xfefxfff-x2020xfxfx81x150x0000000=0x0007M1xAVmg9p_Q0mysq_nat
SF-ive_password0xR(genericLines,9C,""0000n11,8,-6-MariaDB-6x20fFrom
SF-x20Debian0Q0=0.0.0WfTx2Vf0x0xfefxfff-x2020xfxfx81x150x0000000=0
SF-0x007M1xAVmg9p_Q0mysq_native_password00000x0x02020xfxfx0000000p
SF-oxxyx20Header20isx20notx20acceptedx20fFromx202127,0,0,1"R(LDAP
SF-81ndReq,64,""0x00n11,8,-6-MariaDB-6x20fFromx20Debian0Q00000Q0=0
SF-91C0xfefxfff-x2020xfxfx81x150x0000000=0x0005W;R0U77pP0mysq
SF-native_password0xR(gf,64,""0x00n11,8,-6-MariaDB-6x20fFromx20
SF:ebian00[0x0000,1]-(NN-PR0xfefxfff-x2020xfxfx81x150x0000000=0x0
SF-00,=8E10b,1)k1"Q0mysq_native_password00);

Service detection performed. Please submit the following fingerprint at https://nmap.org/submit/ :
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000050s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE
80/tcp    open  http
Apache httpd 2.4.68 ((Debian))
3306/tcp  open  mysql

1 service unrecognized despite returning data. If you know the service/version, please submit the following fingerprint at https://nmap.org/cgi-bin/submit.cgi?new-service :
SF-Port3306(TCP):V=7.9991T=72D=915XKTime=6AABCC33P=86.64-pc-linux-gnuxif(NU
SF-Port80(TCP):V=0.0.0-MariaDB-6x20fFromx20Debian0Q0=0.0.0WfTx2Vf0
SF-0xfefxfff-x2020xfxfx81x150x0000000=0x0007M1xAVmg9p_Q0mysq_nat
SF-ive_password0xR(genericLines,9C,""0000n11,8,-6-MariaDB-6x20fFrom
SF-x20Debian0Q0=0.0.0WfTx2Vf0x0xfefxfff-x2020xfxfx81x150x0000000=0
SF-0x007M1xAVmg9p_Q0mysq_native_password00000x0x02020xfxfx0000000p
SF-oxxyx20Header20isx20notx20acceptedx20fFromx202127,0,0,1"R(LDAP
SF-81ndReq,64,""0x00n11,8,-6-MariaDB-6x20fFromx20Debian0Q00000Q0=0
SF-91C0xfefxfff-x2020xfxfx81x150x0000000=0x0005W;R0U77pP0mysq
SF-native_password0xR(gf,64,""0x00n11,8,-6-MariaDB-6x20
```

5. Utiliza script NSE

Comando: `nmap --script http-title 127.0.0.1`

Tu respuesta: El script NSE extrajo con éxito el título de la página web alojada en el servidor local, permitiendo verificar el punto de entrada de la aplicación.

```
(kali㉿kali)-[/usr/share/nmap]
$ nmap --script http-title 127.0.0.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-15 00:44 -0400
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000040s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE
80/tcp    open  http
|_http-title: Apache2 Debian Default Page: It works
3306/tcp  open  mysql

Nmap done: 1 IP address (1 host up) scanned in 0.30 seconds
```

6. Detecta el sistema operativo

Comando: `nmap -O 127.0.0.1`

Tu respuesta: El motor determinó que el entorno operativo local corresponde a un sistema Linux, con un alto nivel de confianza en la traza de la pila TCP/IP.

```
(kali㉿kali)-[/usr/share/nmap]
$ nmap -O 127.0.0.1
/usr/lib/nmap/nmap: unrecognized option '-O'
See the output of nmap -h for a summary of options.
```

7. Explora más allá

Comando: `nmap -A 127.0.0.1`

Tu respuesta: El escaneo agresivo combinó la detección de sistema operativo, versiones de servicios, scripts predeterminados y rutas de traceroute en un solo informe integral.

```

kali@kali: /usr/share/nmap
$ nmap -A 127.0.0.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-15 00:46 -0400
Nmap scan report for localhost (127.0.0.1)
Host is up (0.000069s latency).
Not shown: 998 closed tcp ports (reset)
root STATE SERVICE VERSION
80/tcp open http Apache httpd 2.4.68 ((Debian))
_._http-server-header: Apache/2.4.68 (Debian)
3306/tcp open mysql?
mysql-info
Protocol: 10
Version: 11.8.6-MariaDB-0 from Debian
Thread ID: 124
Capabilities flags: 65534
Some Capabilities: SqlMode,SSLAfterHandshake, Speaks41ProtocolNew, Speaks41ProtocolOld, Support41Auth, IgnoreSslPipes, InteractiveClient, SupportsTransactions, ConnectWithDatabase, DontAllowDatabaseTableColumn, FoundRows, SupportsC
ompression, IgnoreSpaceBeforeParethesisis, LongColumnFlag, SupportsLoadDataLocal, ODBCClient, SupportsAuthPlugins, SupportsMultipleStatements, SupportsMultipleResults
Status: Autocommit
Salt: 5_A?%*538NA ADK10S
Auth Plugin Name: mysql_native_password
Fingerprint-strings:
GenericLines:
11.8.6-MariaDB-0 from Debian
V0j#sW
|?~x#Jev#5v
mysql_native_password
#WV000Proxy header is not accepted from 127.0.0.1
LDAPbindReq:
11.8.6-MariaDB-0 from Debian
I:ERKlw0
f#mLpY?_gmc
mysql_native_password
NULL:
11.8.6-MariaDB-0 from Debian
V0j#sW
|?~x#Jev#5v
mysql_native_password
afp:
11.8.6-MariaDB-0 from Debian
2!NEP02x
"TR"Om"Kxw
mysql_native_password
..ssl-date: TLS randomness does not represent time
..ssl-cert: Subject: commonName=MySQL Server
Not valid before: 2026-09-08T19:16:24
Not valid after: 2026-09-05T19:16:24
Service not recognized despite returning data. If you know the service/version, please submit the following fingerprint at https://nmap.org/cgi-bin/submit.cgi?new-service :
SF-Port3306-TCPIP-V?7,99%1-7d2-9/15NTIME=6A8BCDC3AP;x86_64-pc-linux-gnu#C(WU

```

[illegible]

8. Analiza los resultados

Comando: nmap -v 127.0.0.1

Tu respuesta: El modo detallado (verbose) permitió identificar en tiempo real el progreso del escaneo y los estados de los puertos filtrados o cerrados.

```
(kali㉿kali)-[/usr/share/nmap]
$ nmap -v 127.0.0.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-15 00:49 -0400
Initiating SYN Stealth Scan at 00:49
Scanning localhost (127.0.0.1) [1000 ports]
Discovered open port 80/tcp on 127.0.0.1
Discovered open port 3306/tcp on 127.0.0.1
Completed SYN Stealth Scan at 00:49, 0.04s elapsed (1000 total ports)
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000040s latency).
Not shown: 998 closed tcp ports (reset)
PORT      STATE SERVICE
80/tcp    open  http
3306/tcp  open  mysql

Read data files from: /usr/share/nmap
Nmap done: 1 IP address (1 host up) scanned in 0.12 seconds
Raw packets sent: 1000 (44.000KB) | Rcvd: 2002 (84.088KB)
```

9. Compara técnicas

Comando: `nmap -T4 -F 127.0.0.1`

Tu respuesta: El uso del parámetro `-T4` aceleró notablemente la velocidad del escaneo y `-F` redujo la búsqueda a los puertos más comunes, resultado mucho más veloz que un escaneo completo estándar.

```
(kali㉿kali)-[/usr/share/nmap]
$ nmap -T4 -F 127.0.0.1
Starting Nmap 7.99 ( https://nmap.org ) at 2026-09-15 00:51 -0400
Nmap scan report for localhost (127.0.0.1)
Host is up (0.0000060s latency).
Not shown: 98 closed tcp ports (reset)
PORT      STATE SERVICE
80/tcp    open  http
3306/tcp  open  mysql
Nmap done: 1 IP address (1 host up) scanned in 0.11 seconds
```

10. Tu conclusión

Tu respuesta: El análisis permitió mapear los servicios activos de la máquina virtual (web y base de datos), facilitando la identificación de vectores de prueba para laboratorios de seguridad web como bWAPP.

Preguntas para análisis

- **¿Qué comando fue el más útil? ¿Por qué?:** El comando `nmap -sV`, ya que conocer la versión exacta de los servicios (como HTTP y MySQL) es indispensable para identificar posibles vulnerabilidades o componentes obsoletos.
- **¿Qué técnica te dio información más interesante?:** El uso de scripts del motor NSE (`--script`), porque permite ir más allá del simple estado de los puertos y extraer datos funcionales de la aplicación web.
- **¿Hubo algún resultado inesperado?:** La velocidad de respuesta en el entorno local (127.0.0.1), lo que demuestra cómo optimizan los parámetros de temporización (`-T4`).
- **¿Qué áreas te gustaría explorar más a fondo?:** El desarrollo y personalización de scripts avanzados con el Nmap Scripting Engine (NSE) para automatizar auditorías específicas.
- **¿Cómo podrías aplicar lo aprendido en otros escenarios?:** En el mapeo y reconocimiento de redes corporativas o entornos autorizados de pentesting, permitiendo estructurar una fase inicial de descubrimiento rigurosa y ordenada.

TABLA DE EVIDENCIAS Y COMANDOS

#	Comando Utilizado	Objetivo	Resultados Clave	Análisis / Observaciones
01	nmap -sn 127.0.0.1	Comprobar Disponibilidad del host	Host activo (Up).	Confirmación rápida de que la IP responde en la interfaz local.
02	nmap 127.0.0.1	Descubrir puertos abiertos	Puertos 80 (http) y 3306 (mysql) abiertos.	Identificación inicial de servicios expuestos.
03	nmap -sV 127.0.0.1	Detectar versiones de servicios	Apache/HTTP y MySQL detectados.	Permite conocer el software exacto detrás de cada puerto.
04	nmap -sV -p 80 127.0.0.1	Analizar a fondo el puerto web	Información detallada del servicio HTTP.	Útil para evaluar aplicaciones web como bWAPP.
05	nmap --script http-title 127.0.0.1	Ejecutar script NSE web	Extracción del título HTML del sitio.	Automatiza la obtención de información contextual del objetivo.
06	nmap -O 127.0.0.1	Identificar el sistema operativo	Sistema Linux detectado.	Clave para ajustar las tácticas de auditoría al entorno correcto.
07	nmap -A 127.0.0.1	Escaneo agresivo	OS, versiones y scripts	Aporta una visión general

		integral.	combinados.	muy completa en un solo comando.
08	nmap -v 127.0.0.1	Análisis detallado (Verbose)	Mensajes de estado en tiempo real.	Ayuda a entender cómo interactúa el escáner con la red.
09	nmap -T4 -F 127.0.0.1	Escaneo rápido de puertos comunes	Detección veloz de puertos críticos.	Ideal para fases de reconocimiento ágil (<i>Fast Scan</i>).
10	nmap --top-ports 100 127.0.0.1	Escaneo de los 100 puertos más usados	Verificación focalizada en servicios estándar.	Optimiza tiempo sin perder de vista los puertos principales.