Bagging: independent models, trained in parallel

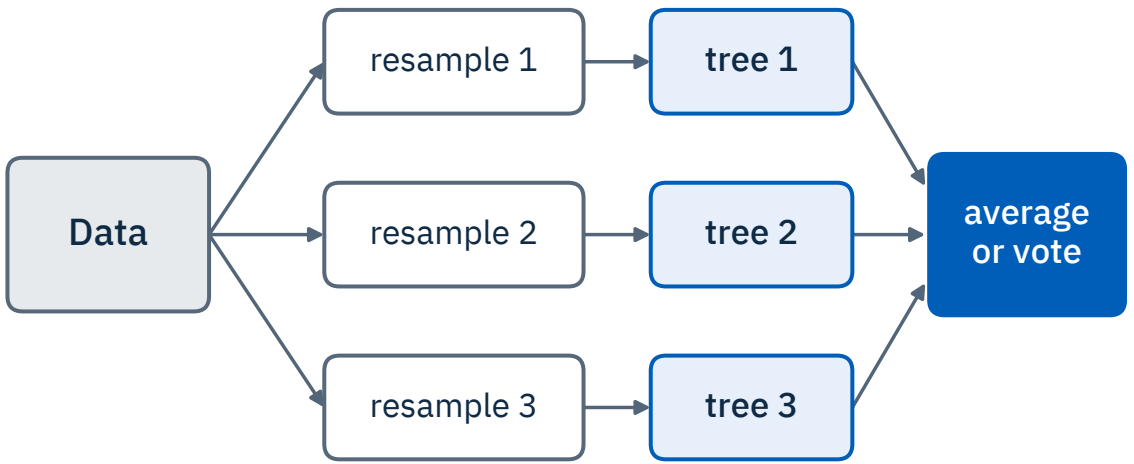

Trees never see each other's errors.
Deep trees: low bias, averaging cuts variance.

Boosting: each model corrects the ensemble so far

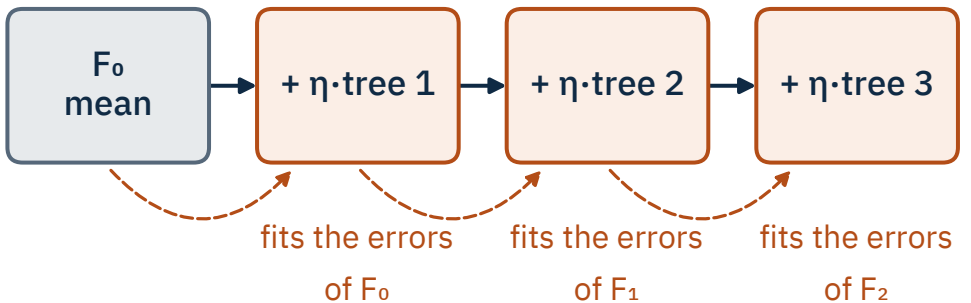

$$F_3(x) = F_0 + \eta \cdot h_1(x) + \eta \cdot h_2(x) + \eta \cdot h_3(x)$$

Shallow trees: each step is small; the sum becomes flexible.