
A Quarto Template for arXiv Preprints with Typst

Render to PDF quickly with that typical NeurIPS/ICML/ICLR look and feel

Ada Lovelace^{1 2 *} Kurt Gödel^{3 *} Emmy Noether³ Stephen D. Turner^{2 4 †} 

¹Department of Computation, Analytical Engine Institute, London, United Kingdom

²Department of Quarto Engineering, Miskatonic University, Arkham, Massachusetts, United States

³Institute for Advanced Study, Princeton, United States

⁴School of Data Science, University of Virginia, Charlottesville, United States

ada@example.org kurt@example.org emmy@example.org stephen@example.org

July 17, 2026

Abstract

The abstract paragraph should be indented ½ inch on both the left- and right-hand margins. Use 10 point type, with a vertical spacing (leading) of 11 points. The word Abstract must be centered, bold, and in point size 12. Two line spaces precede the abstract. The abstract must be limited to one paragraph. This document demonstrates the `arxiv-typst` Quarto format: sections, math, figures, tables, executed R and Python code, cross-references, citations, footnotes, and an appendix.

1 Introduction

Deep learning has seen wide adoption since the introduction of convolutional architectures [1] and attention mechanisms [2]. This document is not a real paper; it exists to exercise the formatting features of the `arxiv-typst` format so you can check that the output matches what you expect from an arXiv preprint. The method appears in Section 2, computational results in Section 3, and additional details in the Supplementary Material starting in Section A.

1.1 Citations

Citations render in bracketed numeric style by default, e.g., generative adversarial networks [3] or multiple works at once [1, 2]. Use `@vaswani2017attention` for an in-text citation: A. Vaswani *et al.* [2] showed that attention suffices.

2 Method

Given inputs $x_1, \dots, x_n$, we compute attention weights by a softmax over scaled dot products:

$$\text{Attention}(Q, K, V) = \text{softmax}\left(\frac{QK^\top}{\sqrt{d_k}}\right)V \tag{1}$$

As shown in (1), the scaling factor $\sqrt{d_k}$ prevents the dot products from growing large in magnitude.

2.1 Static figures

*These authors contributed equally.

†Correspondence to Stephen D. Turner <stephen@example.org>.

All artwork must be neat, clean, and legible. Figure 1 shows a placeholder training curve included as an image file, referenced with `@fig-loss`.

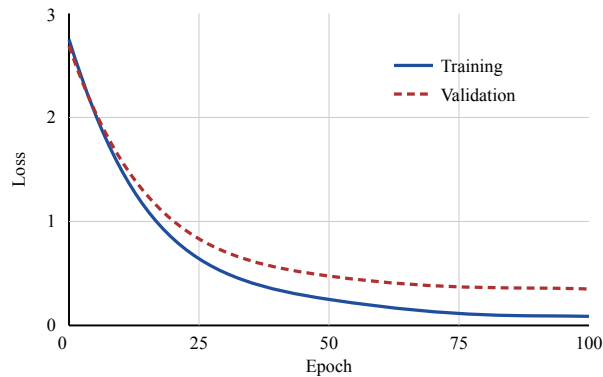


Figure 1: Sample figure caption. Training loss decreases over time, as training losses tend to do.

2.2 Static tables

Tables should have a caption above them, as in Table 1, which is a plain markdown pipe table labeled by putting `{#tbl-results}` on its caption line and referenced with `@tbl-results`. Header rows render bold automatically, and setting `table-stripes: true` in the document metadata shades alternating body rows. Avoid vertical rules.

Table 1: Test accuracy on the held-out set. Best result in each column is not bolded because this is an example.

Model	Params (M)	Accuracy (%)
Baseline	12	71.3
Ours (small)	13	74.8
Ours (large)	88	79.2

3 Computational results

This section holds executed code. Everything here is computed at render time by knitr, so Figure 2, Table 2, and Table 3 always reflect the code shown. Label a chunk `fig-*` or `tbl-*` and give it a `fig-cap` or `tbl-cap` to make it cross-referenceable.¹

3.1 A figure from base R

Figure 2 plots the built-in `cars` data with a least-squares fit, using nothing but base graphics. Here we're using `echo: false` to suppress printing of the code used to generate this section.

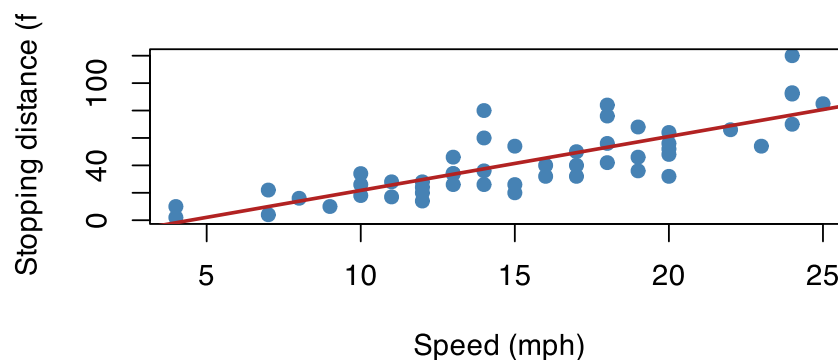


Figure 2: Stopping distance against speed for the built-in cars data, with a least-squares fit.

¹Footnotes appear at the bottom of the page with a short separator rule, as in the LaTeX style.

3.2 A table from knitr::kable

Table 2 summarizes the same data by speed quartile. `knitr::kable()` emits a markdown table, which the format styles like any other table.

```
q <- cut(
  cars$speed,
  quantile(cars$speed),
  include.lowest = TRUE,
  labels = c("Q1", "Q2", "Q3", "Q4")
)
s <- aggregate(dist ~ q, data = cbind(cars, q), function(x) {
  c(mean = mean(x), sd = sd(x))
})
out <- data.frame(
  Quartile = s$q,
  Mean = round(s$dist[, "mean"], 1),
  SD = round(s$dist[, "sd"], 1)
)
knitr::kable(out)
```

Table 2: Stopping distance by speed quartile of the cars data, via `knitr::kable`.

Quartile	Mean	SD
Q1	18.2	9.2
Q2	40.2	18.2
Q3	50.2	17.4
Q4	69.3	24.3

3.3 A table from gt

Table 3 renders the head of `mtcars` through the `gt` package. The `tab_options()` call keeps the render quiet: `table.font.names` replaces `gt`'s default web font stack (Typst warns about fonts it can't find), and `stub.font.weight` replaces the default CSS keyword `initial`, which Quarto's Typst writer warns about on every stub row.

```
gt::gt(mtcars[1:8, 1:5], rownames_to_stub = TRUE) |>
  gt::tab_options(
    table.font.names = "TeX Gyre Termes",
    stub.font.weight = "normal"
  )
```

Table 3: First rows of `mtcars`, via the `gt` package.

	mpg	cyl	disp	hp	drat
Mazda RX4	21.0	6	160.0	110	3.90
Mazda RX4 Wag	21.0	6	160.0	110	3.90
Datsun 710	22.8	4	108.0	93	3.85
Hornet 4 Drive	21.4	6	258.0	110	3.08
Hornet Sportabout	18.7	8	360.0	175	3.15
Valiant	18.1	6	225.0	105	2.76
Duster 360	14.3	8	360.0	245	3.21
Merc 240D	24.4	4	146.7	62	3.69

3.4 A Python chunk

Python chunks work in the same document (here run with `python.reticulate: false`, so only the standard library is required).

```
import statistics
speeds = [4, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 22, 24, 25]
print(f"mean={statistics.mean(speeds):.2f} stdev={statistics.stdev(speeds):.2f}")
```

```
mean=14.67 stdev=5.98
```

4 Discussion

Lists work as expected:

- The margins are 1 inch on all sides.
- The body font is 10 pt Times (or an OpenType lookalike).
- The first-page footer carries the preprint or conference notice.

Block quotes are indented on both sides:

The paper is limited to nine pages, including figures. Additional pages containing references and appendices do not count toward the limit.

5 Conclusion

Rendering this document should produce a PDF that looks like a classic arXiv preprint. Set `notice` in the document metadata to put any text in the first-page footer, or `anonymous: true` for an anonymized submission with line numbers.

The empty `#refs` div below places the reference list here, before the appendix, instead of at the end of the document.

References

- [1] A. Krizhevsky, I. Sutskever, and G. E. Hinton, “ImageNet Classification with Deep Convolutional Neural Networks,” in *Advances in Neural Information Processing Systems*, 2012.
- [2] A. Vaswani *et al.*, “Attention Is All You Need,” in *Advances in Neural Information Processing Systems*, 2017.
- [3] I. Goodfellow *et al.*, “Generative Adversarial Nets,” in *Advances in Neural Information Processing Systems*, 2014.

Supplementary Material

Anything after the `#show: appendix` raw block is numbered as an appendix, and the explicit `#pagebreak(weak: true)` above it starts it on a new page (drop that line to let the appendix run on). This heading carries `{.unnumbered}`, so it acts as an unlettered banner over the whole appendix and the lettering starts at the next numbered heading; drop the class if you want the banner itself lettered. Quarto's `@sec-` cross-references only work on numbered headings, so this banner is referenced from the introduction with a plain link, `[supplementary material](#sec-supplement)`.

A Additional Results

Numbered appendix sections are lettered A, B, and so on. Cross-references keep working: this is Section A, and Section 1 still points back to the introduction.

A.1 Additional Details

Appendix subsections are numbered A.1, A.2, and so on.