

---

# A Single-Layer Model Can Do Language Modeling\*

---

Zanmin Wang  
zanmin.wang@proton.me

## Abstract

Modern language models scale depth by stacking layers, each holding its own state — a per-layer KV cache in transformers, a per-layer matrix in Mamba, Gated DeltaNet (GDN), RWKV, and xLSTM. Biological systems lean heavily on recurrence rather than on stacking. We ask how far that shape can go on language modeling. We propose Grounded Prediction Networks (GPN): one state vector revisited at every step through a single recurrent block — one FFN, one shared matrix memory. At 130M parameters, a 1-layer GPN+M reaches FineWeb-Edu perplexity 18.06, within 13% of a 12-layer Transformer++ (16.05) and 18% of a 10-layer GDN (15.34); a 2-layer variant closes the gap to 6%/11%. We do not match the deep baselines. Because the working context is a single vector, we can directly inspect its geometry: a persistent default-token direction, a content-bearing horizon of tens of tokens, and memory heads that split spontaneously into fast and slow retention pools.

## 1 Introduction

Sequence models scale depth by stacking layers, and that depth comes with state. A transformer holds a per-layer KV cache; Mamba, GDN, RWKV, and xLSTM hold a per-layer matrix state. Both computation and memory are distributed across the stack: every layer keeps its own copy of “what the model knows so far.”

Biological networks lean heavily on recurrence rather than on stacking, with depth coming from revisiting the same circuitry across time. We ask whether the same shape is viable for language modeling: how far can a single shallow recurrent layer go?

A Grounded Prediction Network (GPN) is our answer. One state vector, one FFN, one shared matrix memory — revisited at every step. Each step grounds the previous state with the observed token, predicts the next state via the FFN and a read from the matrix memory, and decodes the next-token distribution. There is no stack; depth comes from time. We call this loop *grounded prediction* and unpack it in §3.

At 130M parameters, a 1-layer GPN+M reaches FineWeb-Edu perplexity 18.06, within 13%/18% of a 12-layer Transformer++ (16.05) and a 10-layer GDN (15.34); a 2-layer variant closes the gap to 6%/11%. The shallow model does not match the deep baselines. And because the entire state is one vector, we can observe what the trained model puts there: a persistent default-token direction, a content-bearing horizon of tens of tokens, and memory heads that split into fast and slow retention pools.

### Contributions.

1. **Architecture.** GPN/GPN+M — one state vector, one FFN, one centralized matrix memory, revisited at every step rather than stacked (§4).

---

\*Code: <https://github.com/steve-z-wang/grounded-prediction-network>

2. **A conceptual view.** The state’s prediction of the next step can be viewed as part of the encoding of that step — a single vector plays both roles, with grounding completing the encoding (§3).
3. **Evidence.** At 130M parameters, a 1-layer GPN+M is within 13%/18% FineWeb-Edu PPL of a 12-layer Transformer++ and a 10-layer GDN; a 2-layer variant closes the gap to 6%/11% (§6).
4. **Observability.** A persistent default-token direction, a tens-of-token content horizon, and a spontaneous fast/slow memory split among architecturally-identical heads — structures a layered stack would have to dig out of residual streams (§7).

## 2 Related Work

**Recurrent and linear-recurrent LMs.** RNNs Hochreiter and Schmidhuber [1997], SSMs Gu et al. [2021], Gu and Dao [2023], and gated linear recurrences Yang et al. [2023], Dao and Gu [2024], Yang et al. [2024a] maintain a per-layer state that evolves in time, usually a matrix that plays both working-context and associative-memory roles in one object. Griffin/Hawk De et al. [2024], RWKV-7 Peng et al. [2025], and xLSTM Beck et al. [2024] are recent entries in the same line. GPN differs in architectural shape: one wide shallow layer instead of a stack, and a single centralized associative memory shared across layers instead of per-layer recurrent state.

**Associative memory.** Linear attention Katharopoulos et al. [2020] and the delta rule Schlag et al. [2021], Yang et al. [2024b,a] view attention as fast-weight associative storage. GPN+M uses the gated delta rule as a single shared memory rather than a per-layer KV cache or per-layer SSM state.

**Short-term / long-term memory splits.** Several recent architectures separate short-term and long-term memory by design: Infini-attention Munkhdalai et al. [2024], Hymba Dong et al. [2024], Titans Behrouz et al. [2025a], and nested/continuum-memory learning Behrouz et al. [2025b] all pair an attention-based local buffer with a separate compressive or recurrent long-term store. GPN+M does not architect such a split: it has one persistent recurrent state and one centralized associative memory, with no attention window at either side. The fast/slow split among its memory heads emerges in training rather than being built in (§7.3).

## 3 Grounded Prediction

**Notation.** Let  $x_1, \dots, x_T$  be a token stream. A step of GPN holds the same working-context vector at two points:

- $s_t^p \in \mathbb{R}^d$  — the *predicted state*. One vector, produced at the end of step  $t$  and carried into step  $t + 1$  as the model’s forecast for the next state, decoded downstream into a distribution over  $x_{t+1}$ .
- $s_t^g \in \mathbb{R}^d$  — the *grounded state*. Intermediate:  $\text{Ground}(s_{t-1}^p, x_t)$  produces it; Predict consumes it.

We write  $\bar{s} = \mathbb{E}_t[s_t^p]$  for the mean of the persistent state, and use  $s$  without superscripts when the stage is clear. Structurally  $s$  is a residual flow: Ground and Predict each add their contribution through gated residuals (§4). This is analogous to a transformer’s residual stream, except the additions accumulate across *time* (one step per token) rather than across *depth* (one layer at a time).

**The loop.** Each step grounds the previous state with the observed token, predicts the next state, and decodes:

$$s_t^g = \text{Ground}(s_{t-1}^p, x_t) \tag{1}$$

$$s_t^p = \text{Predict}(s_t^g) \tag{2}$$

$$\mathcal{L}_t = \text{Loss}(\text{Decode}(s_t^p), x_{t+1}). \tag{3}$$

Training minimizes  $\sum_t \mathcal{L}_t$ ; no auxiliary objective is used. For discrete tokens, Decode is a linear head and Loss is cross-entropy. §4 gives concrete realizations of Ground, Predict, and Decode, first without a matrix memory (GPN) and then with one (GPN+M).

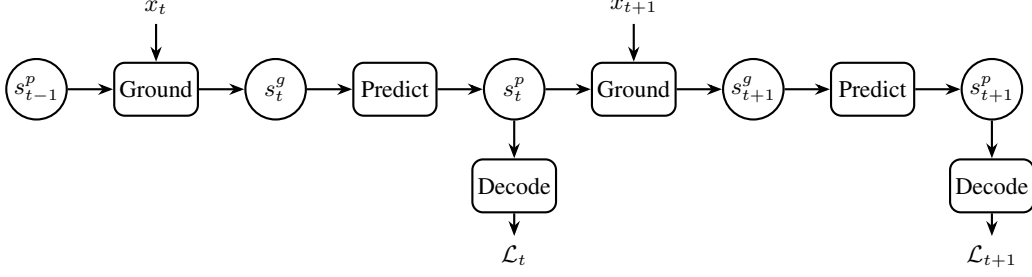


Figure 1: The grounded-prediction loop, unrolled for two steps. The predicted state  $s_{t-1}^p$  is grounded by the observed token  $x_t$  to produce the grounded state  $s_t^g$ ; Predict turns  $s_t^g$  into  $s_t^p$ , the forecast for  $x_{t+1}$ , which is decoded for the loss and carried forward as input to the next Ground. Both  $s^p$  and  $s^g$  are the same working-context vector at different points in the step. Concrete realizations of Ground, Predict, and Decode — with and without the matrix memory — appear in §4 and Fig. 3.

**Prediction as part of encoding.** The state  $s_t^p$  can be viewed in two ways. As a *forecast*, it is the model’s prediction for the next state, decoded downstream into a distribution over  $x_{t+1}$ . As an *encoding*, it summarizes  $x_1, \dots, x_t$  — the model’s record of what has been observed so far, awaiting the next observation. The two views are not two separate state-like objects; they are the same vector at different moments in the loop. The prediction leaving step  $t$  is the partial encoding entering step  $t+1$ , which the new token grounds and completes. Once grounded, the encoding is projected forward again as the next prediction — and the loop continues.

## 4 Architecture

The state  $s_t^p \in \mathbb{R}^d$  is a single recurrent vector with  $d$  on the order of thousands; for our 130M GPN+M,  $d = 2496$ . We define GPN first as the bare primitive with just an FFN-based Predict, then extend it to GPN+M by adding the matrix memory.

### 4.1 GPN: the bare primitive (no memory)

**Ground.** The token  $x_t$  is embedded and fused into  $s_{t-1}^p$  through a gated residual:

$$s_t^g = \text{Gate}_f(s_{t-1}^p) \odot s_{t-1}^p + W_{\text{fuse}} \cdot \text{emb}(x_t), \quad (4)$$

where  $\text{Gate}_f(\cdot) = \sigma(W_f \cdot \text{RMSNorm}(\cdot))$  is a learnable fuse gate ( $\sigma$  is the elementwise sigmoid).

**Predict.** An FFN refines the grounded state, again with a gated residual:

$$s_t^p = \text{Gate}_p(s_t^g) \odot s_t^g + \text{FFN}(s_t^g), \quad (5)$$

where  $\text{FFN}(x) = (\text{SiLU}(W_1^g x) \odot W_1^v x) W_2$  is a SwiGLU FFN with RMSNorm pre-norm, and  $\text{Gate}_p$  is a learnable predict gate of the same form as  $\text{Gate}_f$ .

**Decode.** The decoder is a single linear head:

$$\mathcal{L}_t = \text{CE}(W_{\text{dec}} \text{RMSNorm}(s_t^p), x_{t+1}). \quad (6)$$

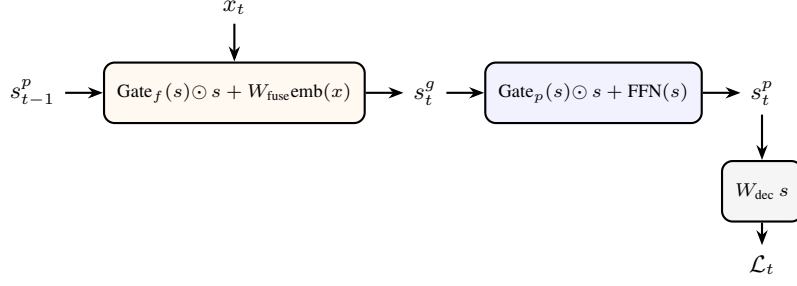


Figure 2: One step of GPN (no memory), horizontal. Blocks show the operation formulas directly; inside a block,  $s$  and  $x$  refer to the block’s input (the state flowing in).  $s_{t-1}^p$  enters from the left;  $s_t^p$  exits on the right and becomes the input to the next step. Decode reads  $s_t^p$  downward for the loss  $\mathcal{L}_t = \text{CE}(\cdot, x_{t+1})$ . Implementation details (RMSNorm pre-norm before the decode head, RMSNorm inside Gate and FFN) are omitted for brevity; see §4.

## 4.2 GPN+M: adding a matrix memory

GPN+M keeps Ground and Decode unchanged and extends Predict with a matrix-memory read:

$$s_t^p = \text{Gate}_p(s_t^g) \odot s_t^g + \text{FFN}(s_t^g) + \text{MemRead}(s_t^g, M_t). \quad (7)$$

The matrix memory  $M \in \mathbb{R}^{H \times d_k \times d_v}$  with  $H$  heads is updated by the gated delta rule:

$$k_t = \ell_2\text{-norm}(\text{ReLU}(W_k s_{t-1}^g)), \quad v_t = W_v s_t^g \quad (8)$$

$$\beta_t = \sigma(W_\beta s_t^g), \quad \gamma_t = -\exp(A) \cdot \text{softplus}(W_a s_t^g) \quad (9)$$

$$M_t = e^{\gamma_t} \odot M_{t-1} + \beta_t (k_t \otimes (v_t - M_{t-1} k_t)). \quad (10)$$

The key comes from the previous grounded state  $s_{t-1}^g$  and the value from the current grounded state  $s_t^g$ , so the rule explicitly learns  $s_{t-1}^g \rightarrow s_t^g$  transitions. Memory reads run in parallel with the FFN: the query  $q_t = \ell_2\text{-norm}(\text{ReLU}(W_q s_t^g))$  retrieves

$$\text{MemRead}(s_t^g, M_t) = \text{silu}(W_{\text{rg}} s_t^g) \odot \text{RMS}(M_t q_t) W_o, \quad (11)$$

which is added into the state update alongside the FFN output (Eq. 7).

**Predict = FFN + memory, two centralized predictors.** Predict is the sum of two predictor functions. The FFN predicts from parameters trained offline; the memory read predicts from parameters written online — whatever keys and values the last few hundred steps have put into  $M$ . Both enter the state update additively, as peers (Fig. 3). Both are also *centralized*: there is one  $M$  shared across all layers, written once per token and read by every layer.

**Configurations.** We train GPN+M at 130M parameters in two depths: a 1-layer variant ( $d = 2496$ ,  $d_{\text{ffn}} = 6656$ ,  $H = 15$  memory heads with  $d_k = 128$ ,  $d_v = 256$ ) — the headline single-layer configuration, also used for the analyses in §7 — and a 2-layer variant ( $d = 1920$ ) that trades the simplest single-layer story for a smaller PPL gap. Vocabulary is 32K. GPN is the same architecture with MemRead removed. Baselines are a 12-layer Transformer++ (RoPE, RMSNorm, SwiGLU, no bias) and a 10-layer Gated DeltaNet, both at matched 130M parameters.

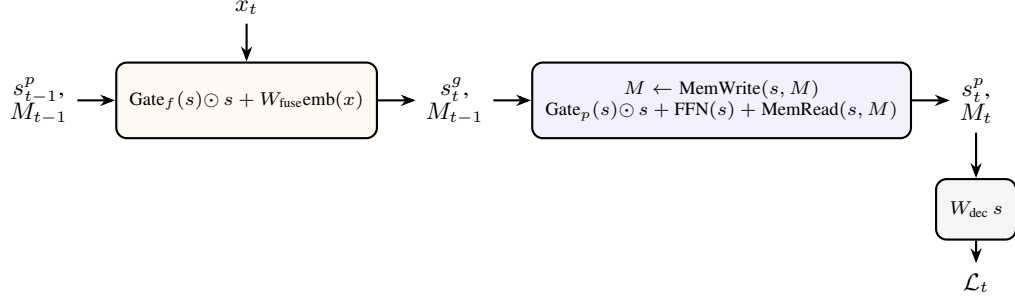


Figure 3: One step of GPN+M, horizontal. Each state bundle carries both the working context  $s^p$  and the matrix memory  $M$ ; inside a block,  $s, M$  refer to the block’s input. Ground updates only  $s^p$ . Predict (blue, two lines) first updates  $M$  via MemWrite (gated delta rule) and then computes the new state as gated residual + FFN + MemRead. The bundle  $(s_t^p, M_t)$  exits on the right and becomes the input to the next step. Decode reads  $s_t^p$  downward for the loss. GPN (Fig. 2) is this diagram with  $M$  and MemWrite/MemRead removed.

## 5 Training

Models are trained on FineWeb-Edu-10B tokenized with the LLaMA-2 tokenizer (vocab 32k), sequence length 2048, batch 128 at 10k optimization steps. Optimizer AdamW with peak LR  $6 \cdot 10^{-4}$ , cosine schedule to 10% of peak after 100-step warmup, weight decay 0.1. Transformer and GDN run in parallel along the sequence. GPN/GPN+M run sequentially in Python across time; for 1-layer configurations we use full BPTT across the 2048-token window, for 2-layer we truncate BPTT at length 512 to fit memory. All models use bfloat16 mixed precision.

## 6 Results

Table 1: Held-out perplexity at 130M parameters. **FineWeb**: last (unused) bin of shuffled FineWeb-Edu-10B, all positions of a 2048-token window. **LAMBADA**: EleutherAI split (5153 examples), tokenized with Llama-2; accuracy is top-1 match of the first subword of the last word given its prefix, PPL is  $\exp(\text{mean CE over the last word’s subwords})$ . “Mem. cells” counts cells in the architecture’s associative/recurrent memory.

| Model           | Layers | State dim | Mem. cells          | FineWeb      | LAMBADA      |              |
|-----------------|--------|-----------|---------------------|--------------|--------------|--------------|
|                 |        |           |                     | PPL ↓        | Acc ↑        | PPL ↓        |
| Transformer++   | 12     | 768       | — (KV)              | 16.05        | <b>0.223</b> | 18.99        |
| GDN             | 10     | 768       | 1.97M (distributed) | <b>15.34</b> | 0.208        | <b>17.23</b> |
| GPN+M (ours)    | 1      | 2496      | 492K (centralized)  | 18.06        | 0.146        | 33.45        |
| GPN+M (ours)    | 2      | 1920      | 360K (centralized)  | 16.95        | 0.160        | 27.39        |
| GPN (no memory) | 1      | 3184      | 0                   | 23.51        | 0.015        | 263.6        |

We train one seed per model with no scaling sweeps; these numbers establish viability, not state-of-the-art. 1L GPN+M reaches FineWeb PPL 18.06, 13% above a 12-layer Transformer++ (16.05) and 18% above a 10-layer GDN (15.34); a 2-layer variant brings the gap to 6%/11% (PPL 16.95).

## 7 Analysis

Because the state is one vector, we measure it directly. All analyses run on the trained 1L GPN+M checkpoint (130M) using held-out data, with no additional training. Three structures appear that were not asked for by the architecture: a high-rank, near-decorrelated state geometry that uses its full width without any decorrelation regularizer (§7.1); a single persistent direction inside the state that decodes to the training unigram (§7.2); and a fast/slow retention split among architecturally-identical memory heads (§7.3).

## 7.1 Geometry of the state

The state is wide:  $d = 2496$ , versus  $d = 768$  for the transformer and GDN baselines at matched parameter count. Most of the parameter budget sits in state width rather than depth. Mean magnitude  $\|s_t^p\| \approx 132$ , tightly concentrated across the sequence ( $\sigma_{\|s\|} \approx 9$ ).

Three structural properties appear without any explicit regularizer (Fig. 4). **(a)** Per-dimension std ranges from 1.05 to 11.3, zero dead dimensions, heavy tail. **(b)** Mean absolute off-diagonal correlation is 0.027, max 0.61 — dimensions are near-independent. **(c)** PCA on 16k state vectors needs 1131 of 2496 components for 90% variance, 2099 for 99%. Stable rank is 40, participation ratio 398: the content signal is not collapsed onto a small subspace.

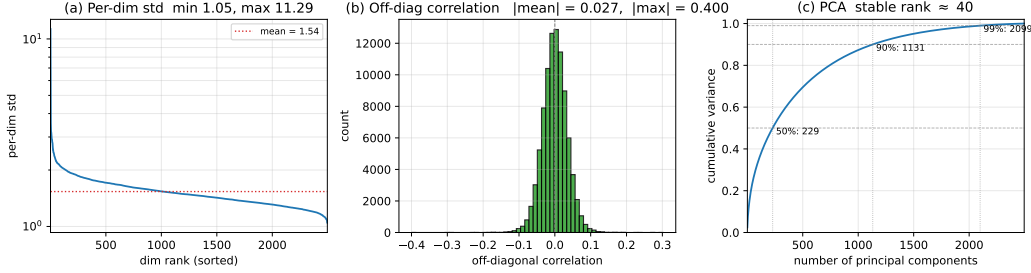


Figure 4: State geometry (1L GPN+M, 130M). **(a)** Sorted per-dim std: heavy tail, no dead dimensions (min 1.05, max 11.3). **(b)** Off-diagonal correlations (300-dim sample):  $|\text{mean}| = 0.03$ . **(c)** Cumulative variance: 1131 PCs for 90%, 2099 for 99%; stable rank  $\approx 40$ . High-rank, near-decorrelated, no dead dimensions — with no explicit regularizer.

**A dominant mean direction.** The state’s mean  $\bar{s} = \mathbb{E}_t[s_t^p]$  has magnitude  $\|\bar{s}\| \approx 107$ , 58% of the typical state magnitude. The state is not a zero-centered fluctuation but a large fixed offset plus a smaller fluctuation around it.  $\bar{s}$  is a *global* property of the trained model: per-batch mean directions are pairwise cosine-similar at  $0.988 \pm 0.005$  across eight different text batches. §7.2 characterizes that anchor.

## 7.2 The mean direction: a learned default-token distribution

Projecting  $\bar{s}$  through the model’s LM head yields a sharp distribution whose top-10 tokens are LLaMA’s most frequent function tokens (“,” “and”, “the”, “in”, “to”, “a”), with Spearman correlation +0.46 against the training unigram. This is not an artifact of averaging embeddings: the mean embedding decoded the same way overlaps the  $\bar{s}$  top-10 in 0/10 tokens (cosine  $-0.62$ ).  $\bar{s}$  is a direction training specifically shaped.

$\bar{s}$  appears quickly — the running mean of the state reaches cosine 0.98 with the final  $\bar{s}$  by token 10, 0.996 by token 100 — and persists even when given a way out. Adding an explicit learnable bias to the decoder (a 50M 1L GPN, 8k steps) drops  $\|\bar{s}\|$  by only 6% ( $64.5 \rightarrow 60.3$ );  $\bar{s}$  remains the top principal component and the learned bias decodes to the same function-token top-10. Training keeps the default-token mechanism in the state even when given an architectural alternative, suggesting  $\bar{s}$  carries structural roles beyond decoding (e.g., a magnitude anchor for RMSNorm) that a decode-only bias cannot replace.

## 7.3 Two horizons from one memory rule

The state is rewritten every step; the matrix memory is a larger decay-governed store written by the state and read back on demand. We measure how long information survives in each.

**State horizon: tens of tokens.** The raw cosine trajectory  $c_k = \mathbb{E}_t[\cos(s_t^p, s_{t+k}^p)]$  plateaus near 0.65 out to  $k = 1500$ , which is  $\bar{s}$  dominating both endpoints, not genuine long-range memory. Once the per-sequence mean is subtracted, the centered cosine falls from 0.31 at  $k = 1$  to  $\approx 0$  by  $k = 256$  (Fig. 5a). The content-bearing part of the state holds information for tens of tokens.

**Memory horizon: heads split into fast and slow pools.** Each head  $h$  applies a data-dependent decay  $\alpha_t^{(h)} \in (0, 1)$  to  $M_{t-1}^{(h)}$  before writing (§4); accumulating these decays along held-out data gives per-head retention curves and a half-life  $k_{1/e}$  (the lag at which  $\prod_{\tau} \alpha_{\tau}^{(h)} = 1/e$ ). The 15 heads split into two pools (Fig. 5b): a *fast pool* of 6 heads with half-lives of 1–3 tokens (write-dominated scratch), and a *slow pool* of 9 heads with half-lives from 5 to 322 tokens. The slowest heads retain information roughly an order of magnitude longer than the state itself.

All 15 heads are architecturally identical; nothing in the design divides them into short- and long-retention pools. The division emerges from training. We did not have to build a two-timescale memory system: one associative memory with data-dependent decay is enough, and the two timescales arise because training finds them useful. Whether the slow pool is actually being used for long-range prediction — as opposed to merely being capable of it — requires an ablation we have not run.

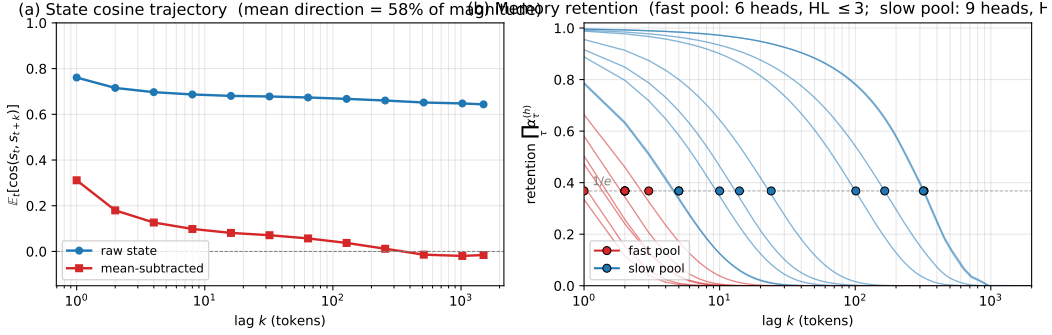


Figure 5: Temporal horizons. **(a)** State cosine trajectory  $\mathbb{E}_t[\cos(s_t^p, s_{t+k}^p)]$  vs. lag  $k$  (log- $x$ ). The raw state (blue) plateaus near 0.65 up to  $k = 1500$  because the shared mean direction dominates both vectors; after subtracting each sequence’s mean (red), the content-bearing component drops from 0.31 at  $k=1$  to  $\approx 0$  by  $k \approx 256$ . **(b)** Per-head retention  $\prod_{\tau \leq k} \alpha_{\tau}^{(h)}$  of the matrix memory  $M$ , one curve per head; dots mark each head’s  $1/e$  half-life. Heads split into a fast pool (red, 1–3 tokens) and a slow pool (blue, up to 322 tokens), roughly an order of magnitude longer than the state’s own content horizon.

## 8 Limitations

This is a result about what a single shallow recurrent layer can carry, not a production-ready system. Practical and scientific caveats:

- (1) **Training cost.** GPN/GPN+M run sequentially in Python across the time dimension; the in-loop matrix-memory update has no parallel-along-sequence kernel, so per-step training cost is well above the transformer and GDN baselines at matched parameter count. This is a research artifact, not a deployable model.
- (2) **Scale.** One seed per configuration at 130M,  $\sim 20$ B training tokens; no scaling sweeps.
- (3) **Descriptive analyses.** We do not measure the PPL impact of zeroing  $\bar{s}$  or ablating slow-pool memory heads, so the emergent structures cannot be called causal.
- (4) **Baselines.** We do not run matched 1-layer GDN or Mamba with the same measurements, so we cannot attribute the observed structures to grounded prediction specifically.
- (5) **Depth cost on context-heavy tasks.** Averaged FineWeb PPL hides what LAMBADA reveals — limited per-token compute depth costs accuracy on context-dependent predictions, even with memory.

## 9 Conclusion

GPN replaces the deep stack with a single recurrent layer revisited at every step around one state vector and one shared matrix memory. At 130M parameters, a 1-layer GPN+M reaches FineWeb PPL 18.06, 13%/18% above a 12-layer Transformer++ and a 10-layer GDN; a 2-layer variant brings the gap to 6%/11%. The shallow model does not match the deep baselines, and pays a measurable cost on context-specific predictions like LAMBADA.

Conceptually, the state’s prediction of the next step can be viewed as part of the encoding of that step — a single vector plays both roles, with grounding completing the encoding. Because the working state is a single vector, structures a layered architecture would have to dig out of residual streams are here on the surface — small enough to see through, large enough to be empirically usable.

## References

- Maximilian Beck, Korbinian Pöppel, Markus Spanring, Andreas Auer, Oleksandra Prudnikova, Michael Kopp, Günter Klambauer, Johannes Brandstetter, and Sepp Hochreiter. xLSTM: Extended long short-term memory. *arXiv preprint arXiv:2405.04517*, 2024.
- Ali Behrouz, Peilin Zhong, and Vahab Mirrokni. Titans: Learning to memorize at test time. *arXiv preprint arXiv:2501.00663*, 2025a.
- Ali Behrouz et al. Nested learning: The illusion of deep learning architectures. *arXiv preprint arXiv:2512.24695*, 2025b.
- Tri Dao and Albert Gu. Transformers are ssms: Generalized models and efficient algorithms through structured state space duality. *arXiv preprint arXiv:2405.21060*, 2024.
- Soham De, Samuel L. Smith, Anushan Fernando, Aleksandar Botev, George Cristian-Muraru, Albert Gu, Ruba Haroun, Leonard Berrada, Yutian Chen, Srivatsan Srinivasan, et al. Griffin: Mixing gated linear recurrences with local attention for efficient language models. *arXiv preprint arXiv:2402.19427*, 2024.
- Xin Dong, Yonggan Fu, Shizhe Diao, Wonmin Byeon, Zijia Chen, Ameya S. Mahabaleshwarkar, Shih-Yang Liu, Matthijs Van Keirsbilck, Min-Hung Chen, Yoshi Suhara, et al. Hymba: A hybrid-head architecture for small language models. *arXiv preprint arXiv:2411.13676*, 2024.
- Karl Friston. The free-energy principle: a unified brain theory? *Nature reviews neuroscience*, 11(2): 127–138, 2010.
- Albert Gu and Tri Dao. Mamba: Linear-time sequence modeling with selective state spaces. *arXiv preprint arXiv:2312.00752*, 2023.
- Albert Gu, Karan Goel, and Christopher Ré. Efficiently modeling long sequences with structured state spaces. *arXiv preprint arXiv:2111.00396*, 2021.
- Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural computation*, 9(8): 1735–1780, 1997.
- Angelos Katharopoulos, Apoorv Vyas, Nikolaos Pappas, and François Fleuret. Transformers are RNNs: Fast autoregressive transformers with linear attention. 2020.
- Tsendsuren Munkhdalai, Manaal Faruqui, and Siddharth Gopal. Leave no context behind: Efficient infinite context transformers with infini-attention. *arXiv preprint arXiv:2404.07143*, 2024.
- Bo Peng et al. RWKV-7 "goose" with expressive dynamic state evolution. *arXiv preprint arXiv:2503.14456*, 2025.
- Rajesh PN Rao and Dana H Ballard. Predictive coding in the visual cortex: a functional interpretation of some extra-classical receptive-field effects. *Nature neuroscience*, 2(1):79–87, 1999.
- Imanol Schlag, Kazuki Irie, and Jürgen Schmidhuber. Linear transformers are secretly fast weight programmers. *arXiv preprint arXiv:2102.11174*, 2021.
- Yu Sun, Xinhao Li, Karan Dalal, Jiarui Xu, Arjun Vikram, Genghan Zhang, Yann Dubois, Xinlei Chen, Xiaolong Wang, Sanmi Koyejo, Tatsunori Hashimoto, and Carlos Guestrin. Learning to (learn at test time): RNNs with expressive hidden states. *arXiv preprint arXiv:2407.04620*, 2024.
- Songlin Yang, Bailin Wang, Yikang Shen, Rameswar Panda, and Yoon Kim. Gated linear attention transformers with hardware-efficient training. *arXiv preprint arXiv:2312.06635*, 2023.



Songlin Yang, Jan Kautz, and Ali Hatamizadeh. Gated delta networks: Improving mamba2 with delta rule. *arXiv preprint arXiv:2412.06464*, 2024a.

Songlin Yang, Bailin Wang, Yu Zhang, Yikang Shen, and Yoon Kim. Parallelizing linear transformers with the delta rule over sequence length. *arXiv preprint arXiv:2406.06484*, 2024b.