

PanelWhiz Installation Instructions

Dr. John P. Haisken-DeNew

<http://www.panelwhiz.eu>

Email: john@panelwhiz.eu

Version: 2010.10.02

Page 6	Appendix A: German SOEP
Page 9	Appendix B: Australian HILDA
Page 12	Appendix C: German IAB Establishment Panel
Page 14	Appendix D: British BHPS
Page 16	Appendix E: American PSID


General Comments

- (1) Please note that you will have to have the appropriate **write permissions** to write files or create directories on a disk.
- (2) You need at least version Stata 10/SE or MP.
- (3) You must **have access to the internet** to install PanelWhiz!

To test this, type in the Stata command box:

```
. update query
```

You should get a response from the Stata server. **If so** (like below), then you can continue.

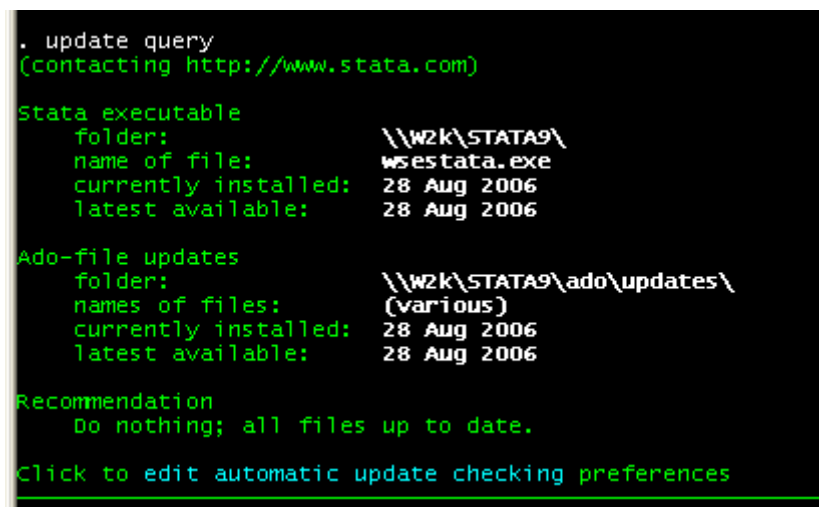

```
. update query
(contacting http://www.stata.com)

Stata executable
  folder:          \\W2k\STATA9\
  name of file:    wsestata.exe
  currently installed: 28 Aug 2006
  latest available:  28 Aug 2006

Ado-file updates
  folder:          \\W2k\STATA9\ado\updates\
  names of files:  (various)
  currently installed: 28 Aug 2006
  latest available:  28 Aug 2006

Recommendation
  Do nothing; all files up to date.

Click to edit automatic update checking preferences
```

If not, it could be that you have a PROXY SERVER in your network. The address of the proxy server needs to be entered into the Stata preferences before ANYTHING will work.

A. To find out this Proxy Server info:

- (1) Open "MS Internet Explorer" in WinXP
 - (2) Click on "Tools" | "Internet Options" | "Connections" | "LAN Settings"
- The info is in the bottom half of the screen.

B. Enter the PROXY SERVER address in Stata

- (1) Start Stata
- (2) Click on "Prefs" | "General Preferences" | "Internet"
- (3) Enter the info from (A) here.

To test if this worked, type in the Stata command box:

```
. update query
```

You should get a response from the Stata server. If so, then you can continue.

- (4) **PLEASE FOLLOW THESE DIRECTIONS CAREFULLY.**
DO NOT LEAVE OUT ANY STEPS.

- (5) **PanelWhiz needs to be able to read and write files “quickly”** to your hard-disk. If it cannot, there are some problems that often arise when using or setting up PanelWhiz, essentially make PanelWhiz useless, as access to many files at once is a necessity for PanelWhiz. It should be made clear that these problems have NOTHING to do with PanelWhiz or Stata itself. These are **exclusively “problems” with your operating system**. There are however easy solutions to these problems.

Problems:

- (A) The hard-disk is so fragmented and access to the files on the hard-disk is so slow, that Stata “times-out” and complains that certain files cannot be read or written.

Solution: Defragment your hard-disk regularly. Sometimes you need “administrator privileges”, depending on the operating system, to do this.

- (B) You have a virus checking software that checks every file before it is read or written, making access to the files overly slow.

Solution: In many anti-virus programs, it is possible to switch off virus checking before reading and writing certain types of files. Therefore you need to exclude files that end with: *.dta, *.gph, *.log, *.do, *.ado, *.smcl. The *.dta and *.gph files are binary and are not known to carry viruses of any sort. The rest of the mentioned file types are all ASCII files, which contain no viruses.

You may have never had problems with Stata before and now using PanelWhiz these problems arise. Most likely you have never used Stata in such a way that so many files need to be accessed simultaneously.

- (C) You have installed PanelWhiz or the data files on a slow network hard-disk causing time-outs.

Solution: Re-install PanelWhiz such that you do not need to rely on the slow network drive.

- (6) If you are an administrator and want to install PanelWhiz for another person, keep the following in mind:

- (A) You must be logged in as the person for whom you are installing PanelWhiz, since there are two files “profile.do” and “pwprofile.do” which are created in the personal user directory during the installation process.

- (B) If you are installing PanelWhiz on more than one machine with the SAME user id and password, it is sometimes useful to use an existing installation of PanelWhiz and just copy all files to the new location. These files include: (1) the PanelWhiz directory (e.g. c:\panelwhiz); (2) the working directory (e.g. c:/pwproj) and (3) the files “profile.do” and “pwprofile.do” which are located in the personal user directory. It is import that all necessary files are copied to exactly the same respective locations.
-

Installation

Step 1: Copy the file **pwnetupdate.ado** to **c:**. If this directory is not writable, copy it to a directory that is.

Step 2: Prepare your installation directory. The “Install Directory” must be a directory that is writable. In your Stata command window, type

```
. cd c:\  
. pwnetupdate, install(c:\panelwhiz) user(myname@uni.ac.uk) pass(my_own_secret_password)
```

Step 3: Enter in your information. The “Working Directory” must be a directory that is writable. All of your PanelWhiz output will be stored here, i.e. retrievals etc.

PanelWhiz: Profile settings

PanelWhiz CPS-NBER PSID HILDA LSAC BHPS IAB-BP MikroZ MZPC SOEP SOEPLONG LIS SHARE PanelWhiz Admin

User Authorisation

PanelWhiz Userid (Email) jhaiskendenew@rwi-essen.de

PanelWhiz Password:

PanelWhiz Paths

Path to PanelWhiz: e:/panelwhiz

Working directory: e:/pwproj

Start-up

Check for updates: No Memsize on startup: 500m

Identity

Author: John Haiken-DeNew


Email: jhaiskendenew@rwi-essen.de

OK Cancel

By default, PanelWhiz always checks each time you start up Stata if there are any updates for the PanelWhiz system. If so you are immediately notified. If for some reason you do not wish to check automatically, please select “Check for updates” to “No”. I strongly suggest allowing automatic updates.

Step 5: Restart Stata.

Step 6: You should see something like the following:

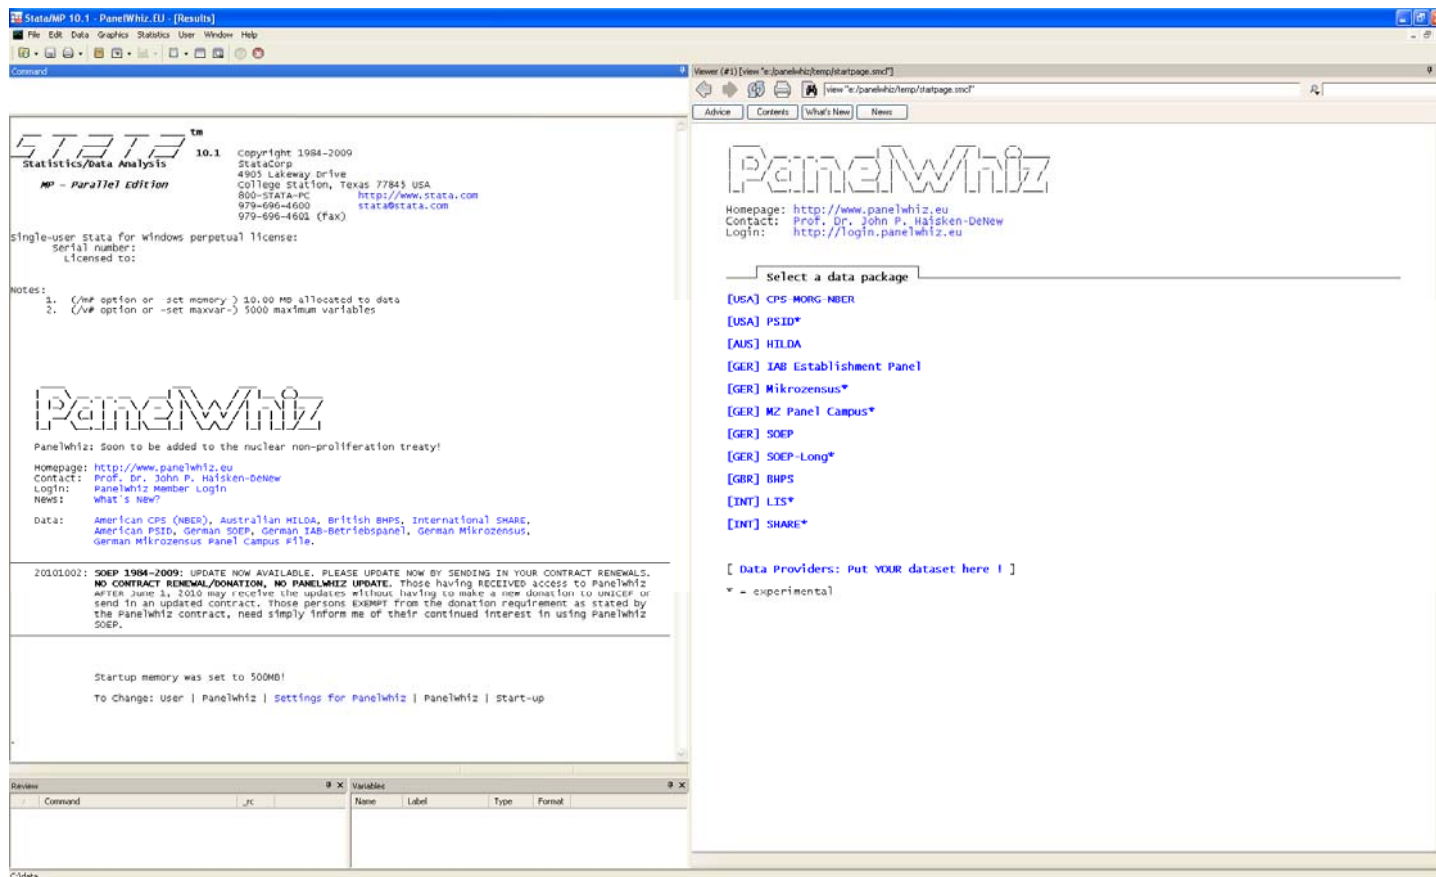

If you do, PanelWhiz should be installed properly on your machine. Please note that the contents of the Viewer window can be different from your version of PanelWhiz.

Step 7: You must now enter the directories in which your data sets are located (see the respective appendices).


Appendix A:

The following section is for users of the German SOEP only.


SOEP STEP (A): You need to install the SOEP Data that have been prepared for PanelWhiz.

Copy the PanelWhiz-SOEP Data Files from the SOEP Data DVD to a directory, **c:\panelwhizdata\soep**

SOEP STEP (B): Now tell PanelWhiz the name of the directory where the data are actually stored. In this case, it is **c:\panelwhizdata\soep**.

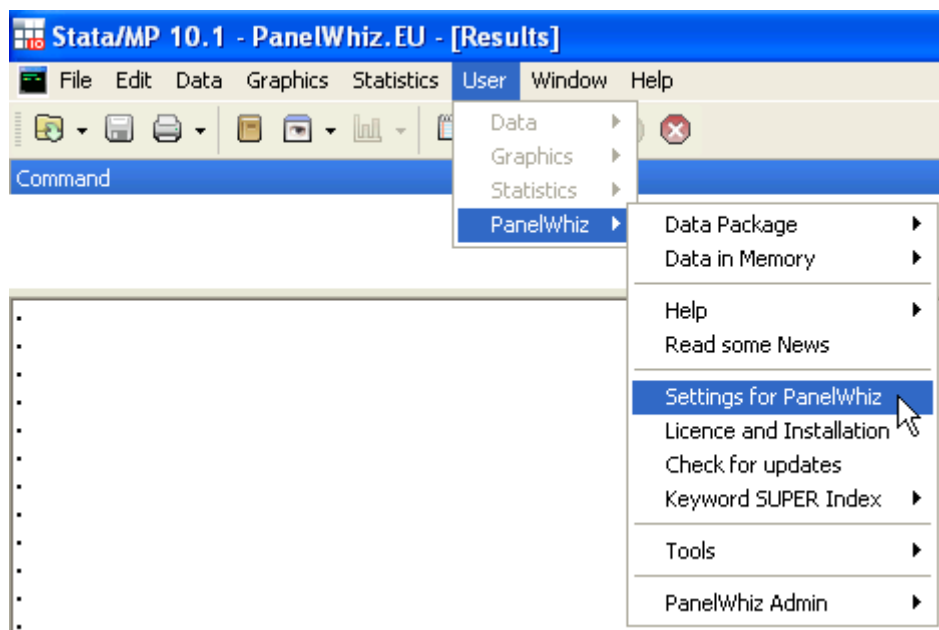



Click on the „SOEP“ tab.

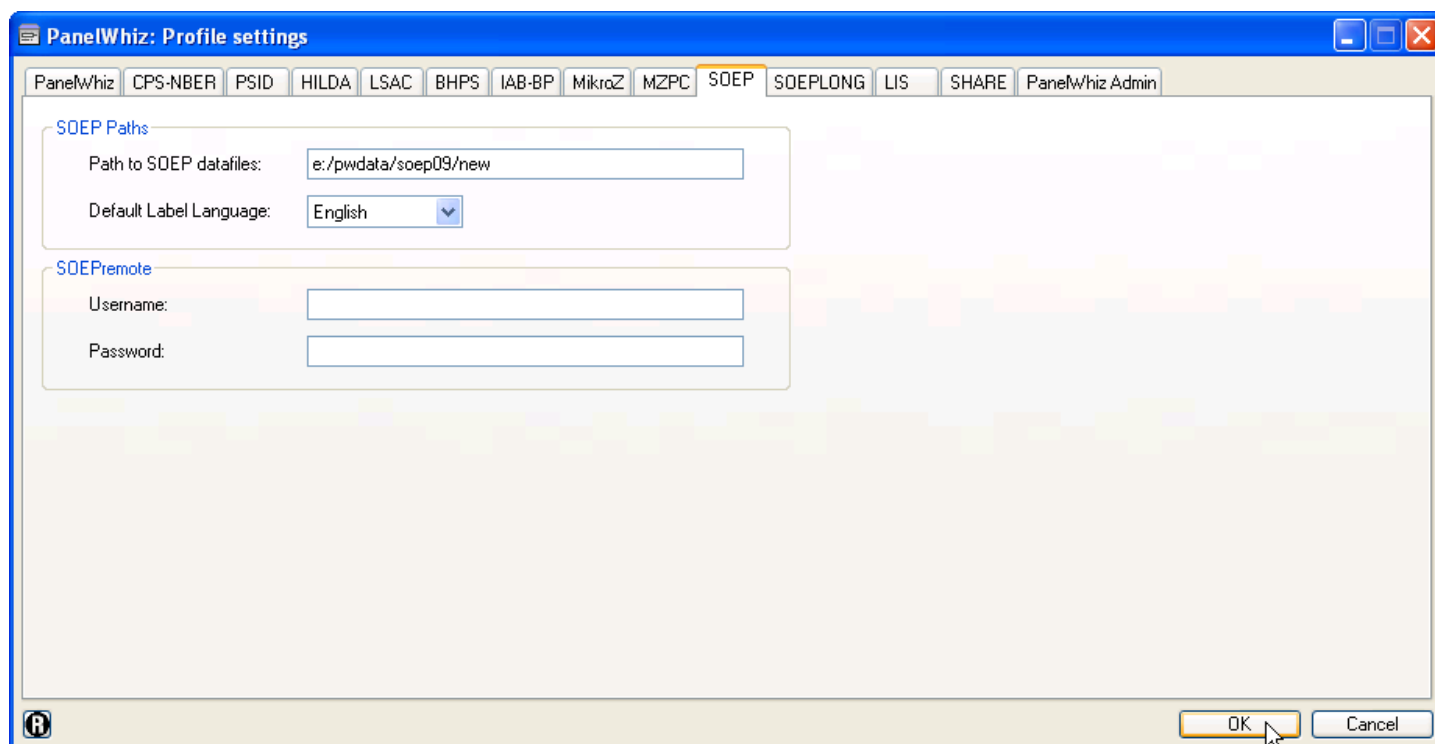

Click on „OK“ to confirm the settings.

SOEP STEP (C): Now RESTART Stata.


If everything has worked out well, you should see this screen. This is the PanelWhiz “Start Page”.

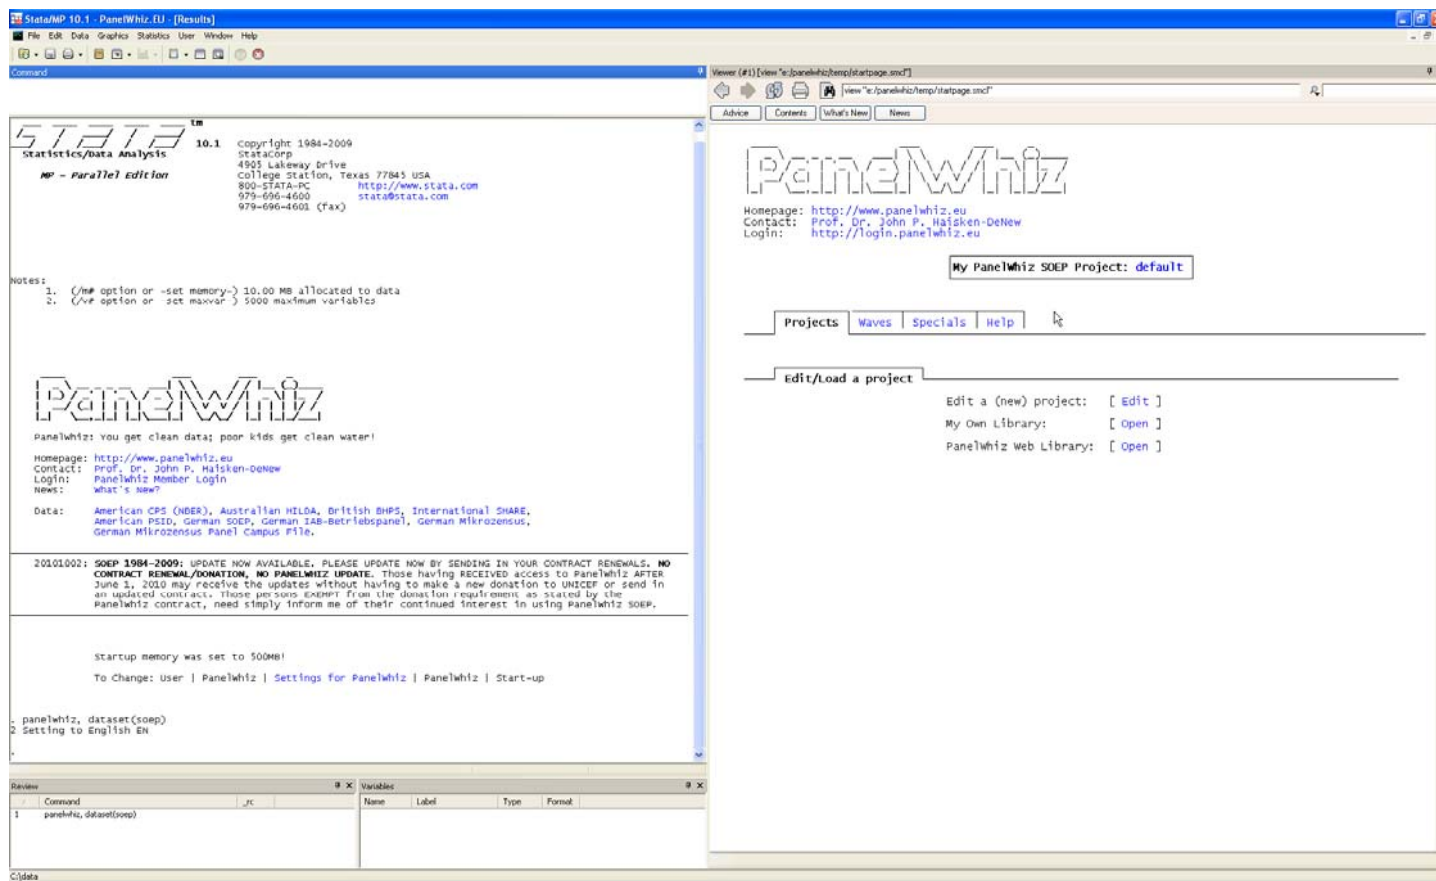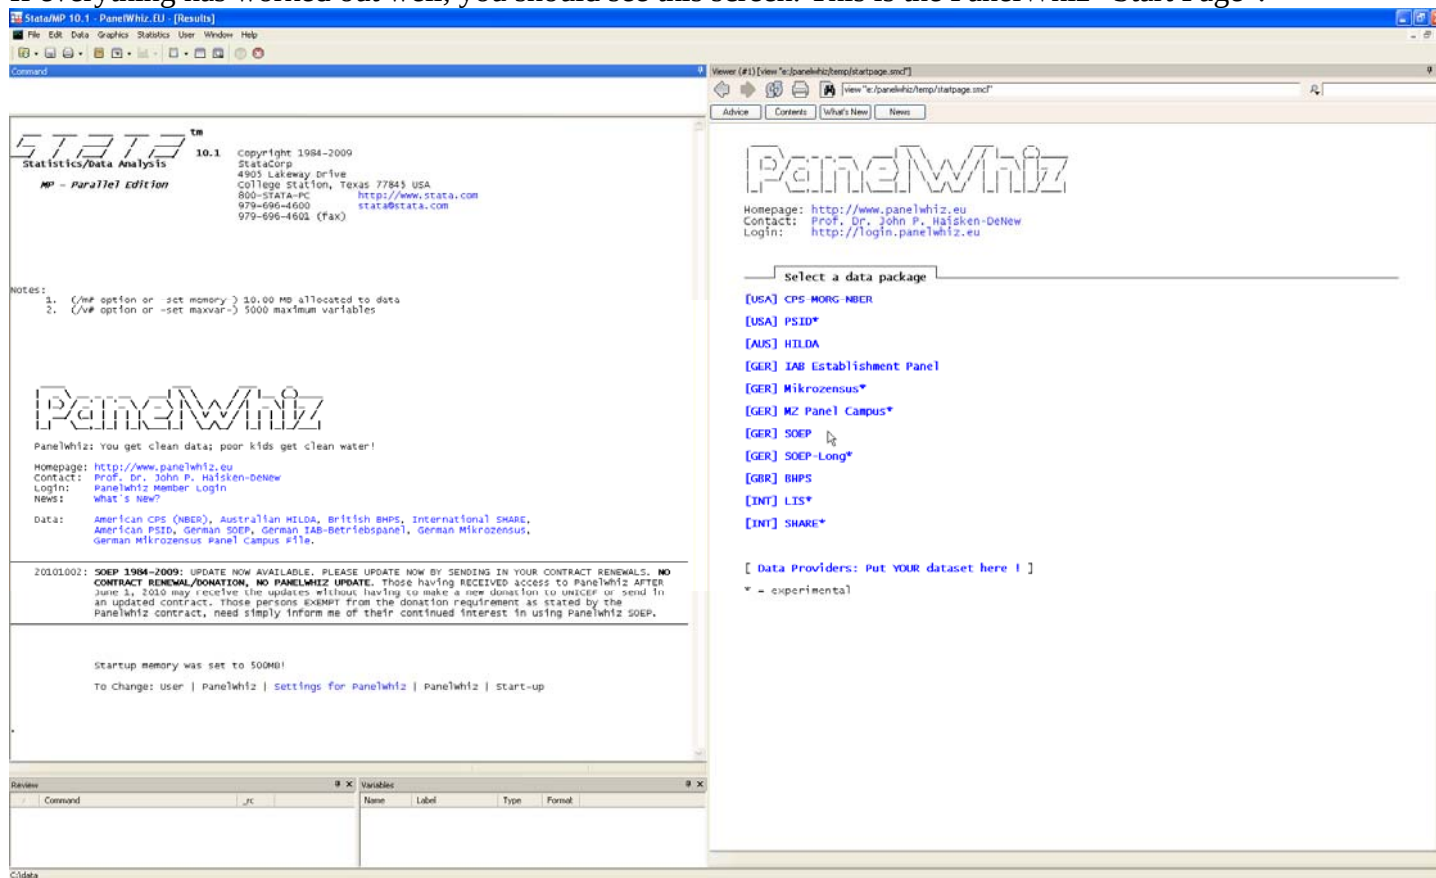

Appendix B:

The following section is for users of the Australian HILDA only.

Make sure that the settings are OK for HILDA.

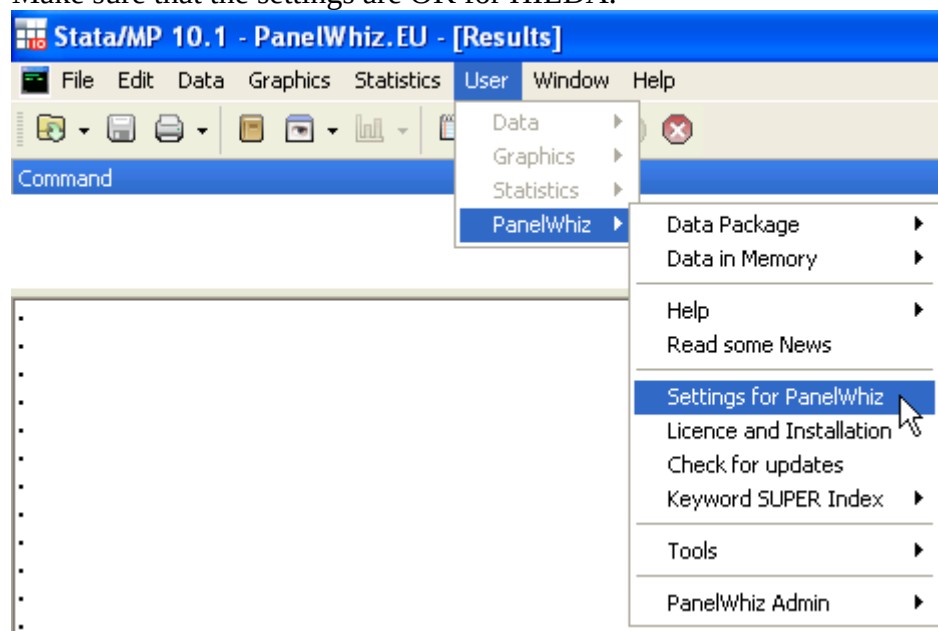


In the “Settings” dialog, click on the tab “HILDA”.



Open the start page of PanelWhiz HILDA.

You should get a screen like the following:

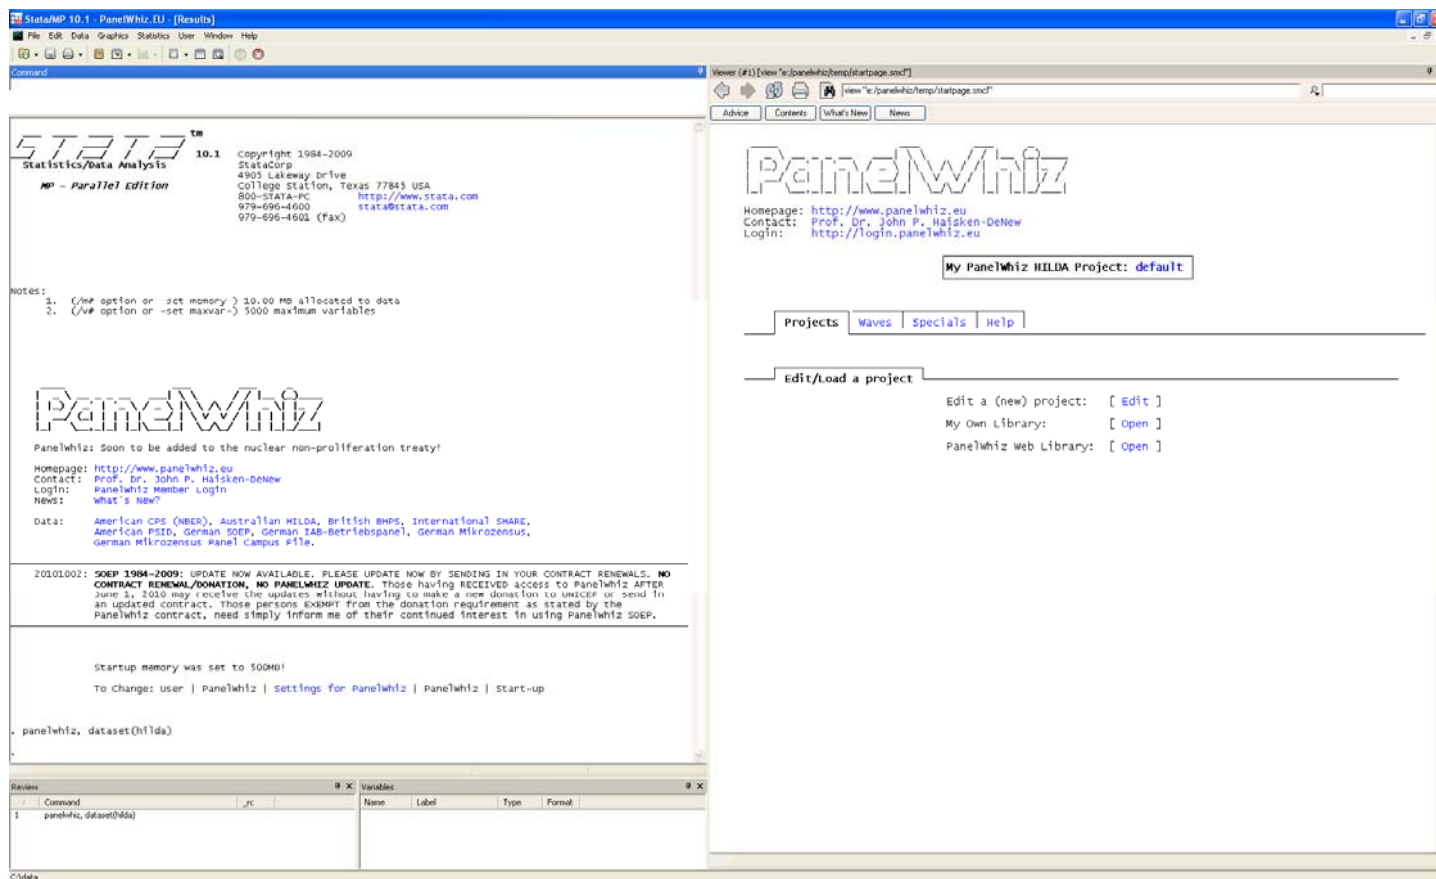


Appendix C:

The following section is for users of the German *IAB Betriebspanel* only.

SOEP STEP (A): You **DO NOT** need to prepare the original data with PanelWhiz meta information. This has been done for you already. The data that are distributed with PanelWhiz are the “TEST FILES” for the IAB Betriebspanel. They do not contain any real data, but are simulated data to allow testing of retrievals. The original and real data are at the IAB Nuremburg. You send your retrievals by email to the IAB Nuremburg and they run them and send back output.

Assuming you installed to `c:\panelwhiz`, the test data are found in the following directory:
`c:\panelwhiz\iabbp\datasetup\test*.dta`

In the drop down menu in Stata, select “User | PanelWhiz | Settings for PanelWhiz”

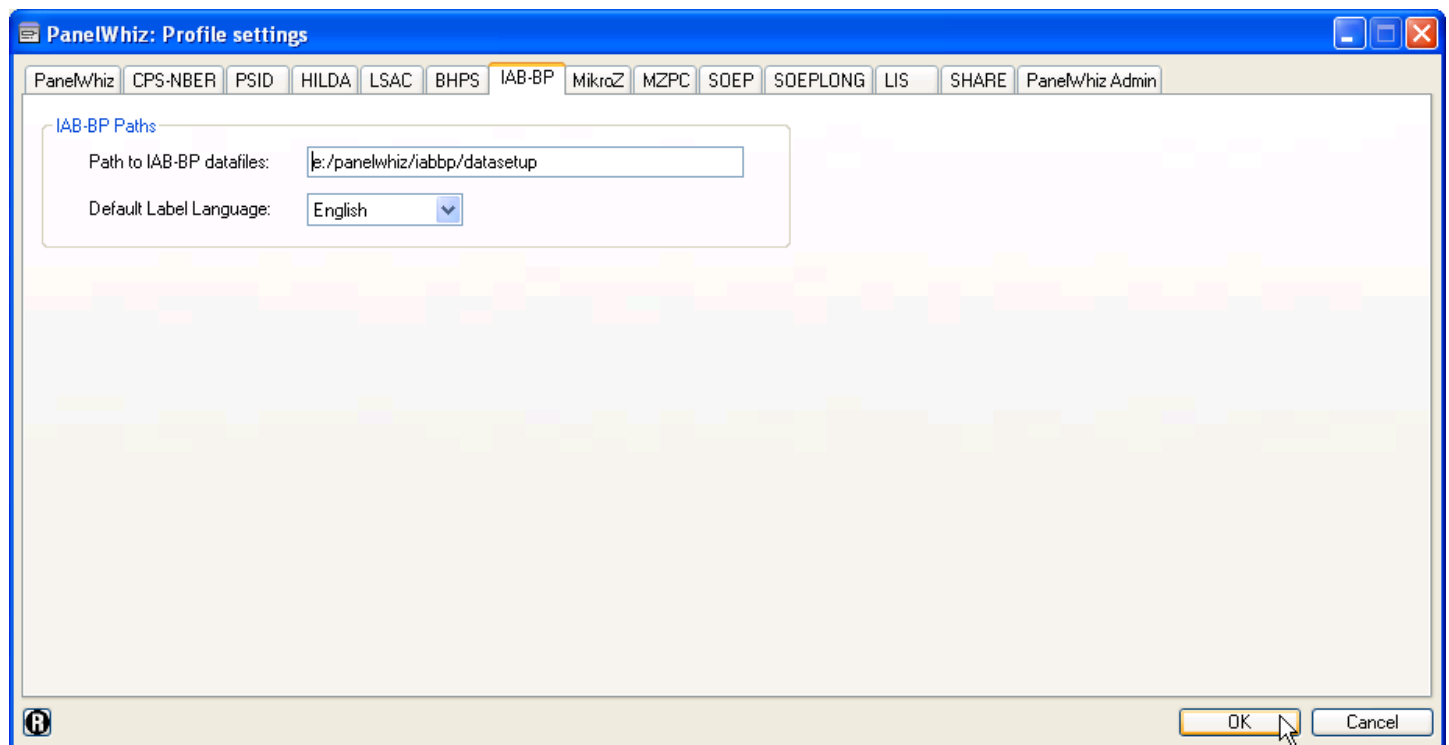

Type in the pathname, and then press OK.

Appendix D:
The following section is for
users of the British
BHPS only.


Step 1: Copy all of the *.dta files from the BHPS to the directory:
c:\panelwhiz\bhps\datasetup

Step 2: Start Stata SE/MP. In the command window, type:
. cd c:\panelwhiz\bhps\datasetup
. do bhps_data_setup.do

The *.dta files have now been physically changed to include the meta information required by PanelWhiz.

Step 3: Move the prepared BHPS *.dta files to another place, e.g.
c:\panelwhizdata\bhps

Step 4: In the drop down menu in Stata, select “User | PanelWhiz | Settings for PanelWhiz”

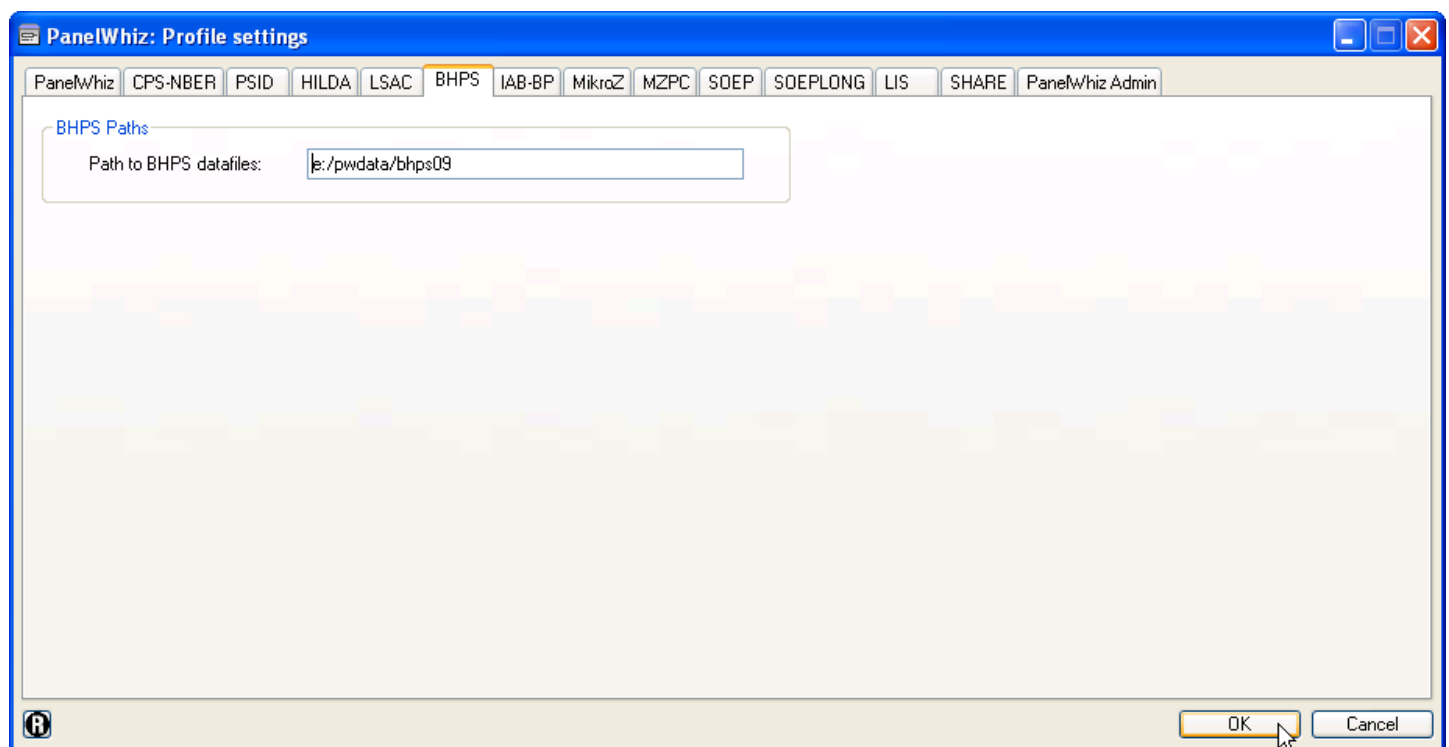

Step 5: Restart Stata, select BHPS as your dataset.

Appendix E:

The following section is for users of the American *PSID* only.

Step 1: Download the PSID data.

Each Family file (1968-2007) ZIP file and the individual ZIP file has to be downloaded separately.

Stata | User | PanelWhiz | PanelWhiz PSID | Download PSID

Store the all the ZIP files in

c:\panelwhiz\psid\psiddata

Step 2: In the command window, type:


. cd c:\panelwhiz\psid\datasetup

. run psid_data_setup.do

The *.dta files have now been physically changed to include the meta information required by PanelWhiz.

Step 3: Move the prepared PSID *.dta files to another place, e.g.

c:\panelwhizdata\psid

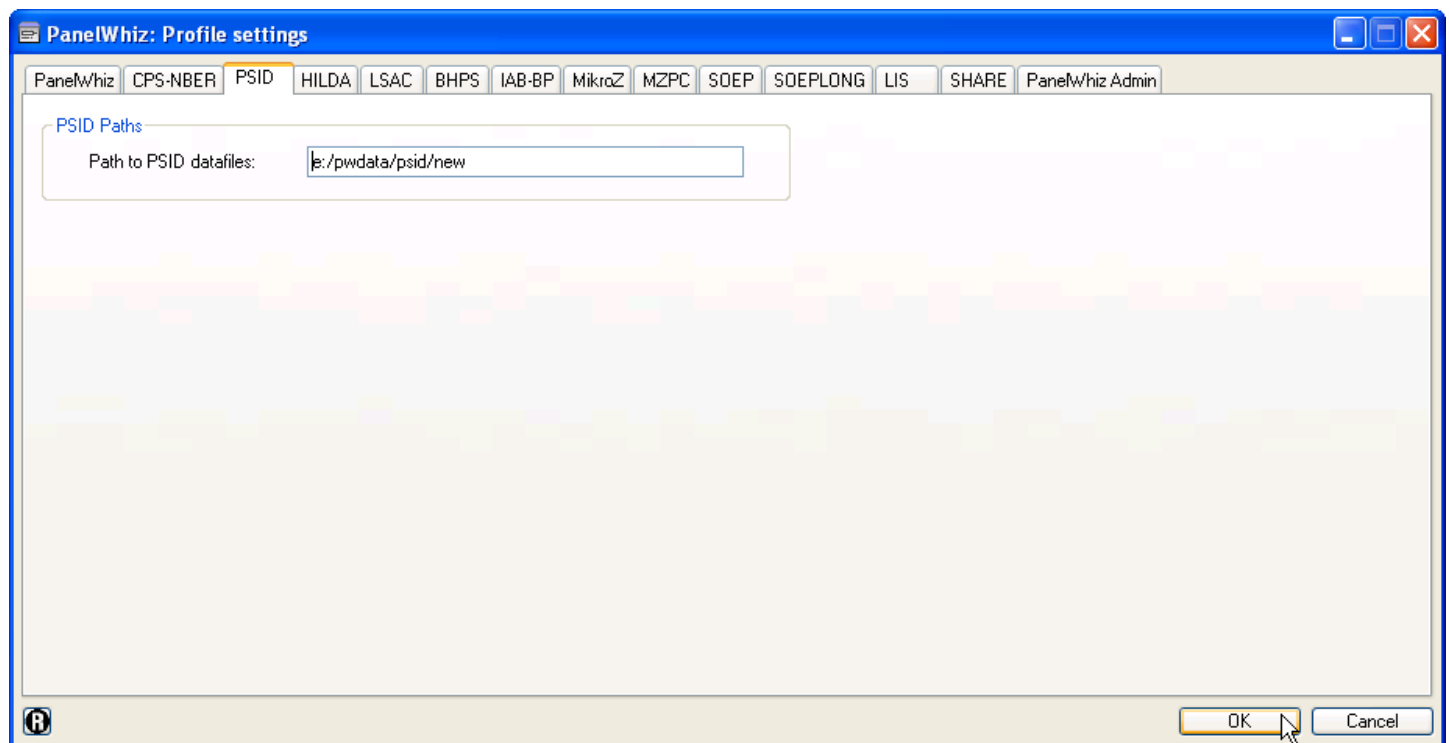Step 4: In the drop down menu in Stata, select “User | PanelWhiz | Settings for PanelWhiz”

Step 5: Restart Stata, select PSID as your dataset.
