

Q1

● Graded

Student
Steven Chen

Total Points
18.5 / 24 pts

Question 1

Score 18.5 / 24 pts

+ 0 pts Correct

🗨 + 18.5 pts Point adjustment

17/24 +1 18/24

COMP 210 Q1

Name: Steven Chen

1. (1 point) Primary storage holds data temporarily and is very fast to access, while secondary storage is for long-term storage and is slower to access.


a. True
b. False

- 1 2. (1 point) Convert 0x2B to binary (remember the prefix!): 0b00101100
- Handwritten notes: 011, 2/2=1 r0, 1/2=0 r1, 12/2=6 r0, 6/2=3 r0, 3/2=1 r1, 1100

3. (1 point) What language does the JVM read and execute? Bytecode

4. (3 points) For each primitive type below, write its size in bytes next to it. Do not write anything for the reference types.

- class
- boolean 1B
- double 8B
- char 2B

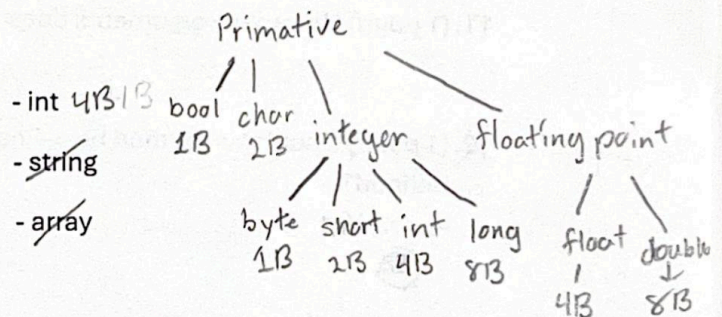

- 1 5. (1 point) What is the value of a reference type variable?

null the object's address

6. (2 points) Declare and initialize a String array containing three of your favorite foods.

String[] favoriteFood = {"sushi", "mango", "noodle"};

7. (1 point) Data abstraction increases security and simplicity by hiding certain data from the user.

Steven Chen

Consider the following method signature for questions 8-12.

```
protected String[] args(int x, int y) {  
    // body omitted  
}
```

8. (1 point) What is the name of the method? args

9. (1 point) Is it an instance method or class method?

- ☒ a. Instance
b. Class

no static

-0.5 ~~10.~~ (1 point) What is the return type (write "none" if no return type)? string[]
↑
capital s

11. (1 point) How many arguments does a call to the method require? 2

-1 ~~12.~~ (1 point) Could this method be called by code outside of the class where it is defined?

- a. Yes
☒ b. No

"Triple T".substring(1,4)

-1 P ~~13.~~ (2 points) What does the following expression evaluate to?
"rip" == "Triple T".substring(1,4)

== address rip

true false

14. (1 point) Big O notation expresses the upper bound of an algorithm's time or space complexity.

Steven Chen

Consider the following code.

```
String[] words1 = {"a", "b", "c"}; "Hello"
String[] words2 = {"x", "y", "z"}; "a", "b", "c"
words2 = words1; "world", "b", "Hello"

words1[2] = "hello";
words2[0] = "world";

System.out.println(words1[0]);
System.out.println(words1[2]);
System.out.println(words2[0]);
System.out.println(words2[2]);
```

15. (3 points) What is printed?

```
a ← world
hello
world
hello
```

16. (4 points) Write a program that prints the numbers 1 through 10 using a loop. Treat the box below like a completely empty Java file (start from scratch).

```
public class -0.5 Capital P needed Program {
    public static void program { -1 Needs to be a main method: main(String[] args)
        for (i=1; i<11; i++) {
            System.out.println(i);
        }
    }
}
```

3 ← ③ No points off but watch your indentation!

Great job! You did amazing!!! ★ =

