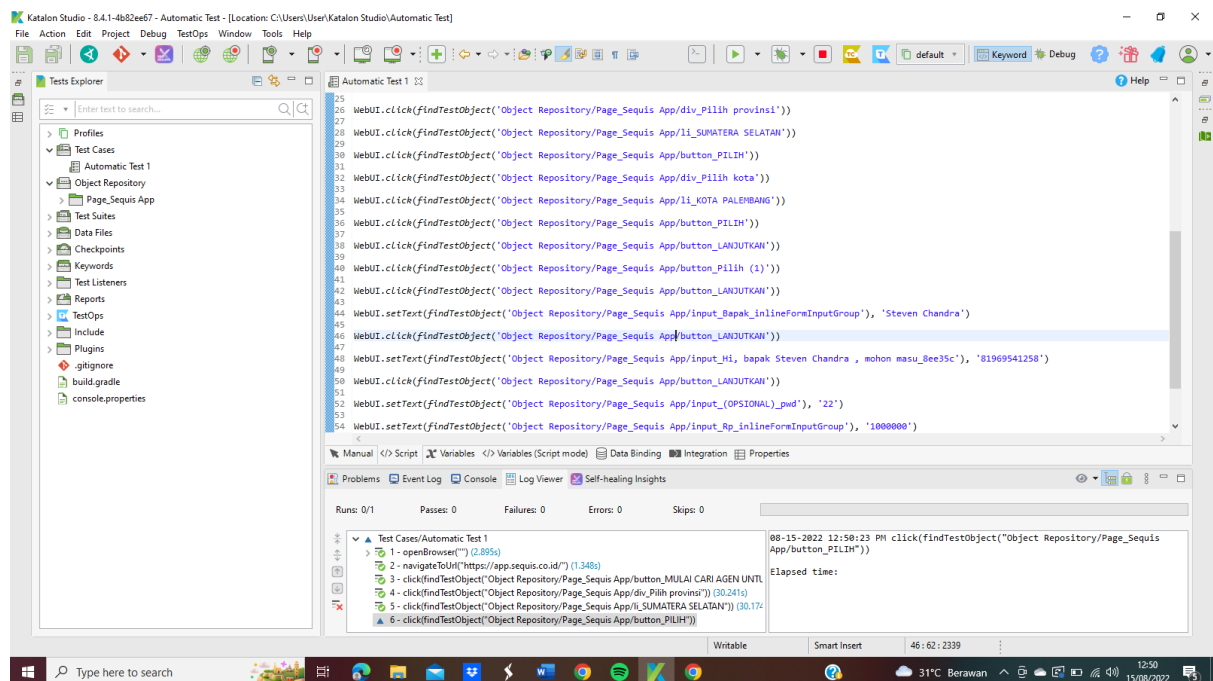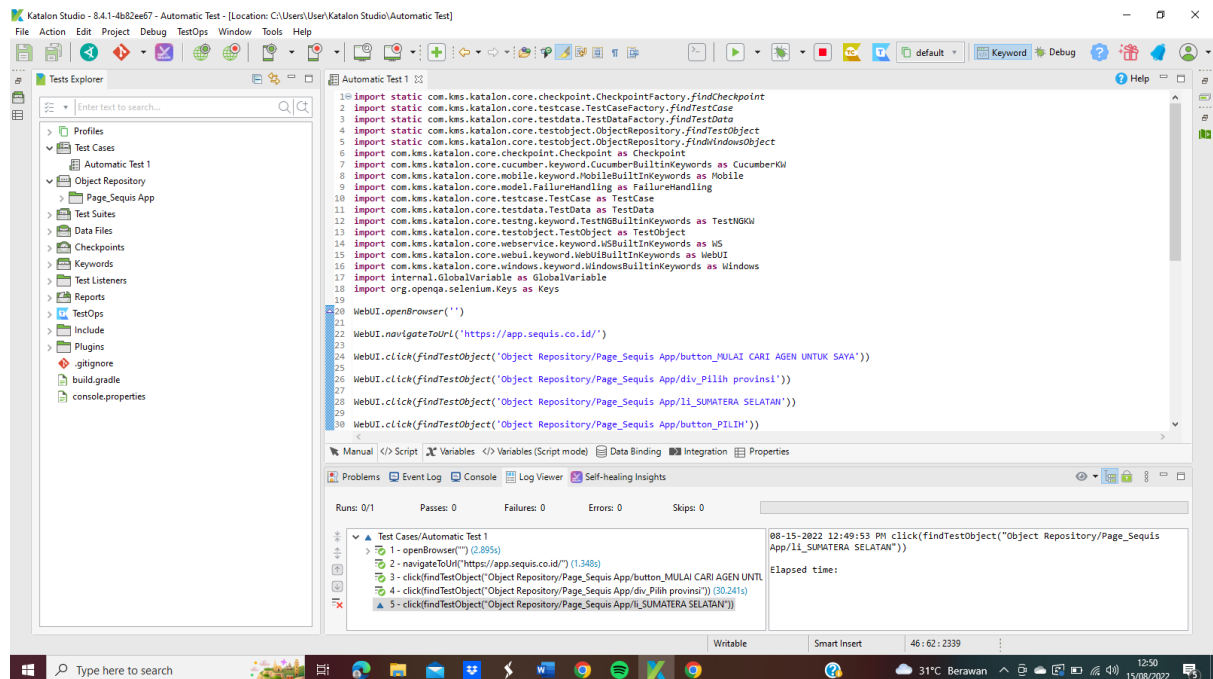# Script Automatic Test Using Katalon Studio


```
import static com.kms.katalon.core.checkpoint.CheckpointFactory.findCheckpoint
import static com.kms.katalon.core.testcase.TestCaseFactory.findTestCase
import static com.kms.katalon.core.testdata.TestDataFactory.findTestData
import static com.kms.katalon.core.testobject.ObjectRepository.findTestObject
import static com.kms.katalon.core.testobject.ObjectRepository.findWindowsObject
import com.kms.katalon.core.checkpoint.Checkpoint as Checkpoint
import com.kms.katalon.core.cucumber.keyword.CucumberBuiltinKeywords as CucumberKW
import com.kms.katalon.core.mobile.keyword.MobileBuiltInKeywords as Mobile
import com.kms.katalon.core.model.FailureHandling as FailureHandling
import com.kms.katalon.core.testcase.TestCase as TestCase
import com.kms.katalon.core.testdata.TestData as TestData
import com.kms.katalon.core.testng.keyword.TestNGBuiltinKeywords as TestNGKW
```

```
import com.kms.katalon.core.testobject.TestObject as TestObject
import com.kms.katalon.core.webservice.keyword.WSBuiltInKeywords as WS
import com.kms.katalon.core.webui.keyword.WebUiBuiltInKeywords as WebUI
import com.kms.katalon.core.windows.keyword.WindowsBuiltinKeywords as Windows
import internal.GlobalVariable as GlobalVariable
import org.openqa.selenium.Keys as Keys

WebUI.openBrowser('')

WebUI.navigateToUrl('https://app.sequis.co.id/')

WebUI.click(findTestObject('Object Repository/Page_Sequis App/button_MULAI CARI
AGEN UNTUK SAYA'))

WebUI.click(findTestObject('Object Repository/Page_Sequis App/div_Pilih
provinsi'))

WebUI.click(findTestObject('Object Repository/Page_Sequis App/li_SUMATERA
SELATAN'))

WebUI.click(findTestObject('Object Repository/Page_Sequis App/button_PILIH'))

WebUI.click(findTestObject('Object Repository/Page_Sequis App/div_Pilih kota'))

WebUI.click(findTestObject('Object Repository/Page_Sequis App/li_KOTA PALEMBANG'))

WebUI.click(findTestObject('Object Repository/Page_Sequis App/button_PILIH'))

WebUI.click(findTestObject('Object Repository/Page_Sequis App/button_LANJUTKAN'))

WebUI.click(findTestObject('Object Repository/Page_Sequis App/button_Pilih (1)'))

WebUI.click(findTestObject('Object Repository/Page_Sequis App/button_LANJUTKAN'))

WebUI.setText(findTestObject('Object Repository/Page_Sequis
App/input_Bapak_inlineFormInputGroup'), 'Steven Chandra')

WebUI.click(findTestObject('Object Repository/Page_Sequis App/button_LANJUTKAN'))

WebUI.setText(findTestObject('Object Repository/Page_Sequis App/input_Hi, bapak
Steven Chandra , mohon masu_8ee35c'), '81969541258')

WebUI.click(findTestObject('Object Repository/Page_Sequis App/button_LANJUTKAN'))

WebUI.setText(findTestObject('Object Repository/Page_Sequis
App/input_(OPSIONAL)_pwd'), '22')

WebUI.setText(findTestObject('Object Repository/Page_Sequis
App/input_Rp_inlineFormInputGroup'), '1000000')

WebUI.click(findTestObject('Object Repository/Page_Sequis
App/input_(OPSIONAL)_inlineRadioOptions'))

WebUI.click(findTestObject('Object Repository/Page_Sequis App/button_LANJUTKAN'))
```