

6.867 Final Project Writeup

Vickie Ye and Alexandr Wang

Abstract

In this project, we compared different methods for facial expression recognition.

1 Introduction

1.1 PCA

1.2 Facial Landmark Detection

1.3 Convolutional Neural Networks

Convolutional Neural Networks (CNNs) are a particularly type of artificial neural network that works particularly well for image data. The structure of CNNs exploits strong local correlation in the inputs. This is done by enforcing local connectivity between neurons of adjacent layers. The inputs of a hidden unit at a particular layer n are some locally-connected subset of the units of the previous layer $n - 1$, done in such a way that the input to layer n represent some tile of the units of layer $n - 1$, where all the tiles overlap.

In addition, CNNs utilize shared parameterizations (weight vector and bias) across layers. By constraining the same types of weights across layers, essentially replicating units across layers, allows for features to be detected regardless to their position in the initial input, making the network much more robust to real world image data. Additionally, by constraining multiple weights to be the same reduces the parameters to be learnt, increasing learning efficiency.

2 Experimental Details

The dataset we used was taken from a Kaggle facial expression dataset.

2.1 Convolutional Neural Network

For implementing our convolutional neural network, we used TensorFlow for the entire implementation, i.e. training, inference, and evaluation. Our model follows the architecture described in [3], with a few differences in the top few layers. In particular, we use fully connected layers instead of locally connected layers. The model described in [3] was designed for ImageNet’s object classification, but it translated well to our problem of classifying facial expressions.

2.1.1 Network Structure

We implemented a deep CNN with five layers, which are from front to back: `conv1`, `conv2`, `local3`, `local4`, and `softmax_linear`. This structure is illustrated in Figure 1.

The layers `conv1` and `conv2` are convolution layers, which divides the image into overlapping tiles and use those as inputs to the next layer. In detail, the expression is

$$y(i, j) = \sum_{di, dj} x(s_1 i + di, s_2 j + dj) f(di, dj)$$

where $y(\cdot, \cdot)$ is the output, di and dj are changes which range over the tile size, s_1 and s_2 are strides which measure how much you move between each convolution window across each dimension, $x(\cdot, \cdot)$ is the input, and $f(\cdot, \cdot)$ are filters, which are the weights for the layer. We didn’t employ any regularization on these convolution layers, and we used window sizes of 5 by 5 pixels with a strides of 1.

As illustrated in Figure 1, after each convolution layer, we performed a `pool1` operation and a `norm1` operation. The `pool1` operation is max pooling, which will transform the input to take the maxima in tiles similarly to the convolution step. In detail,

$$y(i, j) = \max_{di, dj} x(s_1 i + di, s_2 j + dj)$$

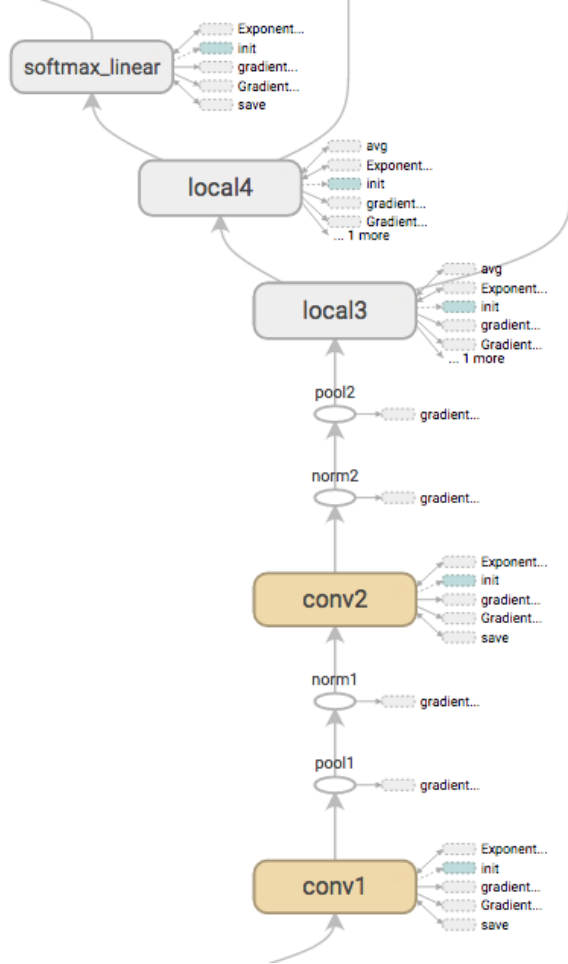


Figure 1: TensorFlow computation graph for the neural network in the CNN we implemented, illustrating each of the layers and computation done in between each layer.

with each term defined as before. Note that this is not a layer because there are no weights. The `norm1` operation is a local response normalization response, where each input is normalized by dividing it by the squared sum of inputs within a certain radius of it. This technique is described in more detail in [3], and serves as form of “brightness normalization” on the input.

The `local3` and `local4` are fully connected layers with rectified linear activation according to $f(x) = \max(x, 0)$. We employ regularization on both of these errors by adding the L2-loss of weights on both layers to our total loss function.

Finally, the `softmax_linear` layer is linear transformation layer that produces logits according to a simple linear transformation based on learned weights and biases.

2.1.2 Training

The loss function we minimized was primarily the cross entropy between the multinomial distribution, formed by the normalized logits outputted by our CNN, and the probability distribution that is 1 for the correct class and 0 for all other classes. The expression for cross entropy between two probability distributions p, q is

$$H(p, q) = E_p[-\log q] = - \sum_x p(x) \log q(x)$$

which measures the divergence between the two discrete probability distributions. In addition, we added standard weight decay, i.e. L2-loss, for the weights of the `local3` and `local4` layers for weight regularization.

For training, we fed the model randomly distorted training examples (see subsection 2.1.3) in randomly shuffled batches of 128 samples each. For each of these examples, we would determine our loss based on our current inference. After each batch, we performed back propagation using gradient descent to learn the weights, and we called each time we finished a batch a step.

2.1.3 Minimizing Overfitting

Since the size of our training set was 28,709 labeled examples, and our neural net needed to go through many more than 28,000 examples to achieve convergence, we employed a few techniques to ensure that our convolutional neural net did not overfit to the training set.

First off, we implemented learning rate decay on our convolutional neural net, so that the learning rate decreased as it had been trained through more examples. We used exponential decay, so that the learning rate decayed by a factor of 0.1 after training through 1,200,000 examples, and we had it decay in a step change manner as is visible in Figure 2. We found that the step change learning rate decay worked better than a continuous exponential decay. This could be because maintaining a high learning rate initially could ensure that the CNN was trained towards a good local optimum in fewer steps, whereas a steadily decreasing learning rate could limit the range of the neural network.

In addition, we implemented distortion of the images while training to artificially increase the size of our training set, and make our convolutional neural net more robust to slightly distorted inputs. We processed our images in a few different ways. We would crop our 48 by 48 pixel images to a 40 by 40 pixel box, centrally for model evaluation and randomly for training. Then we approximately whiten the photos, scaling the pixel values linearly so that they pixel values have a mean of 0 and a standard deviation of 1, essentially normalizing them. This ensures consistent inputs to our neural network.

For training in particular, we would do a few more distortions to artificially increase our training set. We randomly flipped the image from left to right, randomly distorted the image brightness, and randomly distorted the image contrast for each image. These changes to randomly distort the images greatly improved the performance of the model, raising the correct classification rate from 45.4% to 53.8% when initially implemented.

3 Results and Analysis

3.1 Facial Landmarks

3.2 Convolutional Neural Network

3.3 Comparison between the two

References

- [1] Lawrence, S.; Giles, L.; Tsoi, A. C.; Back, A. D. (1997) "Face Recognition: A Convolutional Neural-Network Approach" *Neural Networks, IEEE transactions on* 8 (1):98-113
- [2] Matsugu, M.; Mori, K.; Mitari Y.; Kaneda Y. (2003) "Subject independent facial expression recognition with robust face detection using a convolutional neural network" *Neural Networks* 16 (5):555-559
- [3] Krizhevsky, A.; Sutskever; Hinton, I.; Hinton, G. (2012) "ImageNet Classification with Deep Convolutional Neural Networks" *Advances in Neural Information Processing Systems* 25 (1):1097-1105

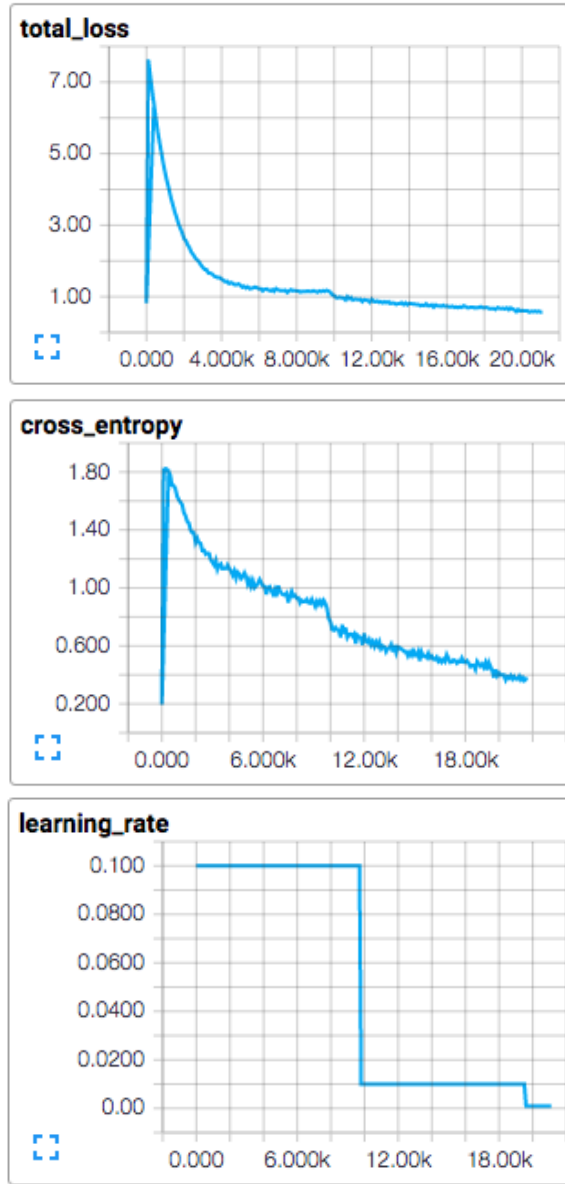


Figure 2: The total loss, cross entropy, and learning rate of the convolutional neural net over time.

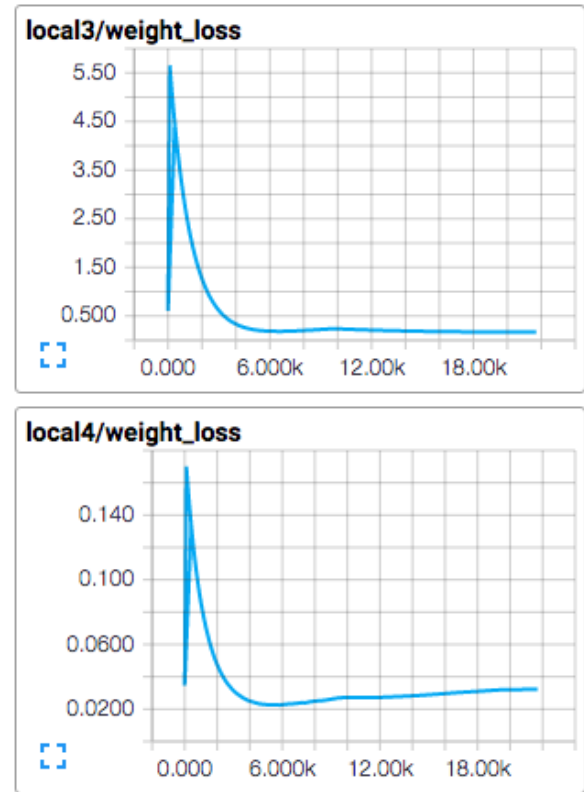


Figure 3: The loss on the local3 layer and local4 layer over time in the convolutional neural net.