

Lab 02: CS631

Working in the Tidyverse

Alison Hill (w/ modifications by Steven Bedrick)



Tidyverse basics

Last week, we covered some basics:

- `←` (variable assignment)
- `%>%` (then...)
- `dplyr`, `ggplot2` (packages)
 - `install.packages("dplyr")` (1x per machine)
 - `library(dplyr)` (1x per work session)



Let's review

Data for today

We'll use data from the Museum of Modern Art (MoMA)

- Publicly available on [GitHub](#)
- As analyzed by [fivethirtyeight.com](#)
- And by [others](#)

Get the data

Use this code chunk to import my cleaned CSV file:

```
library(readr)  
moma ← read_csv("../data/artworks-cleaned.csv")
```

Data wrangling so far

All functions from `dplyr` package

From Last Week

- print a tibble
- `filter`
- `arrange`
- `mutate`

From Lab 01


- `glimpse`
- `distinct`
- `count`



Plus: %>%



Let's review some helpful functions for
filter

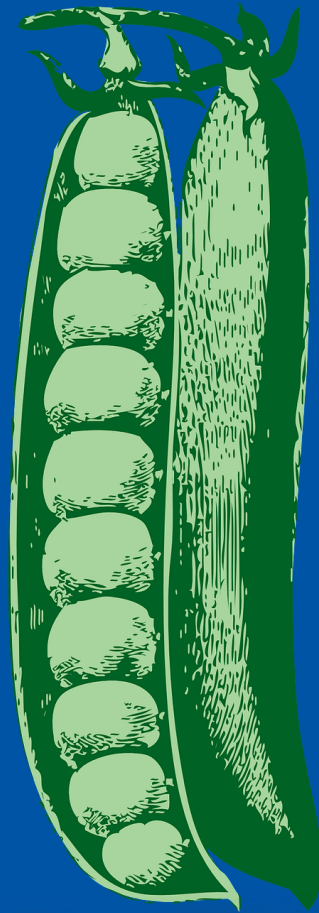

Base R + Tidyverse



First:

Logical Operators

Operator	Description	Usage
&	and	x & y
	or	x y
xor	exactly x or y	xor(x, y)
!	not	!x

Logical or (`|`) is inclusive, so `x | y` really means:

- `x` or
- `y` or
- both `x` & `y`

Exclusive or (`xor`) is exclusive, so `xor(x, y)` really means:

- `x` or
- `y`...
- but not both `x` & `y`

```
x ← c(0, 1, 0, 1)
y ← c(0, 0, 1, 1)
boolean_or ← x | y
exclusive_or ← xor(x, y)
cbind(x, y, boolean_or, exclusive_or)
```

	x	y	boolean_or	exclusive_or
[1,]	0	0	0	0
[2,]	1	0	1	1
[3,]	0	1	1	1
[4,]	1	1	1	0



Second: Comparisons

?Comparison

Operator	Description	Usage
<	less than	<code>x < y</code>
<=	less than or equal to	<code>x <= y</code>
>	greater than	<code>x > y</code>
>=	greater than or equal to	<code>x >= y</code>
==	exactly equal to	<code>x == y</code>
!=	not equal to	<code>x != y</code>
%in%	group membership*	<code>x %in% y</code>
is.na	is missing	<code>is.na(x)</code>
!is.na	is not missing	<code>!is.na(x)</code>

*(shortcut to using `|` repeatedly with `==`)

Lab 02: Challenge 1 (dplyr)

1. How many paintings (rows) are in `moma`? How many variables (columns) are in `moma`?
2. What is the first painting acquired by MoMA? Which year? Which artist? What title?
 - *Hint: you may want to look into `select + arrange`*
3. What is the oldest painting in the collection? Which year? Which artist? What title? (*see above hint*)
4. How many distinct artists are there?
5. Which artist has the most paintings in the collection? How many paintings are by this artist?
6. How many paintings are by male vs female artists?

If you want more:

1. How many artists of each gender are there?
2. In what year were the most paintings acquired? Created?
3. In what year was the first painting by a (solo) female artist acquired? When was that painting created? Which artist? What title?

From Last Week 2

all `ggplot2`

- `aes(x = , y =)` (aesthetics)
- `aes(x = , y = , color =)` (add color)
- `aes(x = , y = , size =)` (add size)
- `+ facet_wrap(~)` (facetting)

Old School (Challenge 2)¹

- Sketch the graphics below on paper, where the `x`-axis is variable `year_created` and the `y`-axis is variable `year_acquired`


```
# A tibble: 4 x 4
  painted acquired  area gender
  <dbl>    <dbl> <dbl> <chr>
1   1980    1985     3 male
2   1990    1995     2 male
3   2000    2005     1 female
4   2010    2015     2 female
```

1. A scatter plot
2. A scatter plot where the `color` of the points corresponds to `gender`
3. A scatter plot where the `size` of the points corresponds to `area`
4. A version of (1), but with separate plots by gender

[1] Shamelessly borrowed with much appreciation to [Chester Ismay](#)


1. A scatterplot

```
library(ggplot2)
ggplot(moma_ex, aes(painted, acquired)) +
  geom_point()
```

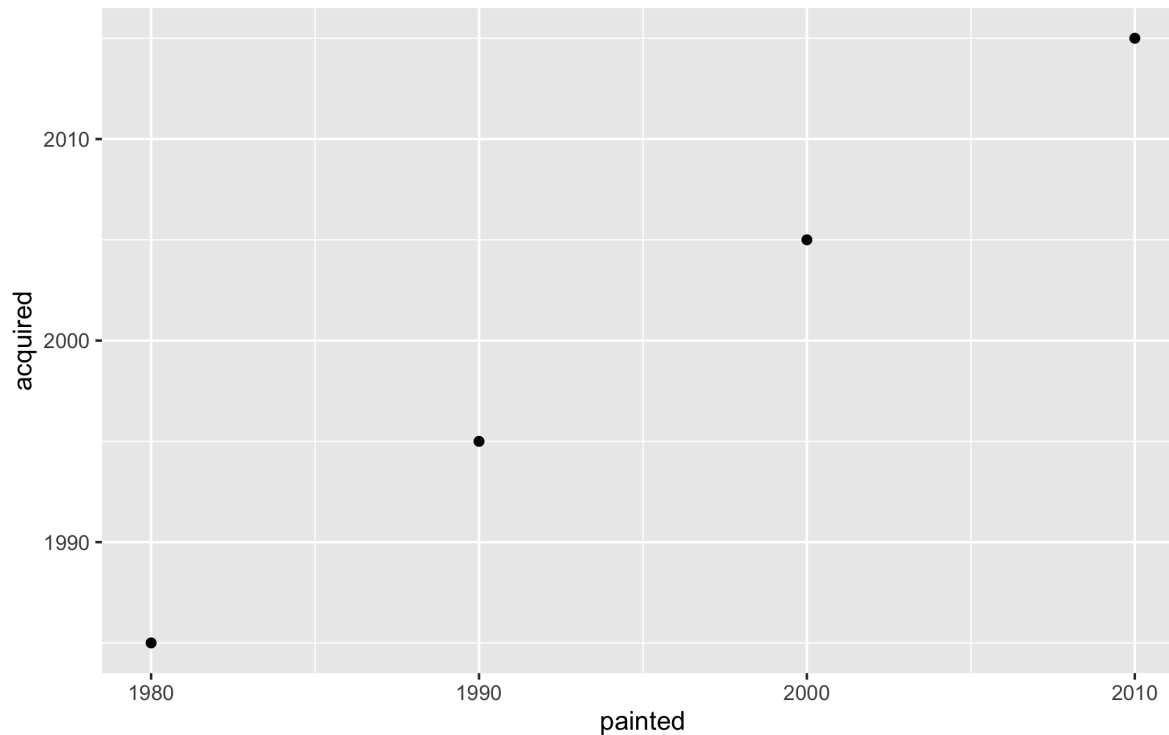


2. color points by gender

```
library(ggplot2)
ggplot(moma_ex, aes(painted, acquired, color = gender)) +
  geom_point()
```

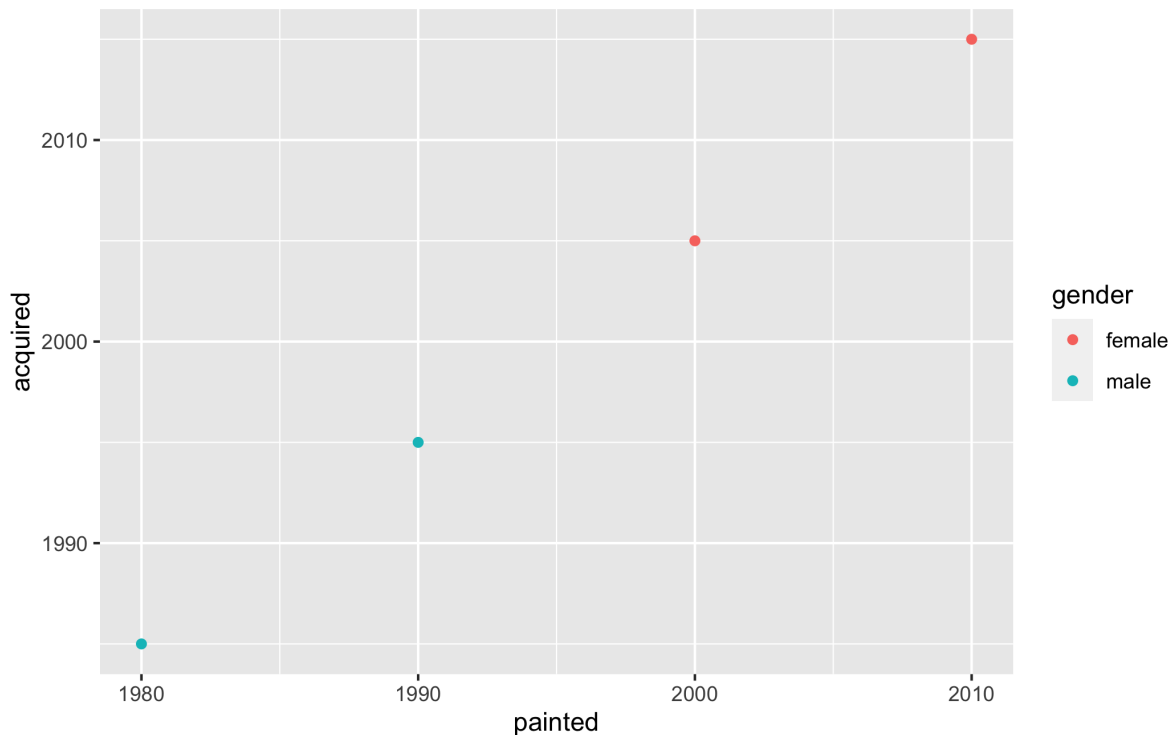


3. size points by area

```
library(ggplot2)
ggplot(moma_ex, aes(painted, acquired, size = area)) +
  geom_point()
```

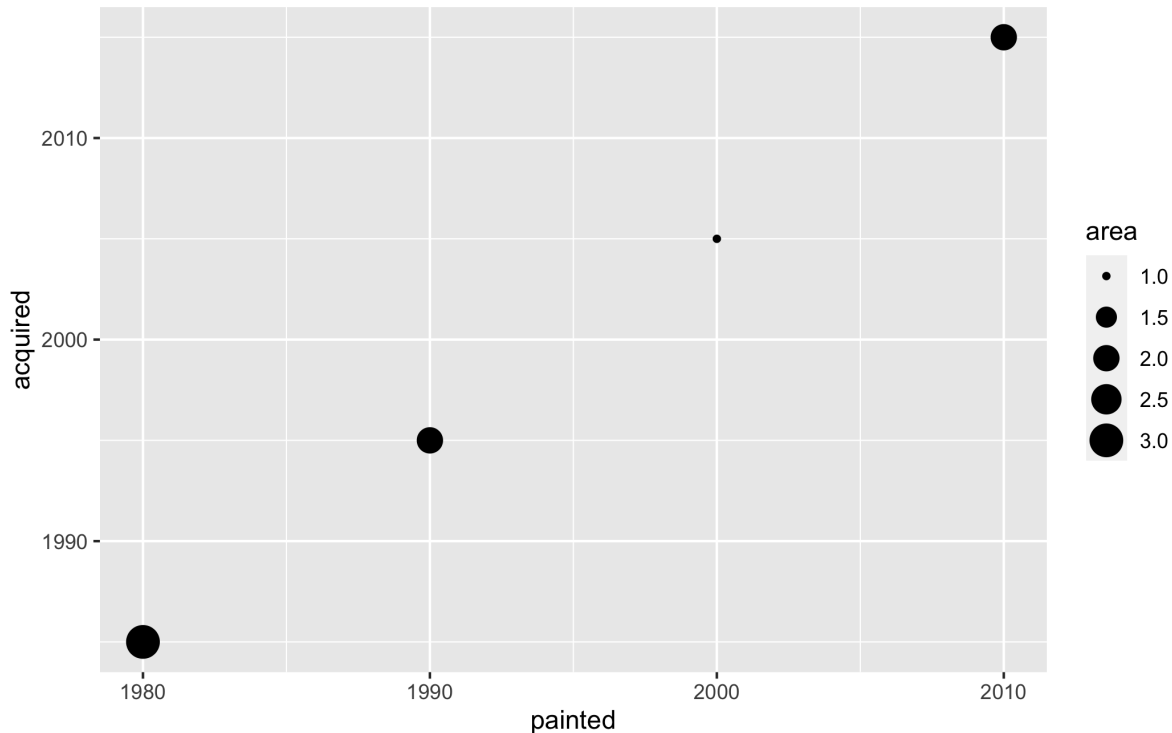

4. Faceting

```
library(ggplot2)
ggplot(moma_ex, aes(painted, acquired, color = gender)) +
  geom_point() + facet_wrap(~gender)
```

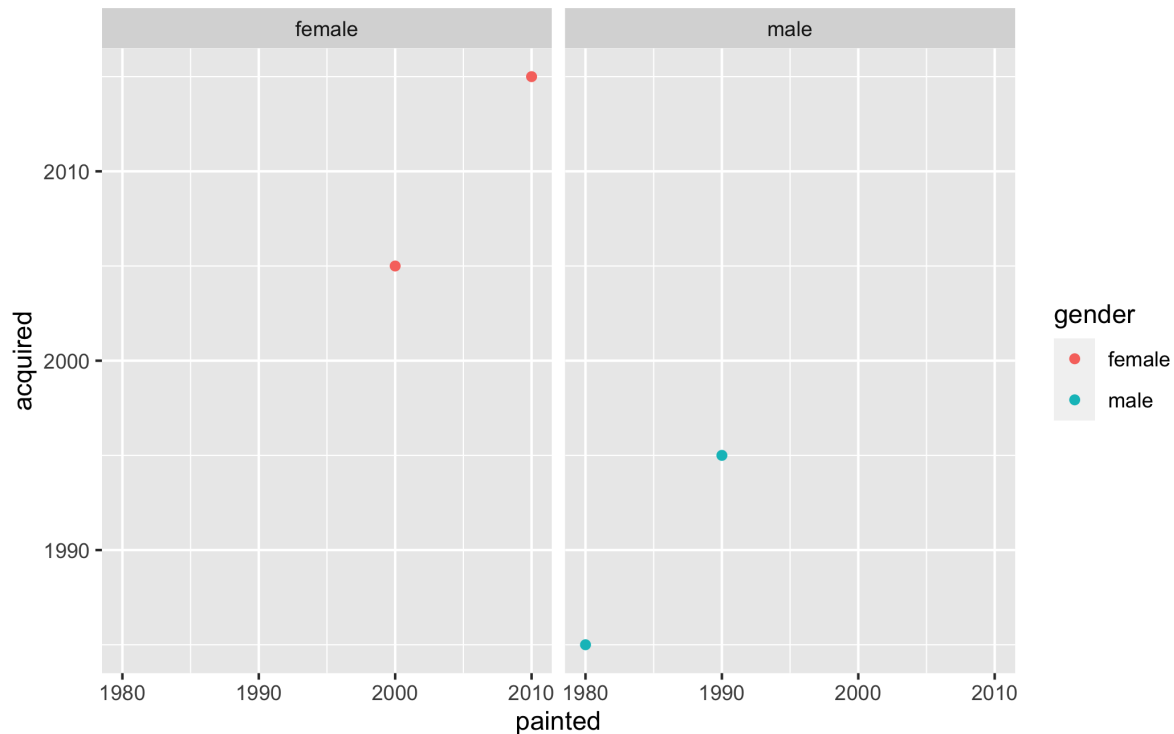

The Five-Named Graphs

- Scatterplot: `geom_point()`
- Line graph: `geom_line()`
- Histogram: `geom_histogram()`
- Boxplot: `geom_boxplot()`
- Bar graph: `geom_bar()` or `geom_col` (see [Lab 01](#))

Lab 02: Plotting Challenges

Challenges 3-5 are in the [Lab 02 code-through!](#)

<https://apreshill.github.io/data-vis-labs-2018/02-moma.html>



Basics of ggplot2 and dplyr:

R4DS ggplot2 chapter

ModernDive ggplot2 chapter

RStudio ggplot2 Cheatsheet

R4DS dplyr chapter

ModernDive dplyr chapter

RStudio dplyr Cheatsheet