SECOND FLOOR PANTRY / NOOK

Linen pantry and dry bar conversion, second floor of a private residence

Two opposing runs of IKEA SEKTION cabinets
ASPUDDEN light grey matte fronts, BORGHAMN 426 mm black pulls

SHEET INDEX

A-1 Floor plan, section cut marks

A-2 Top wall (boxes 1-3), exterior elevation

A-3 Top wall, interior elevation, section marks

A-4 Bottom wall (boxes 4-6), exterior elevation

A-5 Bottom wall, interior elevation

A-6 Sections through boxes 1, 2, 3

A-7 Parts list with IKEA Canada links

A-8 Panel cut list, items not priced, open items

KEY

Box numbers: 1-3 top wall, left to right. 4-6 bottom wall, left to right as seen facing that wall. Rows A, B, C on the top wall are top to bottom.

Walls: the wall beside boxes 1 and 6 is the interior wall (4" stud, no detail). The wall beside boxes 3 and 4 is the exterior wall, drawn thicker, no detail.

Sheets are letter landscape at 3/4" = 1'-0" when printed at 100% (no fit-to-page).

Article numbers on A-7 are links to IKEA Canada product pages.

GENERAL NOTES

Room: 76 1/2" wall to wall, 87" between runs, ceiling 100 1/2". Owner measurements; walls may not be plumb, so cut fillers on site.

Heights: legs 4 1/2" to match the 4 1/2" ASPUDDEN toe kick. Top wall 94.97" overall with a 12 mm counter at 35.0". Bottom wall 94.5".

Fillers: about 2 1/8" at each run end, cut to fit. 1/2" panel on C2's fridge-facing side. Right-side fridge bay about 23 3/4".

Shelves at 15" steps: one in each 30" wall cabinet. Each 90" frame has shelves at 15", 45", 60", 75" plus IKEA's required fixed shelf at 30" (height assumed). Shelf-hole spacing not confirmed with IKEA.


Drawers: ASPUDDEN fronts mount directly on the MAXIMERA boxes, a high box top and bottom. A low inset drawer with its own UTRUSTA front sits above each top box (mounting position unchecked).

Counter: 12 mm slab assumed. Niche: 4 mm Dekton Slim on back, sides and top. The top slab stops 1" short of the back for an LED strip on the A-row underside (LED strip, spec on the electrical page).

Fridge: GE GCE06GSHSB (compact, handle-less). Model may change.

Electrical: two duplex receptacles in the niche with a switch beside the left one, 8" above the counter, plus a fridge outlet. Drawn for layout only. Each sits about 26" from its end of the counter. Details go on a separate electrical page.

This is a concept set from owner dimensions. It is not a construction or permit drawing.

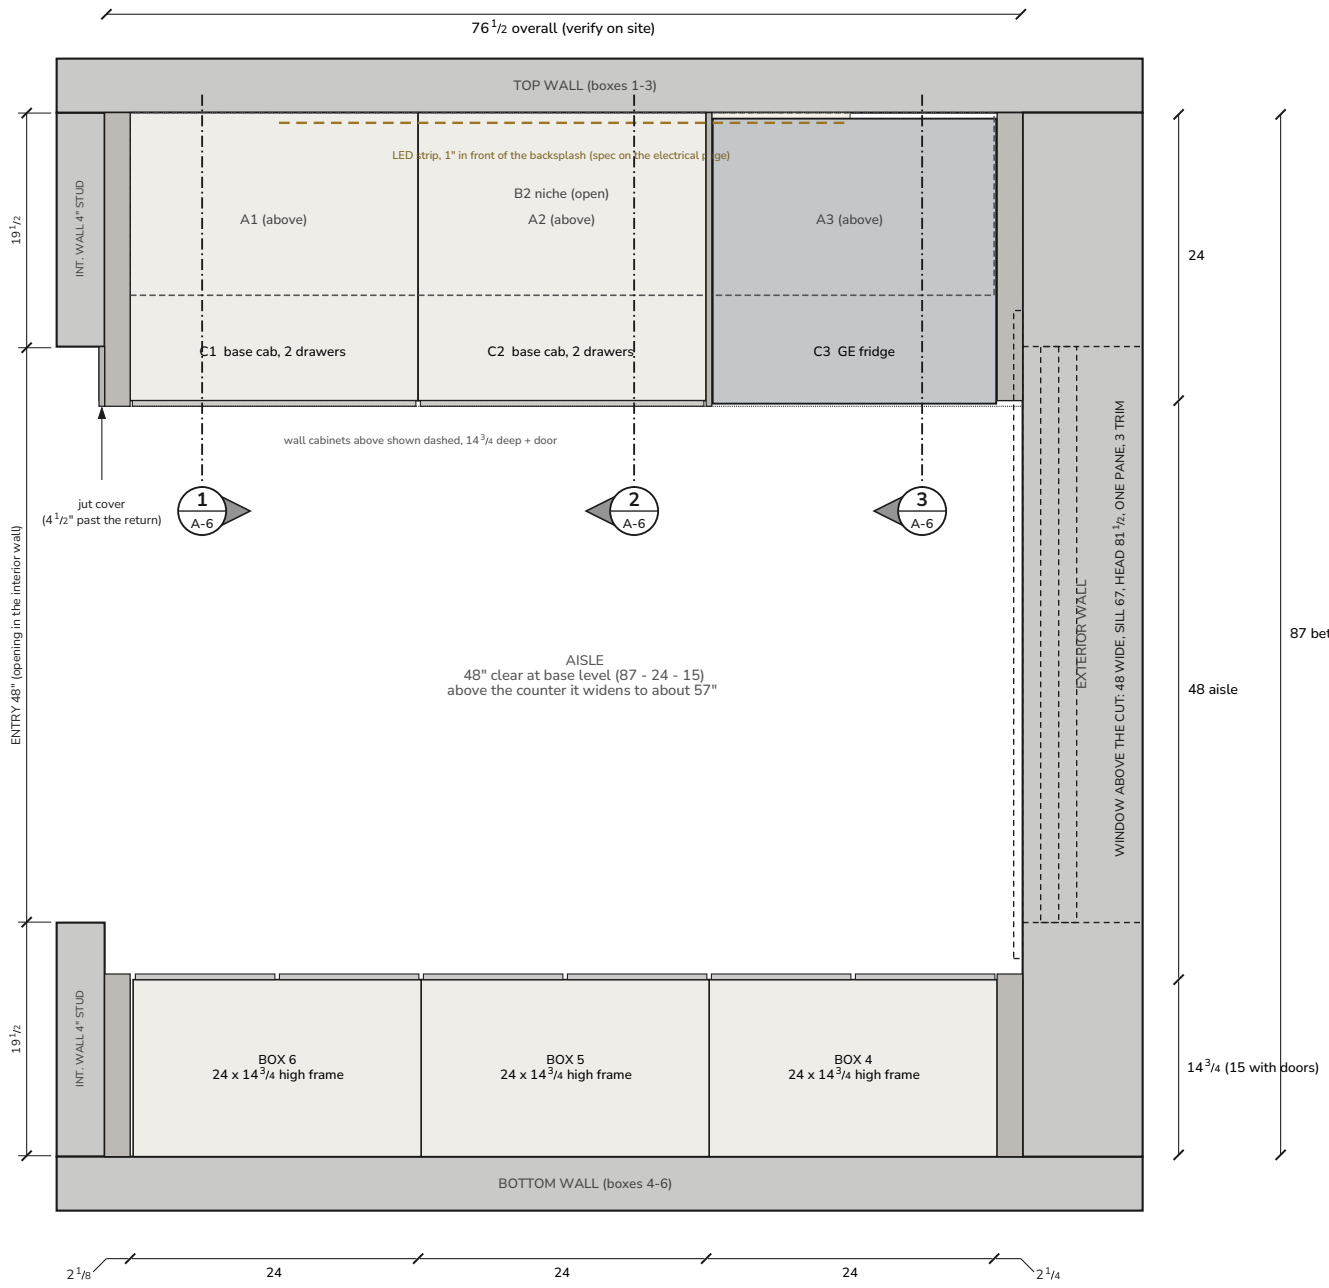

NOTES

Plan drawn with the top wall at the top of the sheet. Boxes 1-3 (top wall) and 4-6 (bottom wall) read left to right as seen facing that wall, so box 4 is at the right here, beside the exterior wall.

Left wall is the interior wall (4" stud) with the 48" entry between two 19 1/2" returns. Right wall is the exterior wall, drawn thicker. Neither has any detail. The window is in the exterior wall, 67 to 81 1/2 above the floor, so it is drawn dashed.

Top run: SEKTION base cabinets 24 deep with the counter flush to the drawer fronts, fridge C3 in the bay, wall cabinets above (dashed) 14 3/4 deep plus 1/2" doors. The niche is open.

Bottom run: three 24 x 14 3/4 x 90 frames with doors, 15" overall.

C1 is 24 deep but the return is 19 1/2, so 4 1/2" of its side shows into the entry and gets a cover panel.

Fillers about 2 1/8" at each end of both runs, cut to fit. Room width 76 1/2" (owner measurement).

SECOND FLOOR PANTRY / NOOK

Concept drawing set, rev 2 | 14 Oct 2026

Dimensions from owner measurements. Verify on site before cutting.

FLOOR PLAN

IKEA SEKTION / ASPUDDEN light grey / BORGHAMN 426 mm black

SCALE

3/4" = 1'-0" (1:16)

Print at 100%

SHEET

A-1



NOTES

Fronts: ASPUDDEN light grey matte. Rows A and B use 12 x 30 doors in pairs. Row C uses 24 x 15 drawer fronts.

Pulls: BORGHAMN 426 mm black. Door pulls are vertical, 2 1/2" from the meeting edge and 2 1/2" up from the door bottom. Drawer pulls are horizontal, centred, 3" below the top edge.

Counter: thicker Dekton slab, 12 mm assumed, 35.0" above the floor. Open niche B2 is 48" wide with two duplex receptacles and a switch (positions only). An LED strip at the back of the A-row underside lights the backsplash.

C3 is a GE GCE06GSHSB fridge, 23 5/8 x 34 1/8 x 23 3/4, hinged right in this drawing, with the handle in the black top strip. About 3/8" below the counter.

Fillers about 2 1/8" at each end. 1/2" panel on the C2 side next to the fridge. Fridge bay about 23 3/4" if the room is exactly 76 1/2".

Left wall: interior wall, 4" stud, no detail. Right wall: exterior wall, thicker, no detail.

Gap above the cabinets: about 5 1/2" to the ceiling.

SECOND FLOOR PANTRY / NOOK

Concept drawing set, rev 2 | 14 Oct 2026

Dimensions from owner measurements. Verify on site before cutting.

TOP WALL, EXTERIOR ELEVATION

IKEA SEKTION / ASPUDDEN light grey / BORGHAMN 426 mm black

SCALE

3/4" = 1'-0" (1:16)

Print at 100%

SHEET

A-2



NOTES

Fronts removed. One shelf at 15" in each of A1-A3, B1 and B3. B2 and C1/C2 have none.

C1, C2: the ASPUDDEN fronts mount on the drawer boxes. Top and bottom are MAXIMERA high boxes (8 3/8"). A low inset drawer (3 7/8") with its own UTRUSTA front sits above each top box, mounted in the cabinet, and is reached when the top drawer is out.

Drawer-box heights are IKEA's. Positions and runner holes in the cabinet sides are unchecked.

Shelf supports sit in factory holes, so real shelf heights follow the hole spacing. One forum report puts SEKTION at 1 1/4", which makes 15" exactly 12 holes. Not confirmed by IKEA.

B2: 4 mm slab on back, sides and top. The LED strip sits at the back of the A-row underside, hidden from the front, and washes the backsplash.

Section cuts 1, 2 and 3 are on sheet A-6. Flags show viewing direction. The fridge is an appliance and keeps its door.

SECOND FLOOR PANTRY / NOOK

Concept drawing set, rev 2 | 14 Oct 2026

Dimensions from owner measurements. Verify on site before cutting.

TOP WALL, INTERIOR ELEVATION

IKEA SEKTION / ASPUDDEN light grey / BORGHAMN 426 mm black


SCALE

3/4" = 1'-0" (1:16)

Print at 100%

SHEET

A-3

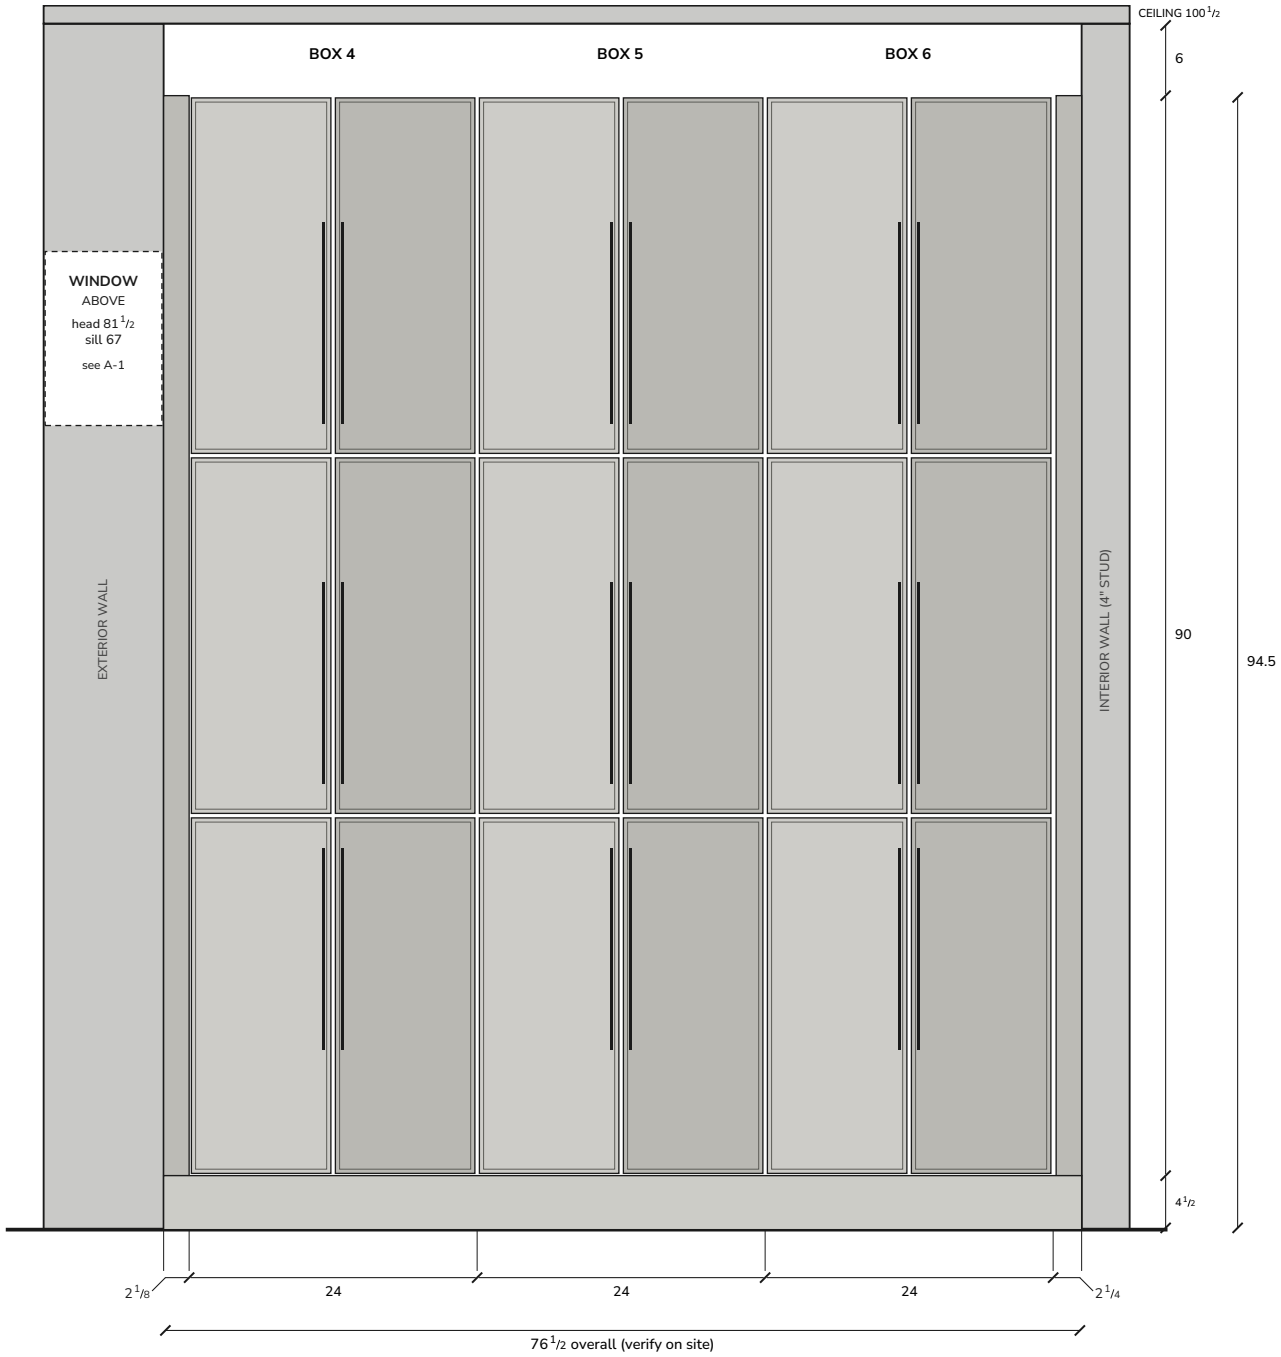

NOTES

Three SEKTION high frames, 24 x 14 3/4 x 90, on 4 1/2" legs. Each has three 30" door sections, two 12 x 30 ASPUDDEN doors each. No drawers.

Pulls: BORGHAMN 426 mm vertical, 2 1/2" from the meeting edge. Bottom section doors have the pull near the top of the door. Middle and top sections have it near the bottom.

Fillers about 2 1/8" at each end, cut to fit. Left wall: exterior wall, thicker, no detail. Right wall: interior wall, 4" stud, no detail.

Overall height 94.5". Gap above: about 6" to the ceiling.

Boxes are numbered 4 to 6 left to right as seen facing this wall.

SECOND FLOOR PANTRY / NOOK

Concept drawing set, rev 2 | 14 Oct 2026

Dimensions from owner measurements. Verify on site before cutting.

BOTTOM WALL, EXTERIOR ELEVATION

IKEA SEKTION / ASPUDDEN light grey / BORGHAMN 426 mm black


SCALE

3/4" = 1'-0" (1:16)

Print at 100%

SHEET

A-4

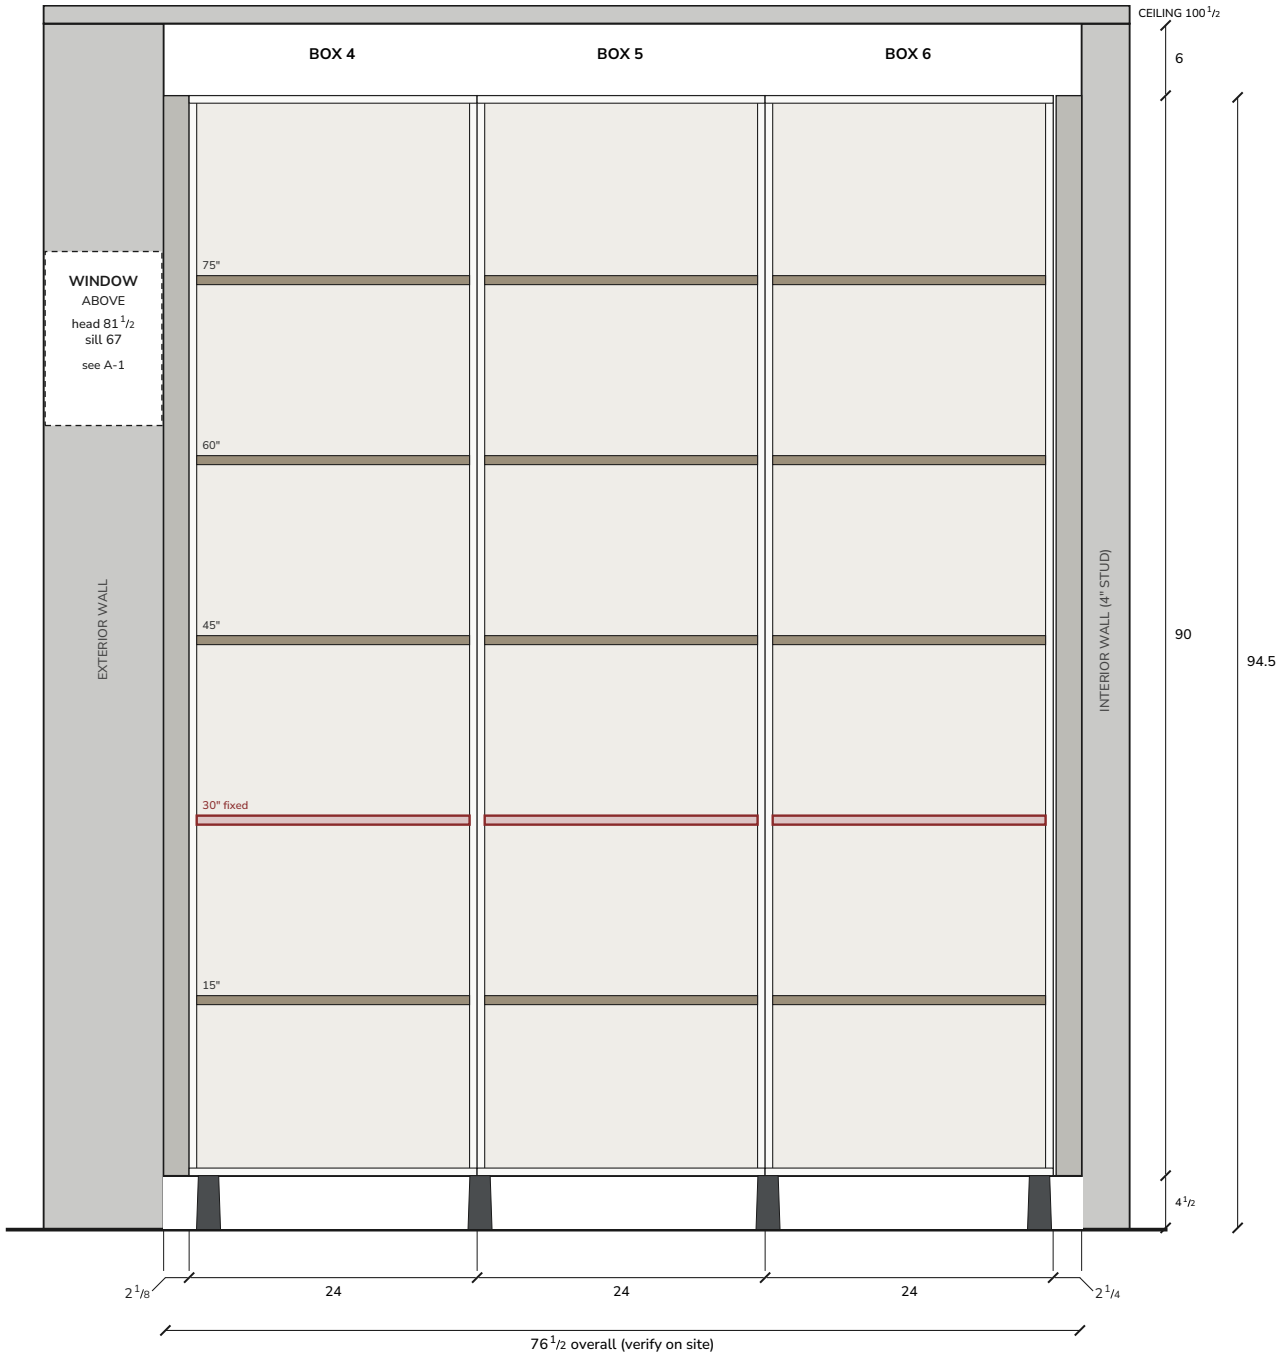

NOTES

Doors removed. Each frame has shelves at 15", 45", 60" and 75" plus IKEA's required fixed shelf at 30" (red). That is five per frame, at 15" steps.

IKEA requires a fixed shelf in the 90" frames but does not set its height. 30" is assumed, which lands on the 15" pattern.

15 shelves on this wall (UTRUSTA 24 x 14 3/4, 20 kg rated each), 18 with the top wall.

Shelf supports sit in factory holes, so real shelf heights follow the hole spacing. One forum report puts SEKTION at 1 1/4", which makes 15" exactly 12 holes. Not confirmed by IKEA.

SECOND FLOOR PANTRY / NOOK

Concept drawing set, rev 2 | 14 Oct 2026

Dimensions from owner measurements. Verify on site before cutting.

BOTTOM WALL, INTERIOR ELEVATION

IKEA SEKTION / ASPUDDEN light grey / BORGHAMN 426 mm black

SCALE

3/4" = 1'-0" (1:16)

Print at 100%

SHEET

A-5



SECTION 1 - B1 / A1 / C1, looking right

SECTION 2 - A2 / B2 niche / C2, looking left

SECTION 3 - A3 / B3 / C3 fridge, looking left

NOTES

Cuts 1, 2 and 3 are marked on A-1 and A-3. Section 1 looks right and sections 2 and 3 look left, so the room wall is on the left in section 1 and on the right in 2 and 3. Walls, floor and ceiling are plain solid shapes.

Wall cabinets: SEKTION 24 or 12 x 14 3/4 x 30 with ASPUDDEN doors (about 1/2" thick) and one shelf at 15". Pulls are BORGHAMN 426 mm, vertical.

Base: SEKTION 24 x 24 x 30 on 4 1/2" legs. The ASPUDDEN fronts mount straight on the MAXIMERA boxes: a high box top and bottom. The low inset drawer above the top box has its own UTRUSTA front. Pulls are 3" below the top edge.

Niche (section 2): 4 mm Dekton Slim back slab on the wall, top slab stopping 1" short of the back. An LED strip sits on the cabinet underside in that reveal and lights the backsplash. Its spec goes on the electrical page.

Counter: 12 mm slab assumed, flush with the drawer fronts. Over the fridge bay the slab spans 24" with no cabinet below; fabricator to confirm support.

Fridge: GE GCE06GSHSB 23 5/8 x 34 1/8 x 23 3/4, about 3/8" below the counter. Rear and side clearance not yet checked.

Toe-kick setback, panel thicknesses and drawer-box depth are schematic.

SECOND FLOOR PANTRY / NOOK

Concept drawing set, rev 2 | 14 Oct 2026

Dimensions from owner measurements. Verify on site before cutting.

SECTIONS THROUGH BOXES 1, 2, 3

IKEA SEKTION / ASPUDDEN light grey / BORGHAMN 426 mm black

SCALE

3/4" = 1'-0" (1:16)

Print at 100%

SHEET

A-6

All prices CAD before tax, from each product's own IKEA Canada page (checked 3 Oct 2026). Article numbers are links. Quantities are in units as sold (packs for 2-packs).

ITEM	ARTICLE	UNIT $	TOP	BOTTOM	QTY	LINE $	NOTE
FRAMES							
SEKTION wall cabinet frame, white 24 x 14 3/4 x 30"	702.654.50	51.00	3	-	3	**153.00**	A1–A3
SEKTION wall cabinet frame, white 12 x 14 3/4 x 30"	102.654.72	31.00	2	-	2	**62.00**	B1, B3
SEKTION base cabinet frame, white 24 x 24 x 30"	902.653.88	63.00	2	-	2	**126.00**	C1, C2
SEKTION high cabinet frame, white 24 x 14 3/4 x 90"	302.654.47	98.00	-	3	3	**294.00**	Boxes 4–6
FRONTS							
ASPUDDEN door, light gray 12 x 30"	605.963.23	42.00	8	18	26	**1,092.00**	6 + 2 on top wall, 2 x 3 x 3 on bottom wall
ASPUDDEN drawer front, light gray 24 x 15"	305.963.53	31.00	4	-	4	**124.00**	C1, C2 (two each)
HARDWARE							
BORGHAMN handle, black, 2-pack 426 mm (c-c 416 mm)	403.189.78	16.99	6	9	15	**254.85**	1 pull per front: 12 top wall, 18 bottom wall
UTRUSTA hinge with built-in damper, 2-pack 110°	805.248.82	22.00	8	18	26	**572.00**	2 hinges per door (per the ASPUDDEN door page)
SEKTION leg, 2-pack adjustable 3 1/2–5 1/8"	905.560.71	10.00	3	4	7	**70.00**	Set to 4 1/2" to match the toe kick. 4 legs per cabinet (assumed), less 2 at each joint where one leg connects two cabinets (install guide p10): top 6 legs, bottom 8 [assumed or to check]
SEKTION suspension rail, galvanized 84" (cut to length)	602.615.27	20.00	3	1	4	**80.00**	Top wall: A row, B row, base row. Bottom wall: one. Counts assumed [assumed or to check]
FINISHING							
ASPUDDEN cover panel, light gray 15 x 90" (1.2 cm thick)	805.963.17	90.00	1	-	1	**90.00**	Cut into the filler strips and the left-end cover for both walls (see cut list) [assumed or to check]
ASPUDDEN cover panel, light gray 25 x 30" (1.2 cm thick)	605.963.18	55.00	1	-	1	**55.00**	Fridge-facing side of C2; no cutting needed beyond trimming to 24" deep [assumed or to check]
ASPUDDEN toe kick, light gray 84 x 4 1/2" (1 cm thick)	605.963.61	30.00	1	1	2	**60.00**	Cut to length per wall (confirmed it can be cut). Legs set to 4 1/2" so the kick reaches the floor
INTERIORS							
UTRUSTA shelf, white, 2-pack 24 x 14 3/4"	102.655.23	18.00	2	7	9	**162.00**	18 shelves in 9 packs: A1–A3 one each (3), bottom frames five each including the fixed one (15). One spare from a top-wall pack goes to the bottom wall. Pins included [assumed or to check]
UTRUSTA shelf, white, 2-pack 12 x 14 3/4"	402.655.31	10.00	1	-	1	**10.00**	B1, B3: one shelf each. 10 kg rating per shelf
DRAWERS							
MAXIMERA drawer, high, white 24 x 24"	102.656.79	75.00	4	-	4	**300.00**	Both large drawers in C1 and C2 (two each). Inside height 8 3/8". The ASPUDDEN fronts mount on the boxes directly
MAXIMERA drawer, low, white 24 x 24"	702.656.62	60.00	2	-	2	**120.00**	Inset drawer above the top box in C1 and C2. Inside height 3 1/8"; cabinet-mounted, runner position unchecked [assumed or to check]
UTRUSTA drawer front (inner), low 24" wide	802.656.28	10.00	2	-	2	**20.00**	Only the inset drawers get their own front (from the 'low inner drawer with front' page: $70 = $60 + $10) [assumed or to check]
				ESTIMATED IKEA SUBTOTAL		**$3,644.85**	

SECOND FLOOR PANTRY / NOOK

Concept drawing set, rev 2 | 14 Oct 2026

Dimensions from owner measurements. Verify on site before cutting.

PARTS LIST (IKEA CANADA)

IKEA SEKTION / ASPUDDEN light grey / BORGHAMN 426 mm black

SCALE


n/a

Print at 100%


SHEET

A-7

15 x 90" ASPUDDEN cover panel (805.963.17)

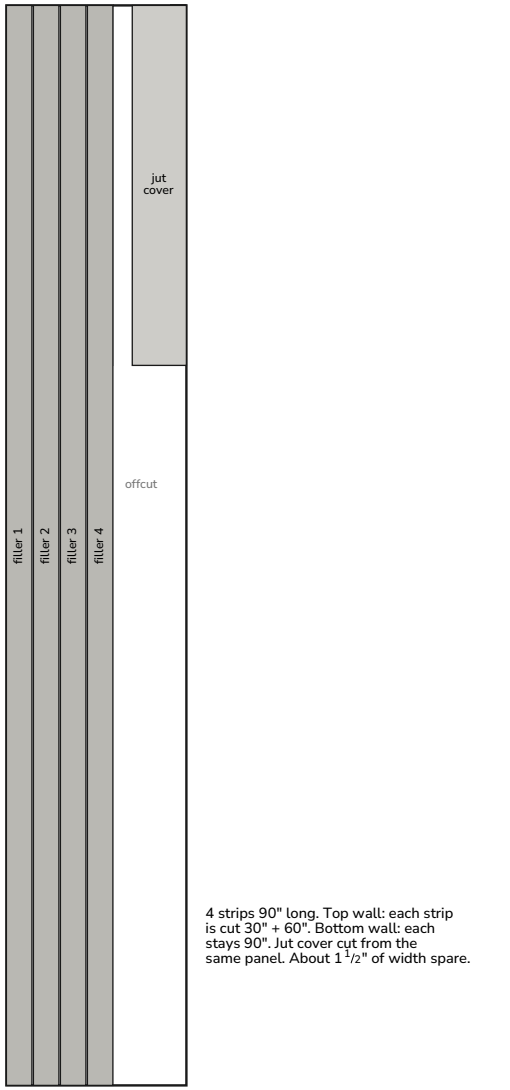

4 strips 90" long. Top wall: each strip is cut 30" + 60". Bottom wall: each stays 90". Jut cover cut from the same panel. About 1 1/2" of width spare.

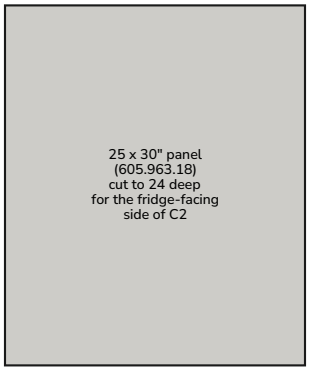

PANEL CUT LIST

Filler strips about 2 1/8" wide x 90", four of them. Cut from one 15 x 90" panel with the jut cover.

Jut cover about 4 1/2 x 30": covers the side of C1 that sticks out past the 19 1/2" return.

Fridge-facing side of C2, 24 x 30": from a 25 x 30" panel.

If a top-wall filler is dropped, the strips fall from four to three and the panel count stays at two.

Cut edges go against walls, so no edge banding. Toe kick (84" long) is cut to length per wall.

NOT IN THE SUBTOTAL

Wall fixings: the cabinet pages say mounting screws are not included.

LED strip, driver, wiring, outlets and switch: not specified here. They go on their own electrical page later. Outlet and switch positions are drawn on A-3 for layout only.

Fridge, Dekton (counter, 4 mm niche slabs, fabrication), electrical and ESA fee: not IKEA parts. Not priced.

IKEA NUMRERAD is not included since the GE is the plan.

IKEA Family offers on the product pages are not deducted.

TOE KICK CUT LIST

Two ASPUDDEN kicks, 84 x 4 1/2" (A-7 qty 2), one per wall.

Top wall, one 84" kick: front piece about 50 1/4" (wall to the panel beside the fridge), a 4 1/2" return on the exposed end of C1 below the jut cover, and an end piece about 2 1/8" under the right filler. About 57" used, about 27" spare before saw kerf.

Bottom wall, one 84" kick cut to about 76 1/2" (verify on site), about 7 1/2" spare.

Left filler at C1: the jut cover sits flush with the wall return, so the 30" base piece of that filler is ripped to about 1 5/8" (2 1/8" less the 12 mm cover). The 60" wall piece stays 2 1/8". Panel count stays at two.

Added 4 Oct 2026, after rev 1.

OPEN ITEMS

Legs: 4 per cabinet is still an assumption (neither IKEA guide gives a count). Per the install guide (p. 10) one leg can connect two cabinets, so each cabinet-to-cabinet joint saves 2 legs: top run 6, bottom run 8, 14 in all (7 packs). Rail counts are assumed. The guide puts the base-cabinet rail underside at 32 3/16" (p. 9). The fixed shelf in the 90" frames is not covered in either guide, so its 30" height is still assumed.

Inset low drawer: mounting position in the cabinet sides is unchecked.

Fixed shelf in the 90" frames: not covered in the installation guide. Height still assumed at 30".

Shelf-hole spacing: one forum report says 1 1/4" for SEKTION (15" = 12 holes). Not confirmed by IKEA.

Fridge: side and rear clearance, and country of origin, not yet checked.

Counter slab support over the fridge bay and the niche LED detail: fabricator and electrician to confirm.

Room width at the fridge end: measure at counter height before cutting fillers.

SECOND FLOOR PANTRY / NOOK

Concept drawing set, rev 2 | 14 Oct 2026

Dimensions from owner measurements. Verify on site before cutting.

PANEL CUT LIST AND OPEN ITEMS

IKEA SEKTION / ASPUDDEN light grey / BORGHAMN 426 mm black

SCALE

1:16 (panels)

Print at 100%

SHEET

A-8