Portable Causal Fairness Across Synthetic Data Generator Families

Anonymous Author(s)
Affiliation
Address
email

Abstract

Institutions that release synthetic data in place of sensitive records, such as a hospital, a lending regulator or a statistical agency, choose the process that generates the table, and can shape that process so unfair pathways are absent. DECAF made this concrete for one GAN: factor the generator along a causal graph, sever the edges from a protected attribute to an outcome, and three fairness definitions become three sets of edge cuts. But DECAF is a single GAN, carrying no privacy guarantee and no competitive data-quality story, and the mechanism has never been shown to work in any other architecture. We ask whether it belongs to DECAF or to causal factorisation itself, porting all three definitions to nine generators from three unrelated families (marginals-based, GAN-based and diffusion-based, each with differentially private variants) across 2,520 matched-pair runs on the Adult and COMPAS datasets. The definitions transfer everywhere: cutting edges reduces downstream disparity in every family, dataset and privacy level. The utility cost is small (under two accuracy points for the cuts worth making in five of six family–dataset cells), and the privacy cost is nil in the marginals family, because a severed edge is never measured under the privacy budget. In this setting privacy and fairness turn out to behave close to independently rather than adversarially. Causal fairness is now available inside a modern differentially private synthesizer and inside a diffusion backbone, not only inside one GAN.

1 Introduction

Institutions holding sensitive records increasingly publish a synthetic substitute rather than the records themselves: a hospital, a lending regulator or a statistical agency fits a generative model and releases a table drawn from it. That substitution is usually justified on privacy grounds, but it carries a second, less-exploited consequence. Whoever generates the data chooses the generating process, and a process can be edited. A disparity that exists in the world because of a pathway running from a protected attribute, such as national origin, to an outcome, such as whether a loan is approved, need not exist in the released table.

The cleanest existing realisation of that lever is DECAF [van Breugel et al., 2021], which factors a generator along a causal graph so that severing an edge at sampling time makes the generator structurally unable to use the pathway it named. But DECAF is a single non-private WGAN-GP [Gulrajani et al., 2017], whose released tables trail modern differentially private marginals-based synthesizers and modern diffusion models on the fidelity and utility benchmarks that decide what institutions actually deploy. Whether the fairness mechanism is confined to that one architecture, or is a property of causal factorisation itself, is therefore a practical question and not an academic one: it decides whether an institution deploying synthetic data has the intervention available at all.

Submitted to 40th Conference on Neural Information Processing Systems (NeurIPS 2026). Do not distribute.

We ask two questions of that mechanism. Is edge surgery a property of DECAF, or of the causal factorisation any such generator uses? And can it be attached to a generator whose graph is not a supplied causal DAG but the undirected marginal-dependency graph a differentially private synthesizer builds from noisy counts? The stakes are practical: if the mechanism that would make a released table fair is confined to a generator no institution would actually deploy, it might as well not exist.

2 Background and related work

DECAF: fairness as graph surgery. DECAF [van Breugel et al., 2021] generates fair synthetic tables from a GAN whose generator is *factored* along a causal DAG (directed acyclic graph): the joint distribution over columns is written as a product of conditionals, $P(X) = \prod_i P(X_i \mid \mathrm{pa}(X_i))$, with $\mathrm{pa}(X_i)$ the columns the graph draws as parents of column X_i. This is similar to the decomposition a marginals-based synthesizer such as MST fits, differing chiefly in that MST's dependency graph is undirected. DECAF gives each column its own sub-network reading only $\mathrm{pa}(X_i)$, so a parent can be severed at generation time by substituting an independently drawn surrogate, leaving the generator structurally unable to use the unfair pathway and requiring no retraining.

Which edges to sever turns a fairness *definition* into an *algorithm*, and DECAF supplies three (Figure 1). **FTU** (fairness through unawareness) cuts only the direct edge $S \to Y$; **DemPar**[1] (demographic parity) cuts every directed path $S \rightsquigarrow Y$; **CF** (conditional fairness) spares paths that pass through an attribute the modeller has nominated *admissible*, so disparity routed through a legitimate factor survives. DECAF's own illustration is the clearest: *Education* $\to$ *Resume* $\to$ *Job* is worth keeping because *Resume* is admissible, while *Race* $\to$ *Postcode* $\to$ *Loan* is redlining and is not. The graph-cutting machinery is unusually clean, and its authors argue it should port to other generators.

Differential privacy. Institutions releasing sensitive tables increasingly attach a differential privacy (DP) guarantee [Dwork et al., 2006], which caps the influence any single individual can have on the released synthetic table by a budget ε: smaller ε means stronger privacy and noisier releases. $\varepsilon{=}1$ is the tight budget an institution might publish under; $\varepsilon{=}1000$ is a permissive comparison point that approximates no privacy at all. Every mention of "private" or "DP-" below refers to such a synthesizer.

Related approaches. Only one prior system attaches an in-generator fairness cut to a private synthesizer. PreFair [Pujol et al., 2023] adapts the CF definition above to MST [McKenna et al., 2021], excluding offending marginals from candidacy before the private structure search runs; it implements only that one definition, and is neither built nor evaluated for any synthesizer other than MST. Causal-DAG diffusion generates column by column much as DECAF does but targets fidelity, with no protected attribute and no edge removal [Zhang et al., 2025, Jacob et al., 2026]. Private tabular diffusion without a causal graph exposes no per-column edge to cut and cannot host the mechanism at all [Zhu et al., 2024]. Everything else that combines privacy with fairness for generation acts outside the graph: enforcing statistical independence on a learned intermediate embedding [Hyrup et al., 2025, Sarmin et al., 2025], prompting an LLM backbone [Nagesh et al., 2025], learning a private structure without a fairness objective [Jia et al., 2025], or mitigating downstream of the synthesizer [Angelozzi and Arcolezi, 2026].

The gap. Nobody has asked whether DECAF's edge surgery is a property of *DECAF* or of *causal factorisation*. DECAF conjectures the latter, calling the method "simple and extendable to other generative methods" and "directly extendable to … other generative models", but never tests the claim. If the conjecture holds, the mechanism should transfer to any generator factored along a graph, including the marginals-based synthesizers that dominate private tabular data [McKenna et al., 2021, Zhang et al., 2014, 2021, McKenna et al., 2022] and including diffusion, the current tabular quality leader [Kotelnikov et al., 2023].

[1] DECAF calls this mechanism DP; we write DemPar throughout and reserve DP for differential privacy, discussed alongside it in every result below.

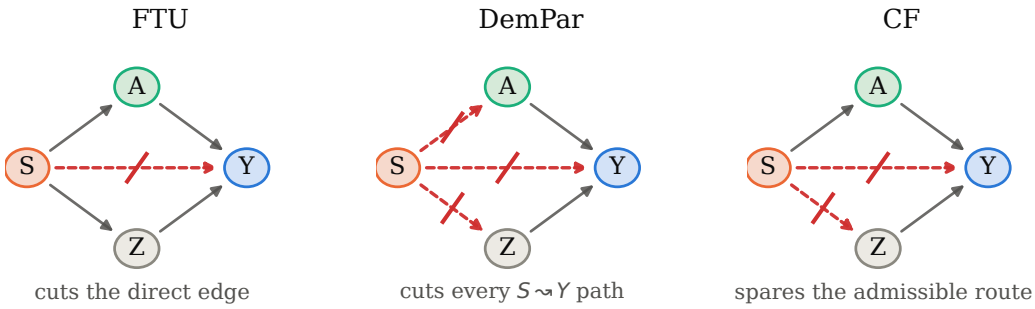


Figure 1: Three fairness definitions as three sets of severed edges, acting on the graph the data is *generated* from, not on the model trained afterwards. S is the protected attribute, Y the outcome, A an admissible attribute whose influence is deemed legitimate, and Z an intermediate proxy. Dashed red edges are cut. DemPar removes every directed $S \rightsquigarrow Y$ path; CF removes only those that avoid A, so the route $S \to A \to Y$ survives.

3 Porting the mechanisms

We implement FTU, DemPar and CF against one interface[2] and attach it to nine generators from three unrelated families. The definitions do not change; only the graph the cut applies to does, and whether that graph is directed or undirected.

Marginals-based synthesizers (MST, PrivBayes, PrivSyn, and AIM[3]) form a graphical model whose edges are the pairs of columns whose noisy joint counts the synthesizer chooses to measure under the privacy budget; the release is drawn from a distribution that reproduces those counts. Because the graph is undirected, the fairness cut is enforced on paths rather than on ordered parent→child edges: whether adding a candidate pair would create a forbidden S-to-Y path depends on what is already in the model, so the constraint is checked incrementally at each selection step. A pair the cut excludes is never measured, making the constraint free in the privacy accounting rather than merely cheap.[4] **Causal GANs** (DECAF, plus CTGAN-based [Xu et al., 2019] and DP-SGD [Abadi et al., 2016] variants) use DECAF's surrogate substitution unchanged, on the directed DAG. **Causal diffusion** keeps the same factorisation and replaces each sub-network with a small denoiser trained by supervised noise prediction; the cut is the same code path, because what exposes an edge is that X_i has its own network reading only $\mathrm{pa}(X_i)$, true whether that network is trained adversarially or by denoising.

Experimental setup. Two datasets, Adult [Becker and Kohavi, 1996] and COMPAS [Angwin et al., 2016]; nine generators; four mechanisms (NONE/FTU/DemPar/CF); $\varepsilon \in \{1, 10, 1000\}$ at $\delta = 10^{-9}$ for the six generators carrying a differential-privacy guarantee [Dwork et al., 2006]; three protected/admissible role splits per dataset; five seeds; 2,520 completed runs. One Adult split reproduces DECAF's own setup (protected `sex`; admissible `occupation`, `hours-per-week`, `workclass`, `education`), one follows PreFair's Table 1, and one is deliberately strict; COMPAS is absent from DECAF's evaluation, so its splits follow PreFair and two variants. For the causal GAN and diffusion families the DAG for each dataset is specified by hand from domain knowledge, as is standard in this literature (following Kusner et al. [2017] and Zhang et al. [2017]) and held fixed across generators so effects are attributable to the mechanism. The marginals-based generators choose their own undirected graph under the privacy budget, and the cut is enforced on that graph.

Metrics. *Fidelity* is 1-way and 2-way total-variation distance between the synthetic and real marginals, averaged over columns and column-pairs (lower is better; a value of 0 means the syn-

[2]Anonymized code, with instructions to reproduce every run and table: `https://anonymous.4open.science/r/CausalFairnessInSDG-55EC/`.

[3]AIM [McKenna et al., 2022] was ported after the main sweep and run at ε=1 with one seed per (dataset, mechanism); it is included as a smoke-test on a fourth marginals backbone, not pooled into the Table 1 averages.

[4]The freed ε does not buy the release a better fit. MST fixes its per-round budget from the number of edges a spanning tree needs, before selection begins, so pruning candidates shrinks each round's pool rather than enriching what remains, and matched-pair 2-way TVD is worse under the cut, by 0.008 for DemPar, 0.003 for CF and 0.001 for FTU on Adult (ordered by how much structure each removes).

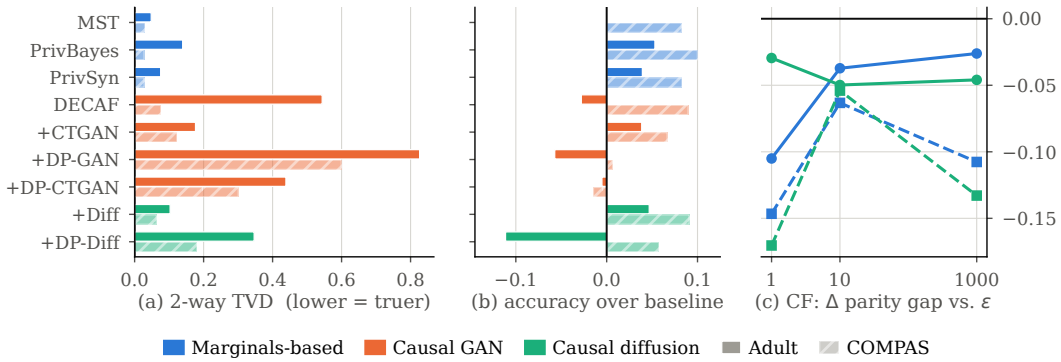


Figure 2: **(a, b)** every generator with no fairness mechanism, averaged over ε, role splits and seeds; (a) 2-way TVD to the real table (lower is better), (b) MLP lift over the majority-class rate (higher is better). A bar at zero in (b) means the data taught a classifier nothing, and a table with no signal has no disparity left to remove. **(c)** the matched-pairs reduction in parity gap from CF at each budget, for the two families present in every cell (marginals and diffusion; the causal GAN family lacks a matched cell at every budget because DP-GAN and DP-CTGAN collapse to a constant predictor in several cells). More negative is fairer, and the effect does not decay as ε tightens.

thetic and real marginals agree exactly). *Utility* is the test accuracy of an MLP trained on the synthetic table to predict the outcome column (`income` on Adult, `two_year_recid` on COMPAS) and evaluated on a real held-out 30%; we report it as *lift* over the majority-class rate so that a generator with no learnable signal scores zero rather than the majority baseline. *Fairness* is that same MLP's worst-case demographic-parity gap across values of the protected attribute, again evaluated against real held-out people (DECAF's DF-ORIGINAL reference). Concretely, if 50% of men and 17% of women in the released table are predicted to earn above \$50k, the demographic-parity gap on Adult is $|0.50 - 0.17| = 0.33$; a mechanism that reduces it to 0.05 has removed 85% of the gap. We also compute conditional parity and positive/negative-rate balance; every claim below reproduces on all four. Seed noise rivals the effects themselves (median within-cell SD of the parity gap: 0.031 on Adult, 0.092 on COMPAS), so every fairness number below is a **matched-pairs** difference: each run with a fairness mechanism is differenced against the run identical in dataset, generator, ε, role split *and seed* but with no fairness mechanism.

4 Results

4.1 Fidelity and utility

Fidelity separates the nine generators cleanly (Figure 2a). The marginals-based synthesizers dominate, as expected since they optimise almost exactly 2-way TVD: MST reaches 0.048 on Adult and 0.030 on COMPAS. Diffusion is the next tier and holds it at every privacy level: our non-private diffusion port reaches 0.103 on Adult against DECAF's own 0.544, and with DP-SGD attached, DP-diffusion at 0.346 still leads DP-GAN at 0.439 and DP-CTGAN at 0.830.

Utility is the load-bearing panel for what follows (Figure 2b). Most generators clear the majority-class baseline meaningfully: on Adult PrivBayes reaches 0.05 lift over the 0.758 majority-class rate, PrivSyn 0.05, our non-private diffusion port 0.04, and DP-diffusion at $\varepsilon \geq 10$ sits just above baseline. Two cells are trouble: MST on Adult sits at exactly zero lift (accuracy 0.747, majority rate 0.758), and the DP-GAN family collapses to a constant predictor in several ε=1 cells. A table that teaches a classifier nothing has no disparity for a fairness mechanism to remove, and is scored as perfectly fair by every existing fairness metric. Every fairness claim below is a matched-pair difference holding the generator fixed, so this artefact does not confound the mechanism's effect; it does mean an absolute fairness number is uninterpretable without the utility number beside it for those two cells.

Table 1: Matched-pairs change in the worst-case demographic-parity gap from applying each mechanism, pooled within generator family. *end* is the gap that remains after the mechanism; Δ gap is the mean paired change with a 95% CI (negative = gap shrunk); Δ acc is the paired MLP-accuracy change. Base (no-mechanism) gaps are in the family headers.

	Adult			**COMPAS**		
Mech.	end	Δ gap	Δ acc	end	Δ gap	Δ acc
Marginals-based (MST, PrivBayes, PrivSyn), base gap 0.143 / 0.331, $n = 135$						
FTU	0.121	-0.022 ± 0.020	$+0.002$	0.254	-0.076 ± 0.027	$+0.003$
CF	0.087	-0.056 ± 0.020	-0.005	0.225	-0.106 ± 0.027	-0.011
DemPar	0.071	-0.073 ± 0.021	-0.032	0.230	-0.101 ± 0.029	-0.033
Causal GAN (DECAF, +CTGAN, +DP-GAN, +DP-CTGAN), base gap 0.074 / 0.238, $n = 102/96$						
FTU	0.072	-0.003 ± 0.006	-0.000	0.156	-0.081 ± 0.028	-0.002
CF	0.019	-0.055 ± 0.019	-0.001	0.134	-0.103 ± 0.031	-0.017
DemPar	0.007	-0.068 ± 0.021	-0.003	0.094	-0.145 ± 0.039	-0.049
Causal diffusion (DECAF+Diffusion, +DP-Diffusion), base gap 0.069 / 0.294, $n = 60$						
FTU	0.059	-0.010 ± 0.014	-0.004	0.193	-0.101 ± 0.029	-0.013
CF	0.015	-0.055 ± 0.017	-0.015	0.160	-0.134 ± 0.034	-0.033
DemPar	0.003	-0.066 ± 0.016	-0.007	0.126	-0.167 ± 0.034	-0.088

4.2 Fairness: the definitions transfer, the magnitude does not

The definitions transfer. In every generator family, on both datasets and at every privacy level, cutting edges reduces the downstream parity gap (Table 1: the mean matched-pair reductions are every one signed the same way and every one comfortably outside its own 95% interval). This answers DECAF's own conjecture in the sense that matters first: nothing about the three definitions requires a GAN, and nothing about them requires a supplied directed DAG.

The magnitude does not transfer, and the pooled averages hide that. The pooled numbers look invariant at first: on Adult, CF's mean matched-pair reduction in parity gap is 0.056 ± 0.020 on marginals, 0.055 ± 0.019 on causal GANs and 0.055 ± 0.017 on causal diffusion, three means agreeing to 0.002. The per-generator effects on Adult span 0.002 (MST) to 0.173 (DECAF), and each family happens to contain both a generator that reproduces the disparity in full and one whose signal has collapsed to the majority class (Figure 2b), so the family means average across those extremes onto the same intermediate value. The comparison as a fraction of each generator's own baseline parity gap is more informative. Restricted to matched pairs where there is disparity to remove (baseline gap > 0.05) and where the generator learned something (lift > 0.02), CF removes 89% of the baseline parity gap on the causal diffusion family, 75% on the causal GAN family and 29% on the marginals-based family on Adult (43%, 32% and 22% on COMPAS). Concretely, on DECAF diffusion under DemPar on Adult, the fraction of men in the released table that the downstream classifier predicts to earn above \$50k differs from the corresponding fraction for women by 0.29 before the mechanism is applied and 0.03 after. On MST the same mechanism moves it from 0.11 to 0.09. Variance partitioning confirms the split: which family the generator belongs to explains essentially none of the raw reduction ($\eta^2 = 0.00$) and about a quarter of the fraction removed ($\eta^2 = 0.25$; $n = 432$ matched pairs in the disparity-and-signal subset).

The gap has a structural cause: the same definition compiles to two operations on very different graphs. The causal GAN and diffusion families receive a directed DAG from a domain expert and sever its edges by surrogate substitution at sampling time. A marginals-based synthesizer receives no DAG; it selects an undirected structure under the privacy budget, so the definition is enforced during that selection and can only sever an edge the structure already carries. The two graphs carry very different amounts of protected-to-outcome dependence (Table 2): the hand-designed Adult DAG puts ≈ 9 edges on some S-to-Y path that DemPar must sever, whereas the private, sparse marginals graph offers only 4. So the GAN and diffusion families cut more edges in absolute terms but a smaller fraction of their already-small baseline disparity, while the marginals family cuts fewer edges but a much larger fraction of its gap.

The predicted ordering falls out of the data. Ranked by parity gap left behind, NONE $>$ FTU $>$ CF $>$ DemPar holds in five of six (dataset $\times$ family) cells (Table 1). CF landing between the other two is a substantive check on the mechanism, not a formality: CF spares disparity routed through

Table 2: Mean number of edges the mechanism must sever, per run, per generator family. For the causal GAN/diffusion families the count is deterministic: it is the number of DAG edges DECAF's surrogate substitution would replace given each dataset's role split. For marginals it is the minimum edge cut needed on the baseline (no-mechanism) learned undirected graph to break every forbidden S-to-Y path (paths through admissibles are legal under CF, hence its intermediate size). DemPar $\geq$ CF $\geq$ FTU by construction.

	Adult			**COMPAS**		
Family	FTU	CF	DemPar	FTU	CF	DemPar
Causal GAN / diffusion (fixed DAG)	0.75	4.00	8.75	1.33	1.67	3.33
Marginals-based (learned graph)	0.58	2.81	4.24	0.96	2.27	3.72

Table 3: **Where to intervene, on identical data.** MST synthetic training data, real held-out test set, XGBoost, 5 seeds, all inside the benchmark code of Angelozzi and Arcolezi [2026]. Entries are |parity gap| / accuracy; **bold** marks the best value in each column at the displayed precision (lower gap, higher accuracy; ties bolded together). The eight comparison mitigators act on the released table or on the model trained from it; our three (**in-gen (ours)**) act inside the generator. Majority-class accuracy is 0.758 (Adult) and 0.533 (COMPAS), so learned fair representations buy their low gap by falling to it.

		Adult		COMPAS	
stage	intervention	ε=1	ε=10	ε=1	ε=10
	no mitigation	0.068 / 0.74	0.073 / 0.74	0.109 / **0.61**	0.190 / 0.61
pre	Reweighing	0.087 / **0.75**	0.085 / **0.75**	0.132 / **0.61**	0.093 / 0.61
pre	Disp. impact rem.	0.078 / 0.74	0.105 / 0.72	0.119 / **0.61**	0.205 / **0.62**
pre	Learned fair repr.	0.018 / 0.72	0.031 / 0.70	0.037 / 0.50	0.028 / 0.51
in	Exp. gradient	0.047 / 0.74	0.058 / 0.74	0.115 / **0.61**	0.053 / 0.60
in	Grid search	0.068 / 0.74	0.073 / 0.74	0.109 / **0.61**	0.190 / 0.61
post	Reject option	0.045 / 0.60	0.046 / 0.61	0.045 / 0.56	0.046 / 0.54
post	Equalised odds	**0.009** / 0.71	0.015 / 0.72	**0.024** / 0.58	**0.023** / 0.59
post	Calib. eq. odds	0.049 / **0.75**	0.040 / **0.75**	0.485 / 0.56	0.415 / 0.57
in-gen (ours)	FTU	0.073 / 0.74	0.062 / 0.74	0.087 / 0.53	0.155 / 0.61
in-gen (ours)	DemPar	0.010 / **0.75**	**0.006** / **0.75**	0.067 / 0.53	0.148 / **0.62**
in-gen (ours)	CF	0.015 / **0.75**	0.029 / 0.74	0.111 / 0.59	0.155 / 0.61

the admissible attribute, so wherever the role split gives DemPar a mediator to cut and CF one to spare, CF must recover strictly less reduction, and it does wherever the two separate by more than seed noise.

Fairness through unawareness is weak, and on Adult barely acts. Pooled over Adult, FTU shifts the matched-pair parity gap by only 0.013 on average. The pooled figure is the sum of two very different behaviours: on MST the mechanism is a literal no-op in all 45 Adult pairs, because the direct protected-to-income marginal is one the private structure search never buys under our budgets and there is nothing for the filter to exclude; on the GAN and diffusion families FTU does cut, but the influence promptly re-routes through proxy attributes. This is the textbook criticism of unawareness, confirmed constructively: the cheap cut fails where the two path-based cuts, on the same generators and seeds, work.

The utility cost tracks the aggressiveness of the cut, and is modest for the cuts worth making: pooled over Adult, DemPar costs 1.7 accuracy points and CF costs 0.6; on COMPAS, 5.0 and 1.7. CF stays under two accuracy points in five of six (dataset $\times$ family) cells.

4.3 How this compares to intervening downstream

Everything so far measures the mechanism against itself. To place it against the alternatives an institution actually has, we ran the benchmark of Angelozzi and Arcolezi [2026] (introduced in §2), which asks where in a differentially private synthetic pipeline a fairness intervention should go and offers eight standard answers spread across pre-processing the table, constraining the classifier, and post-processing its predictions. We add ours as a fourth stage, applied inside the generator. We

use their code unmodified (their preprocessed data, splits, MST synthesizer, XGBoost classifier and aif360 metrics); the only change is that our arm's training table comes from our MST under FTU, DemPar or CF rather than theirs. Table 3 is the result.

On Adult the in-generator cut is on the fairness/accuracy frontier (Table 3, columns 1–2). DemPar in-generator leaves a parity gap of 0.010 at 0.748 accuracy; the only downstream mitigator that reaches a comparable gap is equalised-odds post-processing (which threshold- shifts the classifier per group) at 0.009, and it costs 3.4 more accuracy points to get there. Reweighing and the disparate-impact remover leave the release *less* fair than no mitigation at all in this cell, and grid search is an exact no-op. On COMPAS the ordering reverses: post-processing reaches 0.023 where our best cut reaches 0.148. This is the same finding as §4 seen from outside, since at these budgets the privately selected MST structure barely encodes the protected-to-outcome dependence and there is correspondingly little for a cut to sever, whereas a mitigator acting on the trained model is not subject to that limit. FTU and CF are exact no-ops on Adult in this harness too, reproducing the FTU result above in a different codebase and metric.

This is not a like-for-like ranking of techniques: a downstream mitigator is applied by whoever trains a model, whereas the in-generator cut is applied once by the publisher and is the only one of the four that ships with the released table (§5).

4.4 Privacy and fairness are nearly independent

The standard expectation for privacy and fairness is a trade-off: differential privacy has been shown to fall hardest on the smallest groups [Bagdasaryan et al., 2019], so tightening ε should both widen the parity gap in the released table and blunt any attempt to close it. In this setting we do not see the second half. Cutting edges reduces the parity gap at least as much at the strong $\varepsilon{=}1$ as at the permissive $\varepsilon{=}1000$ in nine of twelve (family $\times$ dataset $\times$ {CF, DemPar}) cells; two of the three exceptions are COMPAS GAN cells where the backbone has already collapsed to a constant predictor at $\varepsilon{=}1$ and has no disparity left to remove. For marginals-based generators on Adult, CF's mean paired reduction in parity gap is 0.105 at $\varepsilon{=}1$ against 0.026 at $\varepsilon{=}1000$ (on COMPAS, 0.147 against 0.108). DP noise widens the baseline gap at $\varepsilon{=}1$, leaving more to remove, but that is not the whole story: the reduction moves the same way as a fraction of baseline (68% against 18% on Adult). For causal diffusion it is essentially flat (0.030, 0.050, 0.046 across the three budgets on Adult). One deviation we cannot yet explain (Figure 2c): the effect at $\varepsilon{=}10$ is weaker than at either neighbour in both families and both datasets.

One private generator fails outright, on a claim DECAF makes. DECAF argues from the post-processing theorem that it "can be directly used for generating private synthetic data by replacing the standard discriminator by a differentially private discriminator." The accounting is correct; the output is not. Attaching DP-SGD [Abadi et al., 2016] to DECAF's WGAN-GP critic in this way (the DP-GAN row in Table 1) collapses the synthetic outcome to a single class in 168 of 360 runs (47%), every COMPAS run at $\varepsilon{=}1$ included. Two independent changes each remove the failure: substituting a CTGAN representation under the same adversarial training ($1/360$), and substituting diffusion for the WGAN-GP critic under DECAF's own representation ($0/360$). Two unrelated repairs locate the cause in DP-SGD on a weight-clipped critic, not in private causal generation as such.

5 Discussion

Edge surgery belongs to causal factorisation, not to DECAF. DECAF conjectured that its mechanism would extend beyond its own GAN but tested no other generator. It extends: across nine generators from three unrelated families, both datasets and every privacy budget, severing edges reduces downstream disparity, and FTU, DemPar and CF compile to the same edge cuts on a diffusion backbone and on a differentially private marginals synthesizer as they do on the original GAN. An institution can now choose a synthesizer for its fidelity, privacy or maturity and keep the fairness lever, instead of being pushed onto a non-private GAN to get it.

Privacy and fairness barely interact here, and in the marginals family the fairness cut costs no privacy at all. The textbook expectation is a trade-off, with tighter privacy blunting any attempt to close the parity gap. We see the opposite: the cut removes at least as much disparity under the

tight $\varepsilon{=}1$ budget as under a permissive one. And in a marginals-based synthesizer the cut is free in the privacy accounting, because an edge the definition forbids is simply never measured under the budget, a property DECAF's GAN cannot offer since it pays for every column it draws. For an institution already publishing under a privacy guarantee, fairness here is close to a free addition rather than a competing demand.

How much the cut removes is set by the graph, not the generator. The definition is identical everywhere; its effect size is not, for a simple reason. A hand-supplied causal DAG routes a protected attribute to the outcome through many edges, leaving a large disparity to sever; a private marginals graph is sparse by construction and often carries that dependence faintly or not at all. On Adult, FTU on MST is a literal no-op in all 45 matched pairs, because the private structure search never buys the direct `sex`$\rightarrow$`income` edge in the first place: the constraint is satisfied before it is imposed. So the question an auditor should ask of a release is not which generator produced it, but which graph it was sampled along and which attributes were nominated admissible.

Only the in-generator cut ships with the table. Where a private structure encodes little to sever, as on COMPAS, downstream mitigators remain the stronger tool. But a public table is used by consumers its publisher will never meet, and of the four places to intervene the in-generator cut is the only one that travels with the release and cannot be dropped by whoever trains the next model on it. The two are complements: the publisher should apply the cut wherever the graph gives it something to sever.

Conclusion. Synthetic data is increasingly the vehicle through which institutions share what they know for the public good, as when a hospital, a regulator or a statistical agency releases a table so that others can build on it. Our results show that the fairness of such a release need not be left to whoever eventually trains a model on it, nor traded against the privacy and fidelity these institutions rightly demand: a single causal edit, portable across the synthesizers they actually deploy, can remove an unfair pathway before the data ever leaves the building. Making that lever available wherever data is generated is a small but concrete step toward synthetic releases that are fair by construction.

References

Martin Abadi, Andy Chu, Ian Goodfellow, H. Brendan McMahan, Ilya Mironov, Kunal Talwar, and Li Zhang. Deep learning with differential privacy. In *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security*, pages 308–318, 2016.

Vinícius Gabriel Angelozzi and Héber H. Arcolezi. Where to intervene? benchmarking fairness-aware learning on differentially private synthetic tabular data. *arXiv preprint arXiv:2607.07471*, 2026. Proceedings on Privacy Enhancing Technologies (PETS) 2026.

Julia Angwin, Jeff Larson, Surya Mattu, and Lauren Kirchner. Machine bias. ProPublica, 2016.

Eugene Bagdasaryan, Omid Poursaeed, and Vitaly Shmatikov. Differential privacy has disparate impact on model accuracy. In *Advances in Neural Information Processing Systems 32 (NeurIPS)*, 2019.

Barry Becker and Ronny Kohavi. Adult. UCI Machine Learning Repository, 1996.

Cynthia Dwork, Frank McSherry, Kobbi Nissim, and Adam Smith. Calibrating noise to sensitivity in private data analysis. In *Theory of Cryptography Conference (TCC)*, pages 265–284, 2006.

Ishaan Gulrajani, Faruk Ahmed, Martin Arjovsky, Vincent Dumoulin, and Aaron Courville. Improved training of Wasserstein GANs. In *Advances in Neural Information Processing Systems 30 (NeurIPS)*, pages 5767–5777, 2017.

Tobias Hyrup, Emmanouil Panagiotou, Arjun Roy, Arthur Zimek, Eirini Ntoutsi, and Peter Schneider-Kamp. Achieving Hilbert–Schmidt independence under Rényi differential privacy for fair and private data generation. *arXiv preprint arXiv:2508.21815*, 2025.

Sven Jacob, Bardh Prenkaj, Weijia Shao, and Gjergji Kasneci. TabSCM: A practical framework for generating realistic tabular data. *arXiv preprint arXiv:2604.22337*, 2026.

Ke Jia, Yuheng Ma, Yang Li, and Feifei Wang. PrAda-GAN: A private adaptive generative adversarial network with Bayes network structure. *arXiv preprint arXiv:2511.07997*, 2025.

Akim Kotelnikov, Dmitry Baranchuk, Ivan Rubachev, and Artem Babenko. TabDDPM: Modelling tabular data with diffusion models. In *Proceedings of the 40th International Conference on Machine Learning*, 2023. arXiv:2209.15421.

Matt J. Kusner, Joshua Loftus, Chris Russell, and Ricardo Silva. Counterfactual fairness. In *Advances in Neural Information Processing Systems*, volume 30, 2017.

Ryan McKenna, Gerome Miklau, and Daniel Sheldon. Winning the NIST contest: A scalable and general approach to differentially private synthetic data. *arXiv preprint arXiv:2108.04978*, 2021.

Ryan McKenna, Brett Mullins, Daniel Sheldon, and Gerome Miklau. AIM: An adaptive and iterative mechanism for differentially private synthetic data. *arXiv preprint arXiv:2201.12677*, 2022.

Nitish Nagesh, Ziyu Wang, and Amir M. Rahmani. FairCauseSyn: Towards causally fair LLM-augmented synthetic data generation. *arXiv preprint arXiv:2506.19082*, 2025. IEEE EMBC 2025.

David Pujol, Amir Gilad, and Ashwin Machanavajjhala. PreFair: Privately generating justifiably fair synthetic data. *Proceedings of the VLDB Endowment*, 16(6):1573–1586, 2023.

Fatima J. Sarmin, Atiquer R. Rahman, Christopher J. Henry, and Noman Mohammed. Privacy-preserving fair synthetic tabular data. *arXiv preprint arXiv:2503.02968*, 2025.

Boris van Breugel, Trent Kyono, Jeroen Berrevoets, and Mihaela van der Schaar. DECAF: Generating fair synthetic data using causally-aware generative networks. In *Advances in Neural Information Processing Systems*, volume 34, 2021. arXiv:2110.12884.

Lei Xu, Maria Skoularidou, Alfredo Cuesta-Infante, and Kalyan Veeramachaneni. Modeling tabular data using conditional GAN. In *Advances in Neural Information Processing Systems*, volume 32, 2019.

Jia-Chen Zhang, Zheng Zhou, Yu-Jie Xiong, Chun-Ming Xia, and Fei Dai. CausalDiffTab: Mixed-type causal-aware diffusion for tabular data generation. *arXiv preprint arXiv:2506.14206*, 2025.

Jun Zhang, Graham Cormode, Cecilia M. Procopiuc, Divesh Srivastava, and Xiaokui Xiao. PrivBayes: Private data release via Bayesian networks. In *Proceedings of the 2014 ACM SIGMOD International Conference on Management of Data*, 2014.

Lu Zhang, Yongkai Wu, and Xintao Wu. A causal framework for discovering and removing direct and indirect discrimination. In *Proceedings of the Twenty-Sixth International Joint Conference on Artificial Intelligence (IJCAI-17)*, pages 3929–3935, 2017. doi: 10.24963/ijcai.2017/549.

Zhikun Zhang, Tianhao Wang, Ninghui Li, Jean Honorio, Michael Backes, Shibo He, Jiming Chen, and Yang Zhang. PrivSyn: Differentially private data synthesis. In *30th USENIX Security Symposium*, pages 929–946, 2021.

Chaoyi Zhu, Jiayi Tang, Juan F. Pérez, Marten van Dijk, and Lydia Y. Chen. DP-TLDM: Differentially private tabular latent diffusion model. *arXiv preprint arXiv:2403.07842*, 2024.

NeurIPS Paper Checklist

1. **Claims**

   Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

   Answer: [Yes]

   Justification: The abstract and introduction claim that DECAF's edge-surgery fairness mechanism ports beyond its original GAN to marginals-based and diffusion generators; Sections 3–4 establish exactly this across nine generators, two datasets and three privacy budgets, and we are explicit that the *magnitude* of the effect does not transfer even though the definitions do.

   Guidelines:

- The answer [N/A] means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A [No] or [N/A] answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. **Limitations**

   Question: Does the paper discuss the limitations of the work performed by the authors?

   Answer: [Yes]

   Justification: Limitations are discussed inline rather than in a separate section: the effect magnitude does not transfer across families and depends on the supplied or privately learned graph (§4); two generators produce degenerate-utility tables that trivially appear fair (§4); the reduction at ε=10 is weaker than at either neighbouring budget and we cannot yet explain it (§4); and the causal-GAN/diffusion results rely on a hand-specified DAG (§3).

   Guidelines:

   - The answer [N/A] means that the paper has no limitation while the answer [No] means that the paper has limitations, but those are not discussed in the paper.
   - The authors are encouraged to create a separate "Limitations" section in their paper.
   - The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
   - The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
   - The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
   - The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
   - If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
   - While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. **Theory assumptions and proofs**

   Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

   Answer: [N/A]

   Justification: The paper makes no formal theoretical claims and states no theorems; all results are empirical.

   Guidelines:

   - The answer [N/A] means that the paper does not include theoretical results.

- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. **Experimental result reproducibility**

   Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

   Answer: [Yes]

   Justification: Section 3 specifies the datasets, generators, fairness mechanisms, privacy budgets, role splits, seed count, downstream classifier and matched-pairs protocol, and we release an anonymized code repository with instructions to reproduce every run and every table (footnote in §3).

   Guidelines:

   - The answer [N/A] means that the paper does not include experiments.
   - If the paper includes experiments, a [No] answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
   - If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
   - Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general. releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
   - While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
     (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
     (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
     (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
     (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. **Open access to data and code**

   Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: Both datasets (Adult, COMPAS) are public, and we release an anonymized code repository with the synthesizer/mechanism implementations and the run and analysis scripts at `https://anonymous.4open.science/r/CausalFairnessInSDG-55EC/` (also cited in §3).

Guidelines:

- The answer [N/A] means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (`https://neurips.cc/public/guides/CodeSubmissionPolicy`) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so [No] is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (`https://neurips.cc/public/guides/CodeSubmissionPolicy`) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. **Experimental setting/details**

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer) necessary to understand the results?

Answer: [Yes]

Justification: Section 3 gives the datasets, the 30% real held-out test split, the downstream MLP, the three protected/admissible role splits, the privacy budgets ($\varepsilon \in \{1, 10, 1000\}$, $\delta = 10^{-9}$) and five seeds per cell; the remaining hyperparameters are fixed in the released code.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. **Experiment statistical significance**

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [Yes]

Justification: Every fairness number is a matched-pairs difference (each mechanism run is differenced against the no-mechanism run identical in dataset, generator, budget, role split and seed); Table 1 reports mean paired changes with 95% confidence intervals, and §3 reports the within-cell seed standard deviation that motivates the paired design.

Guidelines:

- The answer [N/A] means that the paper does not include experiments.
- The authors should answer [Yes] if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.

- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g., negative error rates).
- If error bars are reported in tables or plots, the authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. **Experiments compute resources**

   Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

   Answer: [Yes]

   Justification: All experiments run on a single shared Linux workstation; the models are small (tabular MLPs and per-column generators/denoisers), a single GPU is used for the GAN and diffusion backbones, and the full 2,520-run sweep completes in roughly 6–12 hours of wall-clock time when parallelised.

   Guidelines:

   - The answer [N/A] means that the paper does not include experiments.
   - The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
   - The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
   - The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. **Code of ethics**

   Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics `https://neurips.cc/public/EthicsGuidelines`?

   Answer: [Yes]

   Justification: The research uses only public, widely studied benchmark datasets, involves no human-subjects data collection, and its goal (reducing demographic disparity in released synthetic data under privacy guarantees) is consistent with the NeurIPS Code of Ethics.

   Guidelines:

   - The answer [N/A] means that the authors have not reviewed the NeurIPS Code of Ethics.
   - If the authors answer [No], they should explain the special circumstances that require a deviation from the Code of Ethics.
   - The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. **Broader impacts**

    Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

    Answer: [Yes]

Justification: The intended impact is positive: enabling institutions to remove unfair pathways from synthetic releases (Introduction, Discussion). We also flag concrete failure modes: a generator that teaches a classifier nothing has no disparity to remove yet scores as perfectly fair, so a fairness number is uninterpretable without its utility number (§4), and an in-generator cut can give false assurance if downstream consumers assume more disparity was removed than the graph actually permitted (§4, Discussion).

Guidelines:

- The answer [N/A] means that there is no societal impact of the work performed.
- If the authors answer [N/A] or [No], they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate Deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. **Safeguards**

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pre-trained language models, image generators, or scraped datasets)?

Answer: [N/A]

Justification: The paper releases fairness-mechanism code operating on public tabular benchmarks; it releases no pre-trained generative model, scraped dataset, or other artifact with a high risk for misuse.

Guidelines:

- The answer [N/A] means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. **Licenses for existing assets**

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: Every existing asset is cited to its original source: the Adult and COMPAS datasets, the DECAF, MST, PrivBayes, PrivSyn and AIM synthesizers, DP-SGD, and the downstream benchmark of Angelozzi and Arcolezi [2026] whose code we reuse unmodified. Each is publicly released for research use, and our re-implementations credit the upstream packages they adapt.

Guidelines:

- The answer [N/A] means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, `paperswithcode.com/datasets` has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. **New assets**

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [Yes]

Justification: The one new asset is the fairness-porting codebase; it is released in the anonymized repository above with a README documenting the environment setup, the synthesizer and fairness-mechanism interfaces, and how to run the experiments.

Guidelines:

- The answer [N/A] means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. **Crowdsourcing and research with human subjects**

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [N/A]

Justification: The paper uses pre-existing public datasets and involves no crowdsourcing or new human-subjects data collection.

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. **Institutional review board (IRB) approvals or equivalent for research with human subjects**

    Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

    Answer: [N/A]

    Justification: No human-subjects research was conducted; the work reuses public benchmark datasets only.

    Guidelines:

    - The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
    - Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
    - We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
    - For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. **Declaration of LLM usage**

    Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does *not* impact the core methodology, scientific rigor, or originality of the research, declaration is not required.

    Answer: [N/A]

    Justification: LLMs are not a component of the core methods; the generators studied are marginals-based, GAN and diffusion models. Any LLM use was limited to writing and editing assistance, for which declaration is not required.

    Guidelines:

    - The answer [N/A] means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
    - Please refer to our LLM policy in the NeurIPS handbook for what should or should not be described.