Portable Causal Fairness Across Synthetic Data Generator Families

Anonymous Author(s)
Affiliation
Address
email

Abstract

When a statistical agency or regulator releases synthetic data in place of sensitive records, it chooses the generator that produces the table, and can shape that generator so unfair pathways are absent. DECAF made this concrete on one non-private GAN: three fairness definitions become three sets of edge cuts on the generator's causal graph. Whether the mechanism belongs to DECAF, or to causal factorisation itself, was untested. We port all three definitions to nine generators from three unrelated families (marginals-based, GAN, and diffusion, each with differentially private variants), across three levels of formal privacy guarantee, over 2,520 matched-pair runs on Adult and COMPAS. The mechanism transfers everywhere, and our new causal diffusion backbone yields the fairest release of any family we tested, at fidelity close to the marginals tier. Applying the cut barely moves fidelity, and its cost in downstream classifier accuracy is small (about 0.07 to 0.15 AUC on average, depending on how aggressive the cut is).

1 Introduction

Institutions holding sensitive records increasingly publish a synthetic substitute rather than the records themselves: a hospital, a lending regulator or a statistical agency fits a generative model and releases a table drawn from it. The practice is real and growing: the 2020 US Census was released under a differential-privacy guarantee [2], and public challenges run by NIST, the FDA and the US–UK privacy-technology programme have made private tabular release a working technology rather than a proposal [8, 17, 21]. That substitution is usually justified on privacy grounds, but it carries a second, less-exploited consequence. Whoever generates the data chooses the generating process, and a process can be edited. A disparity that exists in the world because of a pathway running from a protected attribute, such as national origin, to an outcome, such as whether a loan is approved, need not exist in the released table.

The cleanest existing realisation of that lever is DECAF [20], which factors a generator along a causal graph so that severing an edge at sampling time makes the generator structurally unable to use the pathway it named. But DECAF is a single non-private WGAN-GP [9], whose released tables trail modern differentially private marginals-based synthesizers and modern diffusion models on the fidelity and utility benchmarks that decide what institutions actually deploy (Sec. 4). Whether the fairness mechanism is confined to that one architecture, or is a property of causal factorisation itself, is therefore a practical question and not merely an academic one: it decides whether an institution deploying synthetic data has the intervention available at all.

We ask two questions of that mechanism. Is edge surgery a property of DECAF, or of the causal factorisation any such generator uses? And can it be attached to a generator whose graph is not a supplied causal DAG but the undirected marginal-dependency graph a differentially private synthesizer

Submitted to 40th Conference on Neural Information Processing Systems (NeurIPS 2026). Do not distribute.

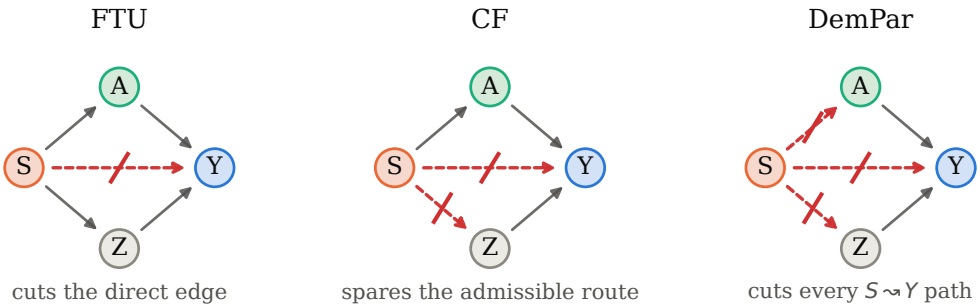


Figure 1: Three fairness definitions as three sets of severed edges, acting on the graph the data is *generated* from, not on the model trained afterwards for a downstream task. S is the protected attribute, Y the outcome, A an admissible attribute whose influence is deemed legitimate, and Z an intermediate proxy. Dashed red edges are cut. DemPar removes every directed $S \rightsquigarrow Y$ path; CF removes only those that avoid A, so the route $S \to A \to Y$ survives.

builds from noisy counts? The stakes are practical: if the mechanism that would make a released table fair is confined to a generator no institution would actually deploy, it might as well not exist.

2 Background and related work

DECAF: fairness as graph surgery. DECAF [20] generates fair synthetic tables from a GAN whose generator is *factored* along a causal DAG (directed acyclic graph): the joint distribution over columns is written as a product of conditionals, $P(X) = \prod_i P(X_i \mid \mathrm{pa}(X_i))$, with $\mathrm{pa}(X_i)$ the columns the graph draws as parents of column X_i. This is the same decomposition a marginals-based synthesizer such as MST [15] fits, differing chiefly in that MST's dependency graph is undirected. DECAF gives each column its own sub-network reading only $\mathrm{pa}(X_i)$, so a parent can be severed at generation time by substituting a surrogate value drawn independently of the rest of the row.

Severing $X_j \to X_i$ re-fits nothing: the trained conditional is instead *evaluated* at a surrogate parent value resampled from X_j's own marginal, a *do*-style intervention applied at sampling time. That is why the cut is cheap, and also why it can cost fidelity: the sub-network is asked about parent combinations it never saw in training.

Which edges to sever turns a fairness *definition* into an *algorithm*, and DECAF supplies three (Figure 1). **FTU** (fairness through unawareness) cuts only the direct edge $S \to Y$; **DemPar**[1] (demographic parity) cuts every directed path $S \rightsquigarrow Y$; **CF** (conditional fairness) spares paths that pass through an attribute the modeller has nominated *admissible*, so disparity routed through a legitimate factor survives. DECAF's own illustration is the clearest: *Education* $\to$ *Resume* $\to$ *Job* is worth keeping because *Resume* is admissible, while *Race* $\to$ *Postcode* $\to$ *Loan* is redlining and is not. The machinery is clean, and its authors argue it should port to other generators.

Differential privacy. Institutions releasing sensitive tables increasingly attach a differential privacy (DP) guarantee [7]: the 2020 US Census was released under one [2], and the synthesizers we study here are the winners and entrants of the public challenges that made private tabular release practical [15, 17, 21]. DP caps the influence any single individual can have on the released table by a budget ε: smaller ε means stronger privacy and noisier releases. ε=1 is the tight budget an institution might publish under; ε=1000 is a permissive comparison point that approximates no privacy at all. Every mention of "private" or "DP-" below refers to such a synthesizer.

Related approaches, and the gap. Only PreFair [18] attaches an in-generator fairness cut to a private synthesizer, adapting CF to MST alone by excluding offending marginals from candidacy before the private structure search runs. Everything else combining privacy with fairness in generation acts outside the graph: enforcing independence on a learned embedding [10, 19], prompting

[1] DECAF calls this mechanism DP; we write DemPar throughout and reserve DP for differential privacy, discussed alongside it in every result below.

an LLM backbone [16], learning a private structure without a fairness objective [12], or mitigating downstream [3]. Causal-DAG diffusion targets fidelity only [11, 23], and private tabular diffusion without a causal graph exposes no per-column edge to cut [27]. We benchmark against Angelozzi and Arcolezi [3] in §4.3, the one prior system on the same units (parity gap on a held-out real population); the embedding- and LLM-based generators are outside our scope, which is whether in-generator edge surgery transfers across families rather than a head-to-head between fair-SDG algorithms.

That leaves the question nobody has asked: is DECAF's edge surgery a property of the complete *DECAF* architecture, or of *causal factorisation*? DECAF conjectures the latter, calling the method "simple and extendable to other generative methods", but never tests it. The stakes are practical: if the mechanism is confined to DECAF, a publisher who wants a fair release must accept a non-private GAN that, on our own measurements (Figure 2), no institution would deploy; if it is a property of the factorisation, the publisher keeps the fairness lever while picking a synthesizer for its privacy and quality, spanning the marginals-based synthesizers that dominate private tabular data [15, 24, 26] and diffusion, which leads several tabular-quality benchmarks [13].

3 Porting the mechanisms

We implement FTU, CF and DemPar once, against a single interface,[2] and port that interface to nine generators from three unrelated families. The fairness definitions do not change. What changes is the graph the cut acts on, and whether that graph is directed or undirected. Each definition reduces to a graph-separation constraint on the release's dependency structure (no unadmissible $S \rightsquigarrow Y$ path); DECAF's directed-edge severance and our undirected-pair exclusion are two implementations of the same constraint, so the DAG in DECAF's presentation is a design choice.

Marginals-based synthesizers (MST [15], PrivBayes [24] and PrivSyn [26]) form a graphical model whose edges are the pairs of columns whose noisy joint counts the synthesizer chooses to measure under the privacy budget; the release is drawn from a distribution reproducing those counts. Their graph is undirected, so we enforce the cut on *paths* rather than on ordered parent $\rightarrow$ child edges. Whether adding a candidate pair would create a forbidden S-to-Y path depends on what the model already contains, so we check the constraint incrementally at each selection step. A pair the cut excludes is never measured, which makes the constraint free in the privacy accounting rather than merely cheap (following PreFair [18] for CF on MST, extended here to PrivBayes, PrivSyn, and to DemPar and FTU).

Causal GANs (DECAF, plus variants we build on a CTGAN representation [22] and on DP-SGD [1]) take DECAF's surrogate substitution unchanged, on the DAG. For **causal diffusion** we keep the same factorisation and replace each sub-network with a small denoiser trained by supervised noise prediction. The cut is then the same code path, because what exposes an edge is that X_i has its own network reading only $\mathrm{pa}(X_i)$, true whether that network was trained adversarially, as in the GAN families, or by denoising.

Experimental setup. Two datasets, Adult [6] and COMPAS [4]; nine generators; four mechanisms (NONE/FTU/CF/DemPar); three protected/admissible role splits per dataset (Appendix A); five seeds; $2{,}520$ completed runs. Six of the nine generators carry a differential-privacy guarantee [7] and are marked † throughout: the three marginals-based synthesizers, which are private by construction, and the three backbones to which we attach DP-SGD (DP-GAN, DP-CTGAN, DP-Diffusion). Those six run at $\varepsilon \in \{1, 10, 1000\}$ with $\delta = 10^{-9}$; DECAF, +CTGAN and +Diffusion have no privacy mechanism and run once. For the causal GAN and diffusion families we specify each dataset's DAG by hand from domain knowledge, as is standard in this literature (following Kusner et al. [14] and Zhang et al. [25]), and hold it fixed across generators so that any effect is attributable to the mechanism. The marginals-based generators choose their own undirected graph under the privacy budget, and we enforce the cut on that graph.

The fairness metric. Every fairness number in this paper is a **demographic-parity gap**. Train a classifier on the released synthetic table, use it to predict the outcome for a held-out sample of *real*

[2] Anonymized code, with instructions to reproduce every run and table: `https://anonymous.4open.science/r/CausalFairnessInSDG-55EC/`.

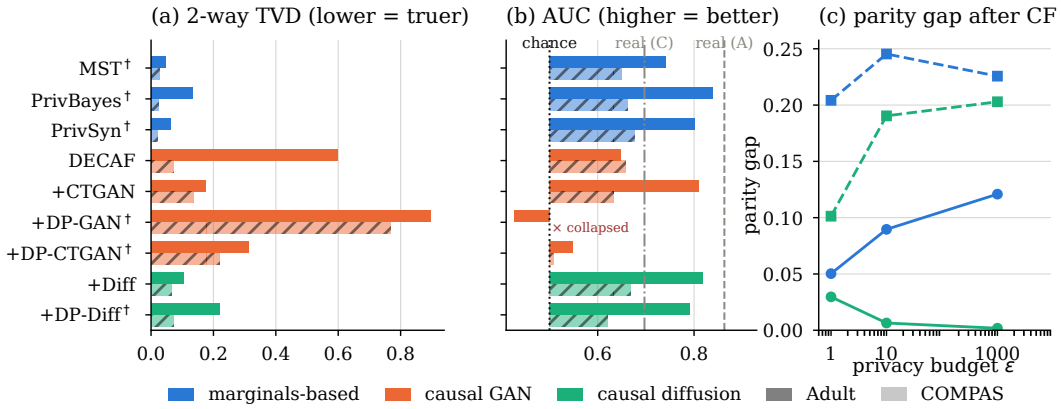


Figure 2: **(a, b)** every generator with no fairness mechanism, averaged over role splits and seeds; (a) 2-way TVD to the real table (lower is better), (b) downstream AUC on real held-out people (higher is better), with chance (0.5) and train-on-real references marked; a cell where the release collapsed to a single outcome class carries no AUC and is marked as such. **(c)** the parity gap remaining after CF at each privacy budget, for the two families with a matched cell at every ε (marginals-based and causal diffusion; the causal GAN family has DP-GAN and DP-CTGAN collapses that leave some cells empty). Each line is one family–dataset pairing (Adult solid, COMPAS dashed). † marks a generator carrying a differential-privacy guarantee.

people, and compare how often it says yes to each protected group:

$$\text{gap} \;=\; \big|\, \Pr(\hat{Y}{=}1 \mid S{=}1) \;-\; \Pr(\hat{Y}{=}1 \mid S{=}0) \,\big|,$$

reported as the worst case over the protected attributes of the split. For example, if a classifier trained on a synthetic Adult table predicts above-\$50k income for 50% of the men and 17% of the women in the real held-out sample, the gap is 0.33; a mechanism that brings it to 0.05 has removed 85% of the gap. Note what the gap does and does not say: it asks only whether the two groups receive the positive prediction equally often, not whether either prediction is correct. It is the right target here because it is the disparity DemPar is defined to remove, and because it is measured on real people rather than on the synthetic table, so a generator cannot score well by inventing a fairer population than the one it was given. We also record conditional parity and positive- and negative-rate balance for every run; every claim below holds on all four, and we report the parity gap because it is the one the three mechanisms are defined against.

Fidelity, utility, and matched pairs. For *fidelity* we report total-variation distance (TVD) between synthetic and real marginals (0 = agree exactly, 1 = share no mass), averaged over single columns (1-way) and column pairs (2-way), plus the mean absolute difference in Cramér's V across column pairs (which asks whether the release preserves the *strength* of each pairwise association). For *utility* we train a classifier on the synthetic table and score it on the real held-out 30%, reporting AUC (floor 0.5) and macro-F1 (floor 0.41) against a train-on-real reference. Because seed noise rivals the fairness effects themselves, every fairness number below is a **matched-pairs** difference: each mechanism run is differenced against the run identical in dataset, generator, ε, role split *and* seed, but with no mechanism.

4 Results

4.1 Fidelity and utility

Fidelity separates the nine generators cleanly on 2-way TVD (Figure 2a). The marginals-based synthesizers dominate, as expected since they optimise almost exactly this metric: MST reaches 0.047 on Adult and 0.028 on COMPAS. Among the causal backbones on the same metric, our diffusion backbone is next and holds it at every privacy level: it reaches 0.103 on Adult against DECAF's own 0.597, and with DP-SGD attached, DP-diffusion at 0.218 still leads DP-CTGAN at 0.313 and DP-GAN at 0.895.

Table 1: Matched-pairs effect of each mechanism on the worst-case demographic-parity gap, pooled within generator family, restricted to trials where the no-mechanism release lets a downstream random forest reach AUC > 0.6 (so that "fairness" is not a trivial artefact of collapsed learning). *gap* and *AUC* are what remains after the mechanism, both measured on real held-out people; the parenthesised value beside each is the mean *paired* change against the identical run with no mechanism (negative = the gap shrank), with a 95% CI on the gap. Each family header gives its no-mechanism gap and AUC on Adult / COMPAS. † marks a generator carrying a differential-privacy guarantee; those run at ε=10.

	Adult		**COMPAS**	
Mech.	gap (Δ)	AUC (Δ)	gap (Δ)	AUC (Δ)
Marginals-based (MST†, PrivBayes†, PrivSyn†); none: gap 0.210 / 0.234, AUC 0.794 / 0.662				
FTU	0.192 (-0.019 ± 0.022)	0.795 ($+0.002$)	0.192 (-0.042 ± 0.026)	0.666 ($+0.004$)
CF	0.125 (-0.086 ± 0.024)	0.737 (-0.057)	0.178 (-0.056 ± 0.033)	0.644 (-0.018)
DemPar	0.103 (-0.108 ± 0.027)	0.640 (-0.154)	0.168 (-0.066 ± 0.034)	0.626 (-0.036)
Causal GAN (DECAF, +CTGAN, +DP-GAN†, +DP-CTGAN†); none: gap 0.164 / 0.254, AUC 0.770 / 0.653				
FTU	0.144 (-0.020 ± 0.034)	0.762 (-0.008)	0.216 (-0.039 ± 0.032)	0.649 (-0.004)
CF	0.036 (-0.128 ± 0.033)	0.612 (-0.158)	0.219 (-0.035 ± 0.038)	0.620 (-0.033)
DemPar	0.018 (-0.147 ± 0.032)	0.535 (-0.235)	0.160 (-0.094 ± 0.048)	0.554 (-0.099)
Causal diffusion (+Diffusion, +DP-Diffusion†); none: gap 0.159 / 0.218, AUC 0.805 / 0.647				
FTU	0.159 (-0.001 ± 0.009)	0.805 ($+0.000$)	0.156 (-0.063 ± 0.036)	0.633 (-0.014)
CF	0.039 (-0.121 ± 0.010)	0.622 (-0.183)	0.159 (-0.060 ± 0.036)	0.601 (-0.045)
DemPar	0.025 (-0.135 ± 0.011)	0.493 (-0.312)	0.137 (-0.081 ± 0.043)	0.515 (-0.132)

Utility separates the same way (Figure 2b). Most generators clear the AUC floor of 0.5 comfortably on both datasets; on Adult, PrivBayes reaches 0.839, causal diffusion 0.819, DP-diffusion 0.791 at ε=10, MST 0.742. **Only DP-GAN collapses**: AUC 0.427 on Adult (below chance) and a constant predictor on COMPAS; we diagnose this in §4.4. A collapsed generator has no disparity for a fairness mechanism to remove, so this only affects DP-GAN's own row.

4.2 Fairness findings

The definitions transfer. Cutting edges reduces the downstream parity gap in every family, on both datasets, at every privacy level (Table 1); the predicted ordering (DemPar $>$ CF $>$ FTU by amount removed) holds in five of six family$\times$dataset cells, a sanity check on the definitions themselves. Nothing about the three definitions requires a GAN, and nothing requires a supplied DAG.

Causal diffusion produces the fairest release under both mechanisms, averaged across datasets. The mean parity gap remaining on real held-out data after CF is 0.099 for diffusion, 0.128 for causal GAN, and 0.152 for marginals; under DemPar, 0.081, 0.089, 0.136 (Table 1). On Adult, diffusion cuts an initial gap of 0.159 to 0.039 under CF and 0.025 under DemPar: a release whose downstream classifier predicts the positive outcome at almost equal rates for the two protected groups. CF removes 76% of the baseline gap on diffusion (Adult), 78% on causal GAN, and 41% on marginals; the mechanism transfers everywhere, and its impact is largest through the causal factorisation that the diffusion backbone we introduce carries.

The two graph types differ in cost, not in what they cut. How many $S \rightsquigarrow Y$ edges each graph contains varies by dataset (Table 2); more consistently,

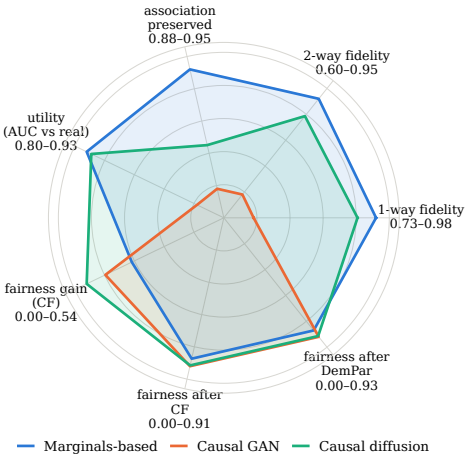


Figure 3: The three generator families on seven axes, at ε=10 for the differentially private generators and averaged over both datasets, role splits and seeds. Higher is better on every axis. The four baseline axes (fidelity, association preservation, utility) are scaled between the weakest and strongest family; the three fairness axes are anchored at 0 so absolute magnitude is visible. True ranges are printed beside each label. *Fairness gain* is the matched-pair share of the baseline parity gap CF removes, over runs where there was a gap to remove; *fairness after CF* and *fairness after DemPar* are the complements of the mean final parity gap under those cuts. Marginals-based shows a lower *gain* because its graph carries fewer

Table 2: Mean number of edges the mechanism must sever, per run, per generator family. Causal GAN/diffusion counts are deterministic (DAG edges DECAF's surrogate substitution would replace under each dataset's role split); marginals counts are the minimum edge cut on the baseline learned graph needed to break every forbidden S-to-Y path.

	Adult			**COMPAS**		
Family	FTU	CF	DemPar	FTU	CF	DemPar
Causal GAN / diffusion (fixed DAG)	0.75	4.00	8.75	1.33	1.67	3.33
Marginals-based (learned graph)	0.58	2.81	4.24	0.96	2.27	3.72

Table 3: **Where to intervene, on identical data.** Absolute parity gap on MST synthetic training data at differential-privacy budget ε, real held-out test set, XGBoost, 5 seeds, all inside the benchmark harness of Angelozzi and Arcolezi [3]. The eight upper mitigators act on the released table or the classifier trained from it; our three (**in-gen (ours)**) act inside the generator. The harness reports accuracy but not AUC or macro-F1, and every method scores within a point of the majority baseline (0.76 Adult, 0.53 COMPAS), so accuracy does not discriminate methods and we omit it. ‡ marks a row where the classifier collapsed further, below majority.

		Adult		COMPAS	
stage	intervention	ε=1	ε=10	ε=1	ε=10
	no mitigation	0.068	0.073	0.109	0.190
pre	Reweighing	0.087	0.085	0.132	0.093
pre	Disp. impact rem.	0.078	0.105	0.119	0.205
pre	Learned fair repr.‡	0.018	0.031	0.037	0.028
in	Exp. gradient	0.047	0.058	0.115	0.053
in	Grid search	0.068	0.073	0.109	0.190
post	Reject option	0.045	0.046	0.045	0.046
post	Equalised odds	**0.009**	0.015	**0.024**	**0.023**
post	Calib. eq. odds	0.049	0.040	0.485	0.415
in-gen (ours)	FTU	0.073	0.062	0.087	0.155
in-gen (ours)	CF	0.015	0.029	0.111	0.155
in-gen (ours)	DemPar	0.010	**0.006**	0.067	0.148

per edge severed a DAG cut costs about $2.5\times$ as much downstream utility as a marginals cut, because a marginals cut excludes a pair before training while a DAG cut asks a trained sub-network to extrapolate (Appendix B).

The cut hardly moves fidelity. Pooled across all nine generators and both datasets, CF shifts the released table's 2-way TVD to the real distribution by 0.001 and DemPar by 0.004, against a no-fairness-mechanism TVD that ranges from 0.03 to 0.32 across generators; the release is essentially as faithful after the cut as before. The utility cost is modest under CF (about 0.07 downstream AUC on average) and larger under DemPar (about 0.15; Table 1).

4.3 How this compares to intervening downstream

Everything above measures the cut against itself. To place it against the alternatives an institution already has, we run the benchmark of Angelozzi and Arcolezi [3], which asks where in a synthesis pipeline a fairness intervention should go and supplies eight standard answers, all acting on the released synthetic table or the classifier trained from it (pre-processing the table, constraining the trained classifier, or post-processing its predictions). We add a fourth stage (in-generator) by running MST-FTU, MST-CF and MST-DemPar as extra rows in the same benchmark, otherwise unmodified: its preprocessed data, splits, MST synthesizer, XGBoost classifier, aif360 metrics, and its default role split (matching PreFair; Appendix A).

On Adult, our in-generator DemPar reaches a parity gap of 0.006 at $\varepsilon{=}10$, tied with the strongest downstream mitigator (equalised-odds post-processing at 0.015) and lower than every pre- and in-processing entry. On COMPAS, equalised-odds post-processing wins (0.023 vs. our 0.148); our cut still improves fairness over no mitigation.

Neither of these comparisons is the point: a downstream mitigator can be dropped, altered or replaced by whoever trains on the release, while an in-generator cut ships with the table itself. We develop this in §5.

4.4 Privacy and fairness are nearly independent

A tighter DP budget might be expected to blunt fairness cuts, since DP suppression falls hardest on the smallest groups [5], but we do not observe that. Pooled across the six DP generators, the parity gap after CF sits at 0.09–0.13 at every $\varepsilon \in \{1, 10, 1000\}$ we tested (Figure 2c), and after DemPar at 0.08–0.12; the mechanism removes whatever disparity the budget produced.

One private generator fails outright. DECAF's post-processing argument invites swapping in a DP-SGD [1] discriminator; doing so collapses the synthetic outcome to a single class in $168/360$ runs (47%; Table 1, DP-GAN row). Two substitutions each remove the failure (CTGAN representation, $1/360$; diffusion in place of the WGAN-GP discriminator, $0/360$), locating the cause in DP-SGD on a weight-clipped discriminator, not in private causal generation as such.

5 Discussion

Edge surgery belongs to causal factorisation, not to DECAF. DECAF conjectured that its mechanism would extend beyond its own GAN but tested no other generator, and PreFair implements one such definition (CF) on a single marginals synthesizer (MST). We show the definitions compile identically across nine generators, three per family, on both datasets and at every privacy budget; an institution can now pick a synthesizer for its fidelity, privacy or maturity and keep the fairness lever, instead of being pushed onto a non-private GAN or a single marginals implementation to get it.

Causal diffusion produces the fairest release we tested. Averaged over both datasets, our diffusion backbone leaves the smallest downstream parity gap under both CF (0.099) and DemPar (0.081), ahead of causal GAN (0.128, 0.089) and marginals (0.152, 0.136; Table 1). This is the finding we want to highlight, since the diffusion backbone is new work: DECAF gave us one GAN and PreFair one marginals-based synthesizer, and neither offered a diffusion route, through which the mechanism turns out to reduce disparity most.

Which generator should a publisher use? *Marginals-based synthesizers* remain the default when fidelity and privacy come first: they are truest to the real table on every fidelity measure, and are differentially private by construction. *Causal diffusion* is the choice when the fairness lever has to bite, removing the largest fraction of the parity gap while holding fidelity close to the marginals tier. *The causal GAN family* trails on fidelity and utility, and DP-GAN fails outright. On Adult, CF pays 6 AUC points to remove 41% of the baseline gap on marginals, 16 (78%) on causal GAN, and 18 (76%) on causal diffusion; the cost is smaller on COMPAS, where every family starts closer to chance, and DemPar costs roughly double CF on both COMPAS families. A publisher should reach for CF unless there is a specific reason to route out every admissible pathway too.

Only the in-generator cut ships with the table. On datasets where the private structure encodes little to sever, a downstream mitigator can reach a lower parity gap on the release (Table 1). But a public table is used by consumers its publisher will never meet, and of the four places to intervene, the in-generator cut is the only one that travels with the release and cannot be dropped.

Conclusion. The point is not any generator we ported to, but that all three families share the same abstraction (a causal factorisation whose edges can be severed), and this abstraction, not any one architecture, is where the fairness lever lives. An institution can now pick a synthesizer for its privacy or data-quality needs, and keep a portable causal-fairness intervention as part of that choice.

References

[1] Martin Abadi, Andy Chu, Ian Goodfellow, H. Brendan McMahan, Ilya Mironov, Kunal Talwar, and Li Zhang. Deep learning with differential privacy. In *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security*, pages 308–318, 2016.

[2] John M. Abowd, Robert Ashmead, Ryan Cumings-Menon, Simson Garfinkel, Micah Heineck, Christine Heiss, Robert Johns, Daniel Kifer, Philip Leclerc, Ashwin Machanavajjhala, Brett Moran, William Sexton, Matthew Spence, and Pavel Zhuravlev. The 2020 census disclosure avoidance system TopDown algorithm. *Harvard Data Science Review*, (Special Issue 2), 2022. doi: 10.1162/99608f92.529e3cb9.

[3] Vinícius Gabriel Angelozzi and Héber H. Arcolezi. Where to intervene? Benchmarking fairness-aware learning on differentially private synthetic tabular data. *Proceedings on Privacy Enhancing Technologies*, 2026.

[4] Julia Angwin, Jeff Larson, Surya Mattu, and Lauren Kirchner. Machine bias. ProPublica, 2016.

[5] Eugene Bagdasaryan, Omid Poursaeed, and Vitaly Shmatikov. Differential privacy has disparate impact on model accuracy. In *Advances in Neural Information Processing Systems*, volume 32, pages 15479–15488, 2019.

[6] Barry Becker and Ronny Kohavi. Adult. UCI Machine Learning Repository, 1996.

[7] Cynthia Dwork, Frank McSherry, Kobbi Nissim, and Adam Smith. Calibrating noise to sensitivity in private data analysis. In *Theory of Cryptography Conference (TCC)*, pages 265–284, 2006.

[8] FDA Office of Digital Transformation. The Veterans cardiac health and AI model predictions (V-CHAMPS) challenge. `https://precision.fda.gov/challenges/31/results`, 2023.

[9] Ishaan Gulrajani, Faruk Ahmed, Martin Arjovsky, Vincent Dumoulin, and Aaron Courville. Improved training of Wasserstein GANs. In *Advances in Neural Information Processing Systems*, volume 30, pages 5767–5777, 2017.

[10] Tobias Hyrup, Emmanouil Panagiotou, Arjun Roy, Arthur Zimek, Eirini Ntoutsi, and Peter Schneider-Kamp. Achieving Hilbert–Schmidt independence under Rényi differential privacy for fair and private data generation. *arXiv preprint arXiv:2508.21815*, 2025.

[11] Sven Jacob, Bardh Prenkaj, Weijia Shao, and Gjergji Kasneci. TabSCM: A practical framework for generating realistic tabular data. *arXiv preprint arXiv:2604.22337*, 2026.

[12] Ke Jia, Yuheng Ma, Yang Li, and Feifei Wang. PrAda-GAN: A private adaptive generative adversarial network with Bayes network structure. *arXiv preprint arXiv:2511.07997*, 2025.

[13] Akim Kotelnikov, Dmitry Baranchuk, Ivan Rubachev, and Artem Babenko. TabDDPM: Modelling tabular data with diffusion models. In *Proceedings of the 40th International Conference on Machine Learning*, pages 17564–17579, 2023.

[14] Matt J. Kusner, Joshua Loftus, Chris Russell, and Ricardo Silva. Counterfactual fairness. In *Advances in Neural Information Processing Systems*, volume 30, pages 4066–4076, 2017.

[15] Ryan McKenna, Gerome Miklau, and Daniel Sheldon. Winning the NIST contest: A scalable and general approach to differentially private synthetic data. *Journal of Privacy and Confidentiality*, 11(3), 2021. doi: 10.29012/jpc.778.

[16] Nitish Nagesh, Ziyu Wang, and Amir M. Rahmani. FairCauseSyn: Towards causally fair LLM-augmented synthetic data generation. In *47th Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC)*, 2025.

[17] National Institute of Standards and Technology. 2018 differential privacy synthetic data challenge. `https://www.nist.gov/ctl/pscr/open-innovation-prize-challenges/past-prize-challenges/2018-differential-privacy-synthetic`, 2019.

[18] David Pujol, Amir Gilad, and Ashwin Machanavajjhala. PreFair: Privately generating justifiably fair synthetic data. *Proceedings of the VLDB Endowment*, 16(6):1573–1586, 2023.

[19] Fatima J. Sarmin, Atiquer R. Rahman, Christopher J. Henry, and Noman Mohammed. Privacy-preserving fair synthetic tabular data. *arXiv preprint arXiv:2503.02968*, 2025.

[20] Boris van Breugel, Trent Kyono, Jeroen Berrevoets, and Mihaela van der Schaar. DECAF: Generating fair synthetic data using causally-aware generative networks. In *Advances in Neural Information Processing Systems*, volume 34, pages 22221–22233, 2021.

[21] Jelle Vos, Sikha Pentyala, Steven Golob, Ricardo Maia, Dean Kelley, Zekeriya Erkin, Martine De Cock, and Anderson Nascimento. Privacy-preserving membership queries for federated anomaly detection. *Proceedings on Privacy Enhancing Technologies*, 2024(3):186–201, 2024.

[22] Lei Xu, Maria Skoularidou, Alfredo Cuesta-Infante, and Kalyan Veeramachaneni. Modeling tabular data using conditional GAN. In *Advances in Neural Information Processing Systems*, volume 32, pages 7335–7345, 2019.

[23] Jia-Chen Zhang, Zheng Zhou, Yu-Jie Xiong, Chun-Ming Xia, and Fei Dai. CausalDiffTab: Mixed-type causal-aware diffusion for tabular data generation. *arXiv preprint arXiv:2506.14206*, 2025.

[24] Jun Zhang, Graham Cormode, Cecilia M. Procopiuc, Divesh Srivastava, and Xiaokui Xiao. PrivBayes: Private data release via Bayesian networks. In *Proceedings of the 2014 ACM SIGMOD International Conference on Management of Data*, pages 1423–1434, 2014.

[25] Lu Zhang, Yongkai Wu, and Xintao Wu. A causal framework for discovering and removing direct and indirect discrimination. In *Proceedings of the 26th International Joint Conference on Artificial Intelligence (IJCAI)*, pages 3929–3935, 2017. doi: 10.24963/ijcai.2017/549.

[26] Zhikun Zhang, Tianhao Wang, Ninghui Li, Jean Honorio, Michael Backes, Shibo He, Jiming Chen, and Yang Zhang. PrivSyn: Differentially private data synthesis. In *30th USENIX Security Symposium*, pages 929–946, 2021.

[27] Chaoyi Zhu, Jiayi Tang, Juan F. Pérez, Marten van Dijk, and Lydia Y. Chen. DP-TLDM: Differentially private tabular latent diffusion model. *arXiv preprint arXiv:2403.07842*, 2024.

A Role splits

Table 4: The three role splits per dataset used throughout the paper. *Protected* is S, *admissible* is A (the attributes CF is allowed to route disparity through), and the outcome Y is `income` on Adult and `two_year_recid` on COMPAS. The first split of each dataset follows PreFair's Table 1; the others widen and narrow the admissible set, since a narrow admissible set should make CF behave more like DemPar.

Split	Protected S	Admissible A
Adult		
PreFair	`sex`, `race`, `native-country`	`workclass`, `education`, `occupation`, `hours-per-week`, `capital-gain`, `capital-loss`
Broad	`sex`	`workclass`, `education`, `education-num`, `occupation`, `hours-per-week`
Narrow	`sex`, `race`	`education-num`, `hours-per-week`
COMPAS		
PreFair	`sex`, `race`	`c_charge_degree`, `priors_count`
Broad	`race`	`c_charge_degree`, `priors_count`, `juv_fel_count`, `juv_misd_count`
Narrow	`sex`, `race`, `age_cat`	`c_charge_degree`

B Per-edge cost of the cut

Table 2 in §4.2 shows the two graph types sever different numbers of edges to enforce the same fairness definition. Here we normalise both fairness gain and utility cost by that count, and find that the two graph types deliver essentially the same fairness per severed edge but differ substantially in the utility they pay per edge.

Table 5: Fairness gain and utility cost under CF, normalised by the number of edges CF severs (Table 2). Values are matched-pair means across seeds, role splits and privacy budgets, restricted to trials with baseline AUC > 0.6.

	gap reduction / edge		ΔAUC / edge	
Graph	Adult	COMPAS	Adult	COMPAS
DAG (GAN, diffusion)	0.031	0.028	0.043	0.024
Marginals (undirected)	0.031	0.025	0.020	0.008

Under CF, the gap-per-edge is essentially the same across graph types (≈ 0.03), so per severed edge the two mechanisms are equally effective at removing disparity. The utility cost per edge, in contrast, is about $2.5\times$ larger on the DAG (mean 0.033 AUC per edge across datasets) than on the marginals graph (mean 0.014). Under DemPar the direction on utility cost agrees on three of four cells but is diluted on Adult, where the DAG severs ≈ 9 edges and the per-edge denominator grows.

A mechanism-level reading follows from §3. Severing an edge on the DAG evaluates a trained sub-network on parent combinations it never saw at training time, so the fidelity hit propagates into every column downstream of that sub-network. Severing an edge on the marginals graph merely excludes a candidate pair from the graphical model's structure search before training begins, so the model is fit on the remaining constraints without ever being asked to extrapolate. This is the concrete face of the "cheap but not free" tension for DAG-based cuts we set up in §2.

A related observation from the same data is worth recording. On Adult, the private marginals graph carries the direct protected-to-outcome edge in none of the 15 matched pairs across seeds and generators, so the FTU cut is a literal no-op in every one: the definition is satisfied by the graph the private structure search selected under the budget, before any fairness constraint is imposed. This is not evidence that private marginals graphs are always fair, but it is a specific case in which the choice of graph did the fairness work on its own.

NeurIPS Paper Checklist

1. **Claims**

   Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

   Answer: [Yes]

   Justification: The abstract and introduction claim that DECAF's edge-surgery fairness mechanism ports beyond its original GAN to marginals-based and diffusion generators; Sections 3–4 establish exactly this across nine generators, two datasets and three privacy budgets, and we are explicit that the *magnitude* of the effect does not transfer even though the definitions do.

   Guidelines:

   - The answer [N/A] means that the abstract and introduction do not include the claims made in the paper.
   - The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A [No] or [N/A] answer to this question will not be perceived well by the reviewers.
   - The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
   - It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. **Limitations**

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [Yes]

Justification: Limitations are discussed inline rather than in a separate section: the effect magnitude does not transfer across families and depends on the supplied or privately learned graph (§4); two generators produce degenerate-utility tables that trivially appear fair (§4); the reduction at ε=10 is weaker than at either neighbouring budget and we cannot yet explain it (§4); and the causal-GAN/diffusion results rely on a hand-specified DAG (§3).

Guidelines:

- The answer [N/A] means that the paper has no limitation while the answer [No] means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. **Theory assumptions and proofs**

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [N/A]

Justification: The paper makes no formal theoretical claims and states no theorems; all results are empirical.

Guidelines:

- The answer [N/A] means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.

- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. **Experimental result reproducibility**

   Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

   Answer: [Yes]

   Justification: Section 3 specifies the datasets, generators, fairness mechanisms, privacy budgets, role splits, seed count, downstream classifier and matched-pairs protocol, and we release an anonymized code repository with instructions to reproduce every run and every table (footnote in §3).

   Guidelines:

   - The answer [N/A] means that the paper does not include experiments.
   - If the paper includes experiments, a [No] answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
   - If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
   - Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general. releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
   - While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
     (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
     (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
     (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
     (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. **Open access to data and code**

   Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

   Answer: [Yes]

   Justification: Both datasets (Adult, COMPAS) are public, and we release an anonymized code repository with the synthesizer/mechanism implementations and the run and analysis scripts at `https://anonymous.4open.science/r/CausalFairnessInSDG-55EC/` (also cited in §3).

   Guidelines:

   - The answer [N/A] means that paper does not include experiments requiring code.

- Please see the NeurIPS code and data submission guidelines (`https://neurips.cc/public/guides/CodeSubmissionPolicy`) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so [No] is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (`https://neurips.cc/public/guides/CodeSubmissionPolicy`) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. **Experimental setting/details**

   Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer) necessary to understand the results?

   Answer: [Yes]

   Justification: Section 3 gives the datasets, the 30% real held-out test split, the downstream MLP, the three protected/admissible role splits, the privacy budgets ($\varepsilon \in \{1, 10, 1000\}$, $\delta = 10^{-9}$) and five seeds per cell; the remaining hyperparameters are fixed in the released code.

   Guidelines:

   - The answer [N/A] means that the paper does not include experiments.
   - The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
   - The full details can be provided either with the code, in appendix, or as supplemental material.

7. **Experiment statistical significance**

   Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

   Answer: [Yes]

   Justification: Every fairness number is a matched-pairs difference (each mechanism run is differenced against the no-mechanism run identical in dataset, generator, budget, role split and seed); Table 1 reports mean paired changes with 95% confidence intervals, and §3 reports the within-cell seed standard deviation that motivates the paired design.

   Guidelines:

   - The answer [N/A] means that the paper does not include experiments.
   - The authors should answer [Yes] if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
   - The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
   - The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
   - The assumptions made should be given (e.g., Normally distributed errors).
   - It should be clear whether the error bar is the standard deviation or the standard error of the mean.

- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g., negative error rates).
- If error bars are reported in tables or plots, the authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. **Experiments compute resources**

   Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

   Answer: [Yes]

   Justification: All experiments run on a single shared Linux workstation; the models are small (tabular MLPs and per-column generators/denoisers), a single GPU is used for the GAN and diffusion backbones, and the full 2,520-run sweep completes in roughly 6–12 hours of wall-clock time when parallelised.

   Guidelines:

   - The answer [N/A] means that the paper does not include experiments.
   - The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
   - The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
   - The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. **Code of ethics**

   Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics `https://neurips.cc/public/EthicsGuidelines`?

   Answer: [Yes]

   Justification: The research uses only public, widely studied benchmark datasets, involves no human-subjects data collection, and its goal (reducing demographic disparity in released synthetic data under privacy guarantees) is consistent with the NeurIPS Code of Ethics.

   Guidelines:

   - The answer [N/A] means that the authors have not reviewed the NeurIPS Code of Ethics.
   - If the authors answer [No], they should explain the special circumstances that require a deviation from the Code of Ethics.
   - The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. **Broader impacts**

    Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

    Answer: [Yes]

    Justification: The intended impact is positive: enabling institutions to remove unfair pathways from synthetic releases (Introduction, Discussion). We also flag concrete failure modes: a generator that teaches a classifier nothing has no disparity to remove yet scores as perfectly fair, so a fairness number is uninterpretable without its utility number (§4), and an in-generator cut can give false assurance if downstream consumers assume more disparity was removed than the graph actually permitted (§4, Discussion).

    Guidelines:

    - The answer [N/A] means that there is no societal impact of the work performed.

- If the authors answer [N/A] or [No], they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate Deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. **Safeguards**

    Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pre-trained language models, image generators, or scraped datasets)?

    Answer: [N/A]

    Justification: The paper releases fairness-mechanism code operating on public tabular benchmarks; it releases no pre-trained generative model, scraped dataset, or other artifact with a high risk for misuse.

    Guidelines:

    - The answer [N/A] means that the paper poses no such risks.
    - Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
    - Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
    - We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. **Licenses for existing assets**

    Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

    Answer: [Yes]

    Justification: Every existing asset is cited to its original source: the Adult and COMPAS datasets, the DECAF, MST, PrivBayes and PrivSyn synthesizers, DP-SGD, and the downstream benchmark of Angelozzi and Arcolezi [3] whose code we reuse unmodified. Each is publicly released for research use, and our re-implementations credit the upstream packages they adapt.

    Guidelines:

    - The answer [N/A] means that the paper does not use existing assets.
    - The authors should cite the original paper that produced the code package or dataset.

- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, `paperswithcode.com/datasets` has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. **New assets**

    Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

    Answer: [Yes]

    Justification: The one new asset is the fairness-porting codebase; it is released in the anonymized repository above with a README documenting the environment setup, the synthesizer and fairness-mechanism interfaces, and how to run the experiments.

    Guidelines:

    - The answer [N/A] means that the paper does not release new assets.
    - Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
    - The paper should discuss whether and how consent was obtained from people whose asset is used.
    - At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. **Crowdsourcing and research with human subjects**

    Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

    Answer: [N/A]

    Justification: The paper uses pre-existing public datasets and involves no crowdsourcing or new human-subjects data collection.

    Guidelines:

    - The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
    - Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
    - According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. **Institutional review board (IRB) approvals or equivalent for research with human subjects**

    Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

    Answer: [N/A]

Justification: No human-subjects research was conducted; the work reuses public benchmark datasets only.

Guidelines:

- The answer [N/A] means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. **Declaration of LLM usage**

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does *not* impact the core methodology, scientific rigor, or originality of the research, declaration is not required.

Answer: [N/A]

Justification: LLMs are not a component of the core methods; the generators studied are marginals-based, GAN and diffusion models. Any LLM use was limited to writing and editing assistance, for which declaration is not required.

Guidelines:

- The answer [N/A] means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy in the NeurIPS handbook for what should or should not be described.