```
In [1]:  import Pkg
         Pkg.activate(@__DIR__)
         Pkg.instantiate()
         using LinearAlgebra, Plots
         import ForwardDiff as FD
         import MeshCat as mc
         using Test
         using Random
         import Convex as cvx
         import ECOS       # the solver we use in this hw
         # import Hypatia # other solvers you can try
         # import COSMO    # other solvers you can try
         using ProgressMeter
         include(joinpath(@__DIR__,"utils/rendezvous.jl"))
```

Activating environment at `/home/sman/Work/CMU/Courses/OCRL/OCRL2024/HW/HW2
_S24/Project.toml`

thruster_model (generic function with 1 method)

Notes:

1. Some of the cells below will have multiple outputs (plots and animations), it can be easier to see everything if you do `Cell -> All Output -> Toggle Scrolling`, so that it simply expands the output area to match the size of the outputs.
2. Things in space move very slowly (by design), because of this, you may want to speed up the animations when you're viewing them. You can do this in MeshCat by doing `Open Controls -> Animations -> Time Scale`, to modify the time scale. You can also play/pause/scrub from this menu as well.
3. You can move around your view in MeshCat by `clicking + dragging`, and you can pan with `right click + dragging`, and zoom with the scroll wheel on your mouse (or trackpad specific alternatives).

```
In [2]:  # utilities for converting to and from vector of vectors <-> matrix
         function mat_from_vec(X::Vector{Vector{Float64}})::Matrix
             # convert a vector of vectors to a matrix
             Xm = hcat(X...)
             return Xm
         end
         function vec_from_mat(Xm::Matrix)::Vector{Vector{Float64}}
             # convert a matrix into a vector of vectors
             X = [Xm[:,i] for i = 1:size(Xm,2)]
             return X
         end
```

vec_from_mat (generic function with 1 method)

Is LQR the answer for everything?

Unfortunately, no. LQR is great for problems with true quadratic costs and linear dynamics, but this is a very small subset of convex trajectory optimization problems. While a quadratic cost is common in control, there are other available convex cost functions that may better motivate the desired behavior of the system. These costs can be things like an L1 norm on the control inputs ($\|u\|_1$), or an L2 goal error ($\|x - x_{goal}\|_2$). Also, control problems often have constraints like path constraints, control bounds, or terminal constraints, that can't be handled with LQR. With the addition of these constraints, the trajectory optimization problem is stil convex and easy to solve, but we can no longer just get an optimal gain K and apply a feedback policy in these situations.

The solution to this is Model Predictive Control (MPC). In MPC, we are setting up and solving a convex trajectory optimization at every time step, optimizing over some horizon or window into the future, and executing the first control in the solution. To see how this works, we are going to try this for a classic space control problem: the rendezvous.

Q3: Optimal Rendezvous and Docking (55 pts)

In this example, we are going to use convex optimization to control the SpaceX Dragon 1 spacecraft as it docks with the International Space Station (ISS). The dynamics of the Dragon vehicle can be modeled with [Clohessy-Wiltshire equations (https://en.wikipedia.org/wiki/Clohessy%E2%80%93Wiltshire_equations)](https://en.wikipedia.org/wiki/Clohessy%E2%80%93Wiltshire_equations), which is a linear dynamics model in continuous time. The state and control of this system are the following:

$$x = [r_x, r_y, r_z, v_x, v_y, v_z]^T,$$
$$u = [t_x, t_y, t_z]^T,$$

where r is a relative position of the Dragon spacecraft with respect to the ISS, v is the relative velocity, and t is the thrust on the spacecraft. The continuous time dynamics of the vehicle are the following:

$$\dot{x} = \begin{bmatrix} 0 & 0 & 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 \\ 3n^2 & 0 & 0 & 0 & 2n & 0 \\ 0 & 0 & 0 & -2n & 0 & 0 \\ 0 & 0 & -n^2 & 0 & 0 & 0 \end{bmatrix} + \begin{bmatrix} 0 & 0 & 0 \\ 0 & 0 & 0 \\ 0 & 0 & 0 \\ 1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} u,$$

where $n = \sqrt{\mu/a^3}$, with μ being the [standard gravitational parameter (https://en.wikipedia.org/wiki/Standard_gravitational_parameter)](https://en.wikipedia.org/wiki/Standard_gravitational_parameter), and a being the semi-major axis of the orbit of the ISS.

We are going to use three different techniques for solving this control problem, the first is LQR, the second is convex trajectory optimization, and the third is convex MPC where we will be able to account for unmodeled dynamics in our system (the "sim to real" gap).

Part A: Discretize the dynamics (5 pts)

Use the matrix exponential to convert the linear ODE into a linear discrete time model (hint: the matrix exponential is just `exp()` in Julia when called on a matrix.

```
In [3]:  function create_dynamics(dt::Real)::Tuple{Matrix,Matrix}
             mu = 3.986004418e14 # standard gravitational parameter
             a = 6971100.0        # semi-major axis of ISS
             n = sqrt(mu/a^3)     # mean motion

             # continuous time dynamics ẋ = Ax + Bu
             A = [0      0 0    1   0   0;
                  0      0 0    0   1   0;
                  0      0 0    0   0   1;
                  3*n^2 0 0    0  2*n 0;
                  0      0 0  -2*n 0   0;
                  0      0 -n^2 0  0   0]

             B = Matrix([zeros(3,3);0.1*I(3)])

             # TODO: convert to discrete time X_{k+1} = Ad*x_k + Bd*u_k
             nx, nu = size(B)
             Dc = zeros(nx+nu, nx+nu)
             Dc[1:nx,1:(nx+nu)] = [A B]
             Dd = exp(Dc*dt)

             Ad = Dd[1:nx,1:nx]
             Bd = Dd[1:nx,(nx+1):end]

             return Ad, Bd
         end
```

create_dynamics (generic function with 1 method)

```
In [4]:  @testset "discrete dynamics" begin
             A,B = create_dynamics(1.0)

             x = [1,3,-.3,.2,.4,-.5]
             u = [-.1,.5,.3]

             # test these matrices
             @test isapprox(A*x + B*u, [1.195453, 3.424786, -0.78499972, 0.190925, 0.44
         95759, -0.4699993], atol = 1e-3)
             @test isapprox(det(A), 1, atol = 1e-8)
             @test isapprox(norm(B,Inf), 0.0999999803, atol = 1e-5)

         end
```

```
Test Summary:     | Pass  Total
discrete dynamics |   3      3
```

Test.DefaultTestSet("discrete dynamics", Any[], 3, false, false)

Part B: LQR (10 pts)

Now we will take a given reference trajectory `X_ref` and track it with finite-horizon LQR. Remember that finite-horizon LQR is solving this problem:

$$\min_{x_{1:N}, u_{1:N-1}} \sum_{i=1}^{N-1} \left[\frac{1}{2}(x_i - x_{ref,i})^T Q(x_i - x_{ref,i}) + \frac{1}{2}u_i^T R u_i \right] + \frac{1}{2}(x_N - x_{ref,N})^T Q_f(x_N - x_{ref,N})$$

$$\text{st} \quad x_1 = x_{IC}$$

$$x_{i+1} = Ax_i + Bu_i \quad \text{for } i = 1, 2, \ldots, N-1$$

where our policy is $u_i = -K_i(x_i - x_{ref,i})$. Use your code from the previous problem with your `fhlqr` function to generate your gain matrices.

One twist we will throw into this is control constraints `u_min` and `u_max`. You should use the function `clamp.(u, u_min, u_max)` to clamp the values of your `u` to be within this range.

If implemented correctly, you should see the Dragon spacecraft dock with the ISS successfuly, but only after it crashes through the ISS a little bit.

```julia
In [5]: """
        use the Ricatti recursion to calculate the cost to go quadratic matrix P and
        optimal control gain K at every time step. Return these as a vector of matrice
        s,
        where P_k = P[k], and K_k = K[k]
        """
        function fhlqr(A::Matrix, # A matrix
                       B::Matrix, # B matrix
                       Q::Matrix, # cost weight
                       R::Matrix, # cost weight
                       Qf::Matrix,# term cost weight
                       N::Int64   # horizon size
                       )::Tuple{Vector{Matrix{Float64}}, Vector{Matrix{Float64}}} # re
        turn two matrices

            # check sizes of everything
            nx,nu = size(B)
            @assert size(A)  == (nx, nx)
            @assert size(Q)  == (nx, nx)
            @assert size(R)  == (nu, nu)
            @assert size(Qf) == (nx, nx)

            # instantiate S and K
            P = [zeros(nx,nx) for i = 1:N]
            K = [zeros(nu,nx) for i = 1:N-1]

            # initialize S[N] with Qf
            P[N] = deepcopy(Qf)

            # Ricatti
            for k = (N-1):-1:1
                K[k] = (R + B' * P[k+1] * B) \ (B' * P[k+1] * A)
                P[k] = Q + A'* P[k+1] * (A - B * K[k])
            end

            return P, K
        end
```

fhlqr

```julia
In [6]: @testset "LQR rendezvous" begin

            # create our discrete time model
            dt = 1.0
            A,B = create_dynamics(dt)

            # get our sizes for state and control
            nx,nu = size(B)

            # initial and goal states
            x0 = [-2;-4;2;0;0;.0]
            xg = [0,-.68,3.05,0,0,0]

            # bounds on U
            u_max = 0.4*ones(3)
            u_min = -u_max

            # problem size and reference trajectory
            N = 120
            t_vec = 0:dt:((N-1)*dt)
            X_ref = desired_trajectory_long(x0,xg,200,dt)[1:N]

            # TODO: FHLQR
            Q = diagm(ones(nx))
            R = diagm(ones(nu))
            Qf = 10*Q
            # TODO get K's from fhlqr
            _, K = fhlqr(A,B,Q,R,Qf,N)
            # simulation
            X_sim = [zeros(nx) for i = 1:N]
            U_sim = [zeros(nu) for i = 1:N-1]
            X_sim[1] = x0
            for i = 1:(N-1)
                # TODO: put LQR control law here
                # make sure to clamp
                U_sim[i] = clamp.(-K[i]*(X_sim[i]-X_ref[i]),u_min,u_max)

                # simulate 1 step
                X_sim[i+1] = A*X_sim[i] + B*U_sim[i]
            end

            # -------------plotting/animation---------------------------
            Xm = mat_from_vec(X_sim)
            Um = mat_from_vec(U_sim)
            display(plot(t_vec,Xm[1:3,:]',title = "Positions (LQR)",
                        xlabel = "time (s)", ylabel = "position (m)",
                        label = ["x" "y" "z"]))
            display(plot(t_vec,Xm[4:6,:]',title = "Velocities (LQR)",
                    xlabel = "time (s)", ylabel = "velocity (m/s)",
                        label = ["x" "y" "z"]))
            display(plot(t_vec[1:end-1],Um',title = "Control (LQR)",
                    xlabel = "time (s)", ylabel = "thrust (N)",
                        label = ["x" "y" "z"]))

            # feel free to toggle `show_reference`
            display(animate_rendezvous(X_sim, X_ref, dt;show_reference = false))
```

```
    # ------------plotting/animation----------------------------


    # testing
    xs=[x[1] for x in X_sim]
    ys=[x[2] for x in X_sim]
    zs=[x[3] for x in X_sim]
    @test norm(X_sim[end] - xg) < .01 # goal
    @test (xg[2] + .1) < maximum(ys) < 0 # we should have hit the ISS
    @test maximum(zs) >= 4 # check to see if you did the circle
    @test minimum(zs) <= 2 # check to see if you did the circle
    @test maximum(xs) >= 1 # check to see if you did the circle
    @test maximum(norm.(U_sim,Inf)) <= 0.4 # control constraints satisfied

end
```
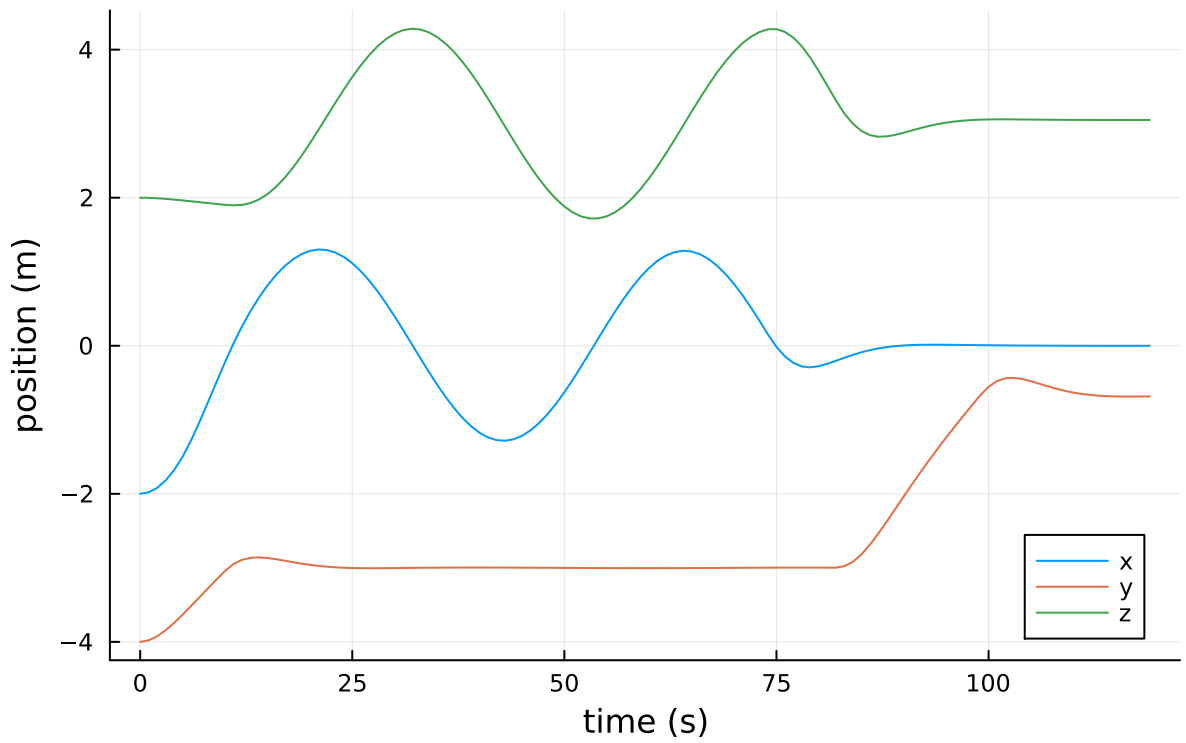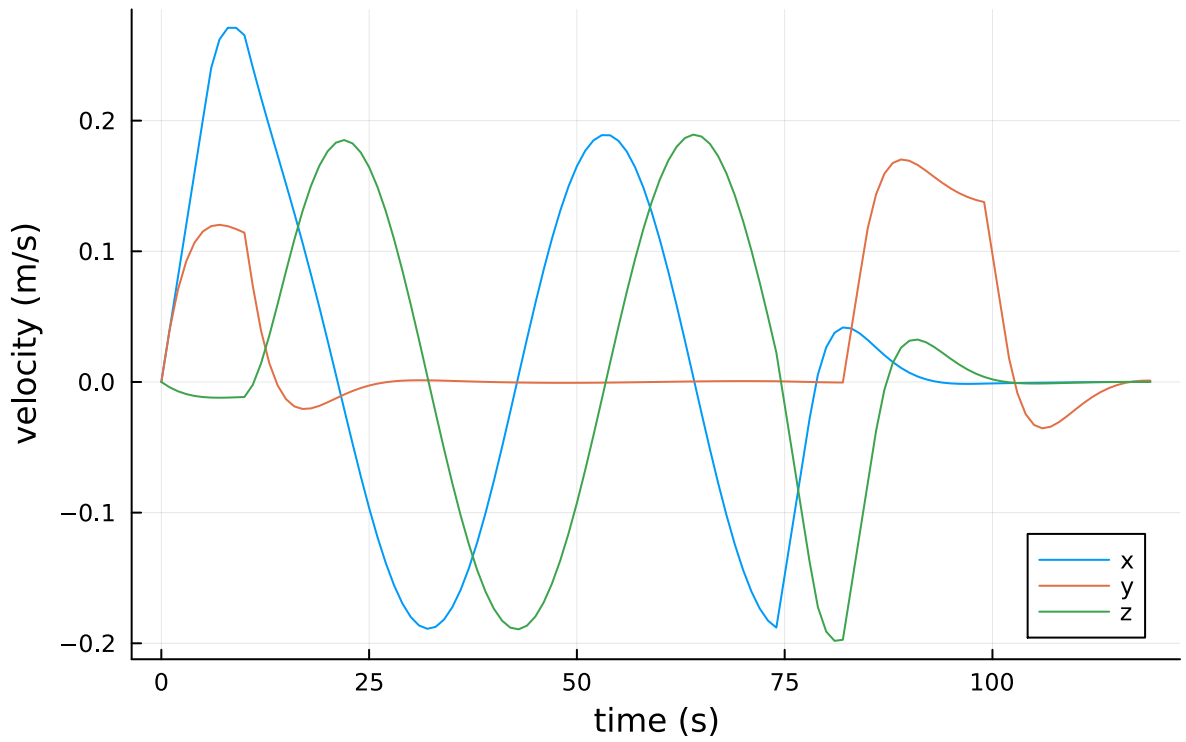
Control (LQR)

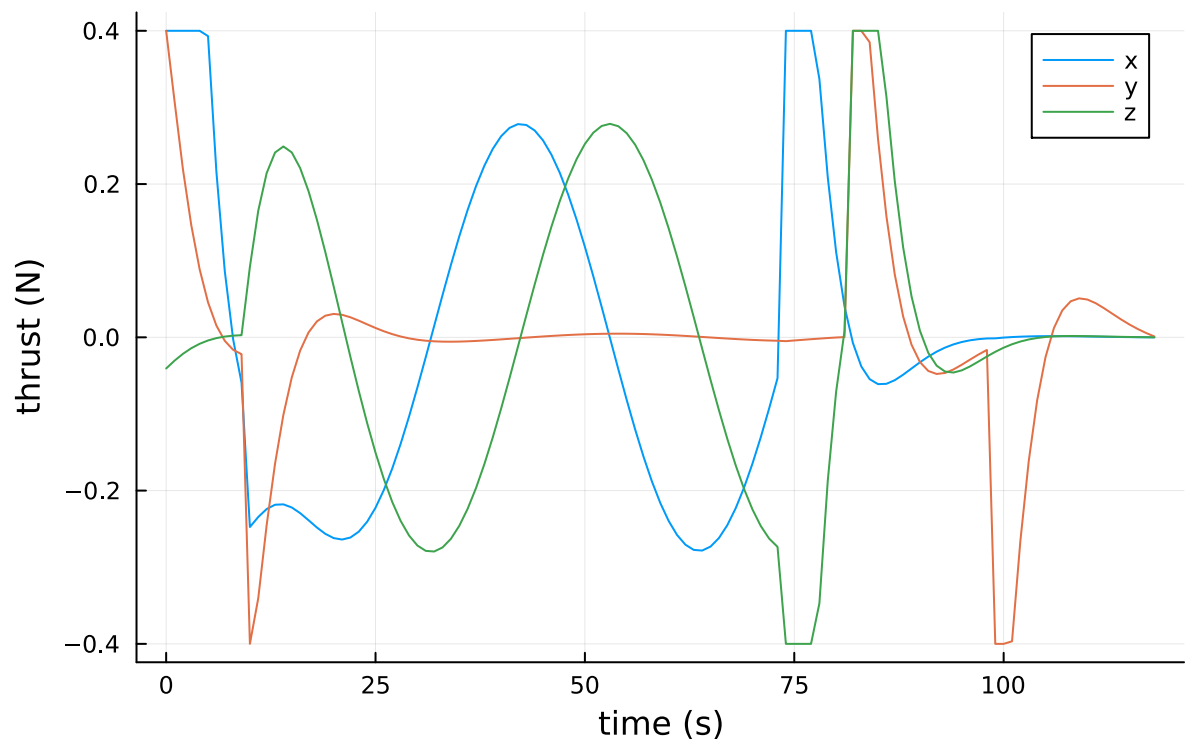┌ Info: Listening on: 127.0.0.1:8700, thread id: 1
└ @ HTTP.Servers /root/.julia/packages/HTTP/1EWL3/src/Servers.jl:369
┌ Info: MeshCat server started. You can open the visualizer by visiting the f
ollowing URL in your browser:
│ http://127.0.0.1:8700
└ @ MeshCat /root/.julia/packages/MeshCat/I6NTX/src/visualizer.jl:63

```
Test Summary:  | Pass   Total
LQR rendezvous |    6       6

Test.DefaultTestSet("LQR rendezvous", Any[], 6, false, false)
```

Part C: Convex Trajectory Optimization (15 pts)

Now we are going to assume that we have a perfect model (assume there is no sim to real gap), and that we have a perfect state estimate. With this, we are going to solve our control problem as a convex trajectory optimization problem.

$$\min_{x_{1:N}, u_{1:N-1}} \quad \sum_{i=1}^{N-1} \left[\frac{1}{2}(x_i - x_{ref,i})^T Q(x_i - x_{ref,i}) + \frac{1}{2} u_i^T R u_i \right]$$

$$\text{st} \quad x_1 = x_{\text{IC}}$$
$$x_{i+1} = Ax_i + Bu_i \quad \text{for } i = 1, 2, \ldots, N-1$$
$$u_{min} \leq u_i \leq u_{max} \quad \text{for } i = 1, 2, \ldots, N-1$$
$$x_i[2] \leq x_{goal}[2] \quad \text{for } i = 1, 2, \ldots, N$$
$$x_N = x_{goal}$$

Where we have an LQR cost, an initial condition constraint ($x_1 = x_{\text{IC}}$), linear dynamics constraints ($x_{i+1} = Ax_i + Bu_i$), bound constraints on the control ($\leq u_i \leq u_{max}$), an ISS collision constraint ($x_i[2] \leq x_{goal}[2]$), and a terminal constraint ($x_N = x_{goal}$). This problem is convex and we will setup and solve this with `Convex.jl`.

```
In [17]:    """
            Xcvx,Ucvx = convex_trajopt(A,B,X_ref,x0,xg,u_min,u_max,N)

            setup and solve the above optimization problem, returning
            the solutions X and U, after first converting them to
            vectors of vectors with vec_from_mat(X.value)
            """
            function convex_trajopt(A::Matrix, # discrete dynamics A
                                    B::Matrix, # discrete dynamics B
                                    X_ref::Vector{Vector{Float64}}, # reference trajectory
                                    x0::Vector, # initial condition
                                    xg::Vector, # goal state
                                    u_min::Vector, # lower bound on u
                                    u_max::Vector, # upper bound on u
                                    N::Int64, # length of trajectory
                                    )::Tuple{Vector{Vector{Float64}}, Vector{Vector{Float6
            4}}} # return Xcvx,Ucvx

                # get our sizes for state and control
                nx,nu = size(B)

                @assert size(A) == (nx, nx)
                @assert length(x0) == nx
                @assert length(xg) == nx

                # LQR cost
                Q = diagm(ones(nx))
                R = diagm(ones(nu))

                # variables we are solving for
                X = cvx.Variable(nx,N)
                U = cvx.Variable(nu,N-1)

                # TODO: implement cost
                obj = 0
                for k = 1:(N-1)
                    obj += 1/2*cvx.quadform(X[:,k]-X_ref[k],Q) + 1/2*cvx.quadform(U[:,k],
            R)
                end

                # create problem with objective
                prob = cvx.minimize(obj)

                # TODO: add constraints with prob.constraints +=
                prob.constraints += (X[:,1]==x0) + (X[:,N]==xg)
                # prob.constraint += (U - u_max <= 0) + (u_min - U <= 0)

                for k = 1:(N-1)
                    # dynamics constraints
                    prob.constraints += (X[:,k+1] == A * X[:,k] + B * U[:,k])
                    prob.constraints += (U[:,k] - u_max <= 0) + (u_min - U[:,k] <= 0)
                    prob.constraints += (X[2,k] - xg[2] <= 0)
                end

                cvx.solve!(prob, ECOS.Optimizer; silent_solver = true)
```

```julia
        X = X.value
        U = U.value

        Xcvx = vec_from_mat(X)
        Ucvx = vec_from_mat(U)

        return Xcvx, Ucvx
end


@testset "convex trajopt" begin

    # create our discrete time model
    dt = 1.0
    A,B = create_dynamics(dt)

    # get our sizes for state and control
    nx,nu = size(B)

    # initial and goal states
    x0 = [-2;-4;2;0;0;.0]
    xg = [0,-.68,3.05,0,0,0]

    # bounds on U
    u_max = 0.4*ones(3)
    u_min = -u_max

    # problem size and reference trajectory
    N = 100
    t_vec = 0:dt:((N-1)*dt)
    X_ref = desired_trajectory(x0,xg,N,dt)

    # solve convex trajectory optimization problem
    X_cvx, U_cvx = convex_trajopt(A,B,X_ref,x0,xg,u_min,u_max,N)

    X_sim = [zeros(nx) for i = 1:N]
    X_sim[1] = x0
    for i = 1:N-1
        X_sim[i+1] = A*X_sim[i] + B*U_cvx[i]
    end

    # -------------plotting/animation---------------------------
    Xm = mat_from_vec(X_sim)
    Um = mat_from_vec(U_cvx)
    display(plot(t_vec,Xm[1:3,:]',title = "Positions",
                xlabel = "time (s)", ylabel = "position (m)",
                label = ["x" "y" "z"]))
    display(plot(t_vec,Xm[4:6,:]',title = "Velocities",
            xlabel = "time (s)", ylabel = "velocity (m/s)",
                label = ["x" "y" "z"]))
    display(plot(t_vec[1:end-1],Um',title = "Control",
            xlabel = "time (s)", ylabel = "thrust (N)",
                label = ["x" "y" "z"]))


    display(animate_rendezvous(X_sim, X_ref, dt;show_reference = false))
    # -------------plotting/animation---------------------------
```

```julia
    @test maximum(norm.( X_sim .- X_cvx, Inf)) < 1e-3
    @test norm(X_sim[end] - xg) < 1e-3 # goal
    xs=[x[1] for x in X_sim]
    ys=[x[2] for x in X_sim]
    zs=[x[3] for x in X_sim]
    @test maximum(ys) <= (xg[2] + 1e-3)
    @test maximum(zs) >= 4 # check to see if you did the circle
    @test minimum(zs) <= 2 # check to see if you did the circle
    @test maximum(xs) >= 1 # check to see if you did the circle
    @test maximum(norm.(U_cvx,Inf)) <= 0.4 + 1e-3 # control constraints satisf
ied

end
```
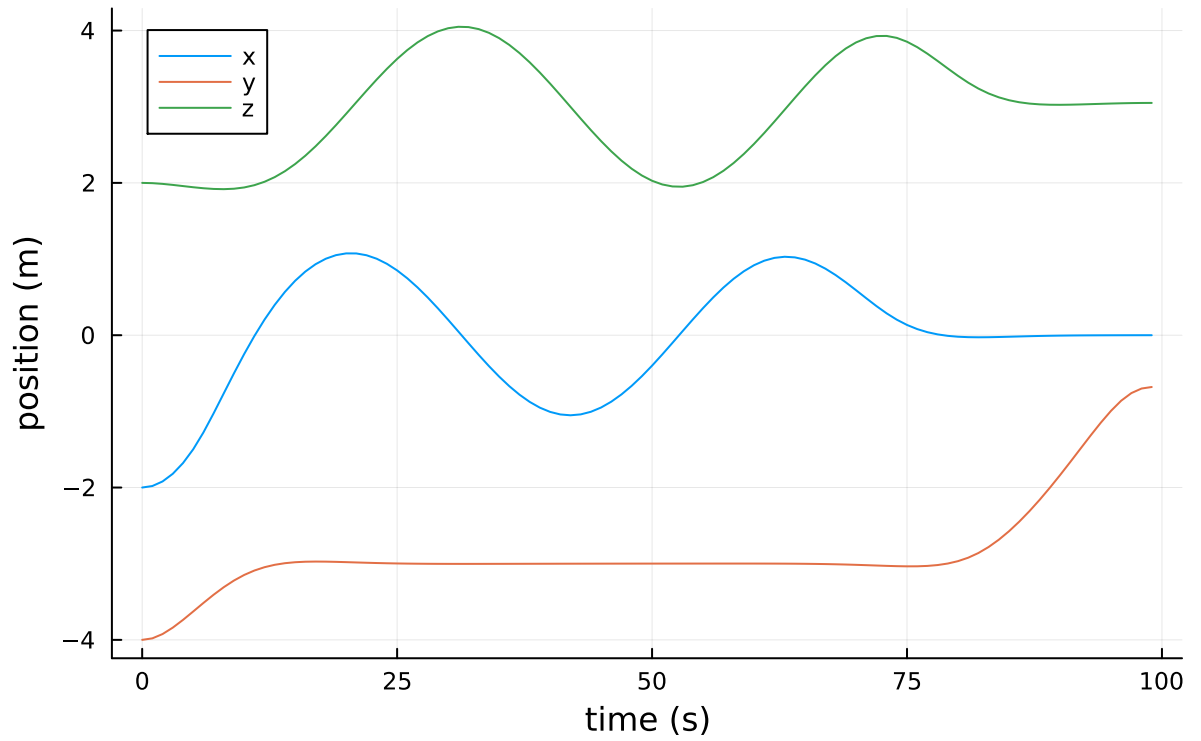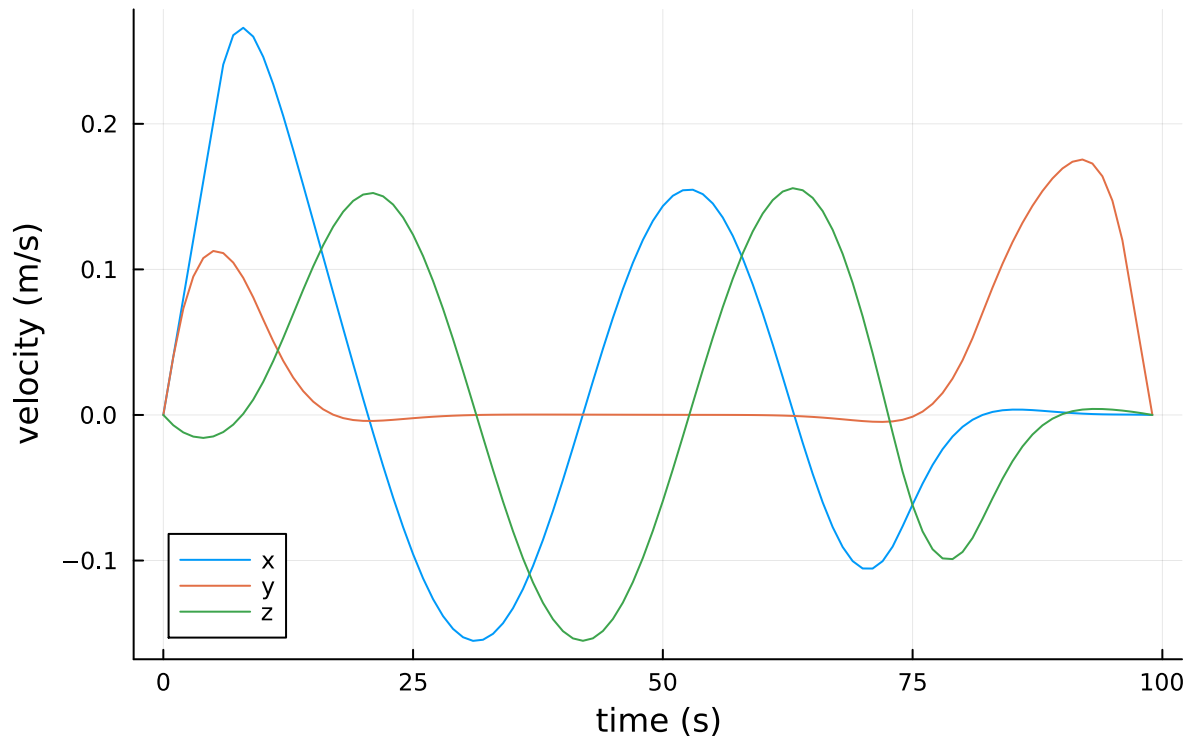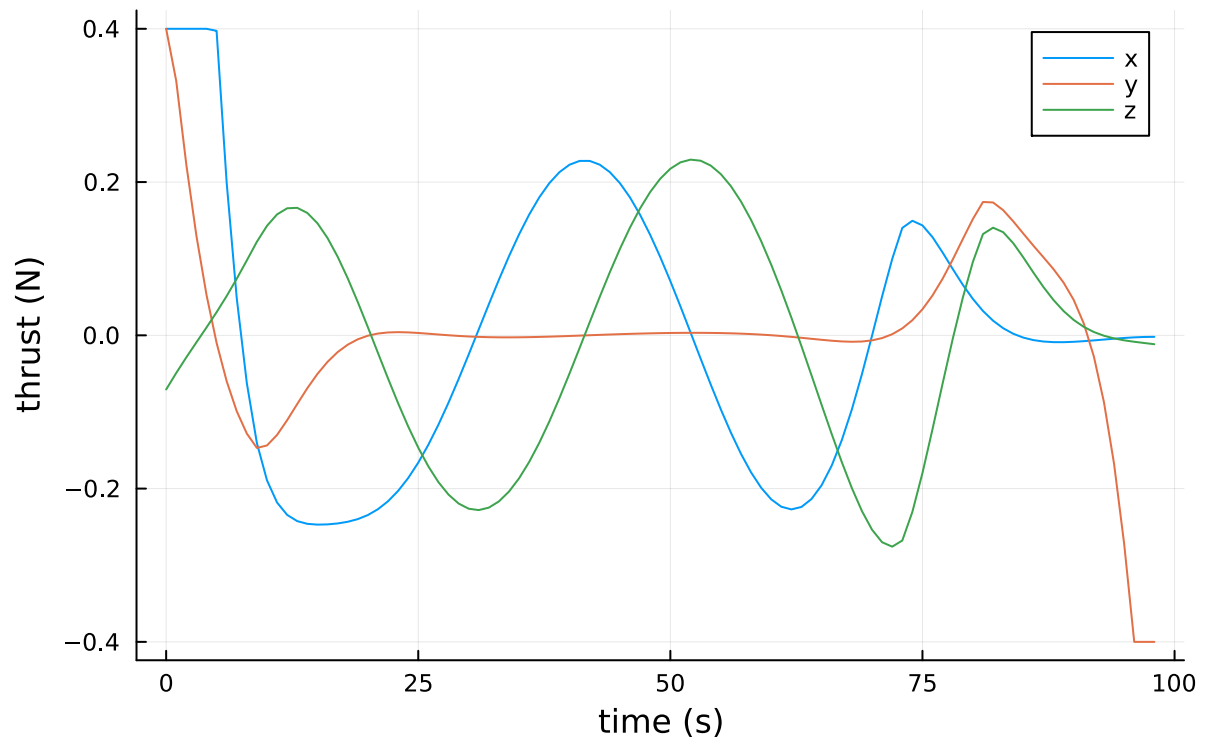
┌ Info: Listening on: 127.0.0.1:8701, thread id: 1
└ @ HTTP.Servers /root/.julia/packages/HTTP/1EWL3/src/Servers.jl:369
┌ Info: MeshCat server started. You can open the visualizer by visiting the f
ollowing URL in your browser:
│ http://127.0.0.1:8701
└ @ MeshCat /root/.julia/packages/MeshCat/I6NTX/src/visualizer.jl:63

```
Test Summary:  | Pass   Total
convex trajopt |    7       7

Test.DefaultTestSet("convex trajopt", Any[], 7, false, false)
```

Part D (5 pts): Short answer

1. List three reasons why an open loop policy wouldn't work well on a real system:

- **Model error (sim ot real gap)**
- **Noise and physical disrturbance (requires rejection from closed loop feedback)**
- **Cannot adapt to system changes**

1. For convex trajectory optimization, give three examples of convex cost functions we can use:

- **Quadratc cost**
- **Conic cost**
- **Linear cost**

1. List three things that convex trajectory optimization can do that LQR cannot:

- **Applying inequality constraints**
- **Non quadratic cost function**
- **Time-varying and state-dependent cost**

1. Say we have the following convex trajectory optimization problem:

$$\min_{x_{1:N}, u_{1:N-1}} \quad \sum_{i=1}^{N-1} \left[\frac{1}{2}(x_i - x_{ref,i})^T Q (x_i - x_{ref,i}) + \frac{1}{2} u_i^T R u_i \right]$$

$$+ \frac{1}{2}(x_N - x_{ref,N})^T Q_f (x_N - x_{ref,N})$$

$$\text{st} \quad x_1 = x_{\text{IC}}$$
$$x_{i+1} = A x_i + B u_i \quad \text{for } i = 1, 2, \ldots, N-1$$
$$x_{min} \leq x_i \leq x_{max} \quad \text{for } i = 1, 2, \ldots, N$$
$$u_{min} \leq u_i \leq u_{max} \quad \text{for } i = 1, 2, \ldots, N-1$$

If the optimal solution to this problem does not violate any either the state or control bounds (the $x_{min} \leq x_i \leq x_{max}$ and $u_{min} \leq u_i \leq u_{max}$ constraints), how will it differ from the finite-horizon LQR solution?

- **Then optimal solution that don't violate any bound wil lbe identical to the fhlqr solution**

Part E: Convex MPC (20 pts)

In part C, we solved for the optimal rendezvous trajectory using convex optimization, and verified it by simulating it in an open loop fashion (no feedback). This was made possible because we assumed that our linear dynamics were exact, and that we had a perfect estimate of our state. In reality, there are many issues that would prevent this open loop policy from being successful.

Together, these factors result in a "sim to real" gap between our simulated model, and the real model. Because there will always be a sim to real gap, we can't just execute open loop policies and expect them to be successful. What we can do, however, is use Model Predictive Control (MPC) that combines some of the ideas of feedback control with convex trajectory optimization.

A convex MPC controller will set up and solve a convex optimization problem at each time step that incorporates the current state estimate as an initial condition. For a trajectory tracking problem like this rendezvous, we want to track x_{ref}, but instead of optimizing over the whole trajectory, we will only consider a sliding window of size N_{mpc} (also called a horizon). If $N_{mpc} = 20$, this means our convex MPC controller is reasoning about the next 20 steps in the trajectory. This optimization problem at every timestep will start by taking the relevant reference trajectory at the current window from the current step i, to the end of the window $i + N_{mpc} - 1$. This slice of the reference trajectory that applies to the current MPC window will be called $\tilde{x}_{ref} = x_{ref}[i, (i + N_{mpc} - 1)]$.

$$\min_{x_{1:N}, u_{1:N-1}} \sum_{i=1}^{N-1} \left[\frac{1}{2}(x_i - \tilde{x}_{ref,i})^T Q(x_i - \tilde{x}_{ref,i}) + \frac{1}{2} u_i^T R u_i \right] + \frac{1}{2}(x_N - \tilde{x}_{ref,N})^T Q(x_N - \tilde{x}_{ref,N})$$

$$\begin{aligned} \text{st} \quad & x_1 = x_{\text{IC}} \\ & x_{i+1} = Ax_i + Bu_i \quad \text{for } i = 1, 2, \ldots, N-1 \\ & u_{min} \leq u_i \leq u_{max} \quad \text{for } i = 1, 2, \ldots, N-1 \\ & x_i[2] \leq x_{goal}[2] \quad \text{for } i = 1, 2, \ldots, N \end{aligned}$$

where N in this case is N_{mpc}. This allows for the MPC controller to "think" about the future states in a way that the LQR controller cannot. By updating the reference trajectory window ($\tilde{x}_{ref}$) at each step and updating the initial condition (x_{IC}), the MPC controller is able to "react" and compensate for the sim to real gap.

You will now implement a function `convex_mpc` where you setup and solve this optimization problem at every timestep, and simply return u_1 from the solution.

```julia
In [21]: """
         `u = convex_mpc(A,B,X_ref_window,xic,xg,u_min,u_max,N_mpc)`

         setup and solve the above optimization problem, returning the
         first control u_1 from the solution (should be a length nu
         Vector{Float64}).
         """
         function convex_mpc(A::Matrix, # discrete dynamics matrix A
                             B::Matrix, # discrete dynamics matrix B
                             X_ref_window::Vector{Vector{Float64}}, # reference traject
         ory for this window
                             xic::Vector, # current state x
                             xg::Vector, # goal state
                             u_min::Vector, # lower bound on u
                             u_max::Vector, # upper bound on u
                             N_mpc::Int64,  # length of MPC window (horizon)
                             )::Vector{Float64} # return the first control command of t
         he solved policy

             # get our sizes for state and control
             nx,nu = size(B)

             # check sizes
             @assert size(A) == (nx, nx)
             @assert length(xic) == nx
             @assert length(xg) == nx
             @assert length(X_ref_window) == N_mpc

             # LQR cost
             Q = diagm(ones(nx))
             R = diagm(ones(nu))

             # variables we are solving for
             X = cvx.Variable(nx,N_mpc)
             U = cvx.Variable(nu,N_mpc-1)

             # TODO: implement cost function
             obj = 0
             for k = 1:(N_mpc-1)
                 obj += 1/2*cvx.quadform(X[:,k]-X_ref_window[k],Q) + 1/2*cvx.quadform(U
         [:,k],R)
             end

             # create problem with objective
             prob = cvx.minimize(obj)

             # TODO: add constraints with prob.constraints +=
             prob.constraints += (X[:,1]==xic) + (X[:,N_mpc]==X_ref_window[N_mpc])
             # prob.constraint += (U - u_max <= 0) + (u_min - U <= 0)

             for k = 1:(N_mpc-1)
                 # dynamics constraints
                 prob.constraints += (X[:,k+1] == A * X[:,k] + B * U[:,k])
                 prob.constraints += (U[:,k] - u_max <= 0) + (u_min - U[:,k] <= 0)
                 prob.constraints += (X[2,k] - xg[2] <= 0)
             end
```

```julia
    # create problem with objective

    # solve problem
    cvx.solve!(prob, ECOS.Optimizer; silent_solver = true)

    # get X and U solutions
    X = X.value
    U = U.value

    # return first control U
    return U[:,1]
end

@testset "convex mpc" begin

    # create our discrete time model
    dt = 1.0
    A,B = create_dynamics(dt)

    # get our sizes for state and control
    nx,nu = size(B)

    # initial and goal states
    x0 = [-2;-4;2;0;0;.0]
    xg = [0,-.68,3.05,0,0,0]

    # bounds on U
    u_max = 0.4*ones(3)
    u_min = -u_max

    # problem size and reference trajectory
    N = 100
    t_vec = 0:dt:((N-1)*dt)
    X_ref = [desired_trajectory(x0,xg,N,dt)...,[xg for i = 1:N]...]

    # MPC window size
    N_mpc = 20

    # sim size and setup
    N_sim = N + 20
    t_vec = 0:dt:((N_sim-1)*dt)
    X_sim = [zeros(nx) for i = 1:N_sim]
    X_sim[1] = x0
    U_sim = [zeros(nu) for i = 1:N_sim-1]

    # simulate
    @showprogress "simulating" for i = 1:N_sim-1

        # get state estimate
        xi_estimate = state_estimate(X_sim[i], xg)
        # TODO: given a window of N_mpc timesteps, get current reference traje
ctory
        X_ref_tilde = X_ref[i:i+N_mpc-1]

        # TODO: call convex mpc controller with state estimate
        u_mpc = convex_mpc(A,B,X_ref_tilde,xi_estimate,xg,u_min,u_max,N_mpc)
```

```julia
        # commanded control goes into thruster model where it gets modified
        U_sim[i] = thruster_model(X_sim[i], xg, u_mpc)

        # simulate one step
        X_sim[i+1] = A*X_sim[i] + B*U_sim[i]
    end



    # -------------plotting/animation---------------------------
    Xm = mat_from_vec(X_sim)
    Um = mat_from_vec(U_sim)
    display(plot(t_vec,Xm[1:3,:]',title = "Positions",
                xlabel = "time (s)", ylabel = "position (m)",
                label = ["x" "y" "z"]))
    display(plot(t_vec,Xm[4:6,:]',title = "Velocities",
            xlabel = "time (s)", ylabel = "velocity (m/s)",
                label = ["x" "y" "z"]))
    display(plot(t_vec[1:end-1],Um',title = "Control",
            xlabel = "time (s)", ylabel = "thrust (N)",
                label = ["x" "y" "z"]))


    display(animate_rendezvous(X_sim, X_ref, dt;show_reference = false))
    # -------------plotting/animation---------------------------

    # tests
    @test norm(X_sim[end] - xg) < 1e-3 # goal
    xs=[x[1] for x in X_sim]
    ys=[x[2] for x in X_sim]
    zs=[x[3] for x in X_sim]
    @test maximum(ys) <= (xg[2] + 1e-3)
    @test maximum(zs) >= 4 # check to see if you did the circle
    @test minimum(zs) <= 2 # check to see if you did the circle
    @test maximum(xs) >= 1 # check to see if you did the circle
    @test maximum(norm.(U_sim,Inf)) <= 0.4 + 1e-3 # control constraints satisf
ied

end
```
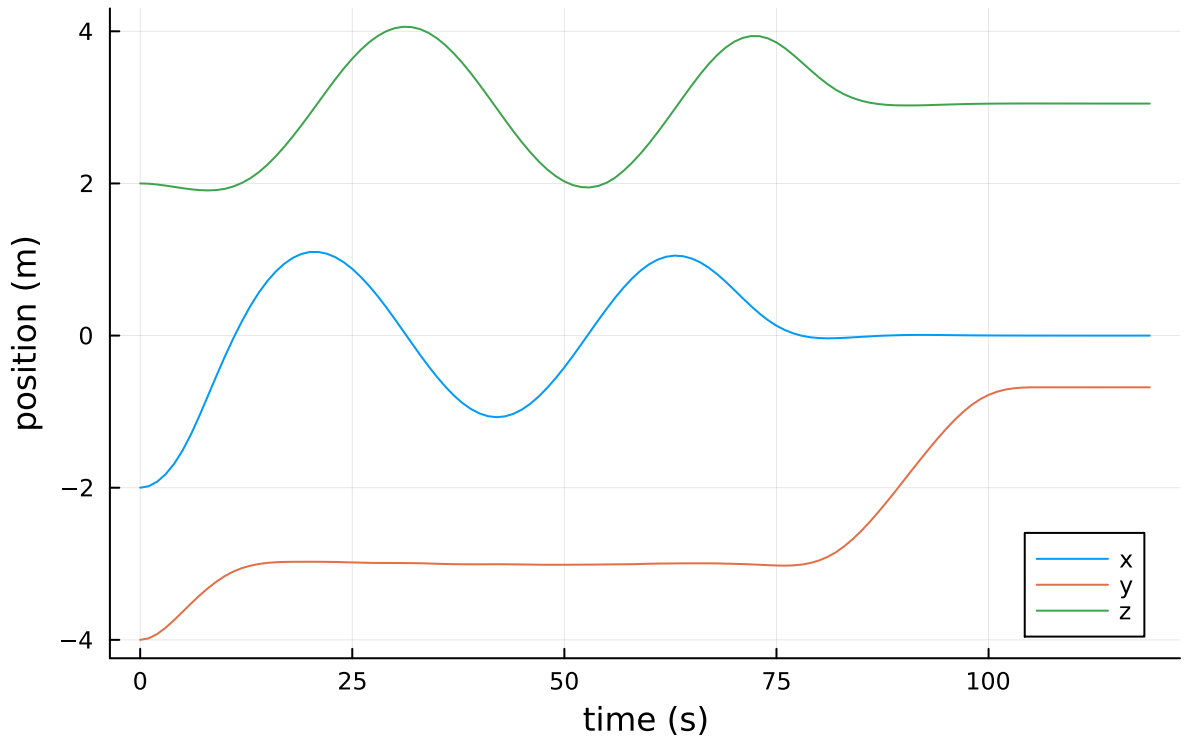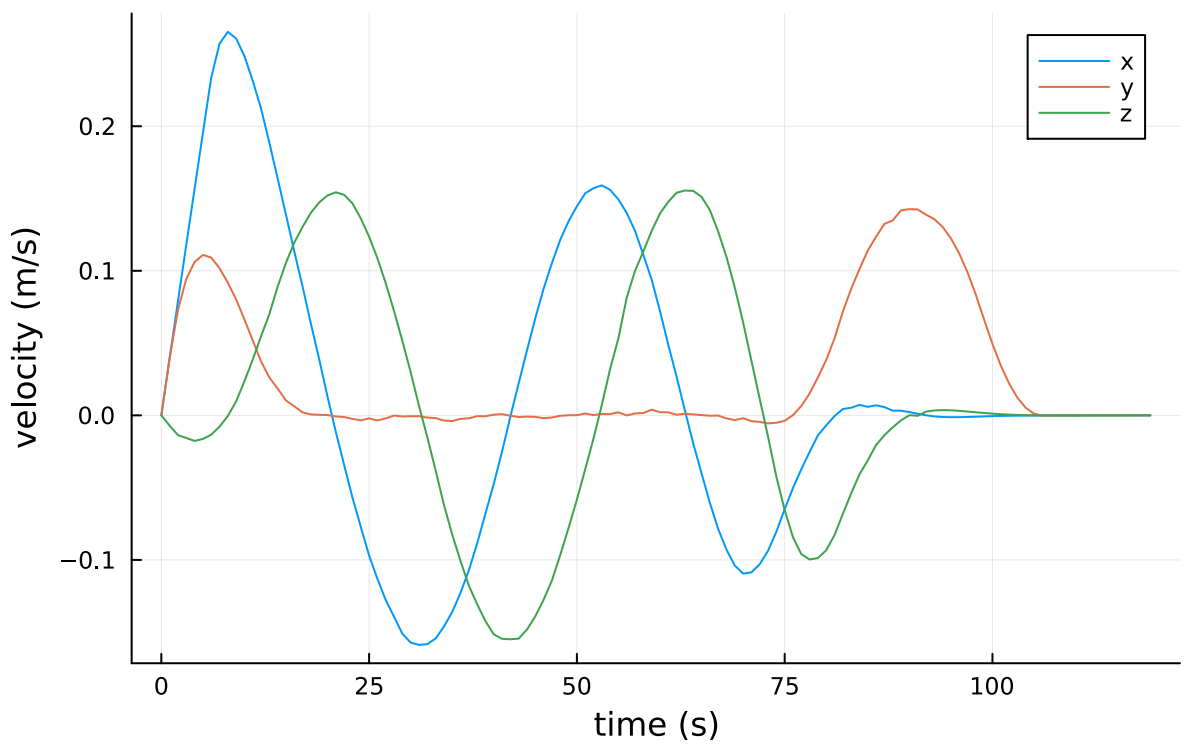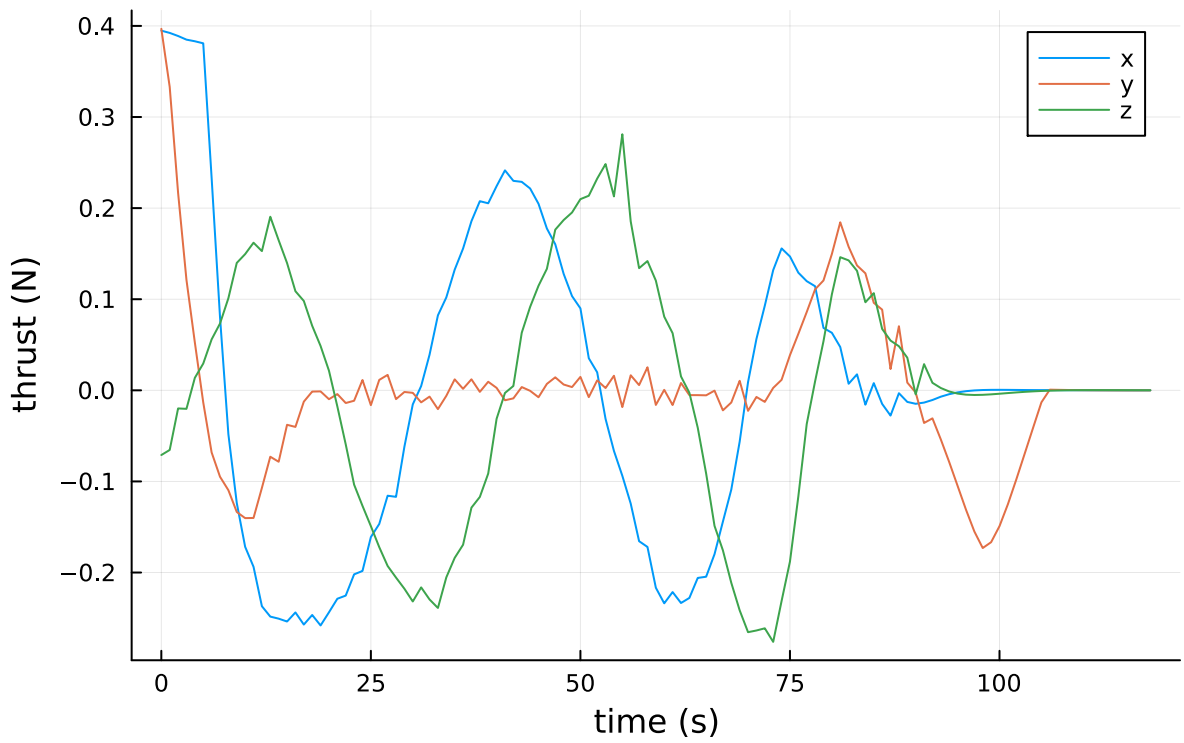
Positions

Velocities

Control


```
┌ Info: Listening on: 127.0.0.1:8702, thread id: 1
└ @ HTTP.Servers /root/.julia/packages/HTTP/1EWL3/src/Servers.jl:369
┌ Info: MeshCat server started. You can open the visualizer by visiting the f
ollowing URL in your browser:
│ http://127.0.0.1:8702
└ @ MeshCat /root/.julia/packages/MeshCat/I6NTX/src/visualizer.jl:63
```

```
Test Summary: | Pass   Total
convex mpc    |   6       6

Test.DefaultTestSet("convex mpc", Any[], 6, false, false)
```