Karhutla on Mac

Step-by-step setup for Apple Silicon and Intel Macs

1. Install Node once

Use the official Node.js download page: choose **LTS**, then **macOS Installer (.pkg)**. Open the installer and follow its steps. Skip this if you already have approved Node 22 or newer. The launcher tries installed Node first.

2. Download and extract Karhutla

Open the latest Karhutla release. Choose **macos-arm64.zip** for Apple Silicon (M-series), or **macos-x64.zip** for Intel. Check **Apple menu > About This Mac** if unsure. Double-click the ZIP and move the **whole extracted folder** to a local folder such as Documents.

3. Try the launcher

Double-click **Start-Karhutla.command** inside the extracted folder. Terminal should open, followed by Operator in your browser. If it opens successfully, go to step 7.

4. If macOS cannot verify it, click Done

Use the approval steps on the next page for the downloaded Karhutla launcher. This first attempt makes its entry appear in Settings.




Apple example: your warning names Start-Karhutla.command (or node) instead of “Example App.” Your macOS wording may differ.

This guide covers a cannot-verify or unidentified-developer warning. If the warning reports known malware, says the file will damage your computer, or says it is damaged, do not override it with these steps.

Approve the downloaded file

5. Find Open Anyway

Open **Apple menu > System Settings > Privacy & Security**. Scroll to **Security**, find the blocked file and click **Open Anyway**. If its entry is missing, try the launcher again and return here.

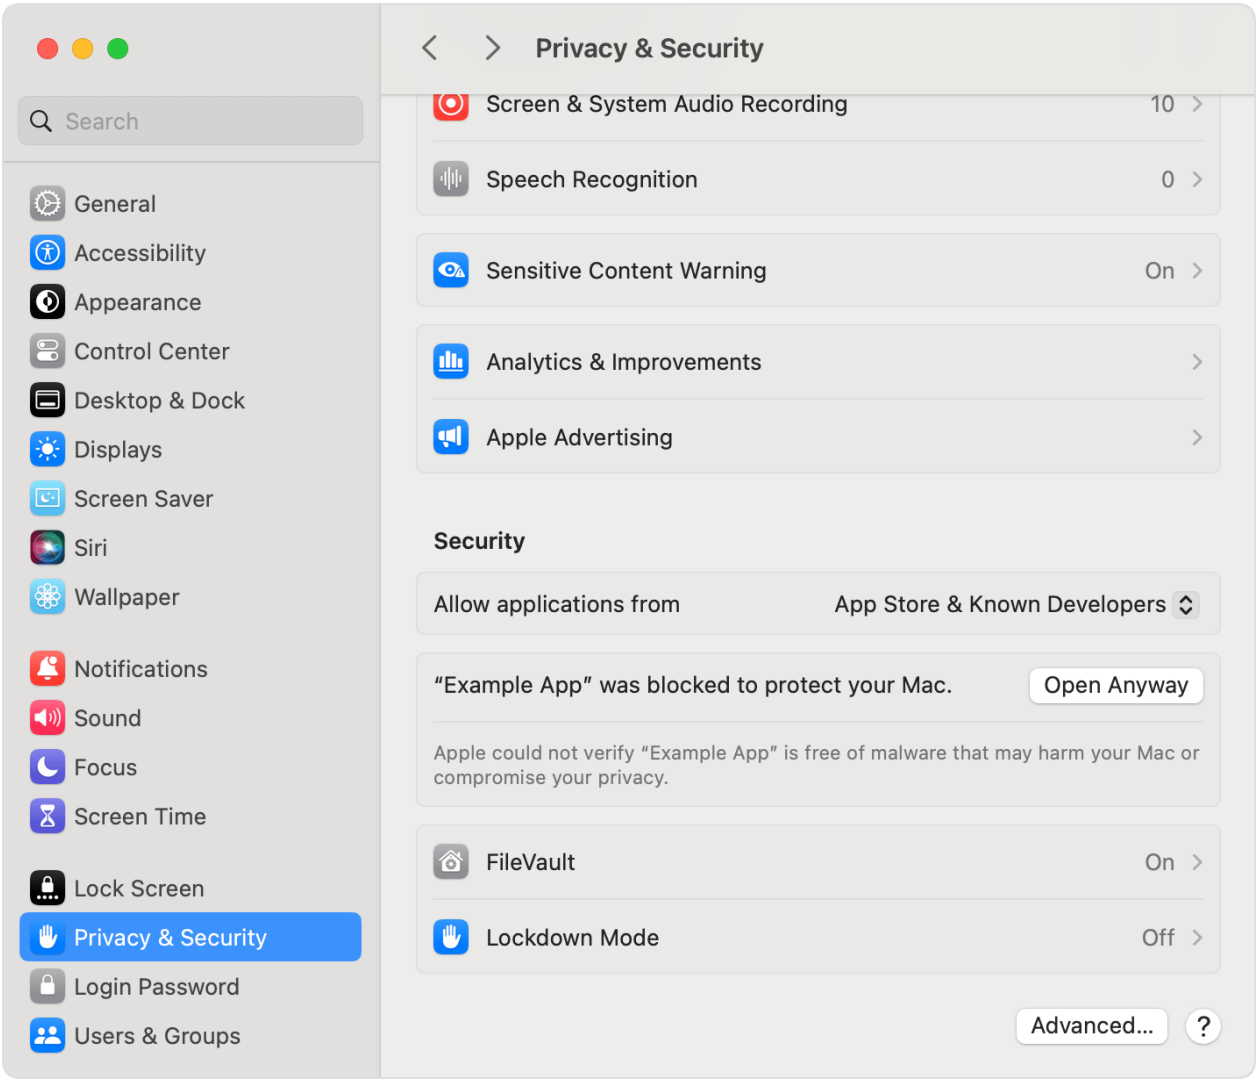

Apple example screenshot. Look for the name of the blocked Karhutla file. The button is beside its message in the Security section.

6. Confirm and reopen

Confirm with **Open** or **Open Anyway**. Use Touch ID or your Mac login password if requested. Return to the extracted folder and double-click **Start-Karhutla.command** again.

7. Start the performance

Keep Terminal open. Enable **Main sound** in Operator and open **Projection** on the projector. Press **Ctrl+C** in Terminal when finished to stop and save.

If the warning names node: repeat steps 4–6 for Node, then run the launcher again. An already approved installed Node avoids launching the bundled copy. The bundled fallback may need its own approval. Installing Node does not remove launcher approval.

Screenshots: Apple Support, Safely open apps on your Mac (unmodified macOS Sequoia examples). Full instructions are in docs/mac-setup.md and docs/mac.md.