

NTE Salesforce operations and reconstruction manual

Mission Community and Mission Motorsport

Workflow and implementation reference

12 September 2026 | MMUAT and maintained source baseline

For the administrators, developers and architects who operate, maintain or rebuild the National Transition Event Salesforce solution.

Start with the illustrated operator workflow. The following chapters explain the data model, pricing, automation, code, public forms, emails and environment setup. Exact field definitions and mappings accompany the feature explanations; the matching source archive supplies the implementation and a file-by-file integrity manifest.

This is internal project documentation. It describes the implementation observed on the baseline date, including the client-owned settings still needed for production. The separate issues register distinguishes defects, configuration dependencies and unresolved decisions.

Included reference coverage

Area	Coverage
Salesforce schema	342 fields across six record objects and two custom metadata types
Runtime code	12 implementation Apex classes, 301 methods and constructors, four LWCs
Intake and automation	Ten public forms, four flows, nineteen stored email templates
Operations	Nineteen labelled screenshots, nine reports and twenty-five list views

Contents

Workflow	3
Solution architecture	29
Pricing and finance rules	38
Runtime implementation	44
Public forms and email presentation	50
Reconstruction and administration	54
Salesforce data dictionary	61
Flow and declarative automation reference	105
Apex class and method reference	111
Form and Lightning component reference	142
Configuration and workspace reference	170
Source coverage and references	209

Use Word Navigation to jump to object, class, form and configuration headings. Search by an exact API name to locate its field or method reference. The PDF preserves headings and internal links.

Screenshots are numbered in reading order. The numbered circles are editable Word labels placed over the original, unchanged captures. The compact key below each image identifies its controls; the surrounding workflow explains their effects.

Workflow

The NTE Management app is the working area for enquiries, applications, bookings, preparation and finance. The Master Panel opens on Interest. Choose the event edition, then work through the relevant queue. Home provides the commercial portfolio. Guests and volunteers have separate intake paths described below.

Master Panel orientation

The six stage buttons select views; they do not advance a record. One approved booking can appear in Approved, Finances and Updates at the same time. Completed is calculated from the booking's recorded requirements. The numbers are record counts, not a sequence of mutually exclusive funnel totals.

Figure 1 Master Panel orientation

Control	Operation and result
Event code	Limits the panel to one edition, such as NTE2027. The initial selection is the highest available canonical NTEYYYY code. Select an older edition explicitly when reviewing its records.
Time	All time, Today, Last 7 days, Last 30 days or Last 90 days. This filters the creation date of the Lead or Opportunity, not its most recent payment or update date. Today begins at the Salesforce user's local midnight; other ranges are rolling periods.
Owner	All owners, an active standard user or a queue. Applies to the current record's owner. An application and its converted booking can have different owners.
Refresh	Reloads the counts and rows. Returning focus from a conversion or record window also schedules a refresh. Controls are disabled while loading or preparing an email.
Interest and Applications	Combine exhibitor and partner / sponsor submissions. The two smaller buttons narrow the selected stage by participant type. Clicking the main stage again restores its combined view.
Approved	All in-scope converted bookings, including bookings still awaiting payment or preparation. The displayed word Approved is a panel label; the stored Opportunity Stage can still be Qualification.
Finances	All bookings with a quote, invoice or payment requirement or activity, including those already paid. Use its four smaller buttons for the current finance task.
Updates	Bookings missing staff details, confirmed vehicle requirements/details or logo confirmation. The three smaller buttons isolate each task.
Completed	Bookings with all applicable quote, invoice, payment, staff, logistics and logo requirements satisfied. The percentage is the integer percentage of approved bookings complete. Final-pack delivery is a separate status.
Record row	Selects a record and shows its details on the right. Enter or Space works when the row has keyboard focus. Selecting a row does not change Salesforce data.
Previous and Next	Moves through 25 records at a time. Rows are ordered by most recent modification, then Salesforce ID. A view exposes its latest 2,000 rows; the displayed total can be larger. Use a report or narrower filters for older records.

Control	Operation and result
Open full record	Opens the selected Lead or Opportunity for complete fields, relationships, activities and email recovery.
Open global list	Opens the named native Salesforce list view. It is a separate view with its own filters. The panel's event, time and owner choices are not passed to it.
View cross-event report	Opens the relevant packaged report. It includes multiple editions; set its native report filters as needed.
View Weekly Finance Report	Appears in all finance views. Opens finance records modified in the last seven days. This uses a different date definition from the panel Time filter.

The top Salesforce bar is standard functionality: App Launcher changes applications; Search searches accessible records; the navigation tabs open their object workspaces. The dropdown beside each object tab gives its native navigation choices. Favorites, Global Actions, Guidance Center, Help, Setup, Notifications and Profile belong to Salesforce. The project adds the NTE app navigation, Home, Master Panel, record-page arrangement, NTE fields, reports and actions explained here. Tasks and Calendar are standard activity workspaces; the project does not implement another task or calendar engine.

Review expressions of interest

Figure 2 Interest row decision controls

If the rightmost decision is clipped, scroll the table horizontally to reveal both actions. Send Application opens a draft. Reject opens a confirmation; Cancel leaves the record untouched, while OK records the decision and removes it from active review without deleting the Lead.

Figure 3 Review decision confirmation

Open Interest, choose the correct participant subtype if needed, select a row and review the organisation, contact, interest detail and preferred contact arrangements in the right-hand panel. Send Application opens a draft for that one Lead. Send to all prepares the matching records across the whole filtered view, rather than only the visible page. More than 500 matches requires narrower filters.

Figure 4 Application invitation composer

The composer initially selects eligible recipients. Clear removes the selection; Select all selects every eligible recipient. Tick individual recipients to choose the exact audience. A disabled row shows why it cannot receive this message. Edit Subject and Message, then choose Preview for to inspect a particular recipient's personalised email. The preview expands tokens such as {ContactName}, {Organisation} and {ApplicationLink}. Refresh rechecks the originally loaded records while preserving the edited text and selected IDs that remain eligible. It does not discover newly added records; close and reopen the composer for a new view selection.

Send to N opens a final confirmation, then queues one email request per selected record. Queued means background processing is outstanding. Sent means Salesforce accepted the email, not that the inbox has confirmed delivery. The Lead is marked Progressed only after acceptance. A changed address, changed routing or changed decision can exclude a record at the final check. The accepted invitation uses the reusable exhibitor or partner application URL for the participant type.

Reject asks for confirmation, records Not Progressed and removes the interest from the active queue while retaining the Lead. It sends no rejection email. Interest with an invitation already queued or sent cannot be rejected through this action. The public application URL is reusable; an invitation is not an authentication token or a prerequisite enforced by the application form.

Review and convert applications

An exhibitor or partner application creates a new Lead, calculates its current price and notifies the configured internal owner. The website displays a receipt page. There is no immediate applicant application-received email in the current implementation. Examine the selected space/packages, planned staff, power, invoice details and price before conversion. Resolve Pricing review required first.

Figure 5 Application review queue

Convert opens Salesforce's native conversion screen in a separate tab. Choose the intended Account and Contact and create a new Opportunity for this booking. Existing organisations and people may be reused across editions; the booking Opportunity should be new. Review the owner and converted Lead status. Complete Convert only when those selections represent the intended booking.

Figure 6 Native Salesforce conversion

The conversion Flow copies the application into the exact converted Opportunity, assigns the NTE Event Opportunity record type and queues its booking email after the transaction commits. It also marks the converted Account and Contact as NTE participants. Closing or cancelling the native conversion screen makes no booking. Returning to the panel refreshes the queues.

The native screen currently permits Don't create an opportunity and choosing an existing Opportunity. Those paths are not guarded by project code: the first bypasses the booking Flow, and the second can replace an earlier booking's application and price fields. Follow the new-Opportunity procedure. The open conversion safeguard decision is recorded in the issues register.

Reject on an application records Application Rejected, retains the Lead and removes it from the active Applications queue. It does not send an email. Conversion, approval and payment are distinct: a converted paid application normally receives a provisional reservation message with preparation links. An eligible charity booking whose total is exactly zero receives a complimentary confirmed message immediately.

Record finance progress

The four refiners show the next applicable finance work. Amounts displayed in the panel are pounds excluding VAT. A booking charge and a later staff top-up are stored and recorded separately. In a queue, Amount refers to the charge currently actionable; Payment confirmed shows the combined known booking and top-up amount.

Figure 7 Finance overview

Button	Use it when	What is recorded
Quote provided	The requested quote has actually been supplied.	Quote flag, timestamp and operator name. This unlocks invoice recording when a quote was required.
Booking invoice provided	The booking invoice or payment link has actually been supplied.	Base invoice flag, timestamp and operator name. Requires known pricing and any required quote.
Booking payment received	Finance has verified the actual base booking payment.	Base payment flag, timestamp and operator name; one booking-confirmation email request is prepared.
Staff top-up invoice provided	A separate invoice for the accepted additional places has been supplied.	Top-up invoice flag, timestamp and operator name. The base invoice and any required quote must already be recorded.

Button	Use it when	What is recorded
Staff top-up payment received	Finance has verified the separate top-up payment.	Top-up payment flag, timestamp and operator name. Requires the top-up invoice and completion of the base booking payment. It does not send a second booking confirmation.

Every milestone button asks for confirmation. It records a fact; it does not create a formal quotation or invoice and does not charge a card. The server rechecks the record before saving. A repeated action cannot replace its original date/operator. A stale action against a cancelled or no-longer-eligible booking is rejected.

[Figure 8 Quotes required](#)

[Figure 9 Invoices required](#)

For Stripe bookings, the background process creates a fixed Payment Link and includes it in the provisional email. Successful acceptance of that email records the base invoice/payment-link milestone, and any requested quote milestone. It does not record payment. Finance compares the booking reference, amount, currency and merchant in Stripe with the saved payment request, then uses Booking payment received. A Stripe receipt and the NTE booking confirmation are separate messages.

A base payment can be recorded while a staff top-up invoice is still outstanding. A free base booking skips only its own finance steps; a positive top-up still needs its own invoice and payment. Unknown pricing never counts as a free booking. If payment is recorded but the confirmation fails, the payment remains recorded; recover the failed email separately.

Complete staff vehicle and logo preparation

Preparations can be completed before payment. Open Updates to see the combined outstanding work; use Logistics outstanding, Staff updates or Logo updates for a focused list.

[Figure 10 Outstanding preparation](#)

Staff updates shows planned and additional staff. Remind All opens a draft for eligible bookings in the filtered staff queue. Logistics outstanding includes a blank or unrecognised vehicle answer as well as Yes with no completed details; No is already complete for logistics. Logo updates contains bookings whose logo-provided flag is false. Each of these three views has Remind All; the combined Updates view has no bulk reminder because it would mix different requests.

[Figure 11 Staff update queue](#)

[Figure 12 Staff reminder composer](#)

All booking reminders go to the unique Primary Contact selected through Opportunity Contact Roles. Event-day contact, billing contact and supplementary form submitter are separate data. The right-hand panel shows the Primary Contact and event-day contact separately. Correct the actual Primary Contact relationship or Contact.Email when needed, then refresh the recipient preview. An outstanding reminder can be sent again in a later, separately reviewed run; the latest successful reminder time is available in the selected booking details.

Partner / sponsor staff form: enter the booking reference, final headcount and one attendee name per line. The headcount and name count must match and be between 1 and 99. A successful update replaces the partner roster and marks staff complete; it creates no extra staff charge.

Exhibitor staff form: enter the names covered by the original booking, one per line. Their number must equal the saved initial allocation. A first positive top-up can purchase 1 to 99 additional places at £50 per place excluding VAT, with a matching list of names. Subsequent submissions can correct names but

cannot increase or reduce that accepted top-up quantity. Choosing No on a later correction preserves an already accepted top-up. The combined list becomes the roster; the original booking price and its finance milestones stay intact.

Heavy vehicle form: identify the booking, supply organisation/contact/declaration information, delivery window, item 1 and haulier details. Items 2 and 3 are optional, but any partly supplied item must include description, dimensions and gross weight; item 3 requires item 2. Registrations can be left blank. A valid update replaces the logistics fields, including clearing omitted optional items, sets Heavy Vehicle Required to Yes and stamps logistics complete. It does not replace booking contacts.

Logo form: upload through the configured external file-request destination, then confirm the upload with the booking reference. Confirmation marks Logo Provided and its date. Salesforce does not receive a file attachment or verify the external upload through this form. The current file-request destination is blank, so the external upload link needs configuration before this route can operate as intended. Logo confirmation Leads remain as audit records and receive no acknowledgement email.

Staff and vehicle forms first create a temporary Lead. Matching and application happen asynchronously. A successful receipt goes to the booking's Primary Contact. The temporary Lead is deleted after the details and receipt succeed. Invalid/unmatched submissions or failed receipts remain for review. A website thank-you page alone does not prove that matching or processing succeeded.

Complete the booking and distribute the final pack

Completed requires known pricing, any requested quote, all applicable base and top-up invoices and payments, staff completion, a confirmed vehicle answer with details when Yes, and Logo Provided. There is no Mark complete button and no requirement to move Opportunity.StageName to Closed Won.

Figure 13 Completed bookings and final packs

Final pack not sent excludes Sent and Queued records. Final pack sent shows completed bookings with a sent status. Distribute final pack on Completed or Final pack not sent prepares only completed, unsent eligible bookings, then uses the same recipient-selection and preview process as reminders. A pack already sent is never silently reset when a late top-up reopens finance. That booking may leave Completed until finance is resolved, but retains its pack history.

Figure 14 Final pack eligibility

The Default routing record must contain the matching Final Pack Event Code and a valid HTTPS exhibitor or partner final-pack URL. Both final-pack URLs are blank in the current configuration. The composer therefore explains the missing link and leaves Send disabled. Supply the final content and destinations in configuration; the feature sends links rather than generating an event-information document.

Use the event breakdown and guest list

Figure 15 Event breakdown and record navigation

The event breakdown at the bottom provides clickable summaries for guest registrations, expressions of interest, applications, approved-booking progress, quotes, invoices, payments, logistics, staff and logos. Each opens the corresponding queue. Interest totals include open and decided interests; Applications totals are current awaiting-review applications plus approved bookings. Guest totals are captured registrations, with no application approval stage. Do not add these different populations together as unique people.

Guest registrations remain Leads. The guest list shows the main guest, accompanying guest name/email and accessibility answer. An accompanying guest is stored on the same Lead, not a separate Contact or attendee object. Use the guest check-in/accessibility report for delivery planning and its native

filters/export where appropriate. The project does not generate tickets, scan check-ins or implement a separate attendance portal.

Use Home and understand its values

Figure 16 Home commercial portfolio

Home has an Event selector and Refresh. Its headline amounts are Applications, Approved applications, Invoiced, Still to collect and Paid. All are pounds excluding VAT and display rounded whole pounds; saved fields retain their decimal precision. Applications covers unconverted, unrejected commercial applications. Approved covers the booking population. Invoiced and Paid include only the charge amounts whose corresponding milestones are recorded; a paid base charge remains in Paid while a top-up is still outstanding. Still to collect includes unpaid billable amounts even before an invoice has been provided, so it can exceed the Payment required queue.

The Commercial pipeline compares counts and values by exhibitor and partner / sponsor. Relative value is against the largest stage value. The rows overlap, so percentages are not conversion rates. Revenue readiness splits amounts by their next finance step. Booking mix includes pending applications plus approved bookings, with counts, amounts and average values by participant type. A pricing-check note identifies records whose value cannot be included reliably.

Use record pages and recover email failures

Figure 17 Booking details and standard activity tools

Open full record leads to the app's record page. Details contains the project field groups; the pencil or Edit changes the underlying record. Related contains native related lists and, for Account, Contact and Opportunity, the custom NTE Relationships component. The standard activity publisher provides Email, Log a Call, New Task and New Event. The timeline shows activities such as booking provisional email outcome Tasks. Manual Email does not automatically update NTE dispatch or milestone statuses.

Figure 18 Booking relationships

On an Opportunity, NTE Relationships shows its Account and Contact Roles, identifying the actual Primary Contact. Native Add Contact Roles and Edit Contact Roles maintain that relationship. On an Account, the component lists its NTE Opportunities. On a Contact, it lists NTE bookings connected through Contact Roles. Each list is capped at 200 records. Products, Quotes, Partners, Notes and Files remain standard related lists; the project pricing engine does not create Product2 or OpportunityLineItem records.

Figure 19 Booking email retry action

Recovery control	Record to open	Scope and prerequisites
Retry booking email	Opportunity action menu	Retries an unsent provisional/complimentary booking email for exactly one converted application and its booking. Pending or Sent is not resent. Repair its recorded failure first.
Retry update email	Retained supplementary Lead	Requires Matched and Applied plus failed applicant receipt and a saved matching booking ID. Sends the receipt again without replaying staff, top-up or logistics changes.

Recovery control	Record to open	Scope and prerequisites
Retry email	Failed NTE Email Dispatch	Reuses the failed invitation/reminder/final-pack/payment-confirmation request. Accepted requests are not sent again. A changed recipient normally needs a newly reviewed draft; booking-confirmation recovery deliberately permits repair of its current primary recipient.

Read NTE Approval Email Error on the booking, NTE Email Error on an update Lead or Error on the dispatch before retrying. A missing template, missing Primary Contact, missing URL, changed booking amount or invalid saved reference requires correcting its cause. The retry action reports its result in a toast and refreshes the record. Standard record-page refresh may be needed if the browser cannot refresh the record cache.

NTE Unmatched Updates contains submissions needing matching/validation work. NTE Update Emails Failed contains applied updates whose receipt failed. NTE Email Dispatches and NTE Email Failures expose invitation, reminder, final-pack and booking-confirmation history. Provisional booking emails use the Opportunity status and activity Task instead of a dispatch record. Failed initial NTE/volunteer intake notifications use their Lead status fields and an administrator-invoked service retry; they do not use Retry update email.

Volunteer applications

The separate Mission Motorsport volunteer form collects the applicant's contact/address/date of birth, emergency contact, service background, opportunities, skills, travel regions, DBS willingness and availability. The applicant opens the September 2026 Code of Conduct, scrolls to its end, ticks its acknowledgement and completes the declaration. One hours choice and either Any availability or selected days are permitted. Submission creates a Volunteer Application Lead and returns to volunteer-thank-you.html. The applicant and current active Lead owner receive separately audited messages. Volunteers are not included in the NTE Master Panel because their intake does not carry an NTE event code. Use the Volunteer Applications list and authorised volunteer field access.

Changes cancellation and exceptions

Close Date is an expected date, not an expiry timer. Passing it does not cancel a booking or close a Payment Link. Closed Won remains eligible for NTE operations. Closed Lost is excluded from active panel views and blocks new payment-request emails, but existing external links remain open until handled in Stripe. Supplementary updates against a valid cancelled booking are accepted under the confirmed current workflow.

A refund, cancellation or changed commercial amount needs an explicit operational reconciliation. Preserve the original payment request. A saved Stripe net amount that no longer equals the booking blocks the automatic payment-confirmation email even if staff record payment. Use the agreed manual handling and the issues register; do not change an old payment snapshot simply to make an email pass validation.

Workflow screen atlas

The following labelled captures accompany the operating instructions above. Use the figure links to move between an instruction and its screen. The shared Salesforce header controls are labelled once on the orientation screen; the later captures focus on the controls for that task.

Figure 1 Master Panel orientation

The screenshot shows the NTE Master Panel interface. At the top, there's a navigation bar with 'NTE Management' (1) and tabs for Home, Master Panel (2), Leads, Accounts, Contacts, Opportunities, Tasks, Calendar, Dashboards, and Reports. A search bar (3) is on the right. Below the navigation bar, the 'Master Panel' title is centered. A filter section (6) includes 'Event code' (NTE2027) (7), 'Time' (All time) (8), and 'Owner' (All owners). A progress bar (9) shows stages: Interest (5), Applications (15), Approved (52), Finances (47), Updates (23), and Completed (29 - 55%). Below this, audience refiners (10) show 'Exhibitor interest' (2) and 'Partner / sponsor interest' (3). Action buttons (11) include 'Send to all', 'Open global list' (12), and 'View cross-event report' (13). The 'CURRENT VIEW' section shows 'Expressions of interest' with a table (14) listing records like 'Avenholt Cyber Systems Ltd'. A details panel (15) on the right shows contact information for 'Leo Hartwell' and 'Steven Skyba' (16).

Control labels	Control labels	Control labels
1 App Launcher	2 App navigation tabs	3 Global search
4 Salesforce tools and profile	5 Refresh panel	6 Event filter
7 Creation date filter	8 Owner filter	9 Stage navigation
10 Audience refiners	11 Draft invitations for all	12 Open native list
13 Open cross event report	14 Select row for details	15 Draft one invitation
16 Selected record details		

NTE Salesforce operations and reconstruction

Figure 2 Interest row decision controls

Sandbox (MMUAT)

THE NATIONAL TRANSITION EVENT

Search...

★

+

🔔

?

⚙️

📧

👤

NTE Management

Home

Master Panel

Leads

Accounts

Contacts

Opportunities

Tasks

Calendar

Dashboards

Reports

THE NATIONAL TRANSITION EVENT

NTE MANAGEMENT

Master Panel

Event code

NTE2027

Time

All time

Owner

All owners

5 Interest

15 Applications

52 Approved

47 Finances

23 Updates

29 · 55% Completed

Exhibitor interest 2

Partner / sponsor interest 3

CURRENT VIEW

Expressions of interest

Combined exhibitor and partner / sponsor interest

Send to all

Open global list

View cross-event report

ENQUIRY TYPE	SPONSORSHIP / INTEREST	ACTIVITIES / DETAILS	PREFERRED CONTACT	OWNER	DECISION
Cyber Systems Ltd ill of interest ·	Both - open to discuss	Strategic event partnership;Stage, content or thought leadership	We would like to discuss a technology programme partnership and contributi...	Email · Weekday mornings	Steven
Mobility Group Ltd rick of interest ·	Sponsorship	Event zone sponsorship;Branding and delegate experience	Please share the automotive sponsorship opportunities. We can bri...	Email · Weekday mornings	Steven Skyba
Skills Partnership Ltd stcott of interest · NTE2027	Exhibitor	Yes	We can offer individual skills-mapping sessions and advice on gaining civilia...	Email · Monday or Wednesday afternoons	Steven Skyba
ad Mobility Group Ltd igley of interest · NTE2027	Sponsorship	Event zone sponsorship;Branding and delegate experience	We are interested in an automotive zone sponsorship with a small vehicle...	Email · Weekdays, 09:00–12:00	Steven Skyba

Expression of interest

Avenholt Cyber Systems Ltd

NTE-CLIENT2-20260910-I04

Contact

Name

Leo Hartwell

Email

steven.skyba@anthrion.com

Phone

07700 900104

Owner

Steven Skyba

Expression of interest

Enquiry type

Both - open to discussion

Sponsorship / interest


Strategic event partnership;Stage, content or thought leadership

Activities / details

We would like to discuss a technology programme partnership and contributing a practical session on moving from military operations into cyber incident response.

Control labels	Control labels	Control labels
1 Send Application opens draft	2 Reject opens confirmation	3 Send to all opens bulk draft
4 Selected Lead contact		


Figure 3 Review decision confirmation

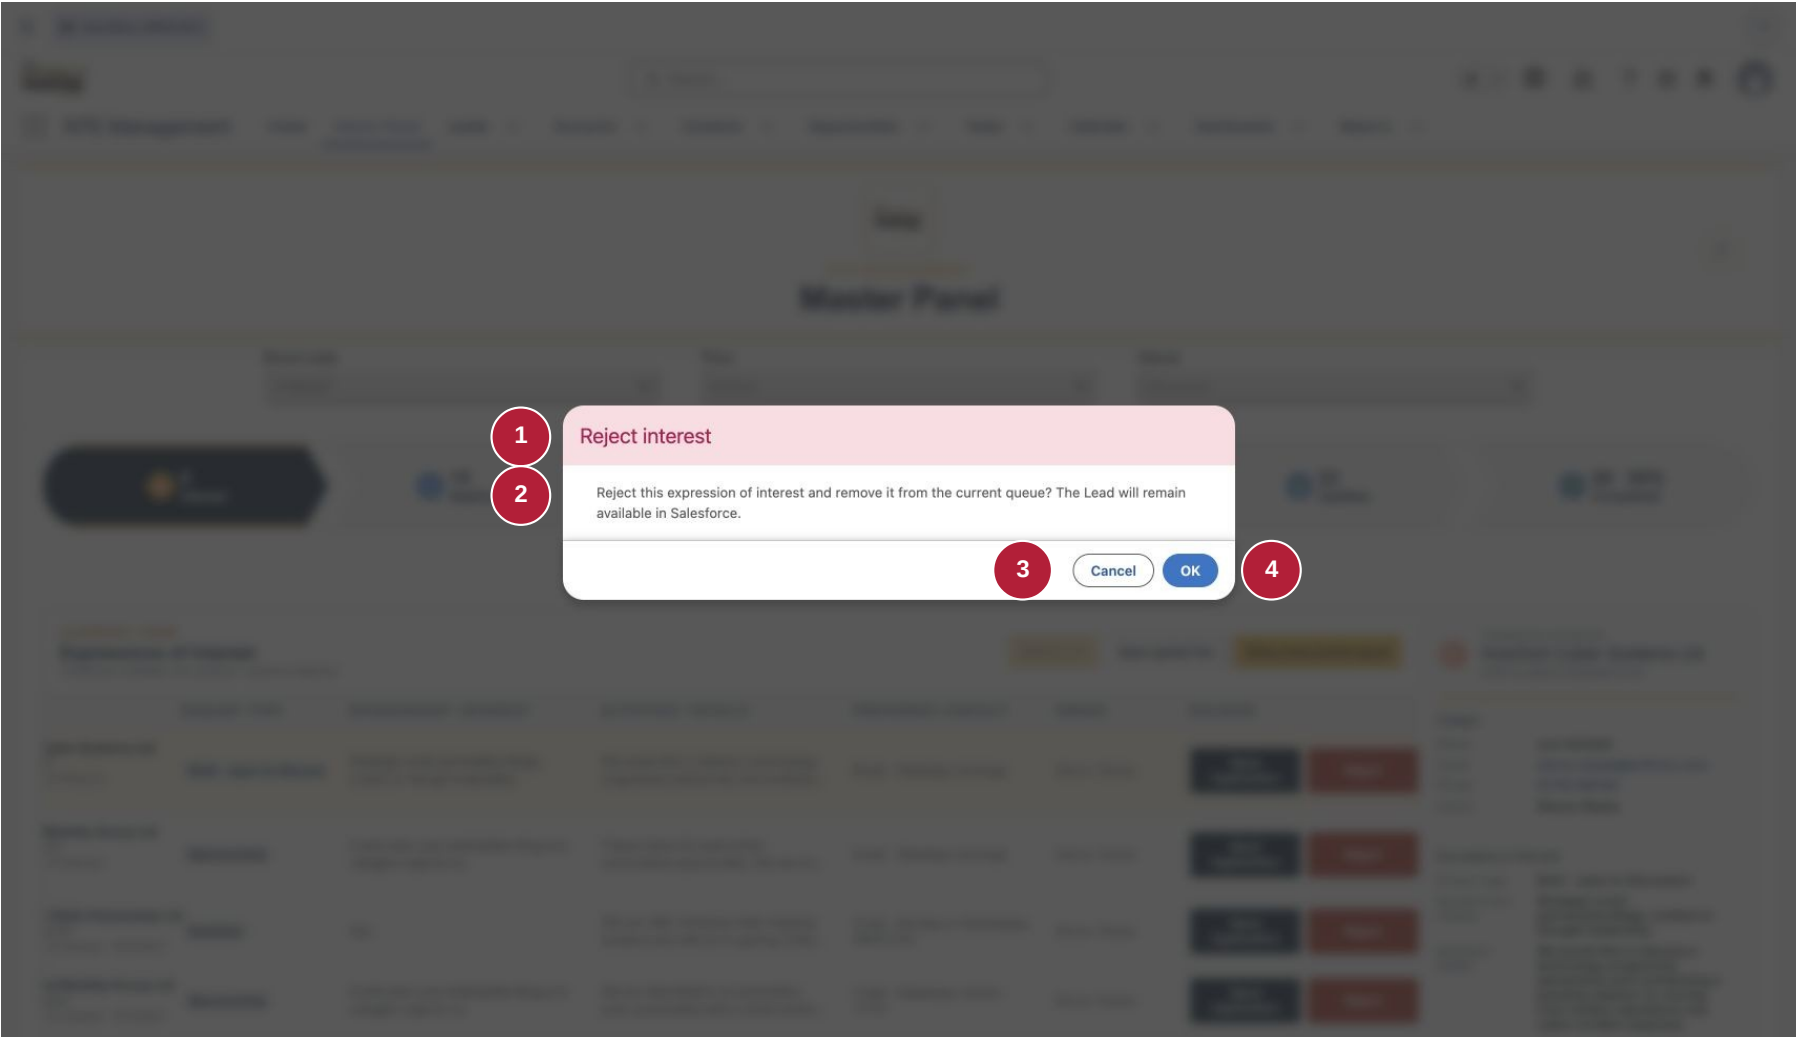

Control labels	Control labels	Control labels
1 Decision being confirmed	2 Effect and record retention	3 Cancel without change
4 OK records the decision		

NTE Salesforce operations and reconstruction


Figure 4 Application invitation composer

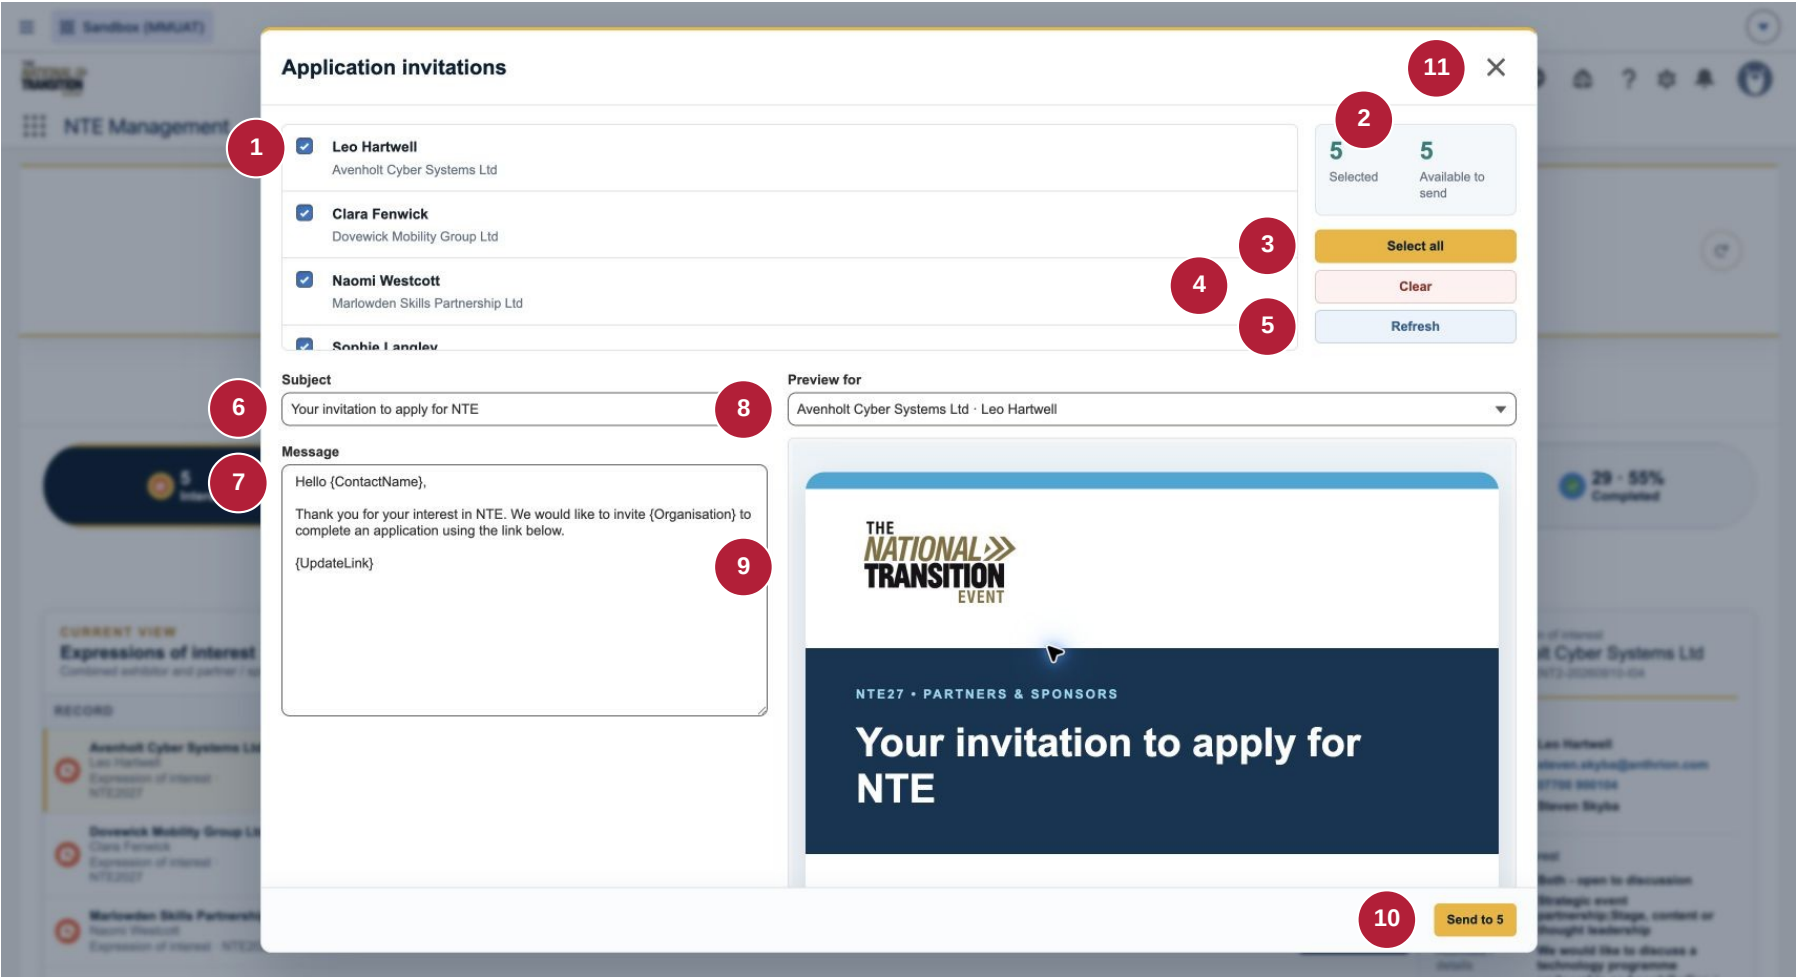

Control labels	Control labels	Control labels
1 Recipient checkbox	2 Selected and available counts	3 Select all eligible
4 Clear selection	5 Refresh eligibility	6 Editable subject
7 Editable message and tokens	8 Preview recipient selector	9 Personalised preview
10 Queue selected messages	11 Close draft	

NTE Salesforce operations and reconstruction

Figure 5 Application review queue

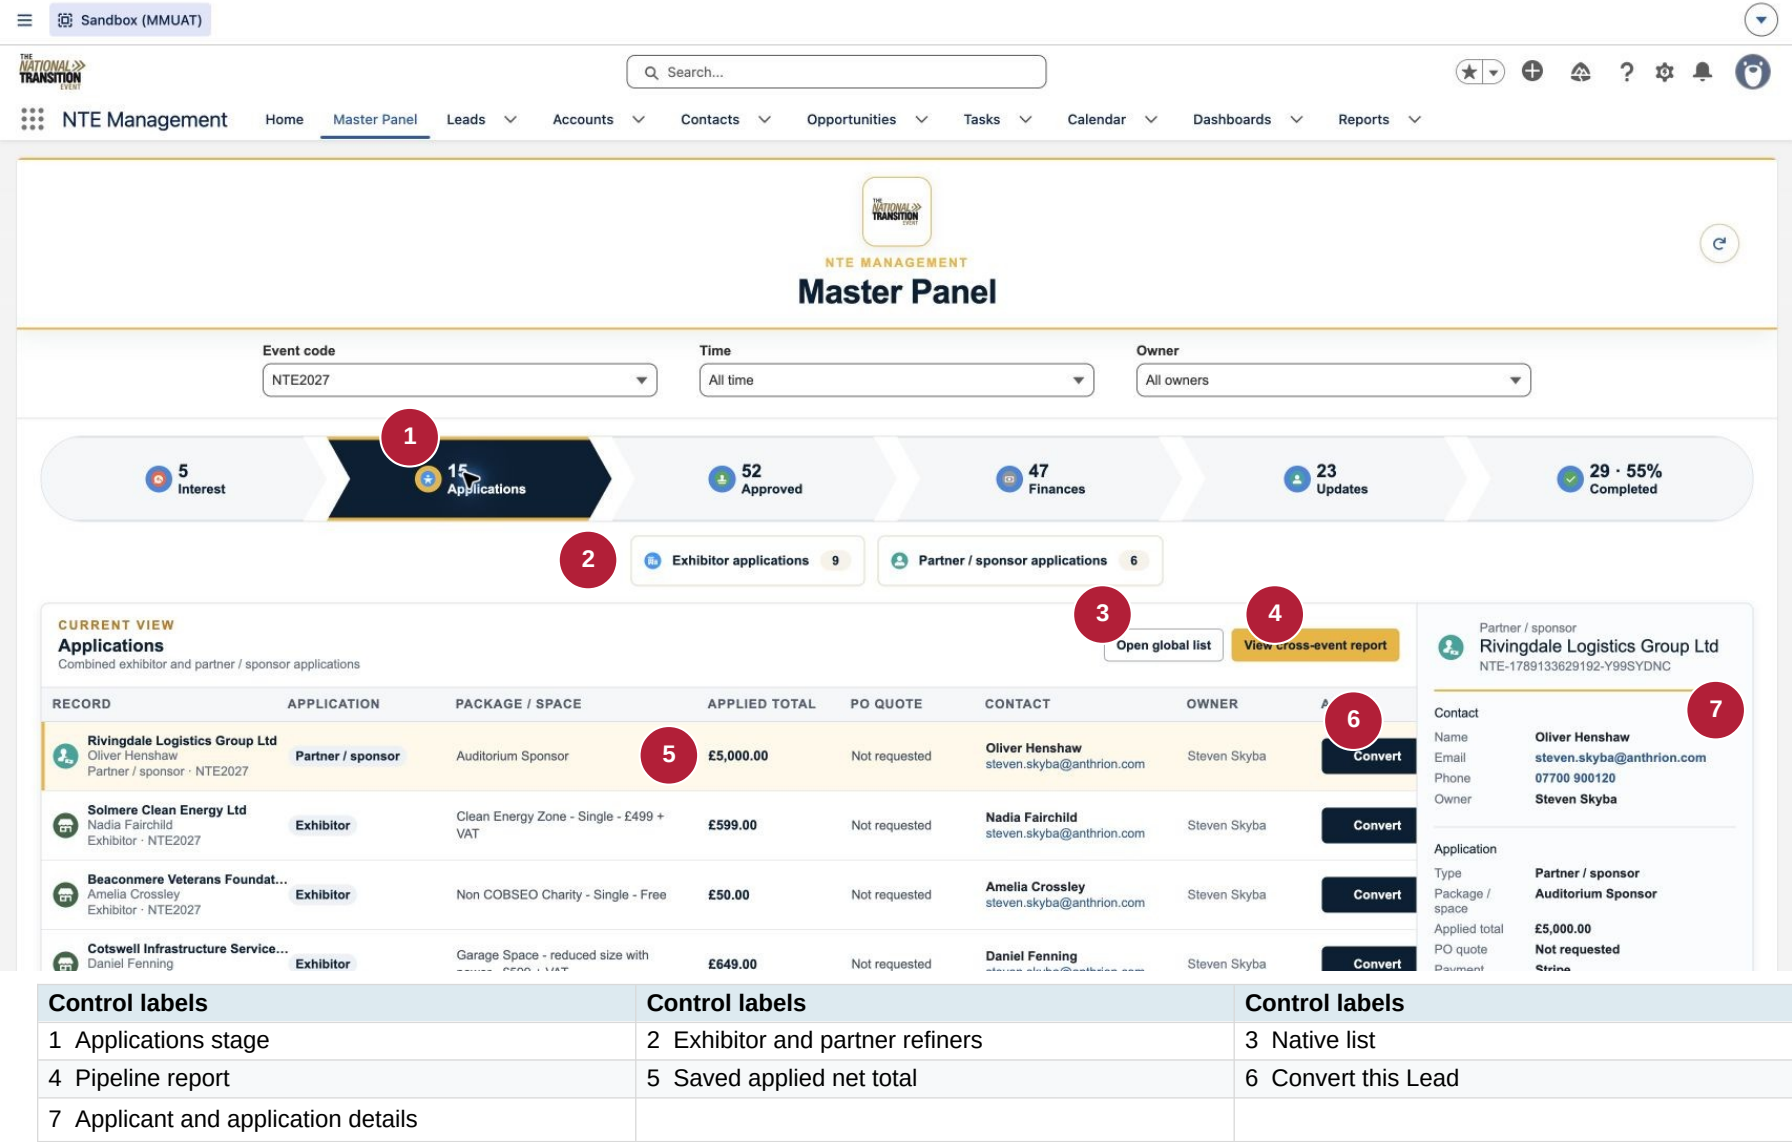

NTE Salesforce operations and reconstruction

Figure 6 Native Salesforce conversion

Sandbox (MMUAT)

THE NATIONAL TRANSITION EVENT

Search...

★

+

🔔

?

⚙️

📧

👤

NTE Management

Home

Master Panel

Leads

Accounts

Contacts

Opportunities

Tasks

Calendar

Dashboards

Reports

Convert Oliver Henshaw

> Accounts

1

Create New Account

Rivingdale Logistics Group Ltd

- OR -

Choose Existing Account

0 Account Matches detected

> Contacts

2

Create New Contact

Oliver Henshaw

- OR -

Choose Existing Contact

0 Contact Matches detected

Opportunities

3

Create New Opportunity

4

* Opportunity Name

Rivingdale Logistics Group Ltd-

5

Record Type

NTE Event Opportunity

7

☐ Don't create an opportunity upon conversion

6

Choose Existing Opportunity

0 Opportunity Matches

8

* Record Owner

Steven Skyba

9

* Converted Status

Qualified

10

Cancel


Convert

11

Control labels	Control labels	Control labels
1 Create or reuse Account	2 Create or reuse Contact	3 Create new Opportunity
4 New booking name	5 NTE record type	6 Existing Opportunity option
7 No Opportunity option	8 New record owner	9 Converted Lead status
10 Cancel without conversion	11 Commit conversion	


NTE Salesforce operations and reconstruction

Figure 7 Finance overview

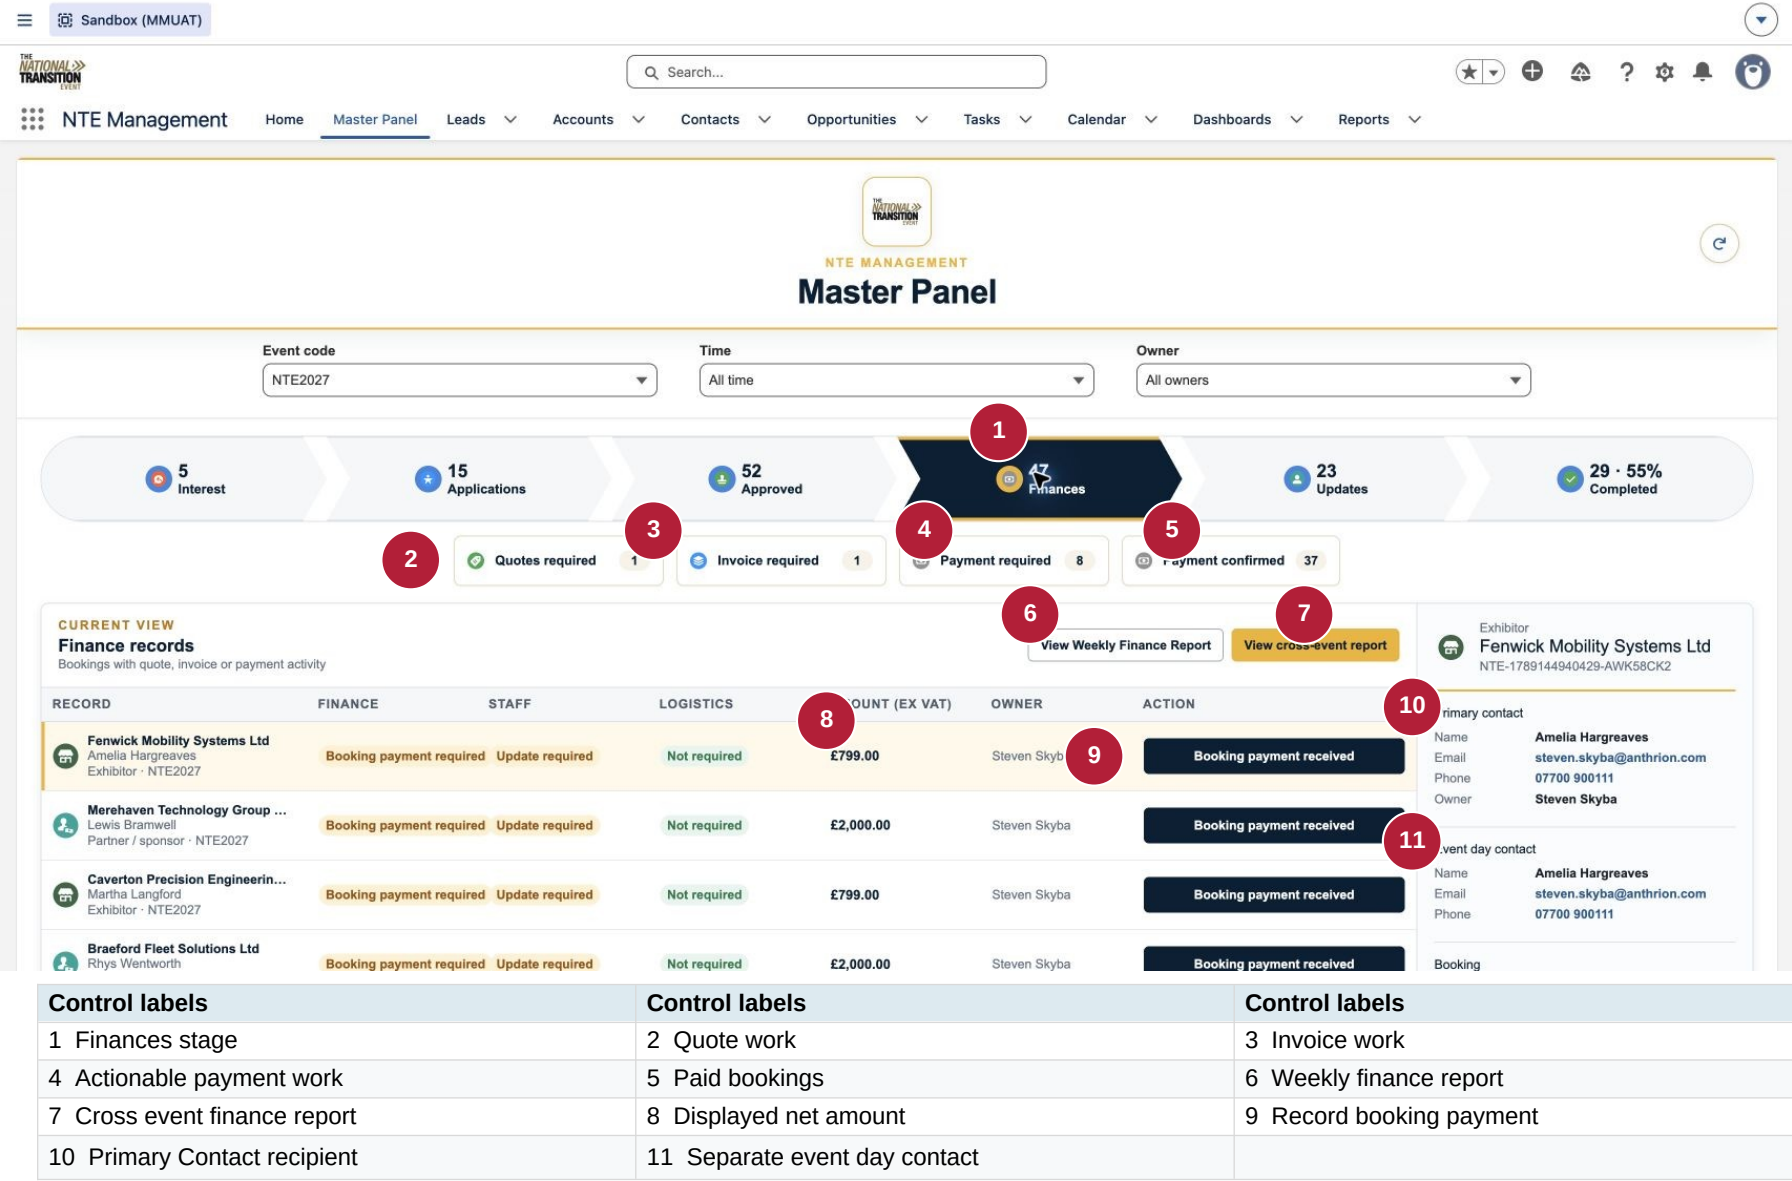

NTE Salesforce operations and reconstruction


Figure 8 Quotes required

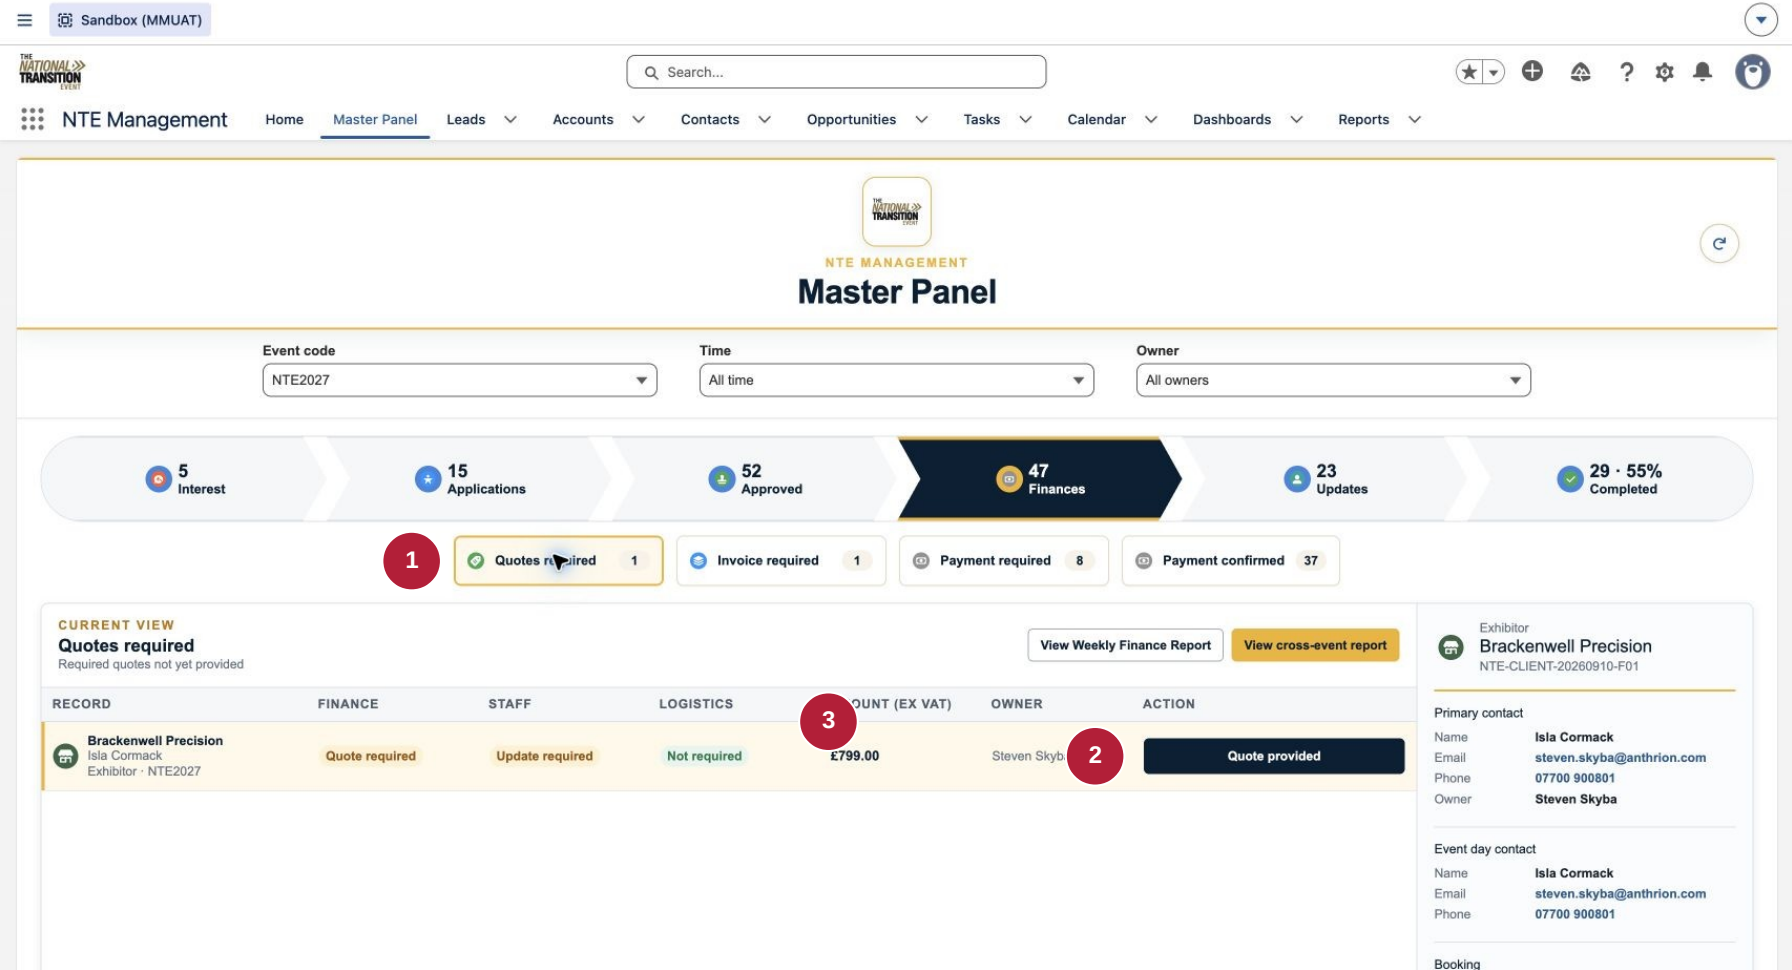

Control labels	Control labels	Control labels
1 Quotes required refiner	2 Mark quote provided	3 Saved net booking amount

NTE Salesforce operations and reconstruction


Figure 9 Invoices required

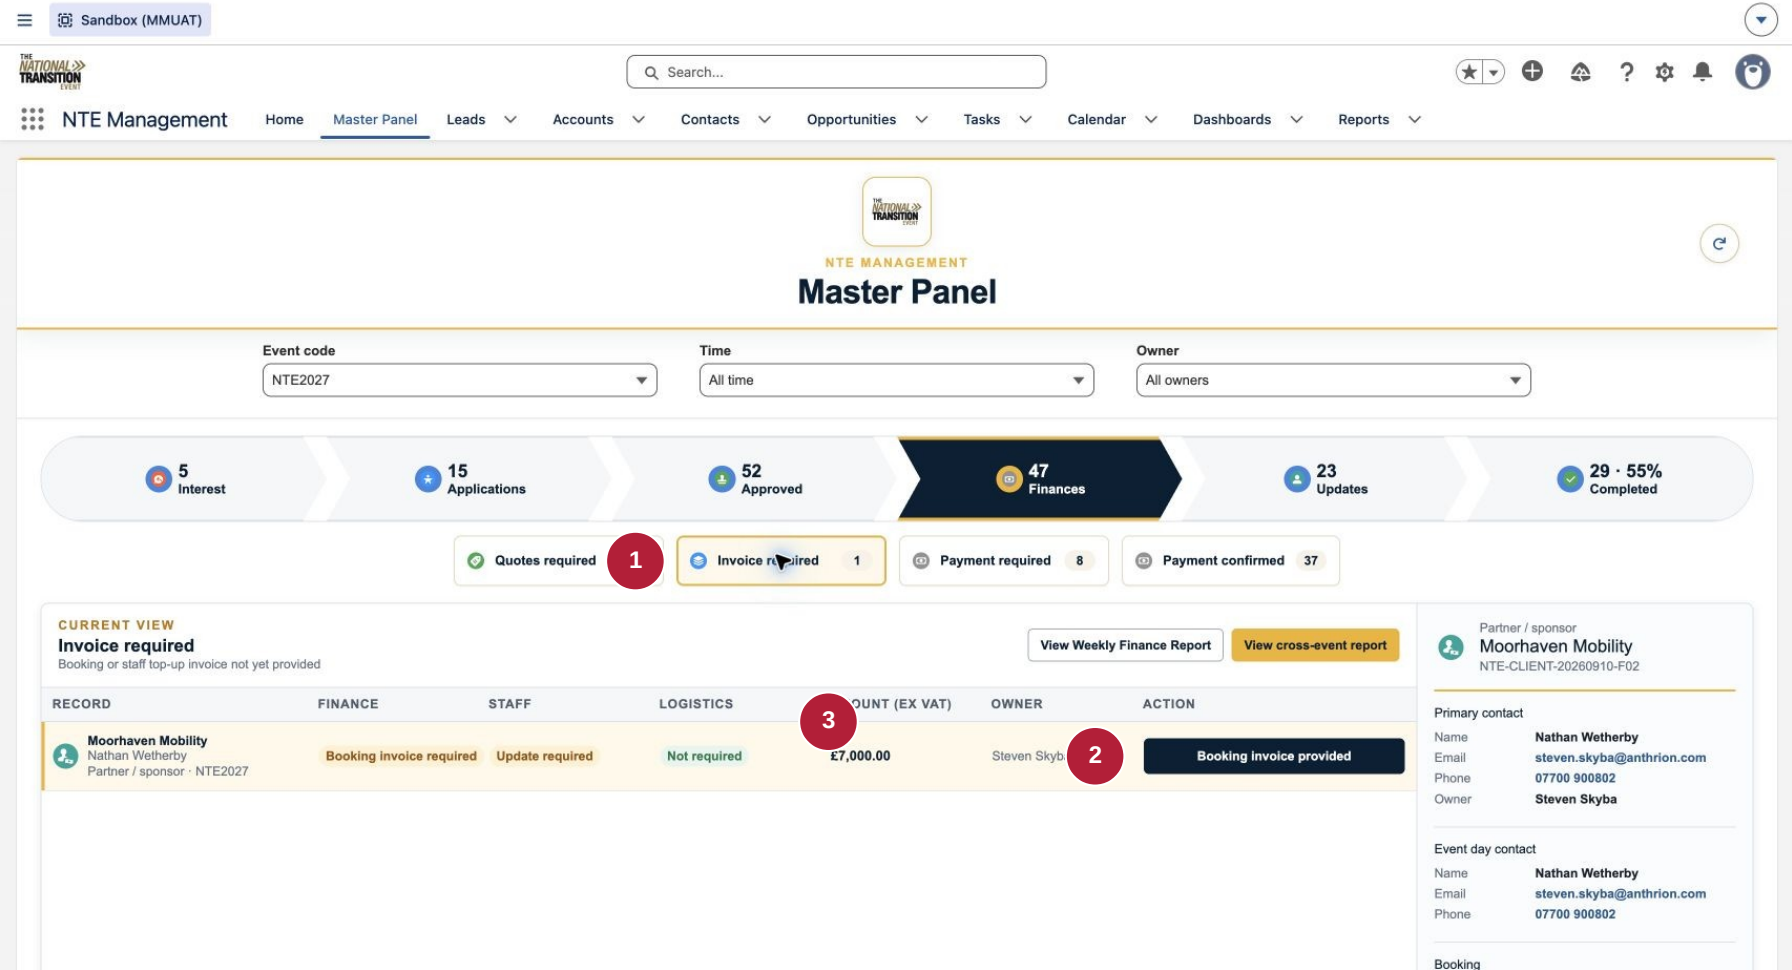

Control labels	Control labels	Control labels
1 Invoice required refiner	2 Mark booking invoice provided	3 Saved net booking amount


NTE Salesforce operations and reconstruction

Figure 10 Outstanding preparation

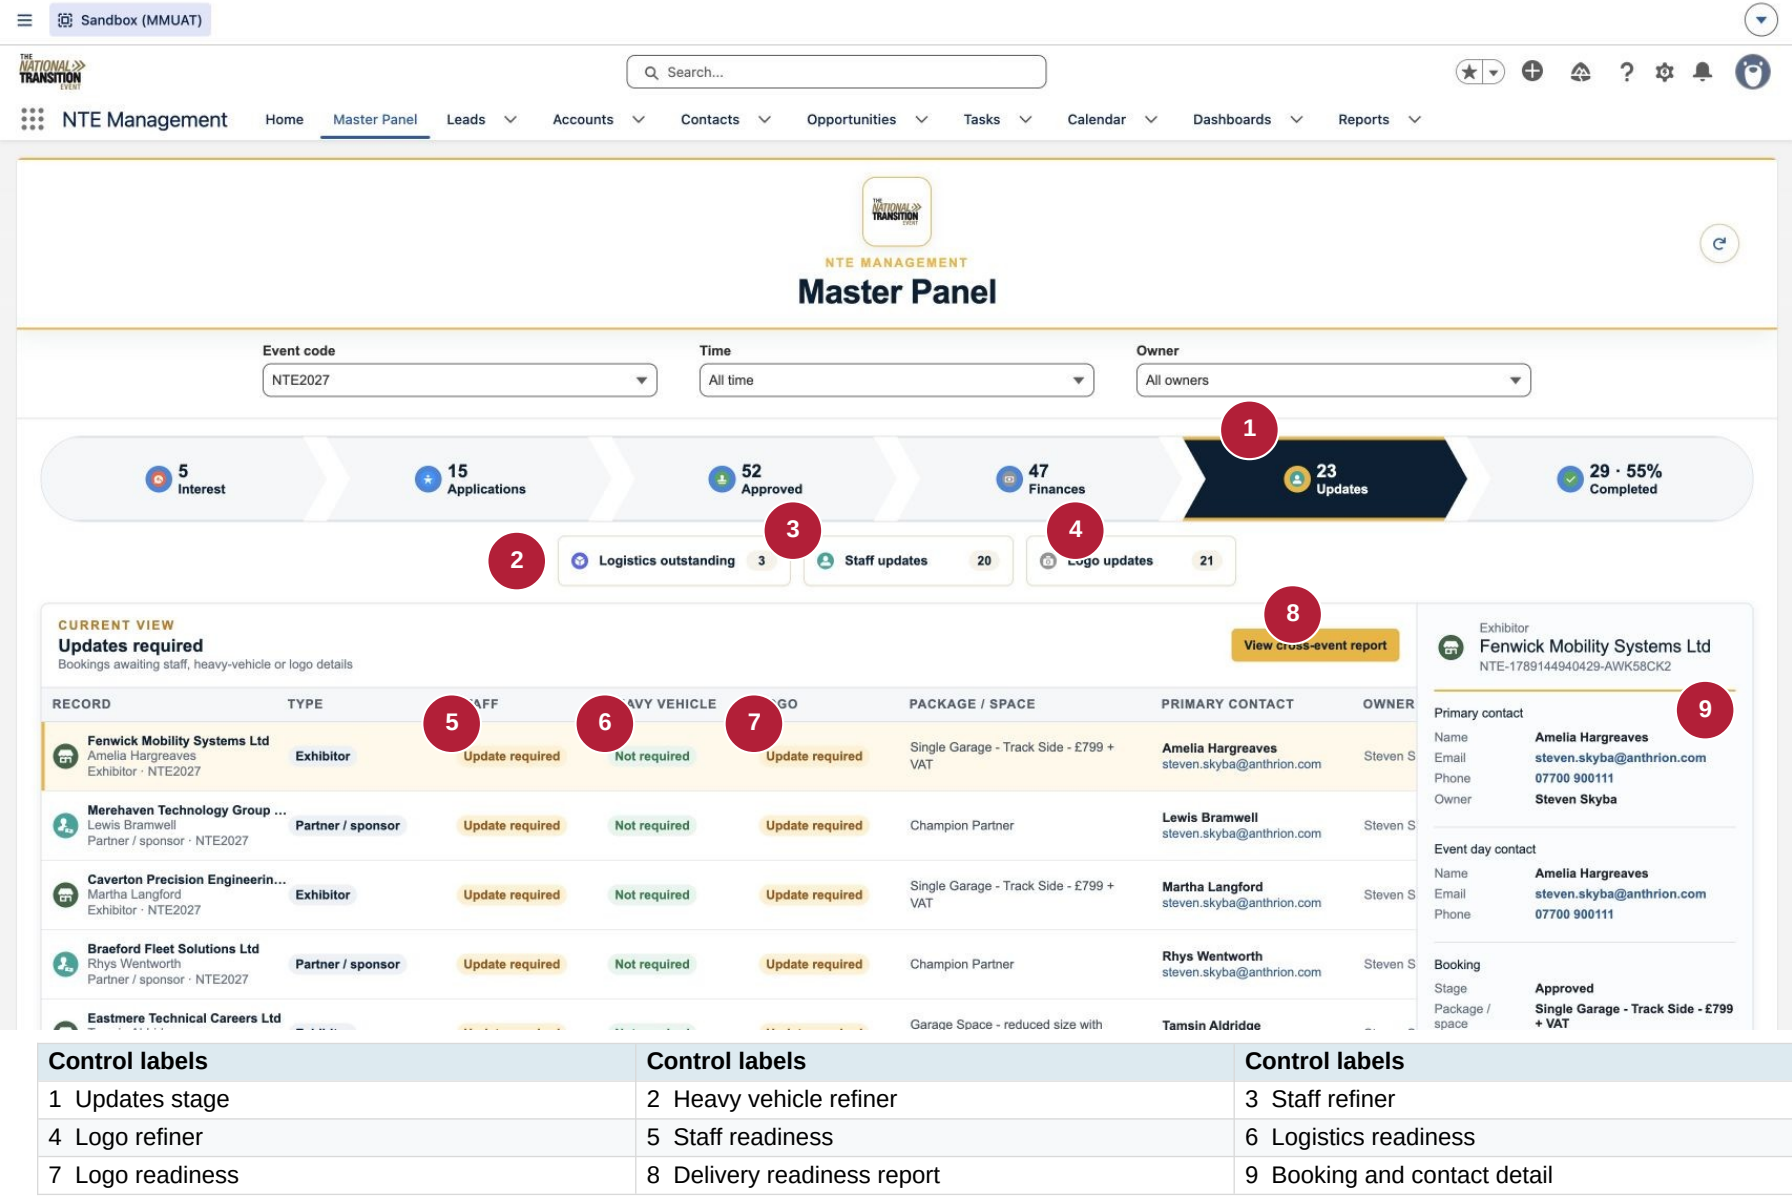


NTE Salesforce operations and reconstruction

Figure 11 Staff update queue

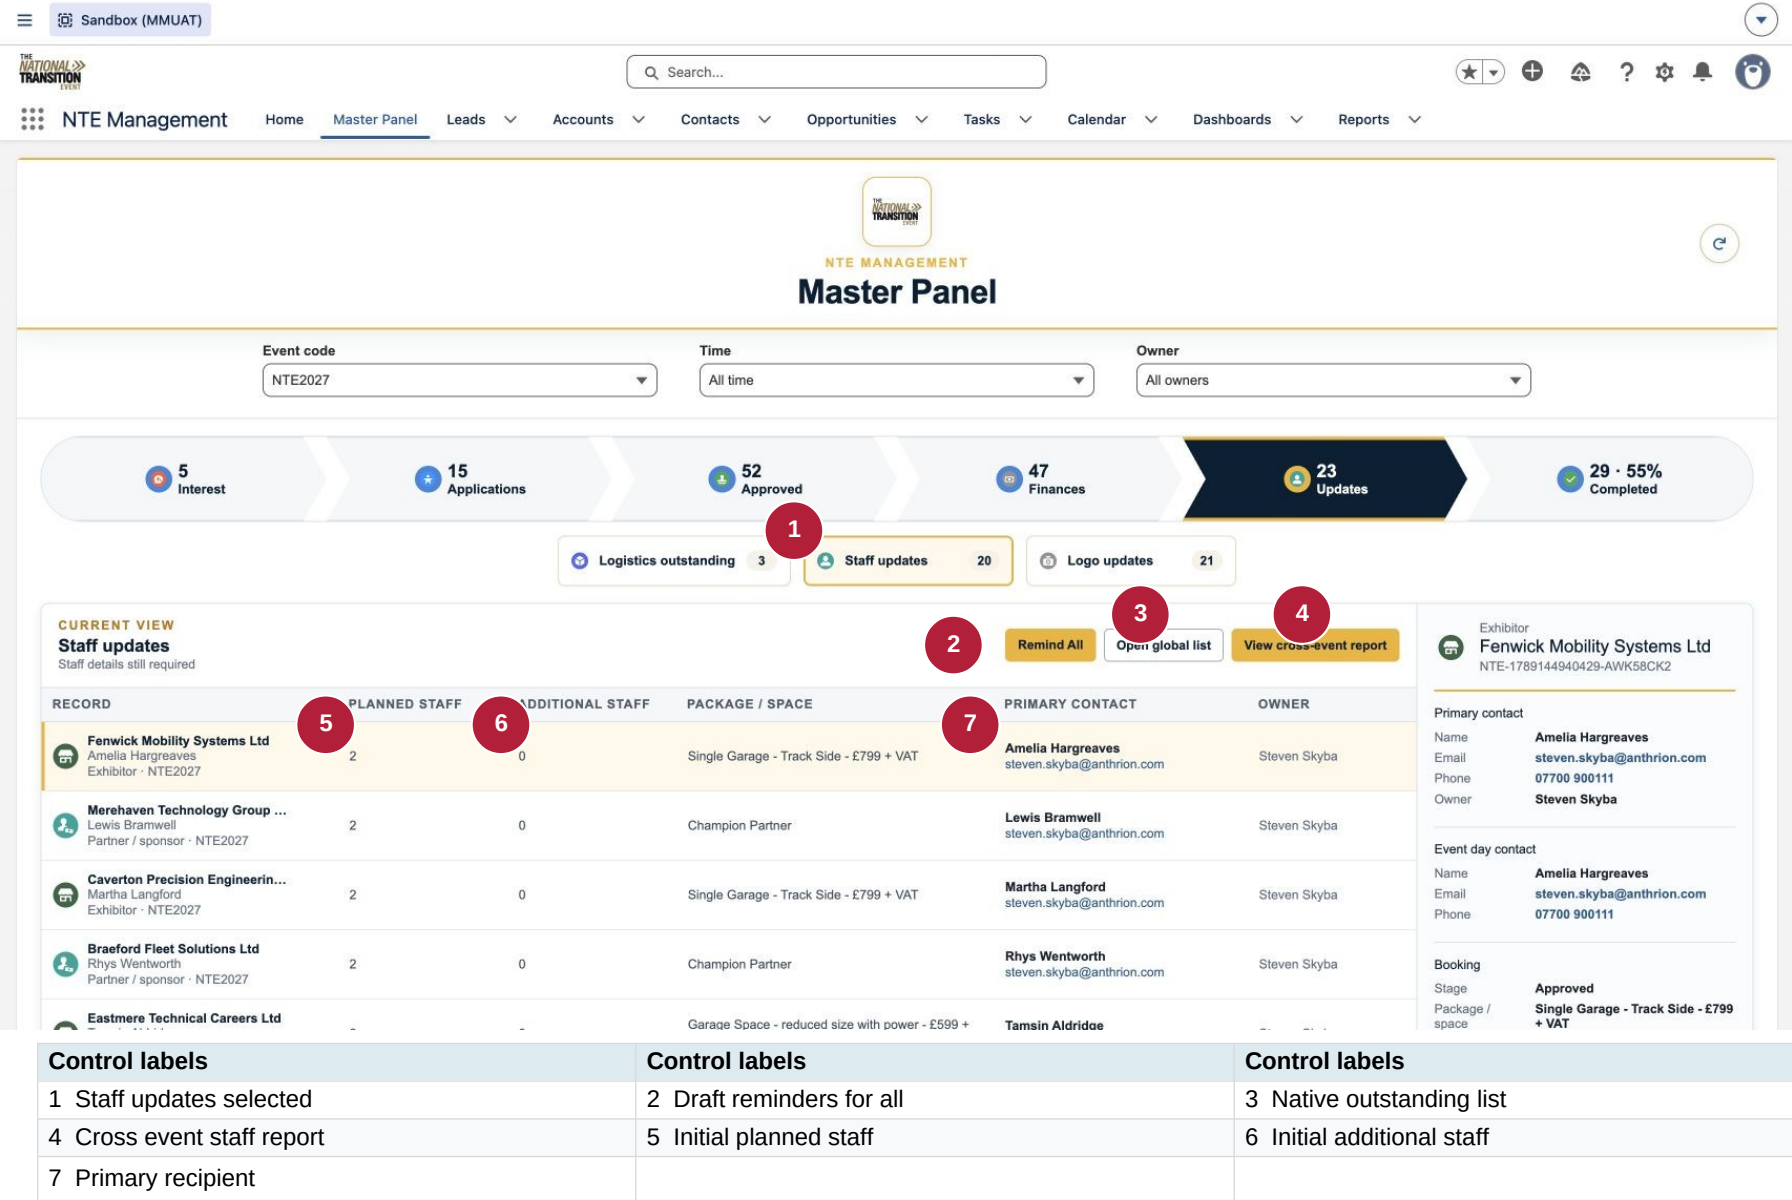

NTE Salesforce operations and reconstruction


Figure 12 Staff reminder composer

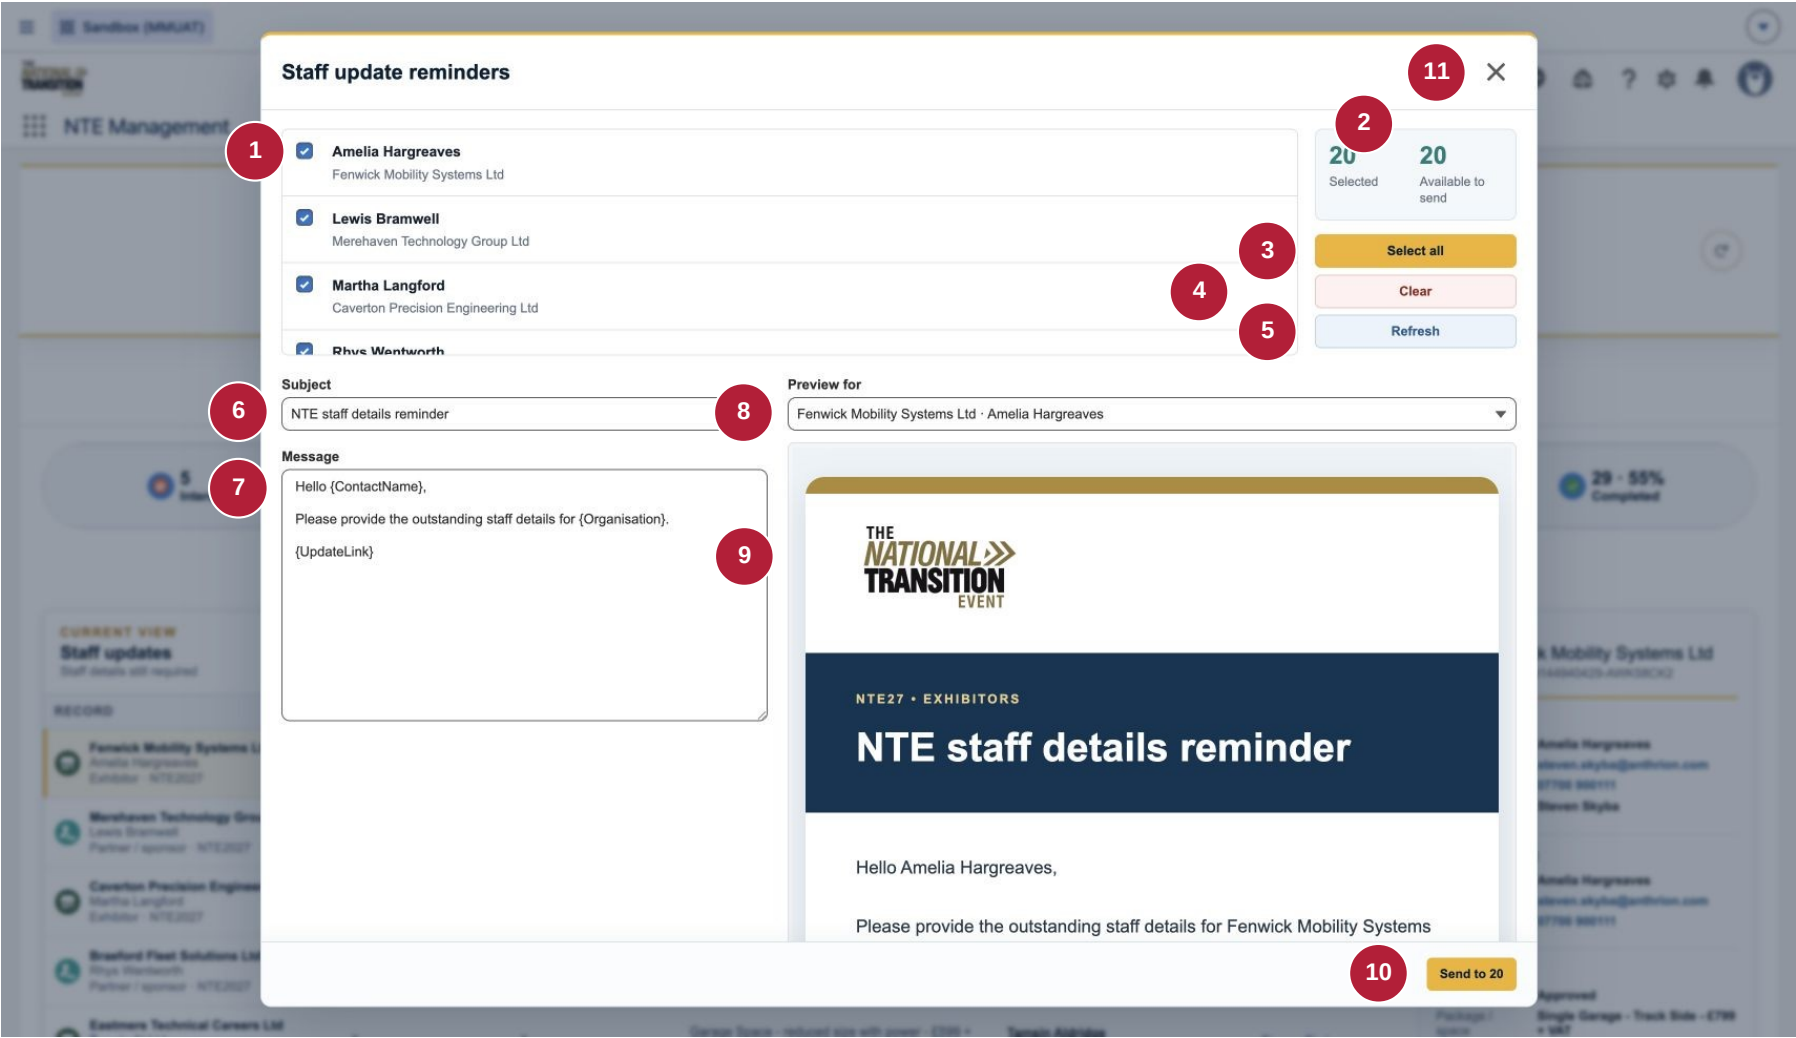

Control labels	Control labels	Control labels
1 Select exact recipients	2 Selection counts	3 Select all eligible
4 Clear selection	5 Refresh eligibility	6 Editable subject
7 Editable body and tokens	8 Preview recipient selector	9 Personalised preview
10 Queue selected reminders	11 Close draft	

NTE Salesforce operations and reconstruction

Figure 13 Completed bookings and final packs

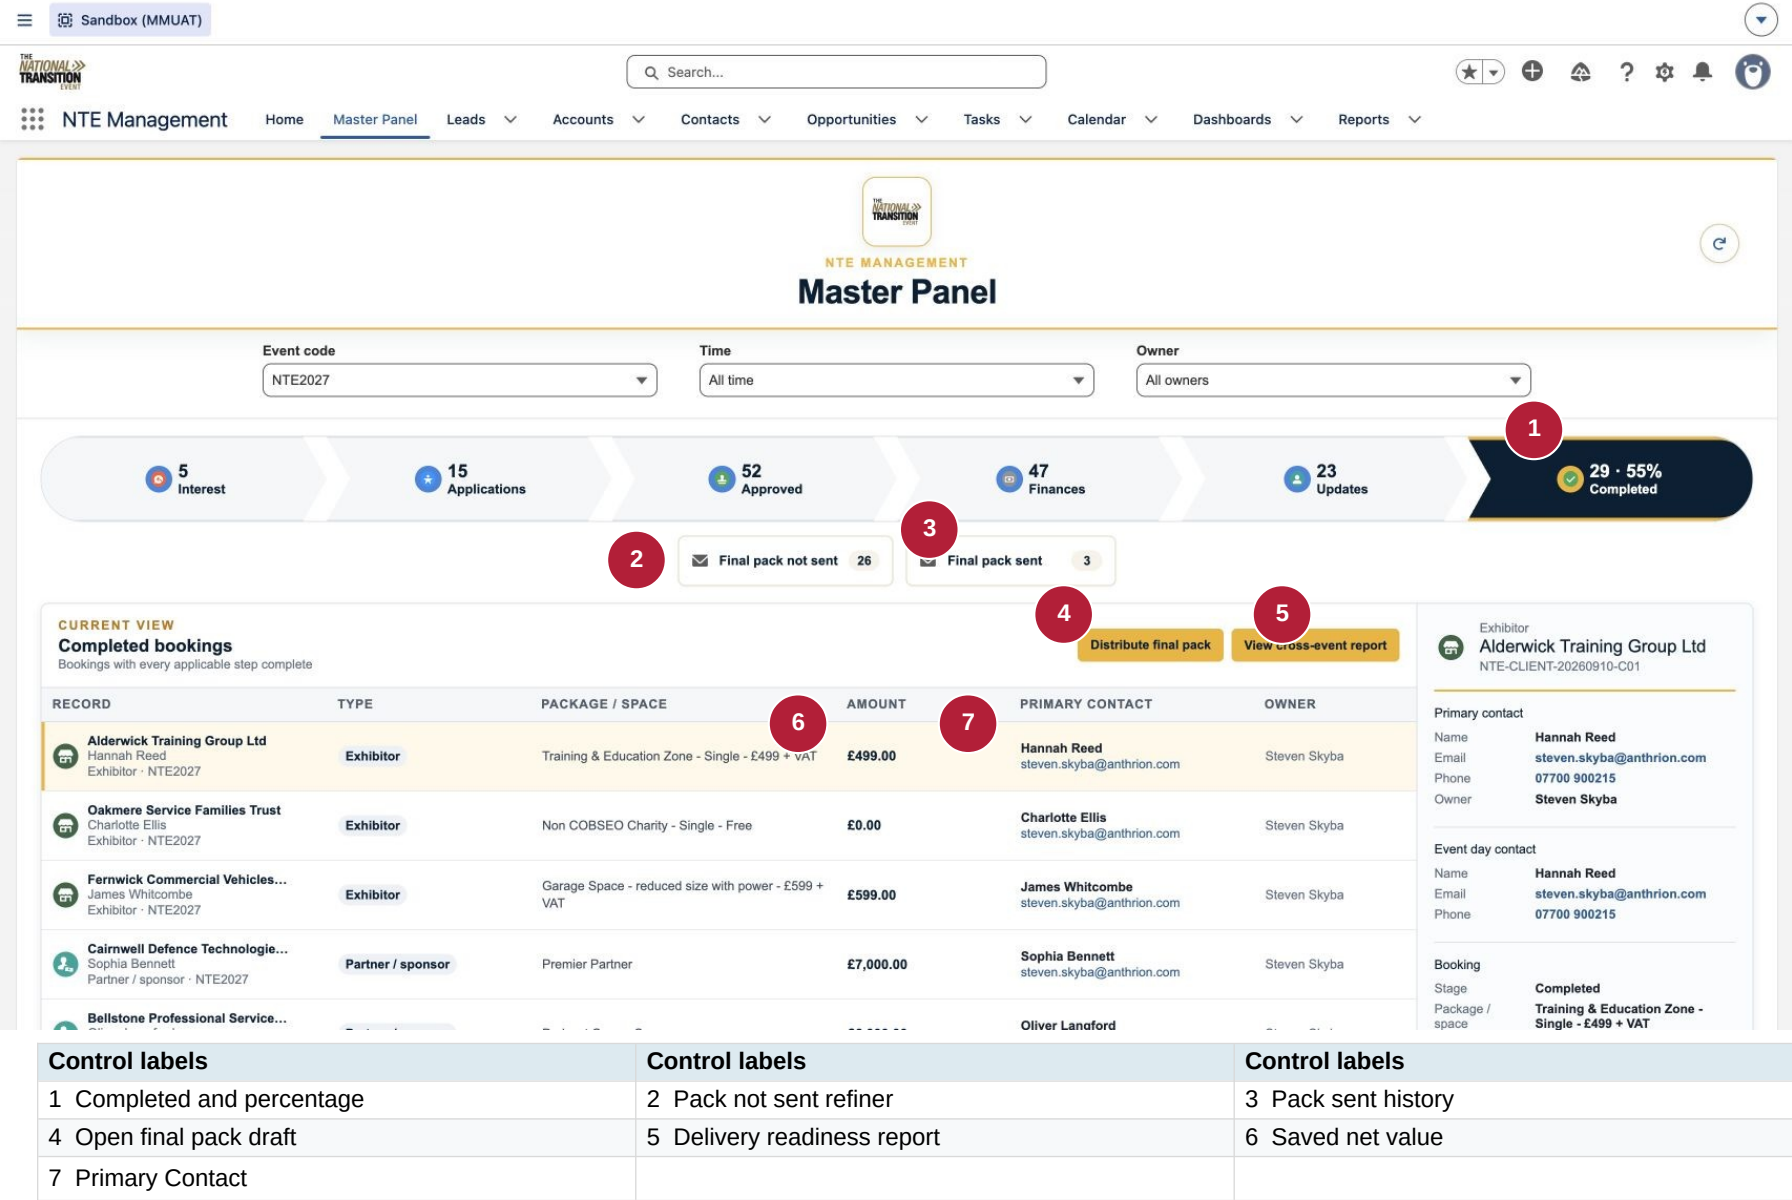


22 / 211

Control labels	Control labels	Control labels
1 Ineligible recipient	2 Missing destination reason	3 Zero eligible recipients
4 Select eligible recipients	5 Clear	6 Refresh after configuration
7 Editable subject	8 Editable message	9 Preview requires selection
10 Disabled Send to zero	11 Close draft	

NTE Salesforce operations and reconstruction


Figure 15 Event breakdown and record navigation

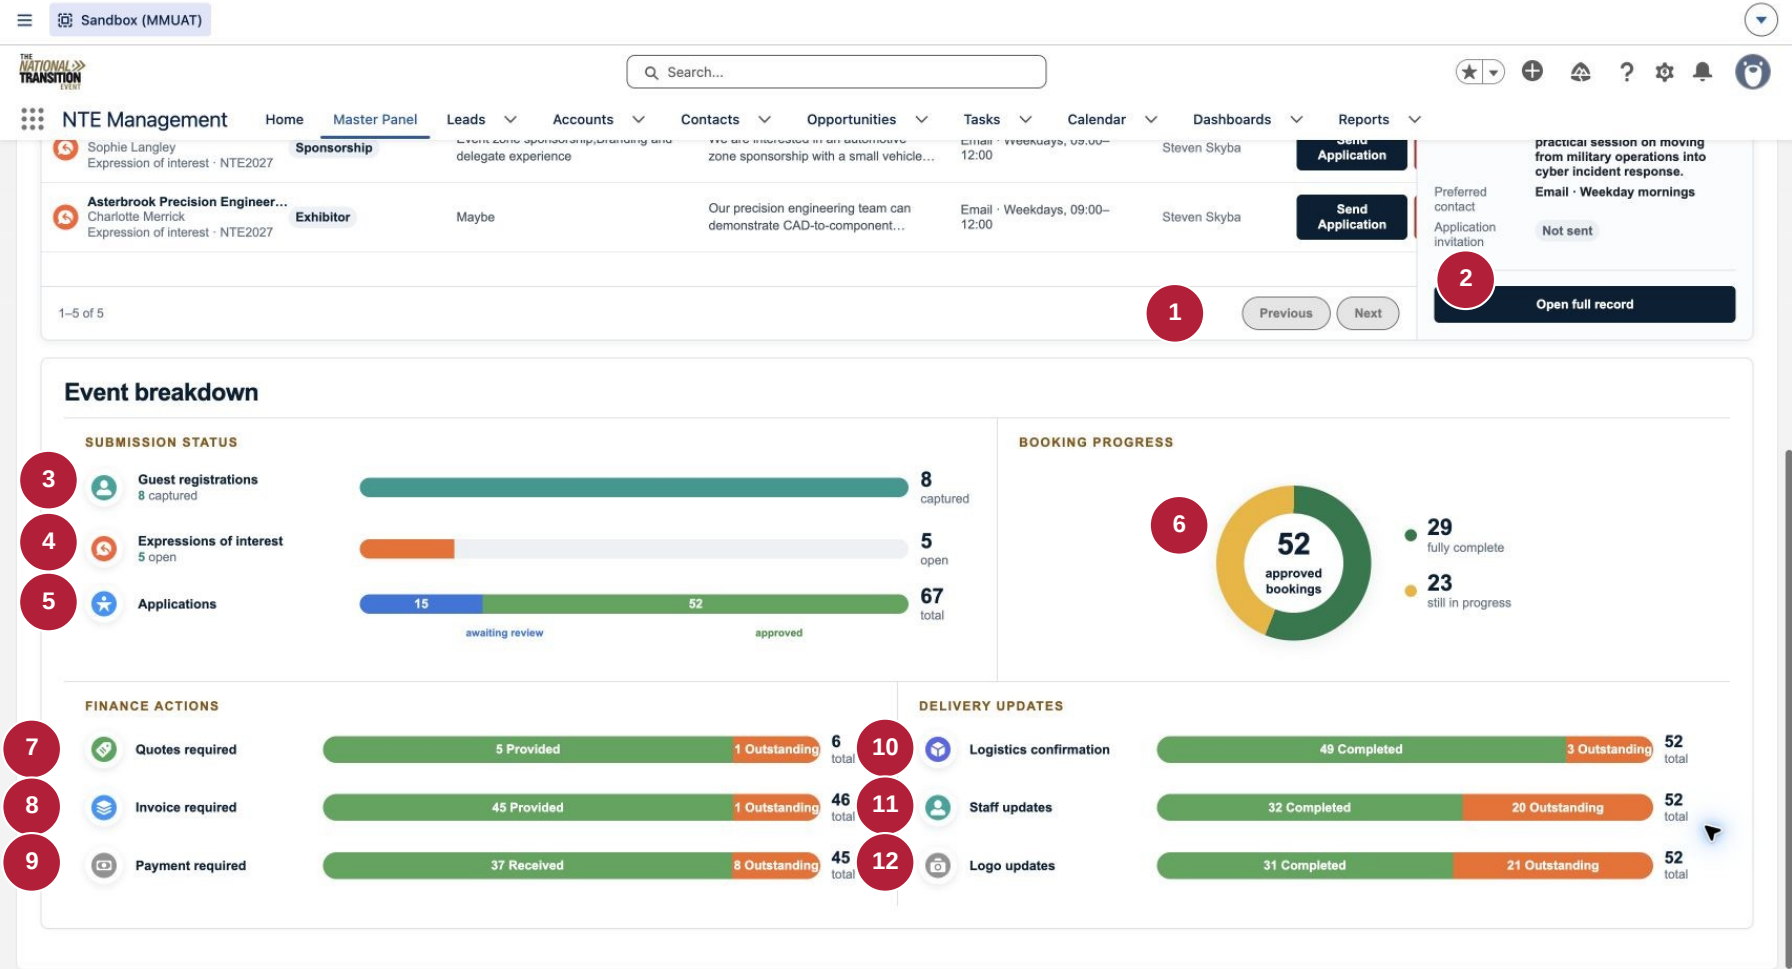

Control labels	Control labels	Control labels
1 Previous and Next pages	2 Open full record	3 Guest register view
4 Interest view	5 Applications view	6 Approved booking breakdown
7 Quotes required view	8 Invoices required view	9 Payment required view
10 Logistics outstanding view	11 Staff outstanding view	12 Logo outstanding view

NTE Salesforce operations and reconstruction

Figure 16 Home commercial portfolio

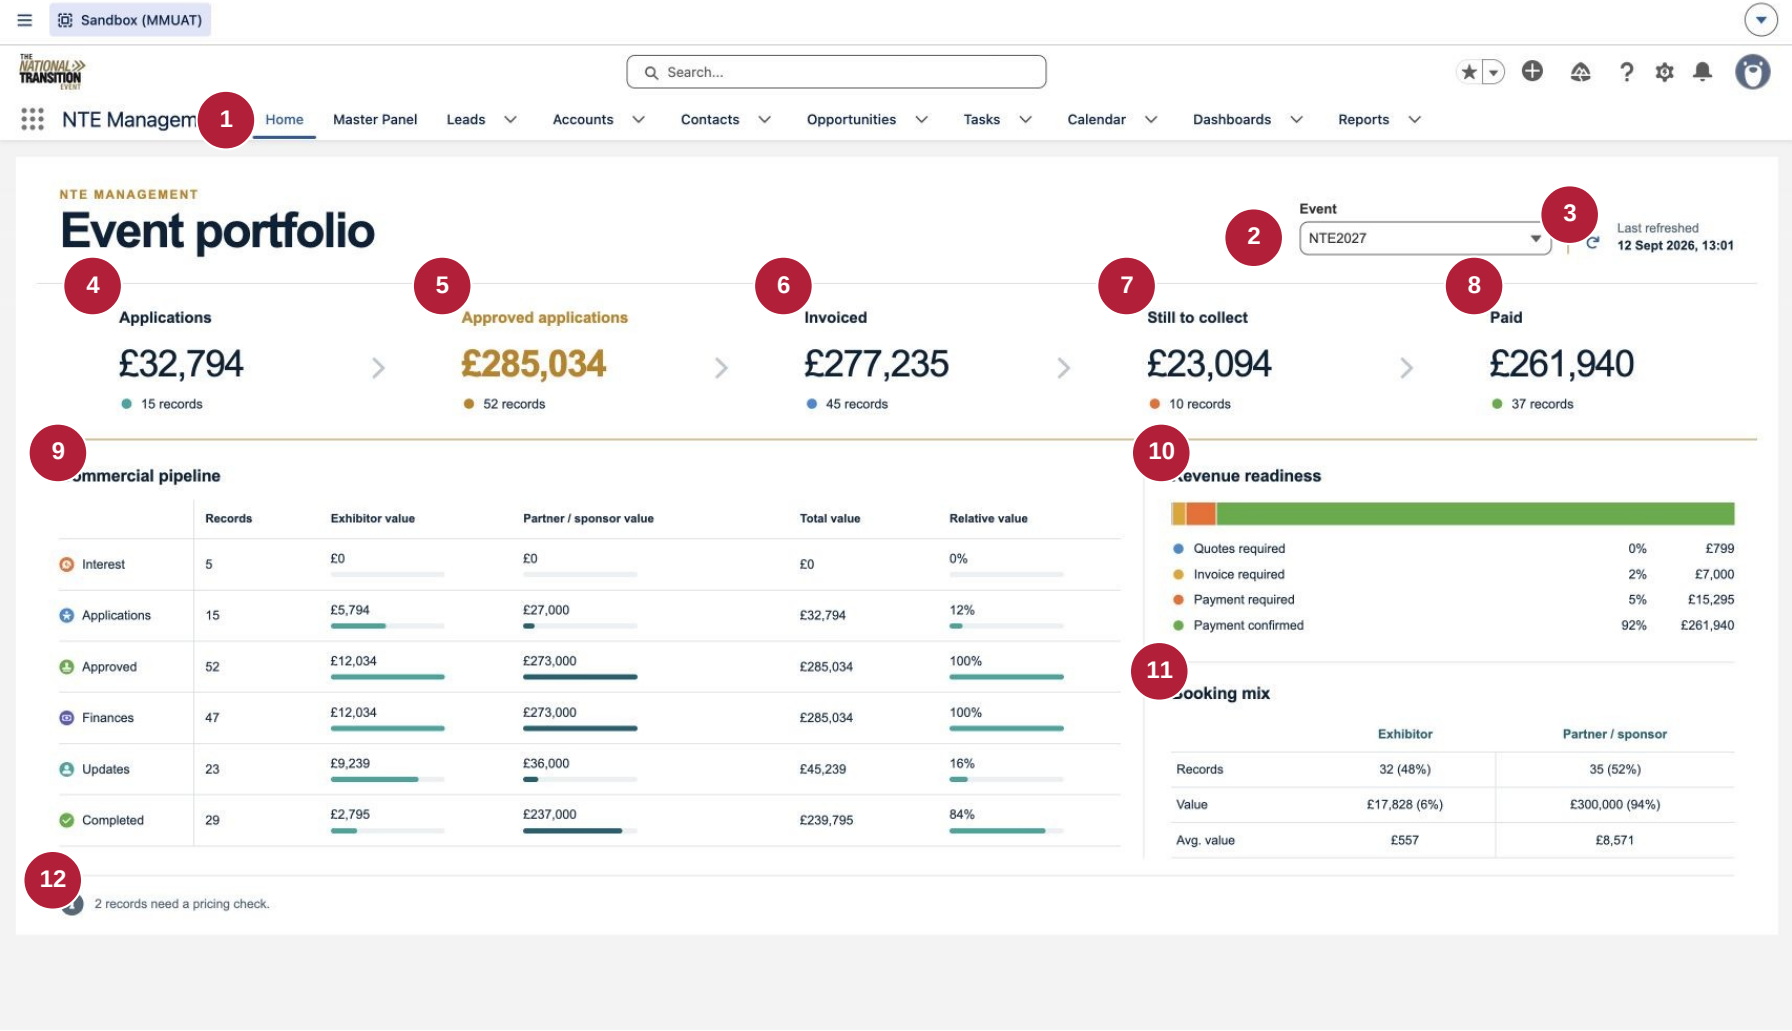

Control labels	Control labels	Control labels
1 Home tab	2 Event selector	3 Refresh
4 Application value	5 Approved booking value	6 Invoiced value
7 Uncollected commitment	8 Recorded paid value	9 Commercial pipeline
10 Revenue readiness	11 Participant mix	12 Pricing review count

Figure 17 Booking details and standard activity tools

The screenshot displays the Salesforce NTE Management interface. The top navigation bar includes links for Home, Master Panel, Leads, Accounts, Contacts, Opportunities, and Tasks. The main content area shows the 'Opportunity' record for 'Fenwick Mobility Systems Ltd - NTE2027'. The 'Details' tab is active, showing a 'Booking and commercial status' section with fields like Account Name, Close Date, Amount, and Opportunity Owner. Below this is an 'Event contacts' section with fields for NTE Event Contact Name, Email, and Job Title. The 'Related' tab is also visible, showing a list of related records. Red circles with numbers 1 through 19 highlight specific UI elements across the interface.

Control labels	Control labels	Control labels
1 Details tab	2 Related tab	3 Follow
4 Edit	5 Clone	6 Change owner
7 Change record type	8 New Task	9 More record actions
10 Collapse field section	11 Inline edit pencil	12 Email action
13 Log a Call	14 New Task action	15 New Event action
16 Activity filter settings	17 Refresh Expand All View All	18 Saved approval email audit
19 Related list quick links		

NTE Salesforce operations and reconstruction

Figure 18 Booking relationships

Sandbox (MMUAT)

THE NATIONAL TRANSITION EVENT

Search...

★

+

🔔

?

⚙️

🔔

👤

NTE Management

Home

Master Panel

Leads

Accounts

Contacts

Opportunities

Tasks

Calendar

Dashboards

Reports

Opportunity

Fenwick Mobility Systems Ltd - NTE2027

+ Follow

Edit

Clone

Change Owner

Change Record Type

New Task

Account Name

Fenwick Mobility Systems Ltd

Close Date

11/06/2026

Amount

£799.00

Opportunity Owner

Steven Skyba

Details

Related

NTE MANAGEMENT

NTE Relationships

ACCOUNT

Fenwick Mobility Systems Ltd

07700 900111https://fenwick-mobility.example

OPPORTUNITY CONTACTS

CONTACT	TITLE	EMAIL	PHONE
Amelia Hargreaves	primary contact	Partnerships Manager	steven.skyba@anthrion.com07700 900111

Contact Roles (1)

Amelia Hargreaves

PRIMARY

Role:

Title:

Partnerships Manager

view All

Products (0)

Add products

Choose Price Book

Quotes (0)

New Quote

Partners (0)

New

Filters: All time • All activities • All types

Refresh • Expand All • View All

Upcoming & Overdue

No activities to show.

Get started by sending an email, scheduling a task, and more.

September • 2026

This Month

NTE booking provisional email - sent

You had a task

Yesterday

No more past activities to load.

Related List Quick Links

Contact Roles (1)

Products (0)

Quotes (0)

Partners (0)

Notes (0)

Files (0)

Stage History (3)

Control labels	Control labels	Control labels
1 Related tab	2 Linked Account	3 Linked Contact
4 Primary role indicator	5 Add Contact Roles	6 Edit Contact Roles
7 Contact Role row menu	8 View all roles	9 Standard Add Products
10 Standard Choose Price Book	11 Standard New Quote	12 Standard New Partner

NTE Salesforce operations and reconstruction

Figure 19 Booking email retry action

Sandbox (MMUAT)

THE NATIONAL TRANSITION EVENT

Q Search...

★

+

🔔

?

⚙️

🔔

👤

NTE Management

Home

Master Panel

Leads

Accounts

Contacts

Opportunities

Tasks

Calendar

Dashboards

Reports

Opportunity

Fenwick Mobility Systems Ltd - NTE2027

+ Follow

Edit

Clone

Change Owner

Change Record Type

New Task

Account Name

Fenwick Mobility Systems Ltd

Close Date

11/06/2026

Amount

£799.00

Opportunity Owner

Steven Skyba

Details

Related

NTE MANAGEMENT

NTE Relationships

ACCOUNT

Fenwick Mobility Systems Ltd

07700 900111 https://fenwick-mobility.example

OPPORTUNITY CONTACTS

CONTACT	ROLE	TITLE	EMAIL	PHONE
Amelia Hargreaves	Primary contact	Partnerships Manager	steven.skyba@anthrion.com	07700 900111

Contact Roles (1)

Add Contact Roles

Edit Contact Roles

Amelia Hargreaves

PRIMARY

Role: Partnerships Manager

View All

Products (0)

Add Products

Choose Price Book

Quotes (0)

New Quote

Partners (0)

New

1

New Event

2

Delete

3

Retry booking email

4

Filters: All time • All activities • All types

Refresh • Expand All • View All

Upcoming & Overdue

No activities to show.

Get started by sending an email, scheduling a task, and more.

September • 2026

This Month

5

NTE booking provisional email - sent

You had a task

Yesterday

No more past activities to load.

Related List Quick Links

Contact Roles (1)

Products (0)

Quotes (0)

Partners (0)

Notes (0)

Files (0)

Stage History (3)

Control labels	Control labels	Control labels
1 More record actions	2 Standard New Event	3 Standard Delete
4 Custom Retry booking email	5 Existing accepted email audit	

28 / 211

Solution architecture

The implementation is an unmanaged Salesforce DX metadata project for Mission Community's National Transition Event and a separate Mission Motorsport volunteer intake. The package API version is 67.0. Its runtime consists of four Lead-triggered Flows, twelve implementation Apex classes, four Lightning Web Components, native Salesforce record pages/reports and ten public Web-to-Lead forms. There is no custom Apex trigger, Apex REST intake endpoint, Experience Cloud site or separate application database in this package.

System boundaries

See diagram 1 in the architecture diagrams that follow

Layer	Responsibility	Maintained source
Public website	Collects declarations, application selections, contact details and supplementary updates; calculates advisory estimates; submits a native HTML POST.	Root HTML pages; assets/config.js; assets/forms.js; assets/styles.css; assets/volunteer-styles.css.
Salesforce intake	Stores each submission as Lead, performs routing/pricing/notifications or schedules supplementary processing.	Four Flows in force-app/main/default/flows; NTEInboundLeadService, VolunteerInboundLeadService, NTEUpdateSubmissionService.
Booking and identity	Standard Lead conversion produces Account, Contact, Opportunity and Contact Role relationships; the conversion Flow adds the NTE booking snapshot.	NTE_Copy_Converted_Lead_to_Opportunity; NTEPricingService; NTEBookingContactService.
Operations	Filters work queues, applies staff decisions and finance milestones, presents reports and relationships.	nteMasterPanel, nteManagementHome, nteRelatedOpportunities; NTE_MasterPanelController; NTERelatedOpportunityController.
Communication	Sends intake receipts, provisional booking emails, reminders, final packs and payment confirmation with distinct audit/retry models.	NTEEmailDispatchService; NTEExhibitorApprovalEmailService; nteRetryEmail; stored email templates.
Payment provider	Creates and verifies booking-specific Stripe Prices and Payment Links. Finance records payment in Salesforce manually.	NTEStripeClient; NTEStripeBookingService; NTE_Payment_Request__c; environment credentials/configuration.
External event operations	Supplies formal invoices/quotes, partner agreements, external logo storage, final-pack content and manual payment/refund reconciliation.	Client-owned services and the configured URLs. These are dependencies, not implemented Salesforce services.

The canonical preview website is <https://stevostar1234.github.io/nte27-web-to-lead-demo/>. It currently posts to MMUAT. The production NTE-hosted website is a separate deployment destination. The repository includes source, generated metadata, browser/email previews, local and Apex qualification code, maintenance scripts and historical release evidence. Historical screenshots, audit fixtures and retired templates are evidence rather than active runtime components.

Physical objects and relationships

See diagram 2 in the architecture diagrams that follow

Object	Purpose and key relationships
Lead	Submission envelope. Main NTE form types and volunteer applications remain Leads until a deliberate commercial application conversion. Supplements carry Target_Booking_Reference__c and are processed independently. ConvertedAccountId, ConvertedContactId and ConvertedOpportunityId identify the exact conversion results.
Account	Reusable organisation. Opportunity.AccountId identifies the organisation for each booking. Five NTE classification fields show the latest classified application; they are not an event-history collection.
Contact	Reusable person. Contact.AccountId is the native organisation link. Six NTE classification fields show latest participation and role label. The Contact's actual name/email are authoritative for booking correspondence.
Opportunity	One event booking under NTE_Event_Opportunity. Stores application snapshot, booking reference, event code, canonical initial price, later staff top-up, readiness, finance milestones and provisional/final-pack audit.
OpportunityContactRole	Standard junction between Opportunity and Contact. Exactly one IsPrimary=true role must resolve for automatic booking correspondence. Other linked Contacts can remain on the booking without becoming recipients.
NTE_Email_Dispatch__c	One queued invitation, reminder, final pack or payment-confirmation request. Optional lookups to Lead, Opportunity and Contact; unique external Dispatch_Key__c. Stores rendered-input snapshot, recipient, kind, outcome and attempt history fields.
NTE_Payment_Request__c	Saved original booking charge and Stripe identifiers. Optional Opportunity lookup; unique external Charge_Key__c. Stores merchant, environment, net/gross minor units, source fingerprint, Price/Link IDs, verification and email-delivery evidence.
NTE_Routing_Config__mdt	Default record holds owner usernames, preparation/application URLs and final-pack edition/URLs. It is configuration, not a transactional booking object.
NTE_Stripe_Config__mdt	Default record holds enablement, merchant/org binding, test/live mode, tax rate and optional scope filters. Credentials are separate.
Task	Native activity records retain provisional booking email outcome against WhatId=Opportunity and Whold=Primary Contact. Other standard tasks/calendar activities are user managed.

Custom dispatch lookups use SetNull on parent deletion; they are not master-detail relationships. The payment-request Opportunity lookup also uses SetNull. Their object-level sharing model is ReadWrite. Reference strings and saved Lead/booking ID text fields are deliberately different from Salesforce lookup relationships. A reference match must be unique within the eligible booking set before any update occurs.

The booking reference is an 80-character Text external ID on both Lead and Opportunity. Both objects enforce case-insensitive uniqueness within their own records. Server matching also rejects ambiguity defensively. Browser generation uses NTE- plus a millisecond timestamp and eight characters from an unambiguous alphabet. Server update matching trims and uppercases the reference and rejects ambiguity. The reference is a matching identifier, not an authenticated user session. Event code is a separate field; it is not embedded into the reference grammar.

Event-day contact fields, secondary-contact fields and invoicing-contact fields on the booking are snapshots of operational information. They do not create additional Contacts automatically and are not fallbacks for email routing. The initial conversion can reuse an existing Contact. Subsequent correspondence intentionally follows the current Primary Contact, subject to the queued message's change-detection rules.

Intake and conversion sequence

See diagram 3 in the architecture diagrams that follow

1. The website synchronises conditional/derived fields, validates the form and submits to `servlet.WebToLead`. Hidden control names are native standard names or target-org custom field IDs.
2. Salesforce creates a Lead. Create-only NTE or volunteer Flow invokes its matching service. The service resets untrusted workflow/audit flags for a new submission, then performs only the relevant intake work.
3. `NTEPricingService` recalculates commercial application values from its server catalogue. Browser price fields are advisory. Applicant and internal notification results are recorded separately; the two commercial application types have no applicant intake receipt.
4. An operator converts an approved application using the standard Salesforce screen. The conversion Flow starts only when `IsConverted` becomes true, `ConvertedOpportunityId` is populated and `Web_Form_Type__c` is one of the two commercial application types.
5. The Flow calls `priceApplicationsForConversion` and receives a priced Lead value in `Priced_Application`. It looks up the NTE Opportunity RecordType by `SubjectType` and `DeveloperName`, updates the exact converted Opportunity, then queues the provisional/complimentary email. It classifies the converted Account and Contact in the same transaction.
6. The background booking worker resolves the exact saved converted Lead and current Primary Contact. For an enabled Stripe booking, payment work runs first and the verified link is included. For manual-payment or complimentary bookings, the corresponding stored template is rendered directly.
7. Salesforce acceptance records the email audit and activity. A failure leaves a visible, recoverable booking email status. It does not repeat conversion or silently select another booking.

No Flow changes the org-wide Lead conversion mappings. The full field-to-field assignments appear in the conversion mapping reference. Standard conversion determines the native organisation, person, Contact Role, Opportunity name, owner and initial stage/date choices; the NTE Flow supplies its additional snapshot and Amount. In particular, it does not set Closed Won to mean approved or paid.

Supplementary submission sequence

See diagram 4 in the architecture diagrams that follow

`NTE_Supplementary_Update_Handler` accepts Partner / Sponsor Staff Update, Exhibitor Staff Update, Heavy Vehicle Details and Logo Update on Lead creation. It calls `applyUpdates`, which resets the new update status and saved applied-booking identity, then schedules `NTEUpdateSubmissionJob` after the Lead commits. The job passes the exact Lead IDs to `processLeadIds`.

Submissions are processed in `CreatedDate` and ID order. The matching index contains supported commercial NTE Opportunities with nonblank event codes and matching references; it does not exclude Closed Lost. A malformed reference is Failed, no match is No Matching Booking, and more than one match is Ambiguous Booking Reference. An invalid payload is Failed with an error. These paths preserve the Lead and do not mark the booking complete.

Valid mutations and Matched and Applied audit are saved together behind a savepoint. The Lead receives the matched event code, saved booking ID and processing result. For multiple updates to one booking in

the batch, the in-memory booking is updated after each accepted change so a second top-up cannot bypass the first purchase. Unexpected DML errors roll back the batch's booking/audit writes and retain failure information.

Acknowledgement is a separate phase after successful application. Staff and heavy-vehicle receipts use Lead merge data but the booking's actual Primary Contact email as the explicit recipient. A missing contact or send failure does not undo accepted data. Successful receipts normally permit deletion of those temporary Leads; deletion failure can leave a successfully processed Lead. Logo submissions are retained and send no receipt. An applied Lead's receipt retry verifies its saved booking identity and original reference, so editing the reference cannot retarget the receipt to another booking.

Transaction and processing boundaries

Boundary	Coupled effects	Recovery semantics
Initial Lead intake	Email acceptance and Lead email-audit fields are coupled using a savepoint.	Failed audit persistence rolls back that send attempt and leaves retryable failure. Accepted applicant/internal messages are not repeated during a later service retry.
Conversion	NTE Opportunity copy, saved provisional request and Account/Contact classification participate in the conversion transaction.	Background work starts after commit. A stored batch key and exact Lead/Opportunity pair prevent unrelated bookings being selected.
Supplement application	Booking changes and applied update audit are one savepoint unit.	Receipt failure preserves accepted booking changes. A receipt retry never applies those changes again.
Dispatch worker	Salesforce send results, dispatch status and invitation/final-pack source status are saved in the worker transaction.	Unhandled failures roll back the worker and a finalizer records failures for still-queued requests.
Stripe callouts	External objects can exist before the final Salesforce save succeeds.	Stable operation keys and saved IDs recover the same request. Source/configuration changes or an old ambiguous operation require reconciliation.
Manual payment action	Payment fact is saved before confirmation preparation is attempted.	A notification error cannot undo the payment milestone. The failed confirmation has its own recovery route.

Edition behaviour

For public NTE forms, April to December selects the following year's edition; January to March selects the current year. The default timezone is Europe/London. A nonblank eventCodeOverride must be NTE followed by four digits and overrides the date calculation. The script recalculates edition at submission and pageshow, so a browser tab left open across the April boundary uses the new edition. A booking reference already generated in that tab is retained.

New or changed main-intake Lead edition/type values are checked by NTE_Intake_Event_Code. The rule does not retroactively invalidate unrelated edits to historical Leads. Supplementary forms match the booking reference and adopt the booking's event code, even if the website's current edition differs. Application invitations use reusable participant URLs and are not gated by the interest's year. Final packs are gated by the routing record's Final Pack Event Code.


NTE27 in current public/email display copy is separate from functional NTE_Event_Code__c. A new edition therefore needs a deliberate content/catalogue review as well as the automatic code rollover. Stripe descriptions for newly created requests are year-neutral. Saved historic descriptions, prices and milestones are not automatically rewritten.

Documentation conventions

The workflow, implementation, data dictionary and reconstruction sections separate operating instructions from technical reference. Diagrams use a bounded purpose, labelled components and explicit direction; the data model names both logical entities and physical APIs and identifies relationship cardinality. These conventions follow Salesforce's published diagram guidance and data-model notation. [How to Build Salesforce Diagrams](#) and [Salesforce Data Model Notation](#).

Explanations connect each custom component to its purpose, data changes and dependencies, consistent with Salesforce Admins' guidance on documenting why an implementation exists and how it works. Salesforce's guidance supplies conventions rather than a single mandatory Word template or a certification for this document. [How to Write Great Documentation to Help with Future Problem Solving](#).


Diagram 1 System context

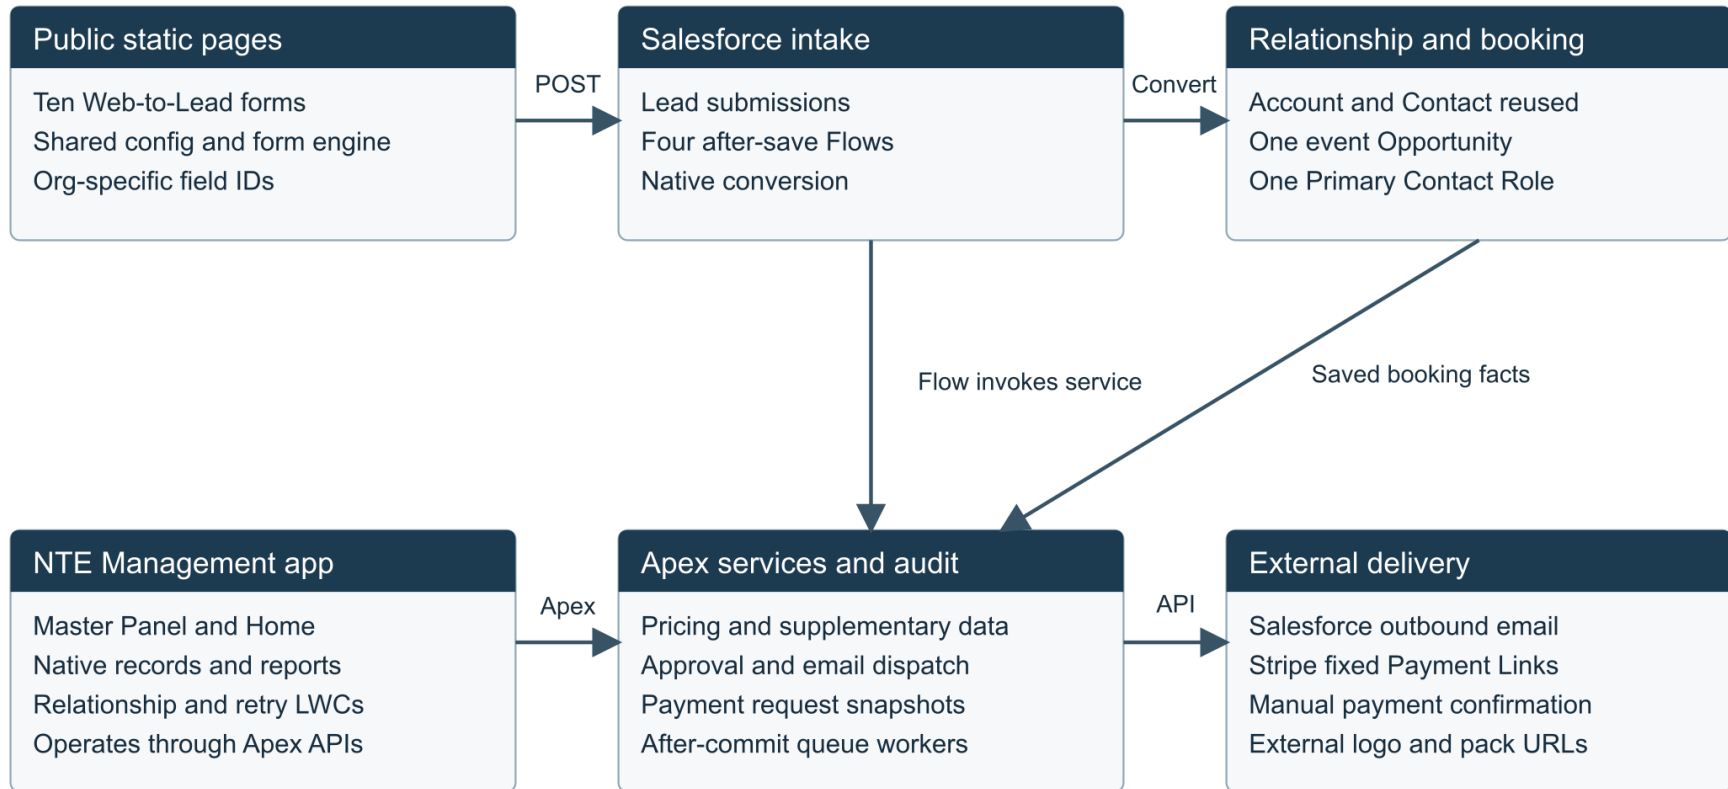

Outside the integration: general attendee ticketing, quote/invoice creation, refunds and binary logo storage.

Custom metadata holds destinations and merchant selection; protected external credentials hold the API key.

Diagram 2 Data relationships

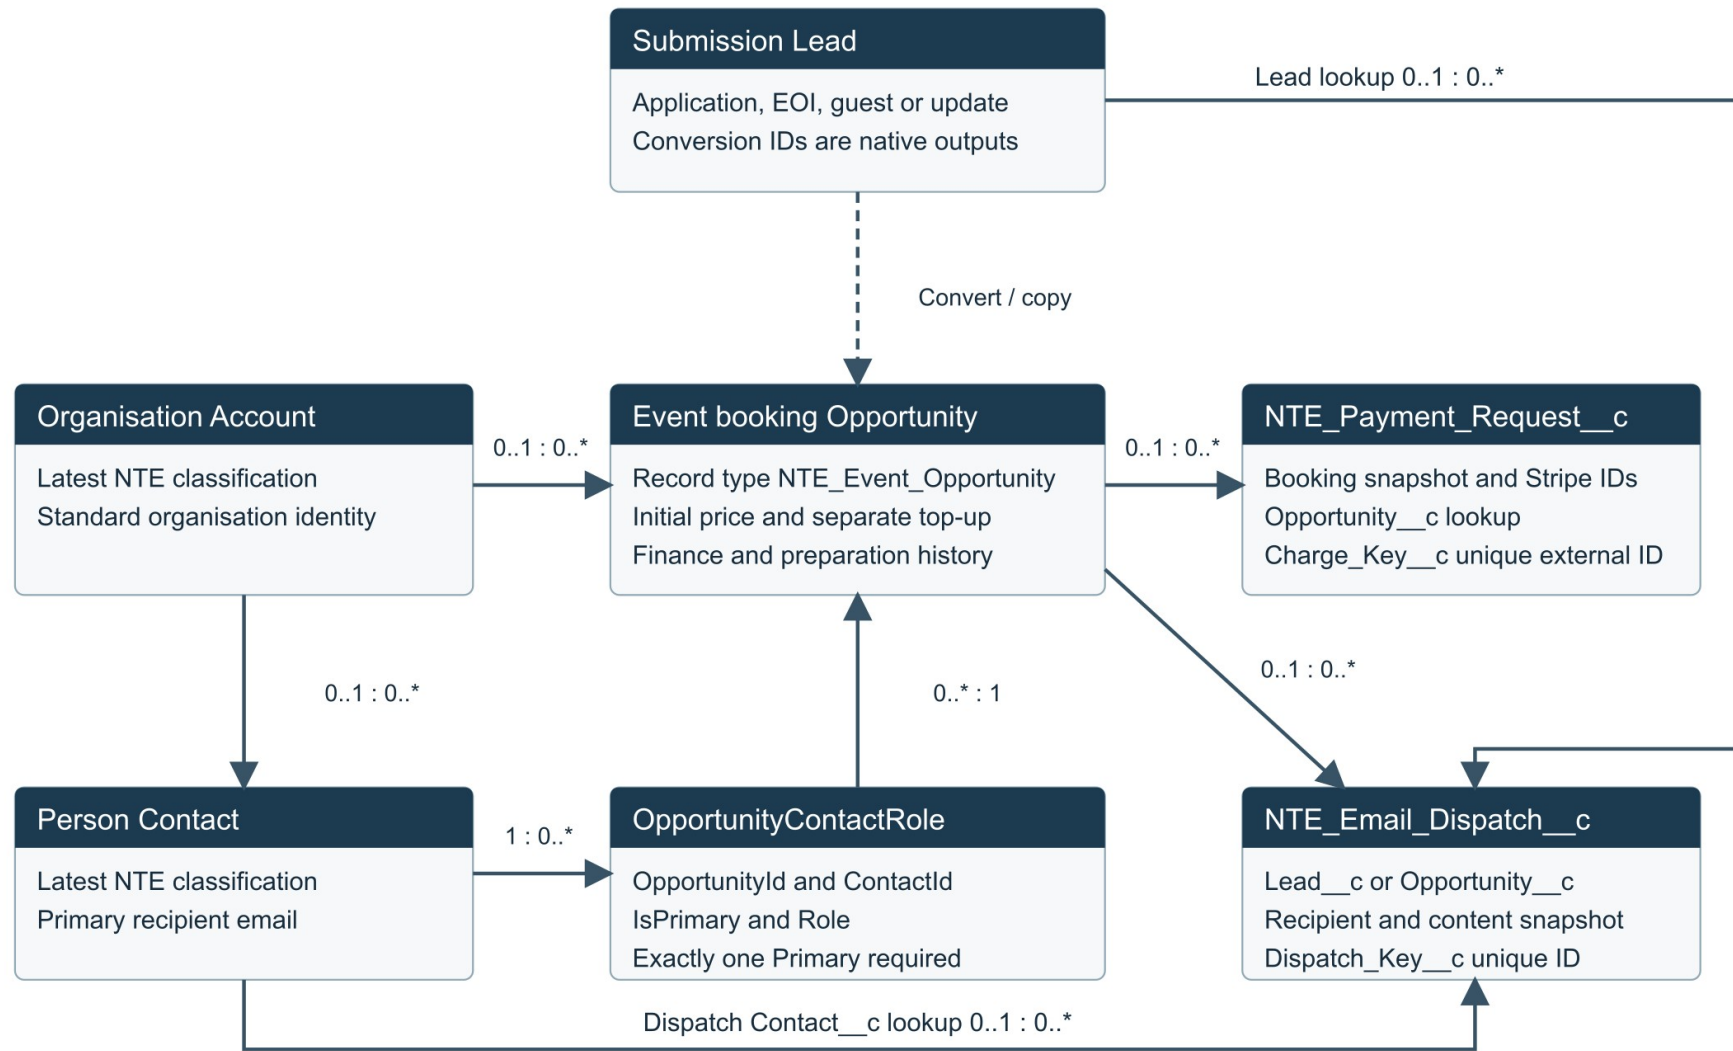

Lookup deletion is SetNull for custom audit relationships. Dotted line denotes conversion, not a lookup.

Default routing and Stripe configuration are custom metadata records; runtime resolves them by name.

Cardinalities read from the first named endpoint to the second along each arrow. Lookup fields can be empty at schema level; service rules impose the documented source and Primary Contact invariants.

Diagram 3 Conversion and booking email sequence



First manually recorded base payment later queues one distinct booking-confirmation dispatch.

Diagram 4 Supplementary submission sequence



Invalid or ambiguous requests remain auditable Leads. A receipt retry never reapplies booking changes.

Pricing and finance rules

The catalogue version is NTE27-2026-09-10. Lead and Opportunity catalogue/reporting amounts are GBP excluding VAT; the payment request separately stores net and gross pence. NTEPricingService is authoritative; assets/forms.js mirrors its catalogue for immediate estimates. The form's exact option values, metadata picklists and Apex allowlists must agree. A label containing a price is a selection key, not a string from which the server parses an amount.

Initial booking calculation

Partner / sponsor applications sum the distinct selected Sponsor_Package__c values, separated by semicolons. Empty, duplicate, removed or unknown selections require review. Planned staff must be a whole number from 1 to 99. Partner staff and power do not add prices in this catalogue. All selected package prices are combined into Sponsor_Package_Total__c and Listed_Price_Total__c.

Exhibitor applications select exactly one known Exhibitor_Space_Selections__c and a recognised active Exhibitor_Organisation_Category__c. Restricted spaces require their exact eligible category. A double garage or double zone includes four staff; every other current space includes two. Planned staff is a whole number from 1 to 99. Additional staff equals $\max(0, \text{planned} - \text{included})$, at £50 per person. Planned count entered on the form is authoritative over submitted hidden derived totals.

Power required Yes requires a whole socket count from 1 to 20. Each additional socket is £100, or £50 for the five exact qualifying categories. No clears chargeable socket quantity/value for pricing, even if a stale submitted socket count exists. A garage selection described as including power still permits additional sockets; the website explains that distinction. The base garage price already includes its stated standard power provision.

Exhibitor total = space price + socket quantity × socket unit price + additional staff quantity × £50. Sponsor package total is zero on an exhibitor result; exhibitor, power and additional-staff components are zero on a partner result. Unit prices are zero where the corresponding charge is not applicable. Invoice Required is Yes for a positive calculated total, otherwise No. Unsupported or incomplete input produces Review required instead of a fabricated free booking.

Partner and sponsor catalogue

Exact package value	Net GBP
Headline Partner	30000
Gold Partner	15000
Premier Partner	7000
Champion Partner	2000
Zone Sponsor	5000
Community Stage Sponsor	6000
Podcast Corner Sponsor	6000
Event Guide Sponsor	5000
Delegate Tote Bag Sponsor	5000
Helmet Bay Sponsor	3000
Auditorium Sponsor	5000

Exact package value	Net GBP
Live Stream Sponsor	6000
Wristband Sponsor	3000
Escapade Sponsor	9000

Exhibitor space catalogue

Exact space value	Net GBP
Garage Space - reduced size with power - £599 + VAT	599
Single Garage - Paddock Side with power - £799 + VAT	799
Double Garage - Paddock Side with power - £1,299 + VAT	1299
Single Garage - Track Side - £799 + VAT	799
Double Garage - Track Side - £1,299 + VAT	1299
Clean Energy Zone - Single - £499 + VAT	499
Clean Energy Zone - Double - £849 + VAT	849
Built Environment Zone - Single - £499 + VAT	499
Built Environment Zone - Double - £849 + VAT	849
Manufacturing Zone - Single - £499 + VAT	499
Manufacturing Zone - Double - £849 + VAT	849
Defence & Security Zone - Single - £499 + VAT	499
Defence & Security Zone - Double - £849 + VAT	849
Digital and Technologies Zone - Single - £499 + VAT	499
Digital and Technologies Zone - Double - £849 + VAT	849
FM Zone - Single - £499 + VAT	499
FM Zone - Double - £849 + VAT	849
Professional & Financial Zone - Single - £499 + VAT	499
Professional & Financial Zone - Double - £849 + VAT	849
Training & Education Zone - Single - £499 + VAT	499
Any other business - Single - £499 + VAT	499
Any other business - Double - £849 + VAT	849

Exact space value	Net GBP
Local Government Authority - Single - £249.50 + VAT	249.50
Blue Light - Single - £249.50 + VAT	249.50
Trade Association - Single - £499 + VAT	499
COBSEO Charity - Single - Free	0
Non COBSEO Charity - Single - Free	0

Discounted power categories: Charity - member of Cobseo; Charity - not a member of Cobseo; Government or Government Agency; Local Government or LG related; Employer - Blue Light & NHS.

Saved conversion price

The conversion operation recalculates from the current application's selections and planned count immediately before copying. `priceApplicationsForConversion` returns one `ConversionPricingResponse` per requested Lead in the same order and makes no Lead DML. The Flow copies the returned component totals, status, version, included/initial/total staff and invoice requirement, and sets `Opportunity.Amount` to the returned listed total. The original application Lead's saved older estimate can consequently differ from the converted booking when the catalogue or application selections changed before approval.

`NTE_Initial_Staff_Count__c` captures the number originally purchased, including included and initial additional staff. `NTE_Included_Staff_Count__c` records the package allowance; `NTE_Additional_Staff_Count__c` is the initially charged excess. `NTE_Total_Staff_Count__c` becomes the current total after supplementary updates. These are different quantities and must not be collapsed into one field.

`recalculateLeads` and `recalculateOpportunities` are maintenance methods. They persist recalculated values using partial-save DML. Opportunity recalculation prefers the saved initial count, falls back to planned text if necessary, and fills Total Staff only if it is blank. These methods are not an automatic repricing trigger. Applying them to historical bookings changes their financial snapshot and requires an explicitly scoped migration.

Complimentary bookings and worked examples

Scenario	Calculation	Result
Single track-side garage, two staff, no additional power	$£799 \text{ space} + £0 \text{ power} + £0 \text{ additional staff}$	£799 net. At the current test tax rate of 20%, Stripe gross is £958.80.
Double zone at £849, six staff, one standard-rate socket	$£849 + £100 + (6 - 4) \times £50$	£1,049 net; four staff included and two initially chargeable.
Eligible local-government single space, three staff, one discounted socket	$£249.50 + £50 + (3 - 2) \times £50$	£349.50 net. The space/category pairing and power discount both apply.
Eligible COBSEO charity free space, two staff, no power	$£0 + £0 + £0$	£0 calculated total. Complimentary confirmation on conversion; preparation still required.

Scenario	Calculation	Result
Same charity, three staff and one socket	£0 + £50 + £50	£100 net. Paid provisional workflow applies despite the free space.
Premier Partner plus Zone Sponsor	£7,000 + £5,000	£12,000 net. Partner roster updates do not add staff charges.
Later exhibitor top-up of three places	3 × £50	Separate £150 net top-up; original booking amount and base payment remain unchanged.

Only the exact COBSEO and non-COBSEO charity category/free-space pairings qualify for immediate complimentary confirmation, and only with Calculated status and total zero. A zero or missing value in another configuration is not sufficient. Payment-confirmation rendering also verifies saved itemisation: each priced line must have a valid whole quantity/unit/total relationship, components must be nonnegative, totals must agree, and a populated Opportunity.Amount must match the base listed total.

The 20% VAT rate above is the current owner-sandbox configuration. Production tax policy and worked totals require the client's final value. VAT does not alter Opportunity.Amount or the panel's ex-VAT reporting; it is added to the fixed Stripe request's gross amount.

Staff top up invariants

The first valid positive exhibitor top-up fixes the additional purchased quantity. Its names can be corrected later, including within a repeated submission, but its quantity cannot be increased or reduced through the public update path. A No answer on a later form preserves an existing positive purchase. Initial and top-up rosters are concatenated with newlines; the combined stored list cannot exceed 32,768 characters. Each individual count is limited to 99, so the current implementation can hold up to 198 combined initial-plus-top-up attendees when both component counts are valid.

Only the first positive top-up sets Top Up Invoice Required, unit price and total, and resets the separate top-up invoice/payment flags and stamps. Correcting names preserves those finance facts. The initial booking price, invoice and payment never become the top-up fields. Partner staff updates replace the final roster and headcount without creating a top-up price. They do not enforce package-specific staffing allowances beyond the general count rules.

Finance predicates

Predicate	Exact business rule
Known pricing	Listed total is nonblank and nonnegative, with status Calculated; or legacy blank status with a strictly positive listed total. Blank-status zero, negative, missing or non-Calculated pricing requires review.
Base billable	Invoice Required is Yes, or listed total is positive, or pricing requires review. The last condition keeps unknown amounts in visible finance work.
Top-up billable	Top Up Invoice Required is true or top-up total is positive.
Quote resolved	Quote Required for PO is not Yes, or Quote Provided is true.
Invoice required view	Pricing review, or a resolved quote plus an outstanding base/top-up invoice.
Payment required view	Known pricing and either base invoice provided with base payment outstanding, or completed/not-applicable base payment plus provided top-up invoice with top-up payment outstanding.

Predicate	Exact business rule
Payment confirmed view	Known pricing, at least one billable charge, and all applicable invoices and payments recorded. A free booking is not a paid booking.
Completed	Known pricing; quote resolved; all applicable finance complete; staff timestamp populated; logo flag true; logistics No or Yes with a completion timestamp.

The controller uses both in-memory predicates and matching SOQL clauses for rows/counts. Native list views use NTE_Pricing_Ready__c, NTE_Finance_Invoice_Due__c, NTE_Finance_Payment_Due__c and NTE_Finance_Payment_Confirmed__c formula fields to keep their filters within native list-view limits. Their complete formulas are in the field reference. NTE_Confirmed_Value__c represents known base plus top-up committed value, not payment received; use payment flags and paid-value calculations for collections.

Stripe booking contract

NTEStripeBookingService selects supported positive-net Stripe bookings when the Default configuration is enabled and any optional reference scope matches. It binds the request to the exact Salesforce organisation, Stripe merchant and test/live environment. Existing saved requests remain subject to those checks even when ordinary scope filters later change. A booking outside the enabled selection follows the existing manual provisional route when no saved Stripe request exists.

The charge key is OrgId:OpportunityId:Booking. Charge_Key__c is a unique external ID. The saved request records the source Lead ID, booking reference, Primary Contact recipient, net minor units, tax rate, gross minor units, GBP currency, merchant, environment and a fingerprint of the relevant source/configuration. Description is NTE booking · followed by the booking reference. Source or recipient changes can invalidate that snapshot; the code does not silently mutate an already issued amount.

Gross = net + round(net × tax rate ÷ 100, 2), using HALF_UP rounding. Minor units are integer pence. The HTTP client validates a positive amount with no more than two decimal places, minimum 30 pence and maximum 99,999,999 pence. It pins Stripe API version 2026-08-26.dahlia and uses a 20-second callout timeout.

Call	Request and verification
GET /v1/account and GET /v1/balance	Verify expected merchant and live/test mode before creation. Live mode additionally requires charges_enabled.
POST /v1/prices	Currency gbp, fixed gross unit_amount, tax_behavior=inclusive, product_data[name]=saved description, and operation/reference/kind metadata. Idempotency key is the saved operation key plus :price.
POST /v1/payment_links	Exactly one verified Price, quantity one, card method, no adjustable quantity, promotion codes, automatic tax or Stripe invoice creation. Billing address collection auto; customer creation if_required; completed sessions limited to one. Metadata is copied onto the link and PaymentIntent. Idempotency key ends :link.
GET /v1/payment_links/{id} and its line_items	Verify mode, active status, allowed URL, all fixed settings, metadata, one line item, quantity, Price identity/currency and exact subtotal/total before emailing.

Payment URLs must be HTTPS on buy.stripe.com with the expected test_ or live path form and no query, fragment, userinfo or alternate port. A saved Ready link must have been verified within five minutes and still match the booking before email. A new ambiguous creation attempt older than 23 hours is held for

review rather than risk creating another link outside the recovery window. Each chained worker processes one request, then resumes the corresponding booking email and remaining batch.

The low-level Stripe client recognises Booking and Staff top-up charge kinds, but the released coordinator creates Booking requests only. Public staff top-ups use the manual Salesforce finance milestones; they do not automatically create another Stripe link. There is no webhook updating payment, refund or dispute state in Salesforce. Link completion, Stripe receipts and payouts must be reconciled operationally. Turning off the integration or setting Closed Lost does not deactivate an already issued Stripe link.

Runtime implementation

Persisted processing states

The status fields below represent different operations. Do not infer that a payment is collected because a request is Ready, that an update failed because its receipt failed, or that a booking is complete because an email is Sent. Several audit statuses are stored as Text, so the service's exact strings are part of the implementation contract.

Operation	Stored states and transitions
Initial NTE or volunteer receipt and internal notice	Not Attempted becomes Accepted by Salesforce or Failed independently for each side. The retired commercial applicant receipt uses Not required. Only unaccepted required sides are retried.
Supplementary data application	New work is Pending. It becomes Matched and Applied, No Matching Booking, Ambiguous Booking Reference or Failed. Matched and Applied can coexist with a failed applicant-email status.
Provisional or complimentary booking email	Saved request is Pending, then Sent or Failed. Sent is not resent; a failed eligible booking can save another Pending attempt through its supported retry action.
Editable or paid-confirmation dispatch	Queued becomes Sent, Failed or Skipped. Failed retries reuse the saved dispatch identity; Skipped reflects a now-ineligible or changed reviewed target. Invitation and final-pack source fields mirror their dispatch outcome.
Stripe payment request	A saved request is Queued, then Ready or Needs review. A retry can reuse the same request/resources and reverify them. Ready requires a valid snapshot and recent verification before email; Delivered At records accepted email, while manual Opportunity flags record payment.

The method catalogue later in this document lists every extracted implementation method and constructor with its signature, source line and responsibility. This chapter explains the collaborations and algorithms that those methods implement. Test-only switches are dependency seams for qualification, not production configuration.

Primary Contact resolution

NTEBookingContactService uses inherited sharing and accepts an explicit AccessLevel. primaryContacts resolves only OpportunityContactRole rows with IsPrimary=true. singlePrimaryContactIds removes any booking with more than one such role, including duplicate role rows pointing to the same Contact. It returns no recipient for that booking. The service then loads the actual Contact records, optionally locking roles and Contacts. Send workflows lock the Opportunity first, then resolve/lock the contact relationships so a concurrent recipient change cannot silently redirect a queued message.

The result is a Map keyed by Opportunity ID. It contains Contact name, email, phone and mobile values. Panel display prefers Phone then MobilePhone. The service does not invent a recipient from Account, an event-day email or a Lead. NTERelatedOpportunityController uses the actual Account/Contact Role graph to display related bookings; Account mode and Contact mode intentionally use different relationship queries.

Initial NTE and volunteer intake

NTEInboundLeadService is a create/retry service called through Request.leadId and Request.isNewSubmission. It locks unconverted supported Leads and only resets public-submitted email/decision flags for a new submission. A transaction-level processed set prevents repeat work on the same Lead. A later retry preserves invitation/rejection decisions and previously accepted applicant/internal messages. NTERouting Default usernames are resolved to active Users per form route; a configured invalid owner records an internal failure instead of notifying an arbitrary fallback. With no configured override, the existing active user owner is used; queues do not provide an individual internal-email recipient.

An applicant message renders against the Lead and targets Lead.Email. The internal message uses the same Lead merge context, sets treatTargetObjectAsRecipient=false and supplies the chosen owner's email explicitly. EOI and guest routes have both templates. Commercial application routes have only the internal template. A null applicant template produces the recorded Not required outcome and stays suppressed during internal retry.

The Sender interface isolates Messaging.sendEmail. Pending messages are sent together within the available platform invocation budget, with result positions mapped back to their exact Lead and audience. Missing result entries, rejected messages, exceptions and exhausted budget become per-message failures. writeAudits persists the separate statuses and combined error text. dispatchAndRecord uses a savepoint so accepted-send audit failure can cancel that attempt before recording retryable failure.

VolunteerInboundLeadService applies the same applicant/owner acceptance pattern to Leads whose Web_Form_Type__c and LeadSource both equal Volunteer Application. It uses Volunteer_Applicant_Email_Status__c, Volunteer_Internal_Email_Status__c and Volunteer_Email_Error__c, its own pair of Mission Motorsport templates and the current active Lead owner. It does not run NTE pricing or NTE metadata owner routing.

Provisional and complimentary booking emails

NTEExhibitorApprovalEmailService retains its historical class name but handles both commercial participant types. sendApprovalConfirmation accepts exact Lead/Opportunity pairs from the Flow. saveRequests rejects mismatches and already sent/pending work, preserves legacy activity evidence that would imply an earlier send, and saves Pending, source Lead ID, batch key, requested timestamp and requesting user. Requests from the same transaction coalesce under one random batch key and Queueable.

ApprovalQueueable attaches ApprovalFinalizer, asks NTEStripeBookingService to prepare selected payment requests, and otherwise drains pending bookings in pages of 40. Sending is performed in groups of ten messages. A chained job continues remaining work. A failed job's finalizer marks only still-pending bookings in its own batch as Failed; it does not touch another conversion's requests.

Each send loads the saved converted Lead, verifies its ConvertedOpportunityId and form type, resolves the current Primary Contact, validates reference, stored price and preparation configuration, then renders the matching stored template against Contact and Opportunity. renderBookingEmail replaces explicit NTE_TOKEN comment markers with an itemised finance summary and the appropriate action links. Missing or unresolved markers fail the message rather than display template syntax. plainTextFromHtml preserves visible paragraphs, rows and link destinations while removing CSS/head/script/hidden preheader text.

Exhibitor and partner provisional templates provide their respective staff form, logo confirmation and vehicle form when logistics is not explicitly No. An eligible zero-price charity uses

NTE_Complimentary_Exhibitor_Approved. Payment-confirmation rendering reuses this presentation pipeline but requires base invoice/payment recorded, positive valid pricing and preparation links; a saved Stripe request must still agree with the current net amount. Paid rendering does not generate another Payment Link.

Successful acceptance stamps the booking's sent time and actual recipient and adds an outcome Task. Stripe's recordEmailAccepted additionally records invoice/link delivery and the payment request's Delivered_At__c and Recipient__c, without recording payment. A failed provisional remains recoverable through the Opportunity action. That recovery requires exactly one qualifying converted application for the booking, cannot resend Sent or Pending, and does not undo any other milestone.

Editable invitations reminders and final packs

NTEEmailDispatchService implements an exact-selection email queue. Kind values are INVITATION, STAFF_DUE, HEAVY_DUE, LOGO_DUE, FINAL_PACK and BOOKING_CONFIRMED. BOOKING_CONFIRMED is reserved for the payment transition and cannot be prepared through the editable bulk composer.

buildDraft validates 1 to 500 IDs of the correct object type, resolves current eligibility and returns a random run ID, editable subject/body, recipient rows, eligible/skipped counts and a first preview. A Selection contains recordId and fingerprint. DraftRequest carries kind, runId, subject, messageBody and those selections. The browser uses JSON boundary methods because they preserve the exact selected payload. deserializeStrict rejects unknown properties; request JSON is limited to 300,000 characters, subject to 255 without line breaks, and body to 32,000. The run ID must be 16 to 64 alphanumeric/underscore/hyphen characters. Duplicate recipient IDs and unknown tokens are rejected.

Allowed tokens are {ContactName}, {Organisation}, {BookingReference}, {EventCode}, {UpdateLink}, {ApplicationLink} and {FinalPackLink}. Personalisation is one pass; recipient data that happens to resemble a token is kept literal rather than expanded again. HTML output escapes editable and recipient text. Missing reference/event/action link content is appended where required by the template. The worker verifies expanded subject/body limits as well as the raw editable limits. Aggregate heap estimation includes the escaped personalised HTML and serialized payload, so a large individually valid message/selection can require a smaller audience.

The fingerprint includes message kind, record/participant identity, current contact/company/email, reference, event and chosen link. Booking confirmation also includes the booking snapshot used to render its financial content. queueMessages rereads and locks the selected records and excludes changed or ineligible recipients. Dispatch_Key__c is a SHA-256 of kind, run ID and source record ID. The same queued selection is idempotent; a separately reviewed reminder run is allowed while that preparation remains outstanding.

DispatchQueueable processes at most 40 saved dispatch IDs per page and chains the rest. It rechecks eligibility and fingerprint after queueing. Each message result updates only its own dispatch. A changed recipient or completed requirement produces Skipped; a booking-confirmation problem remains Failed so the saved payment has a visible recoverable notification. updateSourceStatuses synchronises only invitation and final-pack status, recipient and sent time. Sent is not demoted by a later failure, and a queued request cannot be replaced by a second draft for the same target/kind.

retryFailed takes only Failed dispatch records. It reuses their IDs and selection snapshot, rejecting changed eligibility/recipients rather than silently sending to someone new. Booking-confirmation retry is the deliberate exception: it rebuilds the current valid booking/Primary Contact snapshot after repair. queueBookingConfirmation uses a stable kind plus BOOKING_PAYMENT plus Opportunity key, so the

first base payment transition creates at most one automatic request. Existing Failed needs retry; existing Sent is not repeated. Finalizers record still-queued failures after an unexpected worker rollback.

Supplementary validation and mutation

NTEUpdateSubmissionService validates the form's supported audience before changing a booking. Partner staff updates must target a Partner / Sponsor Application; exhibitor staff updates must target an Exhibitor Application. Non-logo forms require a supplied declaration name and date. Staff forms check integer ranges and nonblank line counts. Exhibitor logic compares against the saved initial quantity and any accepted top-up before calculating the new roster. Numeric legacy values must be valid whole numbers; invalid historic text cannot be rounded into an allocation.

Heavy-vehicle validation requires the supplied main/secondary contact fields, delivery window, first item and haulier fields expected by that form. The form field reference lists each required control. applyHeavyFields copies the delivery/item/haulier values only, replacing the full logistics snapshot. applyLogoFields changes the logo flag and sets its timestamp only when first provided or missing; repeated confirmation preserves an existing date.

sendAcknowledgements resolves applicable stored templates and actual primary emails. At most 100 acknowledgement messages are supported in this phase. A larger set records an actionable receipt failure for the accepted updates rather than pretending to send a subset. Receipts are sent in groups of ten. retryAcknowledgement uses user-mode access and a locked Lead to retry one accepted update's receipt. It neither changes the booking again nor deletes the Lead during that explicit retry.

Master Panel and Home controller

NTE_MasterPanelController builds DashboardResponse from event/owner options, filtered counts, pipeline and breakdown models, view definitions and paged DashboardRow values. Lead base filtering requires a nonblank event code; Opportunity base filtering additionally requires NTE_Event_Opportunity, a supported commercial source type and an open or Closed Won booking. Today/rolling date filters use CreatedDate. Counts are independent COUNT queries over the complete matching population; displayed rows are capped at 2,000 and sliced after deterministic modification-date/ID sorting.

For each booking row the controller derives billability, eligible next actions, finance status, staff/logistics/logo status, completion and actual Primary Contact. It queries successful reminder history for only the current page. A Lead row derives invitation/rejection/conversion state without treating a converted or rejected submission as a new application. WorkQueue DTOs provide the named native report/list destinations; reports are looked up by DeveloperName rather than fixed Salesforce IDs.

updateLeadDecision locks and validates an open in-scope Lead, then writes only the appropriate rejection flags. updateMilestone locks a valid booking, verifies pricing and ordering, and stamps the exact requested finance fact. Both use USER_MODE. getCommunicationRecordIds returns up to 501 IDs as an explicit over-limit sentinel and rejects stale/invalid communication filters instead of broadening the audience. getUpdateEmailIssues finds applied update Leads with failed receipts by booking reference, including submissions whose original website edition differs.

getHomeDashboard calculates commercial metrics from the selected edition, keeping base and top-up monetary facts separate. Unknown prices contribute no amount and increase the pricing review count. The displayed Home rows overlap as described in the workflow chapter. getReminderDraft remains a compatibility/read helper with its historical 100-recipient limit; sendUpdateReminders is deliberately disabled and instructs callers to use the recipient preview. The current LWC uses NTEEmailDispatchService, whose reviewed recipient limit is 500. Legacy reminder Task/personalisation helpers do not constitute another active send path.

Lightning components

Bundle	Exposed surface	Behaviour and integration
nteMasterPanel	Lightning tab / app page / home page targets declared in its bundle metadata.	Imperative getDashboard loads the panel. STAGE_CONFIGURATION maps six stages to combined/refined view keys. Row decoration controls column sets, amount meanings, action visibility and contact links. Calls the decision/milestone services and exact-selection email JSON APIs.
nteManagementHome	Home page.	Imperative getHomeDashboard populates headlines, pipeline, readiness and booking mix. Formats GBP and en-GB dates, scales comparison bars and shows pricing-review count. Event change/refocus refreshes the data.
nteRelatedOpportunities	Record pages with recordId and objectApiName.	Reactive @wire calls getRelationships. Account/Contact display booking lists; Opportunity displays account/contact relationships. Native record URLs and email links are built from returned data.
nteRetryEmail	Headless record action.	@api invoke chooses booking retry for 006 Opportunity IDs, supplementary receipt retry for 00Q Lead IDs, otherwise dispatch retry. Its running flag prevents duplicate invocation; it reports the service outcome and refreshes the record cache.

nteMasterPanel invalidates stale asynchronous responses using separate dashboard, composer and preview sequences. Refocus refresh is delayed 150 ms and suppressed during a modal/action. Conversion opens a blank tab synchronously to avoid a blocked popup, obtains the native conversion URL through NavigationMixin, then watches for window closure every 750 ms. Subject/body edits debounce server preview by 300 ms; Send stays disabled until the preview corresponds to the current version and selection. The dialog traps keyboard focus, supports Escape when idle, and restores focus to the originating control or Refresh.

The component's HTML selects view-specific table columns and the right-hand detail groups. Its CSS supplies the gold/navy NTE appearance, responsive grid/table, status pills, modal and loading treatments. The custom NTE_OneRegionHomeTemplate Aura bundle gives Home a full-width region for nteManagementHome. The application explicitly overrides Home and Account/Contact/Lead/Opportunity View pages within NTE Management, with desktop and mobile record-page assignments. Native mobile record detail is retained alongside desktop Dynamic Forms.

Access that the implementation depends on

NTE_Management_Access combines NTE_Management_User and NTE_Stripe_Test_Operator. The latter's current label is NTE Stripe Payment Operator and it grants both configured environment principals despite its historical API name. Assign the group to NTE administrators and selected standard users. Volunteer_Applications_User is separate and adds the volunteer Lead fields/service; it is not a member of the NTE group. NTE_Forms_Administration remains an alternative administration permission set with overlapping NTE grants, not the standard onboarding group.

NTE Management grants create/read/edit for Lead, Account, Contact, Opportunity, Task, Event and NTE_Email_Dispatch__c, read-only payment-request access, the NTE record type/tab/application and required Apex actions. It grants ConvertLeads, RunReports and EditTask. It does not grant deletion or

blanket View All/Modify All. The packaged criterion-based Opportunity rule gives all internal users Edit access to the NTE record type; the NTE Operations & Finance report folder is shared View to all internal users. Field-level grants and native object permissions are listed in the configuration reference.

Interactive panel, relationship and retry entry points use user-mode checks. Internal pricing, conversion email and Stripe coordination deliberately use system-mode operations to complete their saved workflow. This distinction is material to recreating the behaviour: record visibility in the operator workspace, Primary Contact resolution and background workflow identity cannot be replaced by a blanket sharing assumption.

Public forms and email presentation

Form engine and submission contract

Every public form loads `assets/config.js` before `assets/forms.js`. `window.NTE_CONFIG` is the active configuration; `NTE27_CONFIG` is retained as an alias. The engine discovers form[`data-web-to-lead`] and controls marked `data-sf-field`. Ten pages submit; `staff-update.html` is a chooser, not an eleventh intake route. Supporting index, thank-you, volunteer-thank-you, code-of-conduct and preview pages do not create records by themselves.

The engine collects only enabled, nonempty controls and selected checkboxes/radios. Values are trimmed and multiple values for one Salesforce field are joined with semicolons. `Terms_and_Conditions__c` uses 1 for a selected checkbox. Standard mappings are Company → `company`, FirstName → `first_name`, LastName → `last_name`, Email → `email`, Phone → `phone`, MobilePhone → `mobile`, Title → `title`, Website → `URL`, Salutation → `salutation`, Street → `street` and PostalCode → `zip`. Custom fields use the target-org 00N IDs in `customFieldIds`, not their API names in the HTTP form body.

`submitToSalesforce` creates a hidden POST form with `oid`, `retURL`, `lead_source` and `useDefaultRule`, then native submit navigates to Salesforce. Current public pages explicitly set `useDefaultRule=0`. This does not suppress native Lead auto-response rules. No fetch callback receives a definitive Lead/application/update processing result. The return page is therefore a receipt screen, not proof of conversion, successful matching or accepted email delivery.

Mode review validates and shows the page's local confirmation preview without a network submission. Sandbox mode still submits to the configured endpoint and org. Any other non-review mode also uses the configured POST path; endpoint/org IDs determine the actual target. Missing endpoint/org/return destination, required terms destination or used custom field mapping blocks submission with an actionable unavailable message.

Conditional controls and derived values

`data-conditional-for` names the controlling DOM ID; `data-conditional-value` accepts pipe-separated matching values and defaults to Yes. Hidden sections disable their own controls and `data-required-when-visible` makes them required only when shown. Nested conditions respect their parent's visibility. Disabled stale values are excluded from the outgoing payload.

`data-combine-fields` joins named controls with spaces, `data-copy-value-from` copies one control, `data-checkbox-copy-from` converts a checkbox/Yes answer to 1, and `data-switch-copy` chooses the relevant source set based on a Yes/No control. These support applicant/event-day contact selection, split names and hidden derived roster fields. `syncFormState` re-runs conditions and calculations immediately before validation/POST, normalises number inputs, copies derived fields and uppercases references. `pageshow` restores submit controls and recalculates state when returning from a native submission.

Standard and custom length limits match configured Salesforce lengths. Declaration dates range from 2026-01-01 through today's London date; date of birth ranges from 1900-01-01 through today. DMY mode converts browser YYYY-MM-DD values to DD/MM/YYYY for the current Web-to-Lead creator locale. Date format must be aligned with the destination org's creator locale during reconstruction. The browser validates calendar dates, required nonblank text, selected checkbox groups, known catalogue choices, reference grammar and form-specific roster/item rules.

The reference grammar is `^NTE-[A-Z0-9][A-Z0-9-]{1,74}[A-Z0-9]$`. Main applications generate references; supplementary forms require the reference from the booking email. A hidden honeypot rejects filled automated submissions locally and a submitting flag prevents repeat clicks during navigation. These controls do not make Web-to-Lead an authenticated endpoint; server pricing, creation resets and update matching enforce the project's data rules.

Form route catalogue

Page	Form type	Version	Lead source
exhibitor-application.html	Exhibitor Application	exhibitor-application-v10	Customer Event
exhibitor-interest.html	Exhibitor Expression of Interest	exhibitor-interest-v3	Customer Event
exhibitor-staff-update.html	Exhibitor Staff Update	exhibitor-staff-update-v1	Customer Event
guest-registration.html	Guest Registration	guest-registration-v3	Customer Event
heavy-vehicle-details.html	Heavy Vehicle Details	heavy-vehicle-details-v5	Customer Event
logo-upload.html	Logo Update	logo-update-v2	Customer Event
partner-sponsor-application.html	Partner / Sponsor Application	partner-sponsor-application-v12	Customer Event
partner-sponsor-interest.html	Partner / Sponsor Expression of Interest	partner-sponsor-eoi-v3	Customer Event
partner-sponsor-staff-update.html	Partner / Sponsor Staff Update	partner-sponsor-staff-update-v1	Customer Event
volunteer-application.html	Volunteer Application	volunteer-application-v3	Volunteer Application

Each form's complete control-to-field mapping, required conditions, option values and fixed hidden values appears in the form reference. Those details are part of the build specification: fields present in Salesforce but absent from a current form can be legacy retained fields or internal audit/derived values. Do not add every field to the public page merely because it exists in the dictionary.

Partner applications allow multiple packages and an event-day contact differing from the applicant. Exhibitor applications enforce one space and category eligibility, derive included/additional staff and invoice requirement, and show a separate savings explanation for qualifying space/power discounts. Invoice sections collect the legal billing organisation, trading name, billing address/contact, procurement answers, PO number where supplied and additional information. These values support the manual invoice process; the application does not create an invoice record.

Guests use one Lead for the main and optional accompanying guest, with conditional accessibility details. Volunteers use `LeadSource=Volunteer Application` and a hidden `Company` value, volunteer-specific source/version fields and no `NTE_Event_Code__c`. The volunteer Code of Conduct reader uses the September 2026 document version; only reaching the end of the opened rendered reader enables acknowledgement. `Volunteer_Code_Required` validates new v3 applications for the corresponding acknowledgement/version. Historical applications remain editable without retroactive acknowledgement.

The Code of Conduct text is maintained in `config/volunteer-code-of-conduct.json`. Paragraph order and list structure are preserved; eight paper-signature paragraphs marked `omitFromReader` are excluded from the

online reader while digital declaration controls remain. The current HTML embeds that content; the main metadata build consumes its version for Salesforce validation but is not a general form-page generator.

Stored and preview emails

The nineteen stored templates comprise seventeen NTE and two volunteer templates. The retired exhibitor/partner application-received templates are absent from the active source/manifest. The generic NTE_Staff_Update_Acknowledgement template remains as a legacy retained template; the active split staff routes use their specific exhibitor and partner templates.

Template developer name	Subject	Use and merge context
NTE_Complimentary_Exhibitor_Approved	Your complimentary NTE space is confirmed	NTE complimentary exhibitor confirmation Merge context: Contact, Opportunity.
NTE_Exhibitor_Application_Internal	New NTE exhibitor application	Internal NTE exhibitor application notification Merge context: Lead.
NTE_Exhibitor_Approved	Your NTE space is provisionally reserved	NTE approved exhibitor confirmation Merge context: Contact, Opportunity.
NTE_Exhibitor_EOI_Acknowledgement	NTE exhibitor interest received	NTE exhibitor expression of interest acknowledgement Merge context: Lead.
NTE_Exhibitor_EOI_Internal	New NTE exhibitor expression of interest	Internal NTE exhibitor expression of interest notification Merge context: Lead.
NTE_Exhibitor_Payment_Confirmed	Your NTE exhibition space is confirmed	NTE exhibitor booking payment confirmation Merge context: Contact, Opportunity.
NTE_Exhibitor_Staff_Update_Acknowledgement	NTE exhibitor staff details updated	NTE exhibitor staff update acknowledgement Merge context: Lead.
NTE_Guest_Registration_Acknowledgement	NTE guest registration received	NTE guest registration acknowledgement Merge context: Lead.
NTE_Guest_Registration_Internal	New NTE guest registration	Internal NTE guest registration notification Merge context: Lead.
NTE_Heavy_Vehicle_Acknowledgement	NTE vehicle and logistics details received	NTE vehicle and logistics acknowledgement Merge context: Lead.
NTE_Partner_Sponsor_Application_Internal	New NTE partner / sponsor application	Internal NTE partner / sponsor application notification Merge context: Lead.
NTE_Partner_Sponsor_Approved	Your NTE space is provisionally reserved	NTE approved partner / sponsor confirmation Merge context: Contact, Opportunity.
NTE_Partner_Sponsor_EOI_Acknowledgement	NTE expression of interest received	NTE expression of interest acknowledgement Merge context: Lead.
NTE_Partner_Sponsor_EOI_Internal	New NTE partner / sponsor expression of interest	Internal NTE expression of interest notification Merge context: Lead.
NTE_Partner_Sponsor_Payment_Confirmed	Your NTE partnership / sponsorship is confirmed	NTE partner / sponsor booking payment confirmation Merge context: Contact, Opportunity.
NTE_Partner_Staff_Update_Acknowledgement	NTE partner / sponsor staff details updated	NTE partner / sponsor staff update acknowledgement Merge context: Lead.
NTE_Staff_Update_Acknowledgement	Your NTE staff details	NTE staff update acknowledgement Merge context: Lead.
Volunteer_Application_Acknowledgement	We've received your volunteer application	Volunteer application acknowledgement Merge context: Lead.

Template developer name	Subject	Use and merge context
Volunteer_Application_Internal	New volunteer application: {!Lead.FirstName} {!Lead.LastName}	Internal volunteer application notification Merge context: Lead.

email-templates/source contains the maintained HTML presentation sources. scripts/build-metadata.js compiles them into Salesforce email resources and text alternatives under force-app/main/default/email/unfiled\$public, and builds recipient-facing examples under email-templates/examples. Additional Stripe preview variants are examples of conditional booking rendering; they are not separate Salesforce EmailTemplate records.

scripts/email-template-presentation.js compiles three authoring conventions. NTE_GREETING chooses a first-name greeting or a neutral greeting when blank. data-nte-optional hides a table row only when all its merge fields are blank. data-nte-join suppresses separators when one joined value is absent. Native merge values remain ordinary Salesforce fields; the compiler does not interpolate recipient data into formula string literals. nativeEmailTextFromHtml preserves line breaks outside Salesforce formula literals.

Classic currency merge fields already include the currency symbol. The template must not prepend a second pound sign; currencyPreview reproduces that behaviour in examples. Long text and partial optional contact/billing values retain their meaningful lines. The plain-text generator removes layout-only text and preserves usable URLs. The booking renderer separately replaces finance/payment/preparation comment tokens after Salesforce renders Contact/Opportunity merge fields.

Recipient language follows the participant route. EOI acknowledgement confirms interest; invitations request an application; paid booking conversion is provisional; eligible zero-charge charity conversion is confirmed; first recorded base payment sends the correct exhibitor or partner payment confirmation; supplements acknowledge the saved details; reminders request only the outstanding item. Final-pack emails provide the configured event-information destination. The final-pack and reminder composer uses generated subject/body content rather than an EmailTemplate record.

Native delivery setup that changes this project

The active overlapping volunteer auto-response entry in MMUAT was disabled by setting its formula to FALSE while preserving its surrounding entries, sender and template. This prevents duplicate volunteer applicant acknowledgements now that VolunteerInboundLeadService sends them. On another org, inspect the actual matching rule and Web-to-Lead Default Response Template; do not overwrite the whole native auto-response container from the sandbox.

The two packaged duplicate rules separate Customer Event submissions from other Leads. NTE_Web_to_Lead_Duplicate_Report allows and reports a Contact match for Customer Event. Standard_Rule_for_Leads_with_Duplicate_Contacts is filtered to LeadSource not equal to Customer Event and retains its standard alert/report behaviour. Both reference Standard_Contact_Match_Rule_v1_1 with explicit Lead-to-Contact field mapping. This permits an existing person to submit a new NTE event/application/update while retaining duplicate information; it does not merge duplicate submissions.

Default Lead Creator, Default Lead Owner, notify-owner configuration, verified senders and overlapping native automations remain target-org setup. Their exact effect matters to internal notifications and date parsing. The maintained package does not contain profiles, assignment-rule or whole auto-response-rule replacements. Its current routing usernames and public field IDs are sandbox values to be mapped during installation.

Reconstruction and administration

Reconstruction baseline

The companion source archive is the exact maintained implementation used for this manual. Start from that archive in an isolated working directory. Its SHA256 manifest identifies every included file. The guide explains the relationships and decisions that a source tree alone cannot convey; the archive supplies the exact code, formulas, email HTML, assets and metadata definitions needed to reproduce the implementation without transcribing hundreds of API names or rewriting algorithms from prose.

This is an unnamespaced Salesforce DX project, package directory force-app, source API 67.0. It is a Metadata API deployment bundle, not a managed or unlocked package. Individual component versions remain those in their metadata, including API 65.0 for nteMasterPanel. The observed org is an Enterprise sandbox, MMUAT. All screenshots show the 12 September 2026 state; their record counts are examples, not seed data or acceptance targets. The source working tree contains changes newer than its last commit, so use the archive manifest rather than a Git commit alone to identify this baseline.

The main build uses Node built-ins and local modules. package.json defines build as node scripts/build-metadata.js, test as node tests/forms.test.js and validate as build followed by that single test entry point. The additional suites below are separate commands. Python maintenance tools use the standard library. No database seed, site build framework or npm dependency installation is required to regenerate the supplied metadata and email examples.

Target decisions and configuration values

The following values cannot be invented from source. They belong to the destination organisation. The manual specifies where and how each is used; the owner must supply them before the corresponding feature can operate.

Required value	Where to set it	Effect and current baseline
Target organisation and public Lead field IDs	assets/config.js orgId, endpoint and customFieldIds	Current values target MMUAT. Retrieve the destination IDs after deploying fields. IDs beginning 00N belong to that org; API names are portable.
NTE routing user	NTE_Routing_Config.Default Owner_Username__c	Exact active User.Username; current value is steven.skyba@euroforce.com.mmuat. NTE intake uses it for ownership and internal notification.
Public form hosting and return pages	assets/config.js and NTE_Routing_Config.Default	Current site is the canonical GitHub Pages preview. Production hosting and final URLs must be supplied. Maintain page filenames or update every referring URL.
Application edition	Routing Application_Event_Code__c and browser event configuration	Current routing is NTE2027. Browser edition normally rolls over in April, London time; invitation eligibility must agree with the advertised edition.
Final event information	Exhibitor_Final_Pack_URL__c and Partner_Final_Pack_URL__c	Both are blank. Supply real HTTPS destinations before final-pack sending becomes eligible.
Logo file intake destination	assets/config.js logoFileRequestUrl	Blank in the baseline. The logo workflow records a declaration/update; Salesforce does not store an uploaded binary in this implementation. Supply the external file-request destination to complete the participant's file handoff.

Required value	Where to set it	Effect and current baseline
Lead creator locale and default ownership	Web-to-Lead setup	Current browser date output is DMY. Default Lead Creator must parse that format; volunteer owner notification follows the resolved Lead owner.
Public contact and privacy destinations	assets/config.js supportEmail, termsUrl, termsLinkLabel	Current support is nte@missioncommunity.org and privacy points to nationaltransitionevent.com/privacy. Confirm destination wording and ownership for the release edition.
Merchant and tax policy	NTE_Stripe_Config.Default and external credentials	Baseline is an enabled owner-controlled test account, bound to MMUAT, with 20% fixture VAT. Client merchant identity, live activation and approved VAT/invoice process remain separate decisions.
Native email delivery settings	Target organisation delivery, sender and auto-response setup	Preserve unrelated routes. Disable only a matching duplicate volunteer applicant response; the source package does not replace the complete native rule container.

Assemble the Salesforce implementation

Build the candidate first with node scripts/build-metadata.js. That writes generated fields, flows, list views, reports, permissions, Lightning app/pages, email resources and examples, then invokes the communications, Stripe credential and Stripe booking metadata generators. Apex class bodies, LWC source, public HTML and form JavaScript remain maintained source files. Editing generated XML without updating its generator is a temporary overlay that a later build will overwrite.

Compare the candidate's object/field catalogue with the target before applying it. The package includes the inherited Lead fields used by the forms, so they are not an undocumented installation dependency. Existing fields with the same API name still require compatible types, lengths, precision, picklists and relationship targets. Existing legacy NTE registration objects are outside this package and are not migration destinations. No script automatically transfers their historical records into Opportunities.

The package also depends on standard Account, Contact, Lead, Opportunity, OpportunityContactRole, Task, Event, User, RecordType and EmailTemplate behaviour. Duplicate rules reference the standard Contact matching rule Standard_Contact_Match_Rule_v1_1. The NTE Event Opportunity record type and its sales process, Opportunity stages and LeadSource entries must be deployable together. The complete manifest includes the project-owned dependencies; target-specific profiles, native Lead conversion mappings, matching-rule availability, Web-to-Lead setup and organisation-wide email settings are evaluated in the target.

Shared LeadSource and OpportunityStage definitions affect other applications. Retrieve their complete target definitions into a separate source-format directory. Run scripts/prepare-shared-picklists.py with --required-dir pointing to the candidate's force-app/main/default, --target-dir pointing to the retrieved target force-app/main/default and --output-dir pointing to a new empty overlay directory. The helper preserves target values/attributes, adds missing required values as non-default, and rejects incompatible closed/won flags. Inspect merge-report.json and copy the two resulting standardValueSets files into the isolated candidate after its last build. Do not rebuild away that overlay.

Use the supplied complete manifest for target validation. An illustrative candidate command is sf project deploy start --manifest manifest/production-package.xml --target-org TARGET --dry-run --test-level RunLocalTests. TARGET is the authorised destination alias, not a literal org name. The actual release

uses the exact validated candidate and target; remove --dry-run for an authorised normal deployment or use an eligible validation job's quick-deploy path. The documentation task performed no deployment.

Assign the permission set group NTE_Management_Access to active administrators and selected operations users who need the application. Its components are NTE_Management_User and NTE_Stripe_Test_Operator, the latter labelled NTE Stripe Payment Operator and granting both environment principals. NTE_Forms_Administration is a separate broader administrative permission set; Volunteer_Applications_User serves volunteer processing. Apply the intended app/page assignments and verify the target user's licence and record visibility. The packaged NTE internal sharing rule grants Edit for NTE Event Opportunities to all internal users; the report folder grants View to that group. These are concrete access choices in this design, not automatic behaviour of an LWC.

Configure public intake

Use the field reference to enumerate the custom Lead fields present on each page. Obtain each destination field's Web-to-Lead ID through generated Web-to-Lead HTML or Salesforce field metadata, and replace the matching API-name entry in customFieldIds. Retain the standard HTTP names listed in the forms chapter. Check that every used custom API has an ID and that the orgId, endpoint and returnUrl point to the same intended environment. A 00N ID from MMUAT cannot be reused just because the destination field has the same API name.

Publish the root HTML pages, assets directory and required email examples together to the chosen static host. The browser loads assets/config.js followed by assets/forms.js; CSS and logo/icon assets are shared. Preserve relative paths. staff-update.html routes people to the exhibitor or partner staff form. index.html is the form hub; thank-you.html and volunteer-thank-you.html are the distinct completion pages. The standalone code-of-conduct page and embedded volunteer reader must use the maintained September 2026 text/version together. The preview repository is stevostar1234/nte27-web-to-lead-demo; the Salesforce source branch is not a website release branch.

Configure Web-to-Lead enablement, Default Lead Creator, Default Lead Owner, owner notifications and overlapping Lead automations in the target. Preserve existing assignment and auto-response entries other than a reviewed overlap. NTE pages post lead_source=Customer Event; volunteer pages post Volunteer Application. useDefaultRule=0 does not eliminate the need to inspect native auto-response rules. Initial NTE application acknowledgements have been retired; the first approval-stage email is the booking message after conversion. EOI, guest and volunteer receipts follow their own routes.

After configuration, qualify each form using new controlled records for that target: verify exact persisted field values, workflow routing and the resulting email's real merged body. This is a new-target reconstruction step. Do not resubmit the previously completed September MMUAT stress fixtures or repeat their accepted emails.

Configure the Stripe booking route

The exact runtime configuration is NTE_Stripe_Config.Default, not the example JSON files. The JSON examples support the read-only preflight tool and deliberately start disabled. For a new target, begin with Enabled__c=false. Populate Expected_Org_Id__c with the destination's 18-character org ID, Expected_Account_Id__c with the selected acct_merchant ID, Live_Mode__c with the intended environment and Tax_Rate__c with the approved percentage. Reference_Prefix__c and Allowed_Email__c optionally restrict activation scope; both are blank in the MMUAT baseline.

The named credentials are NTE_Stripe_Test and NTE_Stripe_Live, each using its corresponding external credential and NTEApplication named principal. Configure that principal's ApiKey authentication parameter separately. The custom Authorization header is Bearer followed by the protected ApiKey value.

Credentials are intentionally absent from the source archive and documentation. The endpoint is <https://api.stripe.com>. The Stripe Payment Operator component permission grants use of the principals; it does not supply a key or choose the active environment.

The browser, dashboard and email renderer present GBP and the Stripe adapter requires gbp. Use GBP booking amounts in the destination. This implementation does not convert an Opportunity in another currency into GBP; a multi-currency deployment needs a separately designed currency contract before enabling the route.

Copy the appropriate config/stripe-sandbox.example.json or stripe-live.example.json to a private target configuration file, fill the expected account/environment and run `python3 scripts/stripe-preflight.py --config PRIVATE_CONFIG`. The tool prompts invisibly for a key and reads account and balance information. Its successful result confirms account identity/mode, and in live mode checks `charges_enabled`. It explicitly does not claim that Payment Links were tested or Salesforce was connected. The Apex adapter performs its own verification and needs permissions for account/balance reads and Price/Payment Link creation and retrieval.

When the new target is qualified and activation is approved, enable the selected scope in custom metadata. Converting an eligible paid application then prepares its one booking payment request and link before the provisional email. Accepted delivery stamps the invoice and any quote milestone required for that Stripe route. Payment remains manually confirmed in the Master Panel after finance verification. There is no webhook, Stripe Invoice generation, automatic refund, recurring charge or automatic staff top-up link in this package.

Feature verification and evidence

This documentation review regenerated the full metadata in an isolated copy and compared the outputs with the source baseline: zero changed generated files. A read-only native retrieve from MMUAT also matched all 29 Apex bodies, 15 LWC source files and 19 stored email bodies after line-ending/outer-whitespace normalisation. This is evidence for those compared artefacts, not a claim that every org setting or every metadata byte matches.

Local verification	Result from this documentation review	What it establishes
forms.test.js	Passed	Form/schema invariants and its included email presentation checks.
email-assets.test.js and email-template-presentation.test.js	Passed	Referenced local presentation assets and the source compiler's optional/partial/multiline merge behaviour.
panel-ui-stress.test.js	32 checks passed	Component state and action protections exercised by the local harness.
stress-form-engine.test.js	140 checks passed across 34986 catalogue and boundary combinations	Browser engine date, conditional, mapping, catalogue and submission boundaries within the harness.
shared-picklists.test.py	5 tests passed	Preservation/addition/conflict behaviour of the target picklist overlay.
stripe-preflight.test.py	7 tests passed	Account/environment/key-input validation with controlled responses.

Local verification	Result from this documentation review	What it establishes
metadata-reports.test.js	Fails before completing	Preview-definition extraction includes a generator write without providing write in its VM context. Recorded in PROJECT_DOCUMENTATION_ISSUES.md; no source fix was made.

The supplied 17 Apex test classes describe project-specific cases in the Apex test reference. The documentation review did not rerun business sends, conversions, external charges or the completed full-org stress audit. Earlier native test/deployment evidence remains in the dated audit records, including the 11 September qualification. Local verification is not a substitute for qualifying the destination's native conversion, real merge output and configuration-sensitive behaviour.

Recover incomplete work

Observed condition	Inspect	Project-specific recovery
Initial EOI or volunteer receipt/internal notice failed	Lead applicant/internal statuses and error field, configured user/Lead owner and template	Correct the cause first. Initial intake has no dedicated panel retry; a narrowly scoped administrator invocation must be evaluated against already accepted sides to avoid duplicate mail.
Provisional booking email failed	Opportunity approval status/error, one converted application, Primary Contact and payment request	Correct the recorded cause and use Retry booking email. It rejects Pending/Sent and unsafe source associations. Do not reconvert the Lead to resend.
Payment request needs review or has an ambiguous old external response	NTE_Payment_Request__c status/error, snapshot/account/mode and Stripe resources	Reconcile the existing request/resources manually. Do not replace its key or create a second charge to make a failed email pass. The adapter protects the 23-hour ambiguity boundary.
Supplementary Lead unmatched or validation failed	Target_Booking_Reference__c, match/error fields and relevant Opportunity	Correct the reference/required data under an approved support action. Inspect duplicate references and Closed Lost state. The normal flow runs on creation; editing a retained Lead alone does not requeue it.
Supplement applied but receipt failed	Applied booking ID, acknowledgement status/error and current Primary Contact	Use Retry update email on the retained Lead. This retries the receipt only; it does not reapply field changes or reroute to a different booking.
Editable communication failed	Dispatch type, target, saved recipient/fingerprint, error and source state	Retry email on the failed dispatch record after correcting the cause. Changed recipients/eligibility can require a newly reviewed draft instead. Preserve already Sent records.
Pricing requires review	Saved catalogue version, selected labels, category, counts and component amounts	Correct the specific inconsistency. A historical reprice is a financial-data migration; a general code release does not authorise it.
Final-pack Send is disabled	Both route destination settings and recipient eligibility messages	Supply the correct final-pack URL for each audience and refresh the draft. Completing a booking does not send its pack automatically.

Maintenance files and their roles

File or group	Purpose and effect
scripts/build-metadata.js	Main generator, source catalogue and metadata/email orchestration. Owns generated definitions; rerun before applying a target overlay.
scripts/build-communications.js	Dispatch schema, communication status fields, retry actions and related permissions/metadata.
scripts/build-stripe.js and build-stripe-bookings.js	Named/external credential definitions and the payment-request/configuration schema with access requirements.
scripts/email-formatting.js and email-template-presentation.js	Native currency-aware previews, optional rows, greetings, joins and readable text alternatives.
scripts/normalise-staff-count-fields.mjs	Normalises staff count field definitions. It writes metadata and is not a general record-data migration.
scripts/prepare-shared-picklists.py	Read-only input comparison producing a target-preserving local release overlay.
scripts/audit-package-dependencies.py and audit-pre-production-dependencies.mjs	Examine source/manifest and locally retrieved target definitions for missing dependencies or incompatible baselines. They do not replace fresh target inspection.
scripts/post-deploy/backfill-nte-opportunity-record-type.apex	Constrained update of qualifying NTE Opportunities to the NTE record type; inspect candidate rows before running.
scripts/post-deploy/backfill-nte-participant-classification.apex	Backfills current Account/Contact participant classification from relevant applications. Classification is a current summary, not an event history table.
scripts/post-deploy/backfill-nte-pricing.apex	Recalculates existing application/booking monetary fields against the deployed catalogue. Run only for a separately inventoried financial migration.
scripts/backfill-master-panel-milestones.apex	Historical fixture milestone repair. It is not a routine setup or release step.
scripts/qa and scripts/verify-master-panel.apex	Controlled submission/conversion and operational verification helpers. Several create or mutate records; do not run them against completed fixtures as documentation checks.
scripts/project-metrics.py	Source inventory and metrics, not runtime business logic.
config/salesforce-standard-values.json	Required shared-value baseline consumed by the metadata generator. Reconcile target values after generation.
config/volunteer-code-of-conduct.json	Maintained conduct content/version and deliberate online-reader omissions.
NTE_DESIRED_WORKFLOW.md and NTE_CHANGE_PROPOSALS.md	Confirmed workflow and stable decision numbers. Unselected proposals are not implemented requirements.
NTE_AUDIT_RESUME.md and audit directory	Dated evidence, retained fixtures, unresolved decisions and recovery checkpoints. Historical statements must be read with their date and subsequent decisions.

Maintaining this manual

Update the workflow narrative and screenshots when operators gain a new action or a stage changes. Update field/form/method references from the same frozen source candidate as the release. A changed catalogue requires the browser values, Apex allowlists, generated picklists, saved version and worked examples to agree. A changed email needs native merged-output verification as well as the HTML

preview. A changed form needs both its API-name mapping and the destination org's public field ID mapping considered.

The documentation source and extraction scripts are supplied under documentation. Their coverage register ties the reference sections to the included files and hashes. Issues identified during this task are kept in the separate Markdown register; they are not silently changed in the implementation described here.

Salesforce data dictionary

This reference contains all 342 packaged custom field definitions across six record objects and two custom metadata types. Standard object behaviour is described where the project uses it; unrelated Salesforce standard fields are not added as filler. API names, type limits, defaults, formula text, picklist values and relationships below come directly from the frozen source metadata.

A field without a required declaration below is optional at schema level; public form and Apex validation can impose stronger conditional requirements. R means explicit readable-only field access, E means readable and editable, and a dash means this permission set does not grant the field. Other assigned permissions can still grant access. Permission order is Management User / Forms Administration / Volunteer Application User / Stripe Payment Operator. Formula fields remain calculated regardless of a form or caller. Picklist catalogue identifiers refer to the exact reusable sets later in this chapter.

Standard objects and fields used

Object	Relevant standard fields	Project role
Lead	Id, Company, FirstName, LastName, Email, Phone, MobilePhone, Title, Website, Salutation, Street, PostalCode	Applicant identity and public form standard HTTP mappings.
Lead	LeadSource, Status, OwnerId, CreatedDate, LastModifiedDate	Route discrimination, native review state, ownership and dashboard creation-date filtering.
Lead	IsConverted, ConvertedOpportunityId, ConvertedAccountId, ConvertedContactId	Exact native conversion outputs consumed by the after-save conversion flow; they are not guessed from latest related records.
Opportunity	Id, AccountId, Name, Amount, CloseDate, StageName, IsClosed, IsWon, RecordTypeId, OwnerId	Booking identity and native sales context. Amount is initial net value; stage/close date are native values, separate from payment and readiness flags.
OpportunityContactRole	OpportunityId, ContactId, IsPrimary, Role	Many booking/person associations, with exactly one usable Primary required by this code. The native schema alone does not guarantee that invariant.
Account and Contact	Id, Name, AccountId on Contact, Email/Phone where applicable, OwnerId	Reusable organisation/person identity and record navigation. Contact.AccountId does not substitute for its booking role.
Task	WhoId, WhatId, Subject, Description, Status, ActivityDate	Approval/legacy communication audit and ordinary activities. The controller discovers a closed Task status for compatibility.
User and RecordType	User.Username, Email, IsActive; RecordType.DeveloperName, SubjectType	Exact routing and NTE_Event_Opportunity discrimination.
EmailTemplate and Report	DeveloperName and Id	Runtime resolves portable developer names to destination-specific record IDs. Report IDs and template IDs are not hardcoded into the UI.

Lead

API name: Lead. 145 packaged fields. One public submission, not one permanent participant. Main applications remain here until native conversion; EOI and guests remain Leads. Supplementary

staff/vehicle Leads are temporary only after both applied data and accepted receipt; logo Leads remain as audit records. Applicant and internal email outcomes are independent. Form fields record submitted facts; pricing/audit fields are overwritten by their authoritative services. Volunteer fields share this object but use the distinct volunteer flow/source and do not enter NTE edition queues.

Field and exact definition	Meaning and data lineage
Accompanying_Guest_Email__c Accompanying Guest Email Email; required=false; trackFeedHistory=false Field access E/E/--	Submitted by: guest-registration.html
Accompanying_Guest_Name__c Accompanying Guest Name Text(200); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: guest-registration.html
Additional_Staff_Count__c Additional Staff Count Picklist; required=false; trackFeedHistory=false; values PL01, restricted=true Field access E/E/--	Initial chargeable staff above the package allowance. Accepts calculated values from 0 to 99. Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Additional_Staff_Count__c
Additional_Staff_Required__c Additional Staff Required Picklist; required=false; trackFeedHistory=false; values PL02, restricted=true Field access E/E/--	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Additional_Staff_Required__c
Additional_Staff_Total__c Additional Staff Total (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Additional_Staff_Total__c
Additional_Staff_Unit_Price__c Additional Staff Unit Price (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Additional_Staff_Unit_Price__c
Alternative_Organisation_Name__c Alternative Organisation Name Text(255); required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/--	Captured by the NTE27 exhibitor Web-to-Lead form. Conversion destinations: Opportunity.NTE_Alternative_Organisation_Name__c
Booking_Reference__c NTE Booking Reference Text(80); required=false; unique=true; externalId=true; caseSensitive=false; trackFeedHistory=false Field access E/E/--	Unique browser-generated reference for the original NTE application. Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.Booking_Reference__c, Account.NTE_Booking_Reference__c, Contact.NTE_Booking_Reference__c
Consent_Contact__c Consent Contact Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access --/E/--	Submitted by: volunteer-application.html

Field and exact definition	Meaning and data lineage
Consent_PII__c Consent PII Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access -/-/E/-	Submitted by: volunteer-application.html
Consent_Promotion__c Consent Promotion Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access -/-/E/-	Submitted by: volunteer-application.html
Contact_Consent__c NTE Contact Consent Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/-/-	Submitted by: exhibitor-interest.html, partner-sponsor-interest.html
Date_of_Birth__c Date of Birth Date; required=false; trackFeedHistory=false Field access -/-/E/-	Help: DOB needed for info validation Submitted by: volunteer-application.html
Declaration_Date__c Declaration Date Date; required=false; trackFeedHistory=false Field access E/E/E/-	Submitted by: exhibitor-application.html, exhibitor-interest.html, exhibitor-staff-update.html, guest-registration.html, heavy-vehicle-details.html, partner-sponsor-application.html, partner-sponsor-interest.html, partner-sponsor-staff-update.html, volunteer-application.html Conversion destinations: Opportunity.NTE_Declaration_Date__c
Declaration_Name__c Declaration Name Text(200); required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/E/-	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html, exhibitor-interest.html, exhibitor-staff-update.html, guest-registration.html, heavy-vehicle-details.html, partner-sponsor-application.html, partner-sponsor-interest.html, partner-sponsor-staff-update.html, volunteer-application.html Conversion destinations: Opportunity.NTE_Declaration_Name__c
Delivery_Window__c Delivery Window Picklist; required=false; trackFeedHistory=false; values PL03, restricted=true Field access E/E/-/-	Submitted by: heavy-vehicle-details.html
Event_Contact_Email__c Event Contact Email Email; required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/-/-	Submitted by: exhibitor-application.html, heavy-vehicle-details.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Event_Contact_Email__c
Event_Contact_Mobile__c Event Contact Mobile Phone; required=false; trackFeedHistory=false Field access E/E/-/-	Submitted by: exhibitor-application.html, heavy-vehicle-details.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Event_Contact_Mobile__c
Event_Contact_Name__c Event Contact Name Text(200); required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/-/-	Submitted by: exhibitor-application.html, heavy-vehicle-details.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Event_Contact_Name__c

Field and exact definition	Meaning and data lineage
Event_Contact_Title__c Event Contact Job Title Text(128); required=false; trackFeedHistory=false Field access E/E/–/–	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Event_Contact_Title__c
Event_Discovery_Source__c Event Discovery Source Picklist; required=false; trackFeedHistory=false; values PL04, restricted=true Field access E/E/–/–	How the person discovered the National Transition Event. Submitted by: exhibitor-application.html, exhibitor-interest.html, partner-sponsor- interest.html Conversion destinations: Opportunity.NTE_Event_Discovery_Source__c
Exhibitor_Community_Contribution__c Exhibitor Community Contribution LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/–/–	Submitted by: exhibitor-interest.html
Exhibitor_Hall_Schedule__c Sunday Setup Availability Picklist; required=false; trackFeedHistory=false; values PL05, restricted=true Field access E/E/–/–	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Exhibitor_Hall_Schedule__c
Exhibitor_Interest_Areas__c Exhibitor Interest Areas MultiselectPicklist; required=false; trackFeedHistory=false; visibleLines=4; values PL06, restricted=true Field access E/E/–/–	Retained interest classification field. The current exhibitor-interest page uses the detailed interest/contribution questions instead; do not add this control solely because the field remains packaged.
Exhibitor_Interest_Detail__c Exhibitor Interest Detail LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/–/–	Submitted by: exhibitor-interest.html
Exhibitor_Organisation_Category__c Exhibitor Organisation Category Picklist; required=false; trackFeedHistory=false; values PL07, restricted=true Field access E/E/–/–	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html Conversion destinations: Opportunity.NTE_Exhibitor_Organisation_Category__c
Exhibitor_Space_Position__c Exhibitor Space Position LongTextArea(1000); required=false; trackFeedHistory=false; visibleLines=5 Field access E/E/–/–	Retained older space-position value for compatibility. Current pricing uses the single exact Exhibitor_Space_Selections__c choice. Conversion destinations: Opportunity.NTE_Exhibitor_Space_Position__c
Exhibitor_Space_Price__c Exhibitor Space Price (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/–/–	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Exhibitor_Space_Price__c

Field and exact definition	Meaning and data lineage
Exhibitor_Space_Selections__c Exhibitor Space Selections MultiselectPicklist; required=false; trackFeedHistory=false; visibleLines=8; values PL08, restricted=true Field access E/E/--	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html Conversion destinations: Opportunity.NTE_Exhibitor_Space_Selections__c
Exhibitor_Space_Size__c Exhibitor Space Size Picklist; required=false; trackFeedHistory=false; values PL09, restricted=true Field access E/E/--	Retained older space-size value for compatibility. Current pricing and staff allowance use the selected catalogue space. Conversion destinations: Opportunity.NTE_Exhibitor_Space_Size__c
Form_Version__c NTE Form Version Text(80); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-application.html, exhibitor-interest.html, exhibitor-staff-update.html, guest-registration.html, heavy-vehicle-details.html, logo-upload.html, partner-sponsor-application.html, partner-sponsor-interest.html, partner-sponsor-staff-update.html Conversion destinations: Opportunity.NTE_Form_Version__c
Guest_Accessibility_Details__c Guest Accessibility Details LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/--	Submitted by: guest-registration.html
Guest_Accessibility_Required__c Guest Accessibility Required Picklist; required=false; trackFeedHistory=false; values PL05, restricted=true Field access E/E/--	Submitted by: guest-registration.html
Guest_Accompanying__c Guest Accompanying Picklist; required=false; trackFeedHistory=false; values PL05, restricted=true Field access E/E/--	Submitted by: guest-registration.html
Guest_Information_Declaration__c Guest Information Declaration Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	Submitted by: guest-registration.html
Has_Special_Requirements__c Has Special Requirements Picklist; required=false; trackFeedHistory=false; values PL05, restricted=true Field access E/E/--	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Has_Special_Requirements__c
Haulier_Name__c Haulier Name Text(255); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html

Field and exact definition	Meaning and data lineage
Haulier_Staff__c Haulier Staff LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/--	Submitted by: heavy-vehicle-details.html
Haulier_Vehicle_Dimensions__c Haulier Vehicle Dimensions Text(120); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Haulier_Vehicle_Gross_Weight__c Haulier Vehicle Gross Weight Text(120); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Haulier_Vehicle_Registration__c Haulier Vehicle Registration Text(80); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Haulier_Vehicle_Type__c Haulier Vehicle Type Text(255); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Heavy_Item_1_Description__c Heavy Item 1 Description Text(255); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Heavy_Item_1_Dimensions__c Heavy Item 1 Dimensions Text(120); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Heavy_Item_1_Gross_Weight__c Heavy Item 1 Gross Weight Text(120); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Heavy_Item_1_Registration__c Heavy Item 1 Registration Text(80); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Heavy_Item_2_Description__c Heavy Item 2 Description Text(255); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html

Field and exact definition	Meaning and data lineage
Heavy_Item_2_Dimensions__c Heavy Item 2 Dimensions Text(120); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Heavy_Item_2_Gross_Weight__c Heavy Item 2 Gross Weight Text(120); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Heavy_Item_2_Registration__c Heavy Item 2 Registration Text(80); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Heavy_Item_3_Description__c Heavy Item 3 Description Text(255); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Heavy_Item_3_Dimensions__c Heavy Item 3 Dimensions Text(120); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Heavy_Item_3_Gross_Weight__c Heavy Item 3 Gross Weight Text(120); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Heavy_Item_3_Registration__c Heavy Item 3 Registration Text(80); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: heavy-vehicle-details.html
Heavy_Vehicle_Required__c Heavy Vehicle Required Picklist; required=false; trackFeedHistory=false; values PL10, restricted=true Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Heavy_Vehicle_Required__c
Included_Staff_Count__c Included Staff Count Number(2,0); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Included_Staff_Count__c
Industry_Body_Details__c Industry Body / Trade Association Text(255); required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/--	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html Conversion destinations: Opportunity.NTE_Industry_Body_Details__c

Field and exact definition	Meaning and data lineage
Interested_in_Volunteering__c Volunteering Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access -/E/-	Submitted by: volunteer-application.html
Invoice_Additional_Information__c Invoice Additional Information LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/-	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Invoice_Additional_Information__c
Invoice_Address__c Invoice Address LongTextArea(1000); required=false; trackFeedHistory=false; visibleLines=5 Field access E/E/-	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Invoice_Address__c
Invoice_Contact_Phone__c Invoice Contact Phone Phone; required=false; trackFeedHistory=false Field access E/E/-	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Invoice_Contact_Phone__c
Invoice_Required__c Invoice Required Picklist; required=false; trackFeedHistory=false; values PL05, restricted=true Field access E/E/-	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Invoice_Required__c
Invoiced_Company__c Invoiced Company Text(200); required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/-	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Invoiced_Company__c
Invoiced_Email__c Invoiced Email Email; required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/-	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Invoiced_Email__c
Invoiced_Person__c Invoiced Person Text(200); required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/-	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Invoiced_Person__c
Listed_Price_Total__c Listed Price Total (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/-	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Listed_Price_Total__c, Opportunity.Amount
Logo_Upload_URL__c NTE Logo Upload URL Text(255); required=false; trackFeedHistory=false Field access E/E/-	Submitted by: exhibitor-application.html, partner-sponsor-application.html

Field and exact definition	Meaning and data lineage
NOK_Address__c Emergency Contact Address LongTextArea(1000); required=false; trackFeedHistory=false; visibleLines=4 Field access <code>-/E/-</code>	Submitted by: volunteer-application.html
NOK_Name__c Next of Kin Name Text(100); required=false; unique=false; externalId=false; trackFeedHistory=false Field access <code>-/E/-</code>	Submitted by: volunteer-application.html
NOK_Phone__c Next of Kin Phone Phone; required=false; trackFeedHistory=false Field access <code>-/E/-</code>	Submitted by: volunteer-application.html
NOK_Postcode__c Emergency Contact Postcode Text(20); required=false; trackFeedHistory=false Field access <code>-/E/-</code>	Submitted by: volunteer-application.html
NOK_Relationship__c Relationship to Next of Kin Text(255); required=false; unique=false; externalId=false; trackFeedHistory=false Field access <code>-/E/-</code>	Submitted by: volunteer-application.html
NTE_Applicant_Email_Status__c NTE Applicant Email Status Picklist; required=false; trackFeedHistory=false; values PL11, restricted=true Field access <code>E/E/-/-</code>	Applicant-side initial NTE receipt outcome. Applications deliberately have no applicant receipt here; EOI/guest use their route template. A later retry must preserve an accepted side.
NTE_Application_Rejected__c Application Rejected Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access <code>E/E/-/-</code>	Operator rejection removes an unconverted application from active panel/list review while retaining the Lead for history.
NTE_Email_Error__c NTE Email Error LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=3 Field access <code>E/E/-/-</code>	Combined failed-side errors for initial NTE intake; it does not describe the separate supplementary or approval email path.
NTE_Event_Code__c NTE Event Code Text(20); required=false; unique=false; externalId=true; trackFeedHistory=false Field access <code>E/E/-/-</code>	Evergreen NTE edition code calculated in Europe/London, for example NTE27. Submitted by: exhibitor-application.html, exhibitor-interest.html, exhibitor-staff-update.html, guest-registration.html, heavy-vehicle-details.html, logo-upload.html, partner-sponsor-application.html, partner-sponsor-interest.html, partner-sponsor-staff-update.html Conversion destinations: Opportunity.NTE_Event_Code__c, Account.NTE_Event_Code__c, Contact.NTE_Event_Code__c
NTE_Interest_Not_Progressed__c Interest Not Progressed Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access <code>E/E/-/-</code>	Recorded rejection/not-progressed decision for an interest. Mutually exclusive with progressed; no Lead deletion occurs.

Field and exact definition	Meaning and data lineage
NTE_Interest_Progressed__c Interest Progressed Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	Interest has progressed after accepted application invitation. The retired manual progression action cannot substitute for a send.
NTE_Internal_Email_Status__c NTE Internal Email Status Picklist; required=false; trackFeedHistory=false; values PL12, restricted=true Field access E/E/--	Independent outcome of the internal NTE intake notification to the configured routing user.
NTE_Invitation_Recipient__c NTE Invitation Recipient Email; required=false Field access E/E/--	Address recorded for the accepted invitation, preserving whom that progression reached.
NTE_Invitation_Sent_At__c NTE Invitation Sent At DateTime; required=false Field access E/E/--	Timestamp of Salesforce acceptance for the invitation; not an inbox-open or delivery receipt.
NTE_Invitation_Status__c NTE Invitation Status Text(20); required=false Field access E/E/--	Mirrors the invitation dispatch lifecycle. Queued/Sent prevents stale rejection or another overlapping invitation request.
NTE_Update_Booking_Id__c Applied NTE Booking ID Text(18); required=false; trackFeedHistory=false Field access R/R/--	Opportunity ID recorded by the supplementary update service when the update is accepted. Acknowledgement retries use this booking and must never rematch to a different reference.
NTE_Update_Error__c NTE Update Error LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=3 Field access E/E/--	Reason an update could not match/apply or an unexpected worker failed; retained for administrative recovery.
NTE_Update_Status__c NTE Update Status Picklist; required=false; trackFeedHistory=false; values PL13, restricted=true Field access E/E/--	Supplementary matching/application outcome. A matched or applied update is separate from its acknowledgement email outcome.
Organisation_Type__c Organisation Type Picklist; required=false; trackFeedHistory=false; values PL14, restricted=true Field access E/E/--	Submitted by: exhibitor-interest.html, partner-sponsor-interest.html
Partner_Interest_Areas__c Partner Interest Areas MultiselectPicklist; required=false; trackFeedHistory=false; visibleLines=4; values PL15, restricted=true Field access E/E/--	Submitted by: partner-sponsor-interest.html

Field and exact definition	Meaning and data lineage
Partner_Interest_Type__c Partner Interest Type Picklist; required=false; trackFeedHistory=false; values PL16, restricted=true Field access E/E/--	Submitted by: partner-sponsor-interest.html
Partnership_Interest_Detail__c Partnership Interest Detail LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/--	Submitted by: partner-sponsor-interest.html
Payment_Method__c Payment Method Picklist; required=false; trackFeedHistory=false; values PL17, restricted=true Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Payment_Method__c
Planned_Exhibitor_Count__c Planned Exhibitor Count Picklist; required=false; trackFeedHistory=false; values PL18, restricted=true Field access E/E/--	Total people initially planned for the NTE booking. Accepts the public form range from 1 to 99. Submitted by: exhibitor-application.html, exhibitor-staff-update.html, partner-sponsor-application.html, partner-sponsor-staff-update.html Conversion destinations: Opportunity.NTE_Planned_Exhibitor_Count__c
Power_Socket_Count__c Power Socket Count Number(2,0); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-application.html Conversion destinations: Opportunity.NTE_Power_Socket_Count__c
Power_Socket_Total__c Power Socket Total (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Power_Socket_Total__c
Power_Socket_Unit_Price__c Power Socket Unit Price (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Power_Socket_Unit_Price__c
Preferred_Contact_Method__c Preferred Contact Method Picklist; required=false; trackFeedHistory=false; values PL19, restricted=true Field access E/E/--	Submitted by: exhibitor-interest.html, partner-sponsor-interest.html
Preferred_Contact_Time__c Preferred Contact Time Text(255); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-interest.html, partner-sponsor-interest.html

Field and exact definition	Meaning and data lineage
Previous_NTE_Events__c Previous NTE Events MultiselectPicklist; required=false; trackFeedHistory=false; visibleLines=4; values PL20, restricted=true Field access E/E/--	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html Conversion destinations: Opportunity.NTE_Previous_Events__c
Pricing_Status__c Pricing Status Picklist; required=false; trackFeedHistory=false; values PL21, restricted=true Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Pricing_Status__c
Pricing_Version__c Pricing Version Text(80); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Pricing_Version__c
Purchase_Order_Number__c Purchase Order Number Text(100); required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/--	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Purchase_Order_Number__c
Purchase_Order__c Purchase Order Picklist; required=false; trackFeedHistory=false; values PL05, restricted=true Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Purchase_Order__c
Quote_Required_for_PO__c Quotation Required for PO Picklist; required=false; trackFeedHistory=false; values PL05, restricted=true Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Quote_Required_for_PO__c
Secondary_Contact_Email__c Secondary Contact Email Email; required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/--	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html, heavy-vehicle-details.html Conversion destinations: Opportunity.NTE_Secondary_Contact_Email__c
Secondary_Contact_Mobile__c Secondary Contact Mobile Phone; required=false; trackFeedHistory=false Field access E/E/--	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html Conversion destinations: Opportunity.NTE_Secondary_Contact_Mobile__c
Secondary_Contact_Name__c Secondary Contact Full Name Text(200); required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/--	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html, heavy-vehicle-details.html Conversion destinations: Opportunity.NTE_Secondary_Contact_Name__c
Secondary_Contact_Phone__c Secondary Contact Work Phone Phone; required=false; trackFeedHistory=false Field access E/E/--	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html, heavy-vehicle-details.html Conversion destinations: Opportunity.NTE_Secondary_Contact_Phone__c

Field and exact definition	Meaning and data lineage
Secondary_Contact_Prefix__c Secondary Contact Prefix Text(40); required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/–/–	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html Conversion destinations: Opportunity.NTE_Secondary_Contact_Prefix__c
Secondary_Contact_Title__c Secondary Contact Job Title Text(128); required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/–/–	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html Conversion destinations: Opportunity.NTE_Secondary_Contact_Title__c
Sponsor_Package_Total__c Sponsor Package Total (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/–/–	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Sponsor_Package_Total__c
Sponsor_Package__c Sponsorship Package MultiselectPicklist; required=false; trackFeedHistory=false; visibleLines=5; values PL22, restricted=true Field access E/E/–/–	Sponsorship packages selected by the applicant. Submitted by: partner- sponsor-application.html Conversion destinations: Opportunity.NTE_Sponsor_Package__c
Sponsored_Name__c Sponsored Name Text(200); required=false; unique=false; externalId=false; trackFeedHistory=false Field access E/E/–/–	Name of person applying for sponsorship. Submitted by: partner-sponsor- application.html Conversion destinations: Opportunity.NTE_Sponsored_Name__c
Staff_Base_Names__c Staff Names Covered by Booking LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=8 Field access E/E/–/–	Submitted by: exhibitor-staff-update.html, partner-sponsor-staff- update.html
Staff_Update_Audience__c Staff Update Audience Picklist; required=false; trackFeedHistory=false; values PL23, restricted=true Field access E/E/–/–	Submitted by: exhibitor-staff-update.html, partner-sponsor-staff- update.html
Stand_Colleagues__c Stand Colleagues LongTextArea(1000); required=false; trackFeedHistory=false; visibleLines=5 Field access E/E/–/–	Retained older submitted staff-name field. Current supplementary forms use separate initial/top-up roster fields; the Opportunity consolidated roster remains operational. Conversion destinations: Opportunity.NTE_Stand_Colleagues__c
Stand_Equipment__c Stand Equipment LongTextArea(1000); required=false; trackFeedHistory=false; visibleLines=5 Field access E/E/–/–	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Stand_Equipment__c
Stand_Extra_Notes__c Stand Extra Notes LongTextArea(1000); required=false; trackFeedHistory=false; visibleLines=5 Field access E/E/–/–	Submitted by: partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Stand_Extra_Notes__c

Field and exact definition	Meaning and data lineage
Stand_Power__c Stand Power Picklist; required=false; trackFeedHistory=false; values PL05, restricted=true Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Stand_Power__c
Stand_Special_Requirements__c Stand Special Requirements LongTextArea(1000); required=false; trackFeedHistory=false; visibleLines=5 Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Stand_Special_Requirements__c
Supplier_Agreement_Required__c Supplier Agreement Required Picklist; required=false; trackFeedHistory=false; values PL02, restricted=true Field access E/E/--	Captured by the NTE27 exhibitor Web-to-Lead form. Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Supplier_Agreement_Required__c
Target_Booking_Reference__c Target NTE Booking Reference Text(80); required=false; unique=false; externalId=false; caseSensitive=false; trackFeedHistory=false Field access E/E/--	Exact original booking reference supplied on an NTE supplementary form. Submitted by: exhibitor-staff-update.html, heavy-vehicle-details.html, logo- upload.html, partner-sponsor-staff-update.html
Terms_and_Conditions__c Terms and Conditions Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Terms_Accepted__c
Top_Up_Staff_Count__c Top-up Staff Count Number(2,0); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-staff-update.html
Top_Up_Staff_Names__c Top-up Staff Names LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=6 Field access E/E/--	Submitted by: exhibitor-staff-update.html
Top_Up_Staff_Required__c Top-up Staff Required Picklist; required=false; trackFeedHistory=false; values PL05, restricted=true Field access E/E/--	Submitted by: exhibitor-staff-update.html
Top_Up_Staff_Total__c Top-up Staff Total (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-staff-update.html
Top_Up_Staff_Unit_Price__c Top-up Staff Unit Price (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Submitted by: exhibitor-staff-update.html

Field and exact definition	Meaning and data lineage
Total_Staff_Count__c Total Staff Count Number(2,0); required=false; trackFeedHistory=false Field access E/E/–/–	Submitted by: exhibitor-application.html, exhibitor-staff-update.html, partner-sponsor-application.html, partner-sponsor-staff-update.html Conversion destinations: Opportunity.NTE_Initial_Staff_Count__c, Opportunity.NTE_Total_Staff_Count__c
Trading_Name__c Trading Name Text(255); required=false; trackFeedHistory=false Field access E/E/–/–	Submitted by: exhibitor-application.html, partner-sponsor-application.html Conversion destinations: Opportunity.NTE_Trading_Name__c
Volunteer_Applicant_Email_Status__c Volunteer Applicant Email Status Picklist; required=false; trackFeedHistory=false; values PL12, restricted=true Field access –/–/E/–	Volunteer applicant acknowledgement result, independent of the owner notification.
Volunteer_Armed_Forces_Service__c Armed Forces Service Picklist; required=false; trackFeedHistory=false; values PL05, restricted=true Field access –/–/E/–	Submitted by: volunteer-application.html
Volunteer_Availability__c Volunteer Availability Preference MultiselectPicklist; required=false; trackFeedHistory=false; visibleLines=3; values PL24, restricted=true Field access –/–/E/–	Submitted by: volunteer-application.html
Volunteer_Code_Consent__c Code of Conduct Acknowledged Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access –/–/E/–	Submitted by: volunteer-application.html
Volunteer_Code_Version__c Code of Conduct Version Text(80); required=false; trackFeedHistory=false Field access –/–/E/–	Submitted by: volunteer-application.html
Volunteer_Consent__c Volunteer Consent Picklist; required=false; trackFeedHistory=false; values PL05, restricted=true Field access –/–/E/–	Submitted by: volunteer-application.html
Volunteer_DBS_Willing__c Willing to Complete DBS Check Picklist; required=false; trackFeedHistory=false; values PL05, restricted=true Field access –/–/E/–	Submitted by: volunteer-application.html

Field and exact definition	Meaning and data lineage
Volunteer_Email_Error__c Volunteer Email Error LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access --/E/–	Per-Lead volunteer delivery errors; accepted sides survive retry of the other side.
Volunteer_Form_Version__c Volunteer Form Version Text(80); required=false; trackFeedHistory=false Field access --/E/–	Submitted by: volunteer-application.html
Volunteer_Hours__c Hours Willing to Give per Month Picklist; required=false; trackFeedHistory=false; values PL25, restricted=true Field access --/E/–	Submitted by: volunteer-application.html
Volunteer_Internal_Email_Status__c Volunteer Internal Email Status Picklist; required=false; trackFeedHistory=false; values PL12, restricted=true Field access --/E/–	Volunteer current-owner notification result; it does not use the NTE routing username.
Volunteer_Opportunities__c Volunteering Opportunities MultiselectPicklist; required=false; trackFeedHistory=false; visibleLines=6; values PL26, restricted=true Field access --/E/–	Submitted by: volunteer-application.html
Volunteer_Service_Dates__c Dates in Service Text(255); required=false; trackFeedHistory=false Field access --/E/–	Submitted by: volunteer-application.html
Volunteer_Service_Details__c Service, Unit, Station or Ship LongTextArea(1000); required=false; trackFeedHistory=false; visibleLines=4 Field access --/E/–	Submitted by: volunteer-application.html
Volunteer_Skills__c Volunteer Skills and Experience MultiselectPicklist; required=false; trackFeedHistory=false; visibleLines=6; values PL26, restricted=true Field access --/E/–	Submitted by: volunteer-application.html
Volunteer_Travel_Regions__c Volunteer Travel Regions MultiselectPicklist; required=false; trackFeedHistory=false; visibleLines=6; values PL27, restricted=true Field access --/E/–	Submitted by: volunteer-application.html

Field and exact definition	Meaning and data lineage
Web_Form_Type__c Web Form Type Picklist; required=false; trackFeedHistory=false; values PL28, restricted=true Field access E/E/E/–	Identifies the public form that created the Lead. Stable across NTE editions. Submitted by: exhibitor-application.html, exhibitor-interest.html, exhibitor-staff-update.html, guest-registration.html, heavy-vehicle-details.html, logo-upload.html, partner-sponsor-application.html, partner-sponsor-interest.html, partner-sponsor-staff-update.html, volunteer-application.html Conversion destinations: Opportunity.NTE_Source_Form_Type__c, Account.NTE_Source_Form_Type__c, Contact.NTE_Source_Form_Type__c

NTE Intake Event Code

Source: force-app/main/default/objects/Lead/validationRules/NTE_Intake_Event_Code.validationRule-meta.xml.

fullName: NTE_Intake_Event_Code.

active: true.

description: New or changed NTE interest, application and guest event codes must identify a four-digit edition. Unrelated edits to historical records are preserved.

Validation formula:

```
AND(OR(ISNEW(), ISCHANGED(NTE_Event_Code__c), ISCHANGED(Web_Form_Type__c)),
OR(ISPICKVAL(Web_Form_Type__c, "Partner / Sponsor Expression of Interest"),
ISPICKVAL(Web_Form_Type__c, "Exhibitor Expression of Interest"), ISPICKVAL(Web_Form_Type__c,
"Partner / Sponsor Application"), ISPICKVAL(Web_Form_Type__c, "Exhibitor Application"),
ISPICKVAL(Web_Form_Type__c, "Guest Registration")), NOT(REGEX(NTE_Event_Code__c, "^NTE[0-9]{4}$")))
```

errorDisplayField: NTE_Event_Code__c.

errorMessage: Enter an event code in the format NTE2027.

NTE Interest Decision Exclusive

Source: force-app/main/default/objects/Lead/validationRules/NTE_Interest_Decision_Exclusive.validationRule-meta.xml.

fullName: NTE_Interest_Decision_Exclusive.

active: true.

description: An expression of interest cannot be both progressed and not progressed.

Validation formula:

```
AND(NTE_Interest_Progressed__c, NTE_Interest_Not_Progressed__c)
```

errorMessage: Choose either Progressed or Not Progressed, not both.

Volunteer Code Required

Source: force-app/main/default/objects/Lead/validationRules/Volunteer_Code_Required.validationRule-meta.xml.

fullName: Volunteer_Code_Required.

active: true.

description: New v3 volunteer applications must acknowledge the supplied September 2026 Code of Conduct. Historical applications are unchanged.

Validation formula:

```
AND(ISNEW(), ISPICKVAL(Web_Form_Type__c, "Volunteer Application"), Volunteer_Form_Version__c =
"volunteer-application-v3", OR(NOT(Volunteer_Code_Consent__c), Volunteer_Code_Version__c <>
"September 2026"))
```

errorDisplayField: Volunteer_Code_Consent__c.

errorMessage: Please read and acknowledge the September 2026 Code of Conduct.

Opportunity

API name: Opportunity. 131 packaged fields. One NTE event booking and its durable application snapshot. Initial commercial fields are copied by the conversion flow; subsequent preparation fields are changed by the supplementary service. Invoice/payment flags are independent for the base booking and later exhibitor staff top-up. Timestamps and By text record the action evidence. Approval and final-pack states describe email outcomes, not booking completion or actual payment processing.

Field and exact definition	Meaning and data lineage
Booking_Reference__c NTE Booking Reference Text(80); required=false; unique=true; externalId=true; caseSensitive=false; trackFeedHistory=false Field access E/E/--	Unique browser-generated reference for the original NTE application. Conversion source: \$Record.Booking_Reference__c
NTE_Additional_Staff_Count__c NTE Additional Staff Count Text(40); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: Priced_Application.Additional_Staff_Count__c
NTE_Additional_Staff_Required__c NTE Additional Staff Required Text(40); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: Priced_Application.Additional_Staff_Required__c
NTE_Additional_Staff_Total__c NTE Additional Staff Total (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: Priced_Application.Additional_Staff_Total__c
NTE_Additional_Staff_Unit_Price__c NTE Additional Staff Unit Price (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: Priced_Application.Additional_Staff_Unit_Price__c
NTE_Alternative_Organisation_Name__c NTE Alternative Organisation Name Text(255); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Alternative_Organisation_Name__c
NTE_Approval_Email_Batch__c NTE Provisional Email Batch Text(64); required=false Field access E/E/--	Random saved batch identity joining an exact set of pending conversion email requests and their queue/finalizer continuation.

Field and exact definition	Meaning and data lineage
NTE_Approval_Email_Error__c NTE Provisional Email Error LongTextArea(32768); required=false; visibleLines=4 Field access E/E/--	Last approval/provisional failure reason; correct that cause before using the booking retry action.
NTE_Approval_Email_Lead_Id__c NTE Provisional Email Lead ID Text(18); required=false Field access E/E/--	Text identity of the exact converted source Lead. The approval service verifies the Lead-to-Opportunity association; this field is not a lookup relationship.
NTE_Approval_Email_Recipient__c NTE Provisional Email Recipient Email; required=false Field access E/E/--	Primary Contact address recorded for accepted provisional/complimentary delivery.
NTE_Approval_Email_Requested_At__c NTE Provisional Email Requested At DateTime; required=false Field access E/E/--	Time the conversion/retry saved a pending approval request, before background delivery.
NTE_Approval_Email_Requested_By__c NTE Provisional Email Requested By Text(255); required=false Field access E/E/--	Requesting user identity captured with the pending approval request.
NTE_Approval_Email_Sent_At__c NTE Provisional Email Sent At DateTime; required=false Field access E/E/--	Salesforce acceptance timestamp of the provisional/complimentary message.
NTE_Approval_Email_Status__c NTE Provisional Email Status Text(40); required=false Field access E/E/--	Pending, Sent or Failed approval email state; separate from paid confirmation dispatch and native Opportunity stage.
NTE_Attendance_Status__c NTE Attendance Status Picklist; required=false; trackFeedHistory=false; values PL29, restricted=true Field access E/E/--	Manual attendance classification retained on the booking. It is not the Master Panel calculated Completed flag or a payment milestone.
NTE_Confirmed_Value__c NTE Confirmed Value (ex VAT) Currency(18,2); required=false; trackHistory=false; formula below; blanks=BlankAsBlank Field access R/R/--	Booking value excluding VAT, including staff top-ups. Bookings needing a pricing check are excluded.
NTE_Declaration_Date__c NTE Declaration Date Date; required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Declaration_Date__c
NTE_Declaration_Name__c NTE Declaration Name Text(200); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Declaration_Name__c

Field and exact definition	Meaning and data lineage
NTE_Delivery_Window__c NTE Delivery Window Text(255); required=false; trackFeedHistory=false Field access E/E/--	Delivery timing copied from Lead.Delivery_Window__c by an accepted Heavy Vehicle Details submission; later valid logistics submissions replace it.
NTE_Event_Code__c NTE Event Code Text(20); required=false; unique=false; externalId=true; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.NTE_Event_Code__c
NTE_Event_Contact_Email__c NTE Event Contact Email Email; required=false; trackFeedHistory=false Field access E/E/--	Descriptive event-day or secondary contact detail from the application/logistics submission. It is not an email-recipient fallback for a missing Primary Contact. Conversion source: \$Record.Event_Contact_Email__c
NTE_Event_Contact_Mobile__c NTE Event Contact Mobile Phone; required=false; trackFeedHistory=false Field access E/E/--	Descriptive event-day or secondary contact detail from the application/logistics submission. It is not an email-recipient fallback for a missing Primary Contact. Conversion source: \$Record.Event_Contact_Mobile__c
NTE_Event_Contact_Name__c NTE Event Contact Name Text(200); required=false; trackFeedHistory=false Field access E/E/--	Descriptive event-day or secondary contact detail from the application/logistics submission. It is not an email-recipient fallback for a missing Primary Contact. Conversion source: \$Record.Event_Contact_Name__c
NTE_Event_Contact_Title__c NTE Event Contact Job Title Text(128); required=false; trackFeedHistory=false Field access E/E/--	Descriptive event-day or secondary contact detail from the application/logistics submission. It is not an email-recipient fallback for a missing Primary Contact. Conversion source: \$Record.Event_Contact_Title__c
NTE_Event_Discovery_Source__c NTE Event Discovery Source Text(255); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Event_Discovery_Source__c
NTE_Exhibitor_Hall_Schedule__c NTE Sunday Setup Availability Text(40); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Exhibitor_Hall_Schedule__c
NTE_Exhibitor_Organisation_Category__c NTE Exhibitor Organisation Category Text(255); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Exhibitor_Organisation_Category__c
NTE_Exhibitor_Space_Position__c NTE Exhibitor Space Position Text(255); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Exhibitor_Space_Position__c

Field and exact definition	Meaning and data lineage
NTE_Exhibitor_Space_Price__c NTE Exhibitor Space Price (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: Priced_Application.Exhibitor_Space_Price__c
NTE_Exhibitor_Space_Selections__c NTE Exhibitor Space Selection LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=3 Field access E/E/--	Conversion source: \$Record.Exhibitor_Space_Selections__c
NTE_Exhibitor_Space_Size__c NTE Exhibitor Space Size Text(255); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Exhibitor_Space_Size__c
NTE_Final_Pack_Recipient__c NTE Final Pack Recipient Email; required=false Field access E/E/--	Address recorded for the accepted final event information email.
NTE_Final_Pack_Sent_At__c NTE Final Pack Sent At DateTime; required=false Field access E/E/--	Acceptance timestamp of the final pack, retained when later top-up work reopens booking readiness.
NTE_Final_Pack_Status__c NTE Final Pack Status Text(20); required=false Field access E/E/--	Final-pack dispatch state. Completed bookings do not automatically set Sent; later preparation/finance changes preserve prior pack history.
NTE_Finance_Invoice_Due__c NTE Finance Invoice Required Checkbox; required=false; trackHistory=false; formula below; blanks=BlankAsBlank Field access R/R/--	Booking or staff top-up invoice work, including unresolved pricing.
NTE_Finance_Payment_Confirmed__c NTE Payment Confirmed Checkbox; required=false; trackHistory=false; formula below; blanks=BlankAsBlank Field access R/R/--	Every applicable booking and staff top-up invoice and payment is complete. Fully complimentary bookings are excluded.
NTE_Finance_Payment_Due__c NTE Payment Required Checkbox; required=false; trackHistory=false; formula below; blanks=BlankAsBlank Field access R/R/--	An unpaid charge has its own invoice provided, following the booking-first payment order.
NTE_Form_Version__c NTE Form Version Text(80); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Form_Version__c

Field and exact definition	Meaning and data lineage
NTE_Has_Special_Requirements__c NTE Has Special Requirements Text(40); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Has_Special_Requirements__c
NTE_Haulier_Name__c NTE Haulier Name Text(255); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Haulier_Staff__c NTE Haulier Staff LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Haulier_Vehicle_Dimensions__c NTE Haulier Vehicle Dimensions Text(120); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Haulier_Vehicle_Gross_Weight__c NTE Haulier Vehicle Gross Weight Text(120); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Haulier_Vehicle_Registration__c NTE Haulier Vehicle Registration Text(80); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Haulier_Vehicle_Type__c NTE Haulier Vehicle Type Text(255); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Heavy_Item_1_Description__c NTE Heavy Item 1 Description Text(255); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Heavy_Item_1_Dimensions__c NTE Heavy Item 1 Dimensions Text(120); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Heavy_Item_1_Gross_Weight__c NTE Heavy Item 1 Gross Weight Text(120); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.

Field and exact definition	Meaning and data lineage
NTE_Heavy_Item_1_Registration__c NTE Heavy Item 1 Registration Text(80); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Heavy_Item_2_Description__c NTE Heavy Item 2 Description Text(255); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Heavy_Item_2_Dimensions__c NTE Heavy Item 2 Dimensions Text(120); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Heavy_Item_2_Gross_Weight__c NTE Heavy Item 2 Gross Weight Text(120); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Heavy_Item_2_Registration__c NTE Heavy Item 2 Registration Text(80); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Heavy_Item_3_Description__c NTE Heavy Item 3 Description Text(255); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Heavy_Item_3_Dimensions__c NTE Heavy Item 3 Dimensions Text(120); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Heavy_Item_3_Gross_Weight__c NTE Heavy Item 3 Gross Weight Text(120); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Heavy_Item_3_Registration__c NTE Heavy Item 3 Registration Text(80); required=false; trackFeedHistory=false Field access E/E/--	Saved logistics replacement supplied by a valid Heavy Vehicle Details submission. Optional item groups must be complete if started; omitted optional groups clear their prior values.
NTE_Heavy_Vehicle_Required__c NTE Heavy Vehicle Required Text(40); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Heavy_Vehicle_Required__c

Field and exact definition	Meaning and data lineage
NTE_Heavy_Vehicle_Update_Completed_At__c NTE Heavy Vehicle Update Completed At DateTime; required=false; trackFeedHistory=false Field access E/E/--	Set automatically after a Heavy Vehicle Details submission has been applied successfully.
NTE_Included_Staff_Count__c NTE Included Staff Count Number(2,0); required=false; trackFeedHistory=false Field access E/E/--	Catalogue allowance, two or four for the current exhibitor space. It is part of the initial count, not an additional allocation. Conversion source: Priced_Application.Included_Staff_Count__c
NTE_Industry_Body_Details__c NTE Industry Body Details Text(255); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Industry_Body_Details__c
NTE_Initial_Staff_Count__c NTE Initial Staff Count Number(2,0); required=false; trackFeedHistory=false Field access E/E/--	Immutable initial purchased allocation copied from the conversion pricing result, including included and initially charged places. Conversion source: Priced_Application.Total_Staff_Count__c
NTE_Invoice_Additional_Information__c NTE Invoice Additional Information LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/--	Saved billing/procurement detail for the manual finance process and reports. Collecting it does not create a Salesforce or Stripe invoice. Conversion source: \$Record.Invoice_Additional_Information__c
NTE_Invoice_Address__c NTE Invoice Address LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/--	Saved billing/procurement detail for the manual finance process and reports. Collecting it does not create a Salesforce or Stripe invoice. Conversion source: \$Record.Invoice_Address__c
NTE_Invoice_Contact_Phone__c NTE Invoice Contact Phone Phone; required=false; trackFeedHistory=false Field access E/E/--	Saved billing/procurement detail for the manual finance process and reports. Collecting it does not create a Salesforce or Stripe invoice. Conversion source: \$Record.Invoice_Contact_Phone__c
NTE_Invoice_Provided_At__c NTE Invoice / Stripe Link Provided At DateTime; required=false; trackFeedHistory=false Field access E/E/--	Initial booking milestone evidence stamped by the validated finance action; names/times are preserved on rejected repeated actions.
NTE_Invoice_Provided_By__c NTE Invoice / Stripe Link Provided By Text(120); required=false; trackFeedHistory=false Field access E/E/--	Initial booking milestone evidence stamped by the validated finance action; names/times are preserved on rejected repeated actions.
NTE_Invoice_Provided__c NTE Invoice / Stripe Link Provided Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	Initial booking milestone evidence stamped by the validated finance action; names/times are preserved on rejected repeated actions. Selected from the NTE Master Panel after the invoice or Stripe payment link has been sent.

Field and exact definition	Meaning and data lineage
NTE_Invoice_Required__c NTE Invoice Required Text(40); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: Priced_Application.Invoice_Required__c
NTE_Invoiced_Company__c NTE Invoiced Company Text(255); required=false; trackFeedHistory=false Field access E/E/--	Saved billing/procurement detail for the manual finance process and reports. Collecting it does not create a Salesforce or Stripe invoice. Conversion source: \$Record.Invoiced_Company__c
NTE_Invoiced_Email__c NTE Invoiced Email Email; required=false; trackFeedHistory=false Field access E/E/--	Saved billing/procurement detail for the manual finance process and reports. Collecting it does not create a Salesforce or Stripe invoice. Conversion source: \$Record.Invoiced_Email__c
NTE_Invoiced_Person__c NTE Invoiced Person Text(255); required=false; trackFeedHistory=false Field access E/E/--	Saved billing/procurement detail for the manual finance process and reports. Collecting it does not create a Salesforce or Stripe invoice. Conversion source: \$Record.Invoiced_Person__c
NTE_Last_Update_Declaration_Date__c NTE Last Update Declaration Date Date; required=false; trackFeedHistory=false Field access E/E/--	Audit of the last accepted supplementary update: its form/type, declaration, processing time or error. Distinct from the original application declaration and separate receipt outcome.
NTE_Last_Update_Declaration_Name__c NTE Last Update Declaration Name Text(200); required=false; trackFeedHistory=false Field access E/E/--	Audit of the last accepted supplementary update: its form/type, declaration, processing time or error. Distinct from the original application declaration and separate receipt outcome.
NTE_Last_Update_Error__c NTE Last Update Error LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=3 Field access E/E/--	Audit of the last accepted supplementary update: its form/type, declaration, processing time or error. Distinct from the original application declaration and separate receipt outcome.
NTE_Last_Update_Form_Version__c NTE Last Update Form Version Text(80); required=false; trackFeedHistory=false Field access E/E/--	Audit of the last accepted supplementary update: its form/type, declaration, processing time or error. Distinct from the original application declaration and separate receipt outcome.
NTE_Last_Update_Processed_At__c NTE Last Update Processed At DateTime; required=false; trackFeedHistory=false Field access E/E/--	Audit of the last accepted supplementary update: its form/type, declaration, processing time or error. Distinct from the original application declaration and separate receipt outcome.
NTE_Last_Update_Type__c NTE Last Update Type Text(100); required=false; trackFeedHistory=false Field access E/E/--	Audit of the last accepted supplementary update: its form/type, declaration, processing time or error. Distinct from the original application declaration and separate receipt outcome.

Field and exact definition	Meaning and data lineage
NTE_Listed_Price_Total__c NTE Listed Price Total (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: Priced_Application.Listed_Price_Total__c
NTE_Logo_Update_Provided_At__c NTE Logo Update Provided At DateTime; required=false; trackFeedHistory=false Field access E/E/--	The date and time the first matched Logo Update submission was received.
NTE_Logo_Update_Provided__c NTE Logo Update Provided Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	Selected automatically after a Logo Update submission has been matched to this NTE booking.
NTE_Payment_Method__c NTE Payment Method Picklist; required=false; trackFeedHistory=false; values PL17, restricted=true Field access E/E/--	Conversion source: \$Record.Payment_Method__c
NTE_Payment_Received_At__c NTE Payment Received At DateTime; required=false; trackFeedHistory=false Field access E/E/--	Initial booking milestone evidence stamped by the validated finance action; names/times are preserved on rejected repeated actions.
NTE_Payment_Received__c NTE Payment Received Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	Initial booking milestone evidence stamped by the validated finance action; names/times are preserved on rejected repeated actions. Selected from the NTE Master Panel after payment has been confirmed.
NTE_Payment_Recorded_By__c NTE Payment Recorded By Text(120); required=false; trackFeedHistory=false Field access E/E/--	Initial booking milestone evidence stamped by the validated finance action; names/times are preserved on rejected repeated actions.
NTE_Planned_Exhibitor_Count__c NTE Planned Exhibitor Count Text(40); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Planned_Exhibitor_Count__c
NTE_Power_Socket_Count__c NTE Power Socket Count Number(2,0); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Power_Socket_Count__c
NTE_Power_Socket_Total__c NTE Power Socket Total (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: Priced_Application.Power_Socket_Total__c

Field and exact definition	Meaning and data lineage
NTE_Power_Socket_Unit_Price__c NTE Power Socket Unit Price (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: Priced_Application.Power_Socket_Unit_Price__c
NTE_Previous_Events__c Previous NTE Events Text(255); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Previous_NTE_Events__c
NTE_Pricing_Ready__c NTE Pricing Ready Checkbox; required=false; trackHistory=false; formula below; blanks=BlankAsBlank Field access R/R/--	Whether the saved booking price can be used for finance and readiness.
NTE_Pricing_Status__c NTE Pricing Status Picklist; required=false; trackFeedHistory=false; values PL21, restricted=true Field access E/E/--	Conversion source: Priced_Application.Pricing_Status__c
NTE_Pricing_Version__c NTE Pricing Version Text(80); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: Priced_Application.Pricing_Version__c
NTE_Purchase_Order_Number__c NTE Purchase Order Number Text(120); required=false; trackFeedHistory=false Field access E/E/--	Saved billing/procurement detail for the manual finance process and reports. Collecting it does not create a Salesforce or Stripe invoice. Conversion source: \$Record.Purchase_Order_Number__c
NTE_Purchase_Order__c NTE Purchase Order Required Text(40); required=false; trackFeedHistory=false Field access E/E/--	Saved billing/procurement detail for the manual finance process and reports. Collecting it does not create a Salesforce or Stripe invoice. Conversion source: \$Record.Purchase_Order__c
NTE_Quote_Provided_At__c NTE Quote Provided At DateTime; required=false; trackFeedHistory=false Field access E/E/--	Initial booking milestone evidence stamped by the validated finance action; names/times are preserved on rejected repeated actions.
NTE_Quote_Provided_By__c NTE Quote Provided By Text(120); required=false; trackFeedHistory=false Field access E/E/--	Initial booking milestone evidence stamped by the validated finance action; names/times are preserved on rejected repeated actions.
NTE_Quote_Provided__c NTE Quote Provided Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	Initial booking milestone evidence stamped by the validated finance action; names/times are preserved on rejected repeated actions. Selected from the NTE Master Panel after the quote has been sent.

Field and exact definition	Meaning and data lineage
NTE_Quote_Required_for_PO__c NTE Quotation Required for PO Text(40); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Quote_Required_for_PO__c
NTE_Secondary_Contact_Email__c NTE Secondary Contact Email Email; required=false; trackFeedHistory=false Field access E/E/--	Descriptive event-day or secondary contact detail from the application/logistics submission. It is not an email-recipient fallback for a missing Primary Contact. Conversion source: \$Record.Secondary_Contact_Email__c
NTE_Secondary_Contact_Mobile__c NTE Secondary Contact Mobile Phone; required=false; trackFeedHistory=false Field access E/E/--	Descriptive event-day or secondary contact detail from the application/logistics submission. It is not an email-recipient fallback for a missing Primary Contact. Conversion source: \$Record.Secondary_Contact_Mobile__c
NTE_Secondary_Contact_Name__c NTE Secondary Contact Name Text(200); required=false; trackFeedHistory=false Field access E/E/--	Descriptive event-day or secondary contact detail from the application/logistics submission. It is not an email-recipient fallback for a missing Primary Contact. Conversion source: \$Record.Secondary_Contact_Name__c
NTE_Secondary_Contact_Phone__c NTE Secondary Contact Work Phone Phone; required=false; trackFeedHistory=false Field access E/E/--	Descriptive event-day or secondary contact detail from the application/logistics submission. It is not an email-recipient fallback for a missing Primary Contact. Conversion source: \$Record.Secondary_Contact_Phone__c
NTE_Secondary_Contact_Prefix__c NTE Secondary Contact Prefix Text(40); required=false; trackFeedHistory=false Field access E/E/--	Descriptive event-day or secondary contact detail from the application/logistics submission. It is not an email-recipient fallback for a missing Primary Contact. Conversion source: \$Record.Secondary_Contact_Prefix__c
NTE_Secondary_Contact_Title__c NTE Secondary Contact Job Title Text(128); required=false; trackFeedHistory=false Field access E/E/--	Descriptive event-day or secondary contact detail from the application/logistics submission. It is not an email-recipient fallback for a missing Primary Contact. Conversion source: \$Record.Secondary_Contact_Title__c
NTE_Source_Form_Type__c NTE Source Form Type Text(100); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Web_Form_Type__c
NTE_Sponsor_Package_Total__c NTE Sponsor Package Total (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: Priced_Application.Sponsor_Package_Total__c
NTE_Sponsor_Package__c NTE Sponsorship Package MultiselectPicklist; required=false; trackFeedHistory=false; visibleLines=4; values PL22, restricted=true Field access E/E/--	Conversion source: \$Record.Sponsor_Package__c

Field and exact definition	Meaning and data lineage
NTE_Sponsored_Name__c NTE Sponsored Name Text(200); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Sponsored_Name__c
NTE_Staff_Update_Completed_At__c NTE Staff Update Completed At DateTime; required=false; trackFeedHistory=false Field access E/E/--	Set automatically after the applicable exhibitor or partner / sponsor staff update has been applied successfully.
NTE_Stand_Colleagues__c NTE Stand Colleagues LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/--	Current consolidated roster, one nonblank person per line. Exhibitor initial and top-up names are joined; partner updates replace the free roster. Conversion source: \$Record.Stand_Colleagues__c
NTE_Stand_Equipment__c NTE Stand Equipment LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/--	Conversion source: \$Record.Stand_Equipment__c
NTE_Stand_Extra_Notes__c NTE Stand Extra Notes LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/--	Conversion source: \$Record.Stand_Extra_Notes__c
NTE_Stand_Power__c NTE Stand Power Text(40); required=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Stand_Power__c
NTE_Stand_Special_Requirements__c NTE Stand Special Requirements LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=4 Field access E/E/--	Conversion source: \$Record.Stand_Special_Requirements__c
NTE_Supplier_Agreement_Required__c NTE Supplier Agreement Required Text(40); required=false; trackFeedHistory=false Field access E/E/--	Saved billing/procurement detail for the manual finance process and reports. Collecting it does not create a Salesforce or Stripe invoice. Conversion source: \$Record.Supplier_Agreement_Required__c
NTE_Terms_Accepted__c NTE Terms Accepted Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	Conversion source: \$Record.Terms_and_Conditions__c
NTE_Top_Up_Invoice_At__c NTE Top-up Invoice Provided At DateTime; required=false; trackFeedHistory=false Field access E/E/--	Timestamp or actor for the separate staff top-up milestone. Initial booking finance stamps are preserved.

Field and exact definition	Meaning and data lineage
NTE_Top_Up_Invoice_By__c NTE Top-up Invoice Provided By Text(120); required=false; trackFeedHistory=false Field access E/E/--	Timestamp or actor for the separate staff top-up milestone. Initial booking finance stamps are preserved.
NTE_Top_Up_Invoice_Provided__c NTE Top-up Invoice Provided Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	The separate staff invoice was provided. Does not mean the original booking invoice was provided.
NTE_Top_Up_Invoice_Required__c NTE Top-up Invoice Required Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	The separate staff charge requires an invoice/payment workflow; set on first valid positive top-up.
NTE_Top_Up_Payment_At__c NTE Top-up Payment Received At DateTime; required=false; trackFeedHistory=false Field access E/E/--	Timestamp or actor for the separate staff top-up milestone. Initial booking finance stamps are preserved.
NTE_Top_Up_Payment_By__c NTE Top-up Payment Received By Text(120); required=false; trackFeedHistory=false Field access E/E/--	Timestamp or actor for the separate staff top-up milestone. Initial booking finance stamps are preserved.
NTE_Top_Up_Payment_Received__c NTE Top-up Payment Received Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	Manual receipt of the separate staff payment. Does not send another initial-booking confirmation.
NTE_Top_Up_Staff_Count__c NTE Top-up Staff Count Number(2,0); required=false; trackFeedHistory=false Field access E/E/--	Quantity of the first valid accepted exhibitor top-up purchase. Public later corrections cannot increase or decrease it.
NTE_Top_Up_Staff_Names__c NTE Top-up Staff Names LongTextArea(32768); required=false; trackFeedHistory=false; visibleLines=6 Field access E/E/--	Names for the accepted top-up quantity. Names can be corrected without changing the quantity or its paid/invoice history.
NTE_Top_Up_Staff_Required__c NTE Top-up Staff Required Text(40); required=false; trackFeedHistory=false Field access E/E/--	Saved top-up answer. A later No cannot erase an already accepted positive top-up purchase.
NTE_Top_Up_Staff_Total__c NTE Top-up Staff Total (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Separate net top-up obligation. It is added to committed value but never overwrites Opportunity.Amount or base payment.

Field and exact definition	Meaning and data lineage
NTE_Top_Up_Staff_Unit_Price__c NTE Top-up Staff Unit Price (ex VAT) Currency(18,2); required=false; trackFeedHistory=false Field access E/E/--	Saved net price per later staff place, currently GBP 50; not the initial additional-staff unit field.
NTE_Total_Staff_Count__c NTE Total Staff Count Number(3,0); required=false; trackFeedHistory=false Field access E/E/--	Current roster total after accepted supplementary updates; includes any separately purchased exhibitor top-up. Conversion source: Priced_Application.Total_Staff_Count__c
NTE_Trading_Name__c NTE Trading Name Text(255); required=false; trackFeedHistory=false Field access E/E/--	Saved billing/procurement detail for the manual finance process and reports. Collecting it does not create a Salesforce or Stripe invoice. Conversion source: \$Record.Trading_Name__c

NTE Confirmed Value formula

API name: Opportunity.NTE_Confirmed_Value__c.

```
IF(NOT(NTE_Pricing_Ready__c), NULL, IF(AND(NOT(ISBLANK(Amount)), Amount > 0), Amount,
NTE_Listed_Price_Total__c) + BLANKVALUE(NTE_Top_Up_Staff_Total__c, 0))
```

NTE Finance Invoice Due formula

API name: Opportunity.NTE_Finance_Invoice_Due__c.

```
OR(NOT(NTE_Pricing_Ready__c), AND(OR(NTE_Quote_Required_for_PO__c <> "Yes",
NTE_Quote_Provided__c), OR(AND(OR(NTE_Invoice_Required__c = "Yes", NTE_Listed_Price_Total__c >
0, NOT(NTE_Pricing_Ready__c)), NOT(NTE_Invoice_Provided__c)),
AND(OR(NTE_Top_Up_Invoice_Required__c, BLANKVALUE(NTE_Top_Up_Staff_Total__c, 0) > 0),
NOT(NTE_Top_Up_Invoice_Provided__c)))))
```

NTE Finance Payment Confirmed formula

API name: Opportunity.NTE_Finance_Payment_Confirmed__c.

```
AND(NTE_Pricing_Ready__c, OR(OR(NTE_Invoice_Required__c = "Yes", NTE_Listed_Price_Total__c > 0,
NOT(NTE_Pricing_Ready__c)), OR(NTE_Top_Up_Invoice_Required__c,
BLANKVALUE(NTE_Top_Up_Staff_Total__c, 0) > 0)), AND(OR(NOT(OR(NTE_Invoice_Required__c = "Yes",
NTE_Listed_Price_Total__c > 0, NOT(NTE_Pricing_Ready__c))), NTE_Invoice_Provided__c),
OR(NOT(OR(NTE_Top_Up_Invoice_Required__c, BLANKVALUE(NTE_Top_Up_Staff_Total__c, 0) > 0)),
NTE_Top_Up_Invoice_Provided__c)), AND(OR(NOT(OR(NTE_Invoice_Required__c = "Yes",
NTE_Listed_Price_Total__c > 0, NOT(NTE_Pricing_Ready__c))), NTE_Payment_Received__c),
OR(NOT(OR(NTE_Top_Up_Invoice_Required__c, BLANKVALUE(NTE_Top_Up_Staff_Total__c, 0) > 0)),
NTE_Top_Up_Payment_Received__c)))
```

NTE Finance Payment Due formula

API name: Opportunity.NTE_Finance_Payment_Due__c.

```
AND(NTE_Pricing_Ready__c, OR(AND(OR(NTE_Invoice_Required__c = "Yes", NTE_Listed_Price_Total__c
> 0, NOT(NTE_Pricing_Ready__c)), NTE_Invoice_Provided__c, NOT(NTE_Payment_Received__c)),
AND(OR(NOT(OR(NTE_Invoice_Required__c = "Yes", NTE_Listed_Price_Total__c > 0,
NOT(NTE_Pricing_Ready__c))), NTE_Payment_Received__c), OR(NTE_Top_Up_Invoice_Required__c,
BLANKVALUE(NTE_Top_Up_Staff_Total__c, 0) > 0), NTE_Top_Up_Invoice_Provided__c,
NOT(NTE_Top_Up_Payment_Received__c))))
```

NTE Pricing Ready formula

API name: Opportunity.NTE_Pricing_Ready__c.

```
AND(NOT(ISBLANK(NTE_Listed_Price_Total__c)), NTE_Listed_Price_Total__c >= 0,
OR(ISPICKVAL(NTE_Pricing_Status__c, "Calculated"), AND(ISBLANK(TEXT(NTE_Pricing_Status__c)),
NTE_Listed_Price_Total__c > 0)))
```

NTE Sales Process

Source: force-app/main/default/objects/Opportunity/businessProcesses/NTE_Sales_Process.businessProcess-meta.xml.

fullName: NTE_Sales_Process.

description: Sales process used by National Transition Event opportunities.

isActive: true.

values: fullName=Qualification; fullName=Needs Analysis; fullName=Proposal; fullName=Negotiation;
fullName=Closed Won; fullName=Closed Lost.

NTE Event Opportunity

Source: force-app/main/default/objects/Opportunity/recordTypes/NTE_Event_Opportunity.recordType-meta.xml.

fullName: NTE_Event_Opportunity.

active: true.

businessProcess: NTE_Sales_Process.

description: National Transition Event exhibitor, partner and sponsor opportunities.

label: NTE Event Opportunity.

Account

API name: Account. 5 packaged fields. The standard organisation identity can be reused across editions. Five custom fields are the latest NTE classification summary. A later conversion may replace those summaries; use related Opportunities for the event history. Core Account identity is selected through native conversion rather than overwritten by the supplementary service.

Field and exact definition	Meaning and data lineage
NTE_Booking_Reference__c Latest NTE Booking Reference Text(80); required=false; trackFeedHistory=false Field access E/E/—	Latest classified application booking reference copied during conversion; a text summary, not the relationship to that booking.
NTE_Event_Code__c Latest NTE Event Code Text(20); required=false; trackFeedHistory=false Field access E/E/—	Latest classified application edition copied during conversion; earlier event history remains on related Opportunities.
NTE_Last_Application_Date__c Latest NTE Application Date DateTime; required=false; trackFeedHistory=false Field access E/E/—	Conversion Flow execution timestamp from \$Flow.CurrentDateTime; later conversions replace this latest-application summary.

Field and exact definition	Meaning and data lineage
NTE_Participant__c NTE Organisation Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	Identifies an organisation created or updated from a converted NTE application.
NTE_Source_Form_Type__c Latest NTE Source Form Text(100); required=false; trackFeedHistory=false Field access E/E/--	Latest converted commercial application type copied from Lead.Web_Form_Type__c.

Contact

API name: Contact. 6 packaged fields. The standard person identity can be reused across editions. Six custom fields summarise the latest NTE application/classification. OpportunityContactRole supplies each booking association and Primary choice. Event-day and billing contact details on the booking are descriptive fields and are not alternate email recipients.

Field and exact definition	Meaning and data lineage
NTE_Booking_Reference__c Latest NTE Booking Reference Text(80); required=false; trackFeedHistory=false Field access E/E/--	Latest classified application booking reference copied during conversion; a text summary, not the relationship to that booking.
NTE_Contact_Role__c NTE Contact Role Text(100); required=false; trackFeedHistory=false Field access E/E/--	Classification text set to Applicant / event contact during conversion. The independent OpportunityContactRole record controls the booking Primary Contact.
NTE_Event_Code__c Latest NTE Event Code Text(20); required=false; trackFeedHistory=false Field access E/E/--	Latest classified application edition copied during conversion; earlier event history remains on related Opportunities.
NTE_Last_Application_Date__c Latest NTE Application Date DateTime; required=false; trackFeedHistory=false Field access E/E/--	Conversion Flow execution timestamp from \$Flow.CurrentDateTime; later conversions replace this latest-application summary.
NTE_Participant__c NTE Contact Checkbox; required=false; defaultValue=false; trackFeedHistory=false Field access E/E/--	Identifies a person created or updated from a converted NTE application.
NTE_Source_Form_Type__c Latest NTE Source Form Text(100); required=false; trackFeedHistory=false Field access E/E/--	Latest converted commercial application type copied from Lead.Web_Form_Type__c.

NTE Email Dispatch

API name: NTE_Email_Dispatch__c. 15 packaged fields. One durable request/outcome per communication kind, run and source target. Its unique key makes queue/retry behaviour idempotent. It stores a reviewed recipient/content snapshot and later processing result. Invitation/final-pack outcomes synchronise selected source fields; reminders do not complete preparation. Booking-payment confirmation uses its fixed run identity.

Object settings: deploymentStatus=Deployed; description=Individual NTE invitation, reminder, booking-confirmation and final-pack email requests and outcomes.; enableActivities=false; enableHistory=true; enableReports=true; label=NTE Email Dispatch; nameField=displayFormat=NTE-EMAIL-{000000}; label=Dispatch Number; type=AutoNumber; pluralLabel=NTE Email Dispatches; sharingModel=ReadWrite.

Field and exact definition	Meaning and data lineage
Contact__c Recipient Contact Lookup; required=false; lookup to Contact; delete=SetNull; relationship=NTE_Email_Dispatches_Contact; label=NTE email dispatches Field access E/E/--	Optional snapshot association to the booking Primary Contact selected for this email. The email address and fingerprint are saved separately.
Dispatch_Key__c Dispatch Key Text(100); required=false; unique=true; externalId=true Field access E/E/--	Unique external SHA256 identity of kind, run and target. Repeated queue/retry uses the same row rather than generating another send.
Error__c Send Error LongTextArea(32768); required=false; visibleLines=4 Field access E/E/--	Specific preparation, changed-snapshot, queue or send failure retained for retry review.
Event_Code__c Event Code Text(20); required=false Field access E/E/--	Edition captured for the reviewed message, checked against current eligibility before delivery.
Fingerprint__c Recipient Snapshot Text(64); required=false Field access E/E/--	Hash of recipient and merged booking/route facts. A change after review prevents sending stale content.
Kind__c Email Type Text(40); required=false Field access E/E/--	One implemented invitation, staff/vehicle/logo reminder, final-pack or booking-payment-confirmation route.
Lead__c Interest Lookup; required=false; lookup to Lead; delete=SetNull; relationship=NTE_Email_Dispatches_Lead; label=NTE email dispatches Field access E/E/--	Optional source interest Lead for invitations; mutually contextual with the booking target in application logic.

Field and exact definition	Meaning and data lineage
Link__c Action Link Text(255); required=false Field access E/E/--	Saved participant-specific application/update/final-pack HTTPS action destination.
Message__c Message LongTextArea(32768); required=false; visibleLines=4 Field access E/E/--	Saved reviewed plain-text message content, including its supported personalisation tokens; HTML is rendered by the service.
Opportunity__c Booking Lookup; required=false; lookup to Opportunity; delete=SetNull; relationship=NTE_Email_Dispatches_Opportunity; label=NTE email dispatches Field access E/E/--	Optional booking target for preparation, pack or paid-confirmation messages.
Recipient__c Email Address Email; required=false Field access E/E/--	The saved email address being reviewed/sent; arbitrary fallback contact addresses are not used.
Run_Id__c Send Batch Text(64); required=false Field access E/E/--	One composer run identity; independent reminder runs can occur while preparation remains outstanding. Payment confirmation has a fixed run identity.
Sent_At__c Sent At DateTime; required=false Field access E/E/--	Time Salesforce accepted this individual message, not final recipient inbox delivery.
Status__c Status Text(20); required=false Field access E/E/--	Queued, Sent, Failed or Skipped request outcome. Only supported failed rows are retryable.
Subject__c Subject Text(255); required=false Field access E/E/--	Saved reviewed subject, revalidated after personalisation for length and content.

NTE Payment Request

API name: NTE_Payment_Request__c. 23 packaged fields. One initial booking charge snapshot per Salesforce org and Opportunity. Amounts in minor units are integer pence; tax rate and net/gross values are saved with source identity, merchant/mode and stable Stripe resource/idempotency keys. Ready describes a verified request, not collected payment. Existing test resources are never relabelled as live resources.

Object settings: deploymentStatus=Deployed; description=Saved NTE payment request identities, charge snapshots and Stripe outcomes.; enableActivities=false; enableHistory=true; enableReports=true; label=NTE Payment Request; nameField=displayFormat=NTE-PAY-{000000}; label=Payment Request; type=AutoNumber; pluralLabel=NTE Payment Requests; sharingModel=ReadWrite.

Field and exact definition	Meaning and data lineage
Amount_Minor__c Amount in Minor Units Number(18,0); required=false Field access R/R/–/R	Fixed gross charge including saved VAT, in integer GBP pence. This is the Stripe Price amount.
Batch_Key__c Email Batch Text(64); required=false Field access R/R/–/R	Approval batch that should resume after this request completes or fails.
Charge_Key__c Charge Key Text(100); required=false; unique=true; externalId=true Field access R/R/–/R	Unique external org ID plus Opportunity ID plus Booking identity. Also anchors the stable Price/Link idempotency keys.
Currency__c Currency Text(3); required=false Field access R/R/–/R	Saved Stripe currency code; this implementation requires gbp.
Delivered_At__c Payment Email Sent At DateTime; required=false Field access R/R/–/R	Acceptance time of the provisional email containing this verified link, not payment collection time.
Description__c Charge Description Text(255); required=false Field access R/R/–/R	Year-neutral NTE booking description containing the booking reference; used as the new Stripe Product name.
Error__c Error LongTextArea(4000); required=false; visibleLines=3 Field access R/R/–/R	Last preparation/reverification or ambiguous external outcome requiring repair or manual review.
First_Attempt_At__c First Attempt At DateTime; required=false Field access R/R/–/R	First external creation attempt. An ambiguous request older than 23 hours is held for review.
Kind__c Charge Type Text(20); required=false Field access R/R/–/R	Charge kind. The active coordinator creates Booking requests; low-level staff top-up support is not automatic orchestration.
Link_Id__c Stripe Payment Link ID Text(100); required=false Field access R/R/–/R	Persisted Stripe Payment Link identity used for verification and safe reuse on email retry.
Live_Mode__c Live Payment Checkbox; required=false; defaultValue=false Field access R/R/–/R	Saved environment binding. A test request cannot be reused after switching configuration to live.
Net_Minor__c Net in Minor Units Number(18,0); required=false Field access R/R/–/R	Saved initial net booking amount in pence, excluding VAT and later separate top-ups.

Field and exact definition	Meaning and data lineage
Opportunity__c Booking Lookup; required=false; lookup to Opportunity; delete=SetNull; relationship=NTE_Payment_Requests; label=NTE Payment Requests Field access R/R/–/R	Booking lookup for this charge. Custom lookup deletion is SetNull; the remaining snapshot preserves request evidence.
Payment_URL__c Payment Link Url; required=false Field access R/R/–/R	Verified buy.stripe.com URL inserted into the Pay Now button after all readiness checks.
Price_Id__c Stripe Price ID Text(100); required=false Field access R/R/–/R	Persisted fixed Stripe Price identity; retained if link creation fails so retry can reuse it.
Recipient__c Payment Email Recipient Email; required=false Field access R/R/–/R	Exact saved Primary Contact address bound to the charge/email snapshot.
Reference__c Booking Reference Text(80); required=false Field access R/R/–/R	Saved booking reference copied into Stripe resource metadata and the recipient message.
Source_Fingerprint__c Charge Snapshot Text(64); required=false Field access R/R/–/R	Hash of source identity, components, recipient and payment configuration. Changes prevent reusing an old issued proposal.
Source_Lead_Id__c Application ID Text(18); required=false Field access R/R/–/R	Text ID of the converted application source, validated by the coordinator; not a metadata lookup.
Status__c Status Text(30); required=false Field access R/R/–/R	External request preparation status. Ready means recently verified and usable for email, not paid.
Stripe_Account__c Stripe Account Text(60); required=false Field access R/R/–/R	Saved expected acct_merchant identity verified before resource creation.
Tax_Rate__c Tax Rate Number(18,2); required=false Field access R/R/–/R	Saved percentage used to calculate the gross fixed request. Current 20 is a sandbox fixture setting.
Verified_At__c Verified At DateTime; required=false Field access R/R/–/R	Time the resource contract was checked; email requires a matching recent verification within five minutes.

NTE Routing Config Configuration

API name: NTE_Routing_Config__mdt. 10 packaged fields. Public custom metadata holding environment-specific owner and participant destinations. The code uses the Default record. Empty final-pack destinations deliberately make affected recipients ineligible; source field names alone do not provide the missing event information.

Object settings: description=Environment-specific owner routing for National Transition Event submissions.; label=NTE Routing Configuration; pluralLabel=NTE Routing Configurations; visibility=Public.

Field and exact definition	Meaning and data lineage
Application_Event_Code__c Final Pack Event Code Text(20); required=false Field access --/--/--	Exact edition required for final-pack eligibility. The API retains its earlier Application name; current invitation links are not gated by this value.
Exhibitor_Application_URL__c Exhibitor Application URL Text(255); required=false Field access --/--/--	HTTPS exhibitor application destination personalised into an invitation to an exhibitor expression of interest.
Exhibitor_Final_Pack_URL__c Exhibitor Final Pack URL Text(255); required=false Field access --/--/--	HTTPS final event information destination for eligible completed exhibitor bookings; blank makes that route ineligible.
Exhibitor_Staff_Form_URL__c Exhibitor Staff Form URL Text(255); required=false Field access --/--/--	Public form used by exhibitors to provide or update their NTE staff details.
Heavy_Vehicle_Form_URL__c Heavy Vehicle Form URL Text(255); required=false Field access --/--/--	Public form used to collect outstanding NTE heavy vehicle and logistics details.
Logo_Update_Form_URL__c Logo Update Form URL Text(255); required=false Field access --/--/--	Public form used by confirmed NTE organisations to provide their latest logo.
Owner_Username__c Owner Username Text(255); required=false Field access --/--/--	Username of the active Salesforce user who owns NTE submissions and receives internal notifications in this environment.
Partner_Application_URL__c Partner Application URL Text(255); required=false Field access --/--/--	HTTPS partner/sponsor application destination personalised into an invitation to a partner/sponsor expression of interest.
Partner_Final_Pack_URL__c Partner Final Pack URL Text(255); required=false Field access --/--/--	HTTPS final event information destination for eligible completed partner/sponsor bookings; blank makes that route ineligible.
Partner_Staff_Form_URL__c Partner Staff Form URL Text(255); required=false Field access --/--/--	Public form used by partners and sponsors to provide or update their NTE staff details.

NTE Stripe Config Configuration

API name: NTE_Stripe_Config__mdt. 7 packaged fields. Public custom metadata controlling activation, exact target org/merchant, environment, tax and optional scope. It contains no secret API key. The code uses Default; the two example JSON files serve the separate preflight helper, not runtime configuration.

Object settings: label=NTE Stripe Configuration; pluralLabel=NTE Stripe Configurations; visibility=Public.

Field and exact definition	Meaning and data lineage
Allowed_Email__c Recipient Email Filter Text(255); required=false Field access --/--/--	Optional case-insensitive exact Primary Contact email filter. Blank permits any otherwise eligible recipient; a mismatch blocks payment preparation.
Enabled__c Enabled Checkbox; required=false; defaultValue=false Field access --/--/--	Activation switch for the Stripe booking coordinator. It is considered with payment method, positive booking value and optional reference prefix.
Expected_Account_Id__c Expected Stripe Account Text(255); required=false Field access --/--/--	Expected acct_ merchant identity. The Stripe client reads and verifies the actual account before creating or reusing payment resources.
Expected_Org_Id__c Expected Salesforce Org Text(255); required=false Field access --/--/--	Exact 18-character destination Salesforce organisation ID; a different org cannot operate this saved configuration.
Live_Mode__c Live Payments Checkbox; required=false; defaultValue=false Field access --/--/--	Selects the test or live named credential and required Stripe environment. Existing payment requests retain their original environment binding.
Reference_Prefix__c Booking Reference Filter Text(255); required=false Field access --/--/--	Optional case-sensitive booking-reference prefix used to select the enabled rollout scope. Blank imposes no prefix restriction.
Tax_Rate__c Tax Rate (%) Number(5,2); required=false Field access --/--/--	Percentage between 0 and 100 used to derive the saved gross fixed charge from net GBP pence; the rate is snapshotted on each payment request.

Picklist value catalogue

The API value is the stored value. Unless a different label is shown, the displayed label is identical. Explicit inactive values and defaults are retained exactly. Consecutive numeric strings are expressed as an inclusive range only when every member is present with the same default/active treatment.

PL01 values

Used by: Lead.Additional_Staff_Count__c. Sorted: false.

Every integer string from 0 through 99 inclusive, in ascending order. default=false; active=not explicitly overridden.

PL02 values

Used by: Lead.Additional_Staff_Required__c, Lead.Supplier_Agreement_Required__c. Sorted: false.

Yes; No; Don't know.

PL03 values

Used by: Lead.Delivery_Window__c. Sorted: false.

Sunday 28 February between 14:00 - 18:00; Monday 1 March between 06:30 - 07:15.

PL04 values

Used by: Lead.Event_Discovery_Source__c. Sorted: false.

Previous exhibitor; E-mail invitation; Word of mouth from previous exhibitor; Word of mouth from previous attendees; Website; LinkedIn; Facebook; Instagram; Previous NTE event; NTE webinar or brochure; Email invitation; Recommendation or word of mouth; National Transition Event website; Mission Community website; Other social media; Other.

PL05 values

Used by: Lead.Exhibitor_Hall_Schedule__c, Lead.Guest_Accessibility_Required__c, Lead.Guest_Accompanying__c, Lead.Has_Special_Requirements__c, Lead.Invoice_Required__c, Lead.Purchase_Order__c, Lead.Quote_Required_for_PO__c, Lead.Stand_Power__c, Lead.Top_Up_Staff_Required__c, Lead.Volunteer_Armed_Forces_Service__c, Lead.Volunteer_Consent__c, Lead.Volunteer_DBS_Willing__c. Sorted: false.

Yes; No.

PL06 values

Used by: Lead.Exhibitor_Interest_Areas__c. Sorted: false.

Careers and recruitment; Training and education; Automotive and mobility; Manufacturing and engineering; Renewable and clean energy; Defence and security; Built environment and facilities; Financial and professional services; Digital and technology; Armed Forces charity or support; Other.

PL07 values

Used by: Lead.Exhibitor_Organisation_Category__c. Sorted: false.

Charity - member of Cobseo → Charity - member of COBSEO; Charity - not a member of Cobseo → Charity - not a member of COBSEO; Employer - Automotive Sector; Employer - Manufacturing Sector; Employer - Renewable & Clean Energy Sector; Employer - Defence → Employer - Defence & Security; Employer - Built Environment; Employer - Facilities Management; Employer - Financial and Professional Services; Employer - Digital & Technologies; Employer - Training Provider from any industry; Employer - Landbased industry; Employer - Blue Light & NHS; Employer - Other Sectors not denoted above; Government or Government Agency; Local Government or LG related; Trade Association; CIC or Not for Profit; Regular or Reserve Services, or Cadets.

PL08 values

Used by: Lead.Exhibitor_Space_Selections__c. Sorted: false.

Garage Space - reduced size with power - £599 + VAT; Single Garage - Paddock Side with power - £799 + VAT; Double Garage - Paddock Side with power - £1,299 + VAT; Single Garage - Track Side - £799 + VAT; Double Garage - Track Side - £1,299 + VAT; Clean Energy Zone - Single - £499 + VAT; Clean Energy Zone - Double - £849 + VAT; Built Environment Zone - Single - £499 + VAT; Built Environment Zone - Double - £849 + VAT; Manufacturing Zone - Single - £499 + VAT; Manufacturing Zone - Double - £849 + VAT; Defence & Security Zone - Single - £499 + VAT; Defence & Security Zone - Double - £849 + VAT; Digital and Technologies Zone - Single - £499 + VAT; Digital and Technologies Zone - Double - £849 + VAT; FM Zone - Single - £499 + VAT; FM Zone - Double - £849 + VAT; Professional & Financial Zone - Single - £499 + VAT; Professional & Financial Zone - Double - £849 + VAT; Training & Education Zone - Single - £499 + VAT; Any other business - Single - £499 + VAT; Any other business - Double - £849 + VAT; Local Government Authority - Single - £249.50 + VAT; Blue Light - Single - £249.50 + VAT; Trade Association - Single - £499 + VAT; COBSEO Charity - Single - Free; Non COBSEO Charity - Single - Free.

PL09 values

Used by: Lead.Exhibitor_Space_Size__c. Sorted: false.

Headline Partner - size and position to be confirmed with sponsor; Gold Partner - size and position to be confirmed with sponsor; Premier Partner - double exhibitor space (two trestle tables length); Champion Partner - standard exhibitor space (one trestle table length); Zone Sponsor - double exhibitor space (two trestle tables length); Troops' Track Day Partner - standard exhibitor space (one trestle table length); Standard exhibitor space (one trestle table length) - suitable for Community Stage, Event Guide Sponsor, Delegate Tote Bag and Karting Activity sponsors); 10m × 6m [inactive]; 11m × 7m [inactive]; 12m × 4m [inactive]; 13m × 5m [inactive]; 14m × 6m [inactive]; 15m × 7m [inactive]; 16m × 4m [inactive]; 17m × 5m [inactive]; 18m × 6m [inactive]; 19m × 7m [inactive]; 20m × 4m [inactive]; 9m × 5m [inactive]; As specified in selected space [inactive].

PL10 values

Used by: Lead.Heavy_Vehicle_Required__c. Sorted: false.

Yes; No; Not known yet.

PL11 values

Used by: Lead.NTE_Applicant_Email_Status__c. Sorted: false.

Accepted by Salesforce; Failed; Not Attempted; Not required.

PL12 values

Used by: Lead.NTE_Internal_Email_Status__c, Lead.Volunteer_Applicant_Email_Status__c, Lead.Volunteer_Internal_Email_Status__c. Sorted: false.

Accepted by Salesforce; Failed; Not Attempted.

PL13 values

Used by: Lead.NTE_Update_Status__c. Sorted: false.

Pending; Matched and Applied; No Matching Booking; Ambiguous Booking Reference; Failed.

PL14 values

Used by: Lead.Organisation_Type__c. Sorted: false.

Charity - COBSEO member; Charity - Non COBSEO member; Government Department or Agency; Industry Body / Trade Association; Employer - Automotive; Employer - Clean Energy; Employer - Blue Light Services / NHS; Employer - Built Environment; Employer - Manufacturing; Employer - Defence and Security; Employer - Financial and Professional Services; Employer - Digital and Technologies; Employer - Training and Education; Employer - Land-based; Employer - Other sector; Commercial business; Charity or non-profit; Government or public body; Industry body or trade association; Education or training provider; Other.

PL15 values

Used by: Lead.Partner_Interest_Areas__c. Sorted: false.

Strategic event partnership; Event zone sponsorship; Stage, content or thought leadership; Branding and delegate experience; Troops' Track Day; Other or not sure.

PL16 values

Used by: Lead.Partner_Interest_Type__c. Sorted: false.

Partnership; Sponsorship; Both - open to discussion; Not sure - I would like advice.

PL17 values

Used by: Lead.Payment_Method__c, Opportunity.NTE_Payment_Method__c. Sorted: false.

Bank transfer; Stripe.

PL18 values

Used by: Lead.Planned_Exhibitor_Count__c. Sorted: false.

1; 2; 3; 4; 5; 6; 7; 8; 9; 10; 11; 12; 13; 14; 15; 16; 17; 18; 19; 20; 21; 22; 23; 24; 25; 26; 27; 28; 29; 30; 31; 32; 33; 34; 35; 36; 37; 38; 39; 40; 41; 42; 43; 44; 45; 46; 47; 48; 49; 50; 51; 52; 53; 54; 55; 56; 57; 58; 59; 60; 61; 62; 63; 64; 65; 66; 67; 68; 69; 70; 71; 72; 73; 74; 75; 76; 77; 78; 79; 80; 81; 82; 83; 84; 85; 86; 87; 88; 89; 90; 91; 92; 93; 94; 95; 96; 97; 98; 99; More than 9.

PL19 values

Used by: Lead.Preferred_Contact_Method__c. Sorted: false.

Email; Telephone; Video call; No preference.

PL20 values

Used by: Lead.Previous_NTE_Events__c. Sorted: false.

No; NTE2024 → NTE24; NTE2025 → NTE25; NTE2026 → NTE26.

PL21 values

Used by: Lead.Pricing_Status__c, Opportunity.NTE_Pricing_Status__c. Sorted: false.

Calculated; Review required.

PL22 values

Used by: Lead.Sponsor_Package__c, Opportunity.NTE_Sponsor_Package__c. Sorted: false.

Headline Partner; Gold Partner; Premier Partner; Champion Partner; Zone Sponsor; Community Stage Sponsor; Podcast Corner Sponsor; Event Guide Sponsor; Delegate Tote Bag Sponsor; Helmet Bay Sponsor; Auditorium Sponsor; Live Stream Sponsor; Wristband Sponsor; Escapade Sponsor.

PL23 values

Used by: Lead.Staff_Update_Audience__c. Sorted: false.

Exhibitor; Partner / sponsor.

PL24 values

Used by: Lead.Volunteer_Availability__c. Sorted: false.

Weekdays; Weekends; Any.

PL25 values

Used by: Lead.Volunteer_Hours__c. Sorted: false.

0-4; 4-8; 8-16; 16+; Don't know.

PL26 values

Used by: Lead.Volunteer_Opportunities__c, Lead.Volunteer_Skills__c. Sorted: false.

Fundraising; Transport and Logistics; Motorsport Event Support; Marshalling; Community Outreach / Awareness; Professional Skills; Mentoring & Coaching; Team Area Co-Ordinator; Vehicle Maintenance / Repairs (Wantage); Pop up shop; Storekeeping (Wantage); Maintenance / DIY (Wantage); Driving / Transport [inactive]; Charity Merchandise / Shop Support [inactive].

PL27 values

Used by: Lead.Volunteer_Travel_Regions__c. Sorted: false.

East Midlands; Greater London; North East England; North West England; Scotland; South West England; South East England; Wales; West Midlands; Yorkshire & the Humber.

PL28 values

Used by: Lead.Web_Form_Type__c. Sorted: false.

Partner Sponsor Application Form; Partner Sponsor Exhibition Space Questions; Partner / Sponsor Expression of Interest; Exhibitor Expression of Interest; Partner / Sponsor Application; Exhibitor

Application; Guest Registration; Staff Details Update; Partner / Sponsor Staff Update; Exhibitor Staff Update; Heavy Vehicle Details; Logo Update; Volunteer Application.

PL29 values

Used by: Opportunity.NTE_Attendance_Status__c. Sorted: false.

Planned; Attended; Did Not Attend; Cancelled.

Flow and declarative automation reference

All four packaged flows are active after-save record-triggered flows. Their start criteria and assignments are reproduced here so an administrator can rebuild the same control flow. No Apex trigger source is present in this package. The order within a flow is explicit; ordering relative to unrelated target-org automation must be assessed in that target.

NTE Copy Converted Lead to Opportunity

API name: NTE_Copy_Converted_Lead_to_Opportunity. API version 67.0. Status Active.

Copies NTE application and event fields to the converted Opportunity and classifies the resulting Account and Contact for the NTE workspace. This avoids changing the org-wide LeadConvertSettings owned by another administrator.

Start: Lead Update; RecordAfterSave; changed-to-meet-criteria=true. Filter logic: 1 AND 2 AND (3 OR 4).

Criterion	Field	Operator	Value
1	IsConverted	EqualTo	true
2	ConvertedOpportunityId	IsNull	false
3	Web_Form_Type__c	EqualTo	Partner / Sponsor Application
4	Web_Form_Type__c	EqualTo	Exhibitor Application

Sequence: Price_Application_For_Conversion → Get_NTE_Opportunity_Record_Type → Update_Converted_Opportunity → Send_Exhibitor_Approval_Email → Classify_Converted_Account → Classify_Converted_Contact.

Price Application For Conversion

Element type: actionCalls. Label: Calculate Current Application Price.

Apex action: NTEPricingService. Transaction: CurrentTransaction.

Input	Value
leadId	\$Record.Id

Output pricedLead → Priced_Application.

Get NTE Opportunity Record Type

Element type: recordLookups. Label: Get NTE Opportunity Record Type.

Object: RecordType. Filters: SubjectType EqualTo Opportunity; DeveloperName EqualTo NTE_Event_Opportunity.

First record only=true; store output automatically=true.

Update Converted Opportunity

Element type: recordUpdates. Label: Update Converted Opportunity.

Object: Opportunity. Filters: Id EqualTo \$Record.ConvertedOpportunityId.

Destination field	Assigned value
RecordTypeId	Get_NTE_Opportunity_Record_Type.Id
Booking_Reference__c	\$Record.Booking_Reference__c
NTE_Event_Code__c	\$Record.NTE_Event_Code__c
NTE_Source_Form_Type__c	\$Record.Web_Form_Type__c
NTE_Form_Version__c	\$Record.Form_Version__c
NTE_Declaration_Date__c	\$Record.Declaration_Date__c
NTE_Event_Contact_Name__c	\$Record.Event_Contact_Name__c
NTE_Event_Contact_Title__c	\$Record.Event_Contact_Title__c
NTE_Event_Contact_Email__c	\$Record.Event_Contact_Email__c
NTE_Event_Contact_Mobile__c	\$Record.Event_Contact_Mobile__c
NTE_Sponsored_Name__c	\$Record.Sponsored_Name__c
NTE_Alternative_Organisation_Name__c	\$Record.Alternative_Organisation_Name__c
NTE_Trading_Name__c	\$Record.Trading_Name__c
NTE_Secondary_Contact_Prefix__c	\$Record.Secondary_Contact_Prefix__c
NTE_Secondary_Contact_Name__c	\$Record.Secondary_Contact_Name__c
NTE_Secondary_Contact_Title__c	\$Record.Secondary_Contact_Title__c
NTE_Secondary_Contact_Email__c	\$Record.Secondary_Contact_Email__c
NTE_Secondary_Contact_Mobile__c	\$Record.Secondary_Contact_Mobile__c
NTE_Secondary_Contact_Phone__c	\$Record.Secondary_Contact_Phone__c
NTE_Exhibitor_Hall_Schedule__c	\$Record.Exhibitor_Hall_Schedule__c
NTE_Has_Special_Requirements__c	\$Record.Has_Special_Requirements__c
NTE_Industry_Body_Details__c	\$Record.Industry_Body_Details__c
NTE_Event_Discovery_Source__c	\$Record.Event_Discovery_Source__c
NTE_Declaration_Name__c	\$Record.Declaration_Name__c
NTE_Terms_Accepted__c	\$Record.Terms_and_Conditions__c
NTE_Sponsor_Package__c	\$Record.Sponsor_Package__c
NTE_Exhibitor_Organisation_Category__c	\$Record.Exhibitor_Organisation_Category__c
NTE_Exhibitor_Space_Selections__c	\$Record.Exhibitor_Space_Selections__c
NTE_Exhibitor_Space_Size__c	\$Record.Exhibitor_Space_Size__c
NTE_Exhibitor_Space_Position__c	\$Record.Exhibitor_Space_Position__c
NTE_Previous_Events__c	\$Record.Previous_NTE_Events__c
NTE_Stand_Power__c	\$Record.Stand_Power__c
NTE_Power_Socket_Count__c	\$Record.Power_Socket_Count__c
NTE_Stand_Equipment__c	\$Record.Stand_Equipment__c
NTE_Stand_Special_Requirements__c	\$Record.Stand_Special_Requirements__c
NTE_Stand_Colleagues__c	\$Record.Stand_Colleagues__c

Destination field	Assigned value
NTE_Stand_Extra_Notes__c	\$Record.Stand_Extra_Notes__c
NTE_Planned_Exhibitor_Count__c	\$Record.Planned_Exhibitor_Count__c
NTE_Initial_Staff_Count__c	Priced_Application.Total_Staff_Count__c
NTE_Included_Staff_Count__c	Priced_Application.Included_Staff_Count__c
NTE_Total_Staff_Count__c	Priced_Application.Total_Staff_Count__c
NTE_Additional_Staff_Required__c	Priced_Application.Additional_Staff_Required__c
NTE_Additional_Staff_Count__c	Priced_Application.Additional_Staff_Count__c
NTE_Sponsor_Package_Total__c	Priced_Application.Sponsor_Package_Total__c
NTE_Exhibitor_Space_Price__c	Priced_Application.Exhibitor_Space_Price__c
NTE_Power_Socket_Unit_Price__c	Priced_Application.Power_Socket_Unit_Price__c
NTE_Power_Socket_Total__c	Priced_Application.Power_Socket_Total__c
NTE_Additional_Staff_Unit_Price__c	Priced_Application.Additional_Staff_Unit_Price__c
NTE_Additional_Staff_Total__c	Priced_Application.Additional_Staff_Total__c
NTE_Listed_Price_Total__c	Priced_Application.Listed_Price_Total__c
NTE_Pricing_Status__c	Priced_Application.Pricing_Status__c
NTE_Pricing_Version__c	Priced_Application.Pricing_Version__c
Amount	Priced_Application.Listed_Price_Total__c
NTE_Heavy_Vehicle_Required__c	\$Record.Heavy_Vehicle_Required__c
NTE_Invoice_Required__c	Priced_Application.Invoice_Required__c
NTE_Payment_Method__c	\$Record.Payment_Method__c
NTE_Invoiced_Company__c	\$Record.Invoiced_Company__c
NTE_Invoice_Address__c	\$Record.Invoice_Address__c
NTE_Invoiced_Person__c	\$Record.Invoiced_Person__c
NTE_Invoiced_Email__c	\$Record.Invoiced_Email__c
NTE_Invoice_Contact_Phone__c	\$Record.Invoice_Contact_Phone__c
NTE_Invoice_Additional_Information__c	\$Record.Invoice_Additional_Information__c
NTE_Purchase_Order__c	\$Record.Purchase_Order__c
NTE_Purchase_Order_Number__c	\$Record.Purchase_Order_Number__c
NTE_Quote_Required_for_PO__c	\$Record.Quote_Required_for_PO__c
NTE_Supplier_Agreement_Required__c	\$Record.Supplier_Agreement_Required__c

Send Exhibitor Approval Email

Element type: actionCalls. Label: Queue NTE Provisional Email.

Apex action: NTEExhibitorApprovalEmailService. Transaction: CurrentTransaction.

Input	Value
leadId	\$Record.Id

Input	Value
opportunityId	\$Record.ConvertedOpportunityId

Classify Converted Account

Element type: recordUpdates. Label: Classify Converted Account.

Object: Account. Filters: Id EqualTo \$Record.ConvertedAccountId.

Destination field	Assigned value
NTE_Participant__c	true
NTE_Event_Code__c	\$Record.NTE_Event_Code__c
NTE_Source_Form_Type__c	\$Record.Web_Form_Type__c
NTE_Booking_Reference__c	\$Record.Booking_Reference__c
NTE_Last_Application_Date__c	\$Flow.CurrentDateTime

Classify Converted Contact

Element type: recordUpdates. Label: Classify Converted Contact.

Object: Contact. Filters: Id EqualTo \$Record.ConvertedContactId.

Destination field	Assigned value
NTE_Participant__c	true
NTE_Event_Code__c	\$Record.NTE_Event_Code__c
NTE_Source_Form_Type__c	\$Record.Web_Form_Type__c
NTE_Booking_Reference__c	\$Record.Booking_Reference__c
NTE_Last_Application_Date__c	\$Flow.CurrentDateTime
NTE_Contact_Role__c	Applicant / event contact

Flow variable: name=Priced_Application; dataType=SObject; isCollection=false; isInput=false; isOutput=false; objectType=Lead.

NTE Inbound Lead Routing

API name: NTE_Inbound_Lead_Routing. API version 67.0. Status Active.

Routes new NTE expressions of interest, applications and guest registrations, then sends the appropriate acknowledgement and internal notification.

Start: Lead Create; RecordAfterSave; changed-to-meet-criteria=false. Filter logic: 1 OR 2 OR 3 OR 4 OR 5.

Criterion	Field	Operator	Value
1	Web_Form_Type__c	EqualTo	Partner / Sponsor Expression of Interest

Criterion	Field	Operator	Value
2	Web_Form_Type__c	EqualTo	Exhibitor Expression of Interest
3	Web_Form_Type__c	EqualTo	Partner / Sponsor Application
4	Web_Form_Type__c	EqualTo	Exhibitor Application
5	Web_Form_Type__c	EqualTo	Guest Registration

Sequence: Run_NTE_Service.

Run NTE Service

Element type: actionCalls. Label: NTE Inbound Lead Routing.

Apex action: NTEInboundLeadService. Transaction: CurrentTransaction.

Input	Value
leadId	\$Record.Id
isNewSubmission	true

NTE Supplementary Update Handler

API name: NTE_Supplementary_Update_Handler. API version 67.0. Status Active.

Applies staff, logistics and logo submissions to the NTE Opportunity matched by exact booking reference. Failed submissions are retained; only the existing staff and vehicle temporary Leads are removed after success.

Start: Lead Create; RecordAfterSave; changed-to-meet-criteria=false. Filter logic: 1 OR 2 OR 3 OR 4.

Criterion	Field	Operator	Value
1	Web_Form_Type__c	EqualTo	Partner / Sponsor Staff Update
2	Web_Form_Type__c	EqualTo	Exhibitor Staff Update
3	Web_Form_Type__c	EqualTo	Heavy Vehicle Details
4	Web_Form_Type__c	EqualTo	Logo Update

Sequence: Run_NTE_Service.

Run NTE Service

Element type: actionCalls. Label: NTE Supplementary Update Handler.

Apex action: NTEUpdateSubmissionService. Transaction: CurrentTransaction.

Input	Value
leadId	\$Record.Id

Volunteer Application Notification

API name: Volunteer_Inbound_Lead_Notification. API version 67.0. Status Active.

Sends the internal notification for a new Mission Motorsport volunteer application.

Start: Lead Create; RecordAfterSave; changed-to-meet-criteria=false. Filter logic: 1 AND 2.

Criterion	Field	Operator	Value
1	Web_Form_Type__c	EqualTo	Volunteer Application
2	LeadSource	EqualTo	Volunteer Application

Sequence: Notify_Volunteer_Owner.

Notify Volunteer Owner

Element type: actionCalls. Label: Notify Volunteer Owner.

Apex action: VolunteerInboundLeadService. Transaction: CurrentTransaction.

Input	Value
leadId	\$Record.Id
isNewSubmission	true

Apex class and method reference

The twelve implementation classes contain 301 extracted methods and constructors, including inner queue workers and DTO constructors. Every entry identifies its source signature/line and project purpose. Overloads remain separate. The accompanying archive contains the exact bodies; the runtime chapter explains cross-class orchestration and transaction boundaries. Standard library calls are not separately catalogued.

NTEBookingContactService

public inherited sharing class NTEBookingContactService {. Source:
force-app/main/default/classes/NTEBookingContactService.cls.

Method signature	Purpose and behaviour
public static Map<Id, Contact> primaryContacts(Set<Id> bookingIds, AccessLevel accessLevel) Source line 2	Loads roles and Contacts for the supplied booking IDs in the requested USER_MODE or SYSTEM_MODE. The overload optionally locks them. Returns a Contact only for a booking with exactly one Primary role; it never chooses an event-day contact or arbitrary role as fallback.
public static Map<Id, Contact> primaryContacts(Set<Id> bookingIds, AccessLevel accessLevel, Boolean lockRecords) Source line 8	Loads roles and Contacts for the supplied booking IDs in the requested USER_MODE or SYSTEM_MODE. The overload optionally locks them. Returns a Contact only for a booking with exactly one Primary role; it never chooses an event-day contact or arbitrary role as fallback.
private static Map<Id, Id> singlePrimaryContactIds(List<OpportunityCo ntactRole> roles) Source line 31	Indexes Primary roles by Opportunity. A second Primary role makes that booking ambiguous and removes it from the usable result.

NTEEmailDispatchService

public with sharing class NTEEmailDispatchService {. Source:
force-app/main/default/classes/NTEEmailDispatchService.cls.

Public data contracts: Selection.recordId: Id; Selection.fingerprint: String; DraftRequest.kind: String; DraftRequest.runId: String; DraftRequest.subject: String; DraftRequest.messageBody: String; DraftRequest.recipients: List<Selection>; RecipientDTO.recordId: Id; RecipientDTO.name: String; RecipientDTO.company: String; RecipientDTO.email: String; RecipientDTO.reference: String; RecipientDTO.eventCode: String; RecipientDTO.link: String; RecipientDTO.eligible: Boolean; RecipientDTO.issue: String; RecipientDTO.fingerprint: String; RecipientDTO.lastSentAt: Datetime; RecipientDTO.previewHtml: String; DraftDTO.kind: String; DraftDTO.runId: String; DraftDTO.title: String; DraftDTO.subject: String; DraftDTO.messageBody: String; DraftDTO.previewHtml: String; DraftDTO.recipients: List<RecipientDTO>; DraftDTO.recipientCount: Integer; DraftDTO.skippedCount: Integer; DraftDTO.recipientLimit: Integer; DraftDTO.canSend: Boolean; QueueResponse.queuedCount: Integer; QueueResponse.skippedCount: Integer; QueueResponse.message: String; HistoryDTO.dispatchId: Id; HistoryDTO.recordId: Id; HistoryDTO.kind: String; HistoryDTO.recipient: String; HistoryDTO.status: String; HistoryDTO.subject: String; HistoryDTO.sentAt: Datetime; HistoryDTO.createdAt: Datetime; HistoryDTO.error: String; HistoryDTO.runId: String; HistoryDTO.canRetry: Boolean.

Method signature	Purpose and behaviour
public static DraftDTO buildDraft(String kind, List<Id> recordIds) Source line 80	Builds a kind-specific editable subject/body and recipient eligibility snapshot for exactly the requested IDs. Does not render every recipient HTML or send messages.
public static String previewMessageJson(String requestJson, Id recordId) Source line 105	Strict JSON boundary that deserialises and validates a browser draft then returns one selected recipient preview.
public static String queueMessagesJson(String requestJson) Source line 110	Strict JSON boundary that validates a browser draft and serialises the queued/skipped response.
public static String previewMessage(DraftRequest request, Id recordId) Source line 115	Revalidates the selected recipient/fingerprint, personalises subject/body and returns that recipient HTML without creating dispatches.
public static QueueResponse queueMessages(DraftRequest request) Source line 127	Locks/reloads the exact selection, checks fingerprints and aggregate payload limits, persists unique dispatch rows, queues the saved IDs and returns accepted queue counts.
private static NTE_Email_Dispatch__c dispatchForRequest(DraftRequest request, RecipientDTO recipient) Source line 158	Creates a dispatch snapshot with the kind/run/record key, original recipient, reviewed content, personalised content and fingerprint.
private static void validateQueueSize(DraftRequest request, List<RecipientDTO> recipients) Source line 170	Checks combined raw, personalised and escaped HTML size before retaining a full bulk payload. Individually legal messages can still exceed the aggregate budget.
public static QueueResponse queueBookingConfirmation(Id opportunityId) Source line 204	Creates or reuses the unique first-base-payment confirmation dispatch. This automatic message has fixed project rendering and cannot be sent through the editable mass composer.
public static QueueResponse retryDispatch(Id dispatchId) Source line 235	Convenience entry point for the record action; delegates one failed dispatch ID to the same retry mechanism.
public static List<HistoryDTO> recentDispatches(List<Id> recordIds) Source line 242	Returns up to 1000 recent dispatch history DTOs for the selected source records, including outcome, recipient and retry information.
public static QueueResponse retryFailed(List<Id> dispatchIds) Source line 266	Reuses only Failed dispatches with their existing identities. Rechecks current eligibility/recipient/fingerprint; paid-confirmation recovery deliberately rebuilds its current valid primary-recipient presentation.
private static void enqueue(List<Id> dispatchIds) Source line 334	Schedules a worker only for the saved dispatch ID list; queue failure is converted into a truthful persisted failure outcome.
DispatchQueueable(List<Id> dispatchIds, Boolean bypassDelivery) Source line 345	Stores saved dispatch IDs and the controlled delivery-bypass flag for a worker page.
public void execute(QueueableContext context) Source line 346	The Queueable overload attaches its finalizer and processes a page; the Finalizer overload marks still-queued rows failed after an unexpected worker exception. Their parameter types distinguish the paths.
DispatchFinalizer(List<Id> dispatchIds) Source line 360	Captures the exact dispatch IDs whose pending state must be recovered after worker failure.

Method signature	Purpose and behaviour
public void execute(FinalizerContext context) Source line 361	The Queueable overload attaches its finalizer and processes a page; the Finalizer overload marks still-queued rows failed after an unexpected worker exception. Their parameter types distinguish the paths.
private static void processQueued(List<Id> dispatchIds, Boolean bypassDelivery) Source line 369	Locks queued rows, reloads recipients and verifies unchanged reviewed facts, renders validated messages, sends bounded groups, maps individual outcomes, synchronises source status and chains remaining saved IDs.
private static void failQueued(List<Id> dispatchIds, String error) Source line 483	Marks only still-Queued target dispatches Failed with a bounded reason and updates related source status where applicable.
private static List<RecipientDTO> loadRecipients(String kind, List<Id> recordIds, Boolean lockRecords, Set<Id> allowedQueuedIds) Source line 497	Kind-specific query and eligibility engine for invitations, staff/vehicle/logo reminders, final packs and paid confirmations. Uses one Primary Contact for booking mail, validates route links/references and explains every exclusion.
private static void updateSourceStatuses(List<NTE_Email_Dispatch__c> dispatches, AccessLevel accessLevel) Source line 626	Synchronises invitation progression and final-pack state from dispatch outcomes. Sent history is preserved; reminder sends do not mark preparation complete.
private static Map<Id, RecipientDTO> recipientMap(List<RecipientDTO> recipients) Source line 683	Indexes recipient DTOs by target record ID for exact selection and outcome lookup.
private static Boolean sameRecipient(NTE_Email_Dispatch__c dispatch, RecipientDTO recipient) Source line 688	Compares the saved recipient association/address/fingerprint with the freshly loaded recipient to stop an old reviewed email reaching changed details.
private static Id targetId(NTE_Email_Dispatch__c dispatch) Source line 692	Returns the Lead or Opportunity target from a dispatch row.
private static String normalizeKind(String kind) Source line 695	Restricts the requested communication type to the implemented allowlist.
private static List<Id> validateIds(List<Id> recordIds, String kind) Source line 700	Enforces permitted object IDs, nonempty bounded selections and duplicate handling for the selected kind.
private static DraftRequest parseRequestJson(String requestJson) Source line 716	Rejects malformed, unknown-field or oversized JSON before strict DraftRequest deserialisation.
private static Map<Id, String> validateRequest(DraftRequest request) Source line 730	Validates run identity, subject/body lengths, token/content rules, selected IDs and required fingerprints for the reviewed draft.
private static String fingerprint(String kind, RecipientDTO recipient) Source line 750	Hashes kind plus recipient/booking/route facts that must remain unchanged between review and delivery.
private static String dispatchKey(String kind, String runId, Id recordId) Source line 754	Builds the stable SHA256 key from kind, run and target. Payment confirmation uses its fixed booking-payment run identity.
private static String hash(String value) Source line 757	Returns the SHA256 digest used for snapshot and idempotency identities.

Method signature	Purpose and behaviour
private static String route(String kind, String sourceType, NTE_Routing_Config__mdt routing) Source line 758	Resolves application, staff, vehicle, logo or final-pack URL by kind and participant type from the Default routing metadata.
private static NTE_Routing_Config__mdt configuredRouting() Source line 767	Returns the current Default routing record or the injected test configuration.
private static Boolean validLink(String value) Source line 770	Validates configured HTTPS destinations before preview/queue/delivery.
private static String titleFor(String kind) Source line 777	Returns the kind-specific default composer title, subject or plain-text message. Personalisation occurs later against the selected recipient.
private static String subjectFor(String kind) Source line 784	Returns the kind-specific default composer title, subject or plain-text message. Personalisation occurs later against the selected recipient.
private static String bodyFor(String kind) Source line 791	Returns the kind-specific default composer title, subject or plain-text message. Personalisation occurs later against the selected recipient.
private static String personalise(String template, RecipientDTO recipient) Source line 800	Replaces the supported greeting, organisation, booking reference, event and route tokens in one pass; token-looking recipient values remain literal.
private static String normaliseLines(String text) Source line 820	Normalises CRLF/CR to LF for consistent editor and text-alternative handling.
private static String personalisedContentIssue(String subject, String body, RecipientDTO recipient) Source line 821	Rechecks expanded subject/body sizes and content after token expansion, including long recipient values.
private static String htmlFor(String kind, String subject, String body, RecipientDTO recipient) Source line 832	Builds the escaped branded HTML from the personalised plain-text composer content, including the appropriate route action.
private static String escape(String value) Source line 875	Escapes dynamic values for HTML output.
private static String emailError(Messaging.SendEmailResult result) Source line 876	Extracts a useful delivery error from a failed Salesforce send result.
private static QueueResponse resultFor(Integer queued, Integer skipped) Source line 879	Constructs the queue response with queued/skipped counts and operator-facing outcome text.
private static AuraHandledException handled(String message) Source line 885	Creates the AuraHandledException used for a controlled LWC-visible validation error.

NTEExhibitorApprovalEmailService

public without sharing class NTEExhibitorApprovalEmailService {
Source: force-app/main/default/classes/NTEExhibitorApprovalEmailService.cls.

Public data contracts: Request.leadId: Id; Request.opportunityId: Id; ApprovalRetryResult.queuedCount: Integer; ApprovalRetryResult.message: String.

Method signature	Purpose and behaviour
public static void sendApprovalConfirmation(List<Request> requests) Source line 42	Invocable conversion entry point. Validates explicit Lead/Opportunity associations, coalesces requests into a saved pending batch and schedules processing after the conversion transaction commits.
public static ApprovalRetryResult retryApprovalEmail(Id opportunityId) Source line 69	User action for one failed booking. Requires an eligible unsent, non-pending booking and its exact converted source application; returns the queue outcome instead of claiming an email was delivered.
private static Set<Id> saveRequests(List<Request> requests) Source line 106	Deduplicates and validates requests, checks prior approval/audit evidence, writes Pending and batch identity on eligible bookings and returns the saved booking IDs.
ApprovalQueueable(String key, Boolean bypass, Boolean allowLead) Source line 143	Stores the batch key and delivery/test-source flags for the asynchronous approval worker.
public void execute(QueueableContext context) Source line 146	Queueable.execute attaches a finalizer and processes the saved batch; ApprovalFinalizer.execute marks only still-pending records in its batch failed after an unhandled worker error. The signature distinguishes the two implementations.
public static void resumeAfterStripe(String batchKey, Boolean bypassDelivery, Boolean allowTestLead) Source line 160	Resumes the same approval batch after payment-link work without generating a new conversion request.
public static void finishStripeBooking(Id paymentRequestId, String batchKey, Boolean bypassDelivery, Boolean allowTestLead) Source line 163	Resumes approval for the exact booking represented by a completed payment request, preserving the original batch identity.
ApprovalFinalizer(String key) Source line 169	Captures the approval batch key used to isolate unexpected-failure recovery.
public void execute(FinalizerContext context) Source line 170	Queueable.execute attaches a finalizer and processes the saved batch; ApprovalFinalizer.execute marks only still-pending records in its batch failed after an unhandled worker error. The signature distinguishes the two implementations.
private static void processRequests(List<Request> requests) Source line 177	Internal/test-facing bridge from explicit Request values into the same saved-request processing path.
private static void processPendingBatch(String batchKey, Boolean bypassDelivery, Boolean allowTestLead) Source line 183	Loads pending bookings for one batch, optionally one subset, validates source association, Primary Contact, saved price, template and preparation settings, coordinates Stripe readiness and sends in bounded pages. Persists individual accepted/failed outcomes and audit Tasks; chains remaining work.
private static void processPendingBatch(String batchKey, Boolean bypassDelivery, Boolean allowTestLead, Set<Id> onlyBookingIds) Source line 187	Loads pending bookings for one batch, optionally one subset, validates source association, Primary Contact, saved price, template and preparation settings, coordinates Stripe readiness and sends in bounded pages. Persists individual accepted/failed outcomes and audit Tasks; chains remaining work.
public static Messaging.SingleEmailMessage renderBookingEmail(Opportunity booking, Contact recipient, Id templateId, NTE_Routing_Config__mdt routing, Boolean paymentConfirmation) Source line 320	Renders the stored Contact/Opportunity template, supplies event/organisation/finance/payment/preparation markers, and builds a readable text alternative. The paymentConfirmation flag selects paid presentation without creating another payment request.

Method signature	Purpose and behaviour
private static String replaceTemplateMarkers(String html, Map<String, String> replacements) Source line 358	Replaces only source-owned HTML comment markers in one pass. Recipient text that resembles a merge token remains literal data.
private static String plainTextFromHtml(String html) Source line 376	Removes layout-only markup while preserving meaningful paragraphs, itemised amounts and usable links.
private static String templateFor(Opportunity booking) Source line 395	Selects the exhibitor or partner provisional/complimentary stored template by saved participant type.
public static String savedPriceError(Opportunity booking) Source line 400	Checks saved status, base amount and itemised component consistency before any booking/paid confirmation. Rejects unknown zero, invalid quantities and participant-incompatible components.
private static Boolean validLineItem(String quantity, Decimal unitPrice, Decimal total) Source line 418	Validates a quantity, unit price and extended total as one internally consistent line. The String overload parses count text; the Decimal overload checks the numeric relationship.
private static Boolean validLineItem(Decimal quantity, Decimal unitPrice, Decimal total) Source line 424	Validates a quantity, unit price and extended total as one internally consistent line. The String overload parses count text; the Decimal overload checks the numeric relationship.
public static String paymentConfirmationError(Opportunity booking, NTE_Routing_Config__mdt routing) Source line 430	Applies the paid-confirmation prerequisites to the saved booking and preparation routing; payment history is not changed by a rendering failure.
private static String paymentNote(Opportunity booking, NTE_Payment_Request__c payment) Source line 443	Chooses provisional, complimentary, manual-payment or Stripe wording from saved booking/request facts.
private static String financeSummary(Opportunity booking, NTE_Payment_Request__c payment, Boolean paymentConfirmation) Source line 455	Builds the participant-specific saved component table and, for Stripe, the request VAT/gross amounts. Paid presentation omits a new Pay Now request.
private static String stripePaymentButton(NTE_Payment_Request__c payment) Source line 469	Builds the payment call-to-action only from the verified saved Stripe request URL.
private static Decimal componentTotal(Opportunity booking) Source line 473	Sums the saved initial sponsor/space/power/staff components for itemisation consistency checks.
public static String preparationConfigurationError(Opportunity booking, NTE_Routing_Config__mdt routing) Source line 477	Validates the booking reference and the relevant staff/logo/vehicle destinations before promising the recipient can complete preparation.
private static String preparationLinks(Opportunity booking, NTE_Routing_Config__mdt routing) Source line 485	Builds the audience-specific preparation buttons, with vehicle details included when applicable.

Method signature	Purpose and behaviour
private static String staffUrl(Opportunity booking, NTE_Routing_Config__mdt routing) Source line 495	Selects the partner or exhibitor staff form from routing metadata.
private static Boolean needsVehicleLink(Opportunity booking) Source line 499	Determines whether the saved heavy-vehicle answer requires exposing the vehicle-details route.
private static String shortEventLabel(String eventCode) Source line 500	Derives the recipient-facing short event label from the saved edition code.
private static Boolean validUrl(String value) Source line 504	Accepts usable HTTPS preparation destinations; invalid settings fail the affected booking email.
private static Boolean validBookingReference(String value) Source line 512	Checks the supported NTE reference grammar before emitting preparation instructions.
private static String button(String label, String url, String colour, Integer columnCount) Source line 515	Builds one escaped, consistently sized HTML preparation button for the current column count.
private static String quantityLabel(String label, String quantity, Decimal unitPrice) Source line 523	Formats a component quantity and unit amount for the saved itemisation. Overloads accept stored text or numeric quantities.
private static String quantityLabel(String label, Decimal quantity, Decimal unitPrice) Source line 529	Formats a component quantity and unit amount for the saved itemisation. Overloads accept stored text or numeric quantities.
private static String moneyRow(String label, Decimal value) Source line 533	Builds one escaped label/GBP amount row in the booking finance table.
private static Decimal amount(Opportunity booking) Source line 537	Resolves the booking base amount used by the renderer according to the saved pricing rules.
private static Decimal valueOrZero(Decimal value) Source line 538	Normalises a missing numeric component for validated arithmetic/presentation.
private static String money(Decimal value) Source line 539	Formats a Decimal as GBP with two decimal places.
private static String escape(String value) Source line 540	Escapes dynamic text for insertion into HTML.
private static Map<Id, Id> requestMap(List<Request> requests) Source line 541	Produces the explicit Opportunity-to-Lead request association and rejects conflicting mappings.
private static Opportunity failedUpdate(Id bookingId, String errorMessage) Source line 551	Builds a sparse Opportunity update setting failed approval status and bounded error text.
private static void failPendingBatch(String batchKey, String errorMessage) Source line 554	Marks still-pending members of the identified batch failed; does not demote accepted messages or another batch.

Method signature	Purpose and behaviour
private static Task auditFor(Opportunity booking, String status, String outcome, String recipient, String templateName, String errorMessage) Source line 562	Constructs the completed Task audit containing booking, recipient, template, status and error/outcome evidence.
private static Boolean isEligibleComplimentaryBooking(Opportunity booking) Source line 571	Requires the supported zero-price charity exhibition choice and known saved zero-charge pricing; a missing amount alone is not complimentary.
private static String truncate(String value) Source line 579	Bounds audit/error text to its persistence limit.

NTEInboundLeadService

public with sharing class NTEInboundLeadService { . Source:
force-app/main/default/classes/NTEInboundLeadService.cls.

Public data contracts: Request.leadId: Id; Request.isNewSubmission: Boolean.

Method signature	Purpose and behaviour
public List<Messaging.SendEmailResult> send(List<Messaging.SingleEmailMessage> messages) Source line 29	Default delivery adapter delegates the complete message list to Messaging.sendEmail; a replaceable adapter supports deterministic partial-result tests.
EmailDispatch(Id leadId, Boolean applicant, Messaging.SingleEmailMessage message) Source line 40	Associates one message with its Lead ID and applicant-versus-internal audit side so results cannot be assigned to a different recipient.
public static void routeAndAcknowledge(List<Request> requests) Source line 47	Flow entry point for five NTE routes. Reloads Leads, resets forged creation decisions/statuses, recalculates application pricing, resolves the configured owner and templates, sends only required unaccepted receipt/notification sides and records per-side outcomes. Application applicant receipts remain suppressed.
private static void dispatchAndRecord(List<EmailDispatch> dispatches, Map<Id, Lead> audits, Map<Id, List<String>> errors) Source line 175	Coordinates delivery and durable audit updates around a savepoint so an audit persistence failure does not leave a falsely accepted intake state.
private static void sendDispatches(List<EmailDispatch> dispatches, Map<Id, Lead> audits, Map<Id, List<String>> errors) Source line 195	Submits the accumulated list within the shared email invocation budget and maps every returned result, missing result or exception back to its own audit side.
private static void writeAudits(Map<Id, Lead> audits, Map<Id, List<String>> errors) Source line 221	Persists applicant/internal status, timestamp and combined errors for each Lead. Successful sides remain accepted during a later failed-side retry.
private static Boolean isUsableEmail(String email) Source line 233	Checks the address shape required before attempting a message; a missing or malformed address becomes a visible delivery failure.
private static void setDispatchStatus(Lead audit, Boolean applicant, String status) Source line 237	Sets the applicant or internal notification status selected by the dispatch flag.

Method signature	Purpose and behaviour
private static void fail(Lead audit, Boolean applicant, Map<Id, List<String>> errors, String message) Source line 242	Marks only the affected side Failed and appends the specific error to that Lead audit.

NTEPricingService

public without sharing class NTEPricingService {. Source:
force-app/main/default/classes/NTEPricingService.cls.

Public data contracts: ConversionPricingRequest.leadId: Id; ConversionPricingResponse.pricedLead: Lead.

Method signature	Purpose and behaviour
String status() Source line 86	Returns Review required when any selection/count/eligibility check failed; otherwise Calculated. This is the pricing-result status, not a payment state.
public static List<ConversionPricingResponse> priceApplicationsForConversion(List<ConversionPricingRequest> requests) Source line 104	Validates requested Lead IDs and supported application types, reloads current inputs, calculates each application and returns pricedLead responses in request order. It does not persist Lead prices or reprice another booking.
public static void recalculateLeads(Set<Id> leadIds) Source line 132	Maintenance entry point: reloads and reprices matching application Leads, then performs partial SYSTEM_MODE updates. SaveResult outcomes are not exposed; see the issues register before a historical migration.
private static List<Lead> loadLeadsForPricing(Set<Id> leadIds) Source line 139	Queries the source choices, staff allocation and component fields required for current Lead pricing; non-application or missing requested records cannot become valid conversion results.
public static void recalculateOpportunities(Set<Id> opportunityIds) Source line 149	Maintenance entry point for stored booking prices. Recalculates the initial components while preserving separately accepted staff top-up facts; partial DML outcomes are not returned.
private static void applyLeadPricing(Lead lead) Source line 163	Writes the calculated component, included/extra/total staff, listed total, status and catalogue version onto an in-memory application Lead, overriding browser-supplied derived prices.
private static void applyOpportunityPricing(Opportunity opportunity) Source line 192	Maps booking fields into the pricing calculator and writes current initial pricing components. Keeps the booking allocation/top-up separation described in the finance chapter.
public static Decimal componentTotal(Decimal sponsorTotal, Decimal spacePrice, Decimal powerTotal, Decimal staffTotal) Source line 224	Adds sponsor, exhibition space, power and additional initial staff amounts, treating null components as zero. VAT and later staff top-ups are outside this base total.
private static PricingResult calculate(String formType, String sponsorPackages, String exhibitorSpace, String category, String powerRequired, Decimal socketCount, String plannedStaffCount) Source line 228	Authoritative allowlist algorithm. Distinguishes partner package sums from one exhibitor space, checks active category/restricted-space eligibility and whole counts, derives included and chargeable staff, and returns Review required for invalid input.

Method signature	Purpose and behaviour
private static Decimal includedStaffForSpace(String spaceName) Source line 294	Returns four included places for the explicit double-space allowlist and two for other recognised exhibitor spaces.
private static Boolean isApplication(String formType) Source line 301	Recognises only Partner / Sponsor Application and Exhibitor Application.
private static Boolean qualifiesForPowerDiscount(String category) Source line 305	Matches the five explicit qualifying organisation category labels; approximate or altered text cannot receive the discount.
private static Boolean isKnownExhibitorCategory(String category) Source line 309	Caches active schema picklist values and requires an exact recognised category. This makes the field definition part of the pricing contract.
private static Boolean isEligibleForRestrictedSpace(String spaceName, String category) Source line 319	Checks the category-to-space restrictions for charity, local government, blue-light and trade-association choices.
private static Decimal decimalFromText(String value) Source line 331	Parses a stored numeric text count; blank/unparseable input returns null for the caller to classify rather than inventing a valid allocation.
private static Decimal valueOrZero(Decimal value) Source line 340	Normalises a nullable amount to zero for arithmetic after eligibility checks.

NTERelatedOpportunityController

public with sharing class NTERelatedOpportunityController {. Source:
force-app/main/default/classes/NTERelatedOpportunityController.cls.

Public data contracts: RelationshipResponse.mode: String; RelationshipResponse.title: String;
RelationshipResponse.emptyMessage: String; RelationshipResponse.account: RelatedAccount;
RelatedOpportunity.id: Id; RelatedOpportunity.name: String; RelatedOpportunity.eventCode: String;
RelatedOpportunity.bookingType: String; RelatedOpportunity.stage: String; RelatedOpportunity.amount:
Decimal; RelatedOpportunity.closeDate: Date; RelatedOpportunity.primaryContact: Boolean;
RelatedAccount.id: Id; RelatedAccount.name: String; RelatedAccount.phone: String;
RelatedAccount.website: String; RelatedContact.id: Id; RelatedContact.name: String; RelatedContact.title:
String; RelatedContact.email: String; RelatedContact.phone: String; RelatedContact.role: String;
RelatedContact.primaryContact: Boolean.

Method signature	Purpose and behaviour
public RelatedOpportunity(Opportunity opportunityRecord, Boolean isPrimary) Source line 21	Projects the readable Opportunity into display fields, including event, reference, stage, amount and whether the current Contact role is Primary.
public RelatedAccount(Account accountRecord) Source line 39	Projects the linked Account into its display name and record link.
public RelatedContact(OpportunityContactRole roleRecord) Source line 56	Projects a Contact Role into Contact details, role and Primary indicator.

Method signature	Purpose and behaviour
public static RelationshipResponse getRelationships(Id recordId, String objectApiName) Source line 67	Validates object/ID agreement and USER_MODE visibility. Account mode returns its NTE bookings; Contact mode follows its roles; Opportunity mode returns its Account and Contact roles. Caps list results at 200.
private static List<Opportunity> readableOpportunities(List<Opportunity> records) Source line 169	Applies readable-field filtering to the selected object records before creating response DTOs. Each helper handles its named SObject type.
private static List<OpportunityContactRole> readableRoles(List<OpportunityContactRole> > records) Source line 177	Applies readable-field filtering to the selected object records before creating response DTOs. Each helper handles its named SObject type.
private static List<Account> readableAccounts(List<Account> records) Source line 185	Applies readable-field filtering to the selected object records before creating response DTOs. Each helper handles its named SObject type.

NTEStripeBookingService

public without sharing class NTEStripeBookingService {. Source:
force-app/main/default/classes/NTEStripeBookingService.cls.

Method signature	Purpose and behaviour
public static NTE_Stripe_Config__mdt configuration() Source line 21	Loads Default Stripe custom metadata or injected test configuration.
private static Boolean selected(Opportunity booking, NTE_Stripe_Config__mdt config) Source line 24	Applies Enabled and optional reference-prefix/recipient scope to a prospective booking.
private static String configurationError(NTE_Stripe_Config__mdt config) Source line 31	Checks required merchant/org/environment/tax configuration and the current Salesforce org binding.
private static List<Opportunity> bookings(String whereClause, Map<String, Object> binds, Boolean lockRows) Source line 40	Executes the fixed field-set SYSTEM_MODE query with supplied bind variables and optional row lock for booking or payment-request records.
private static List<NTE_Payment_Request__c> requests(String whereClause, Map<String, Object> binds, Boolean lockRows) Source line 44	Executes the fixed field-set SYSTEM_MODE query with supplied bind variables and optional row lock for booking or payment-request records.
public static Boolean prepareProvisionalBatch(String batchKey, Boolean bypassDelivery, Boolean allowTestLead) Source line 49	Inspects one approval batch, validates source bookings/contacts, creates or reuses their unique Booking payment requests, and schedules payment work. Returns whether approval must wait for that route.
private static Map<Id, List<Lead>> convertedApplications(Set<Id> bookingIds) Source line 112	Bulk-loads converted source Leads per booking so association checks do not query once per record.

Method signature	Purpose and behaviour
private static String eligibilityError(Opportunity booking, Contact recipient, NTE_Stripe_Config__mdt config, Boolean allowTestLead, List<Lead> source) Source line 121	Rejects unsupported, unconverted/mismatched, paid/cancelled, wrong- org, invalid-price or unusable-recipient bookings before making a link.
private static String fingerprint(Opportunity booking, Contact recipient, NTE_Stripe_Config__mdt config) Source line 142	Hashes the booking identity, price components, recipient, event and payment configuration to bind external resources to the exact saved proposal.
PaymentWork(List<Id> values, String batchKey, Boolean bypass, Boolean allowLead) Source line 157	Stores request IDs and approval continuation context for callout-capable queue processing.
public void execute(QueueableContext context) Source line 160	PaymentWork.execute processes saved requests and continues the same approval workflow; PaymentFinalizer.execute records unhandled failures and resumes failure-aware approval handling.
PaymentFinalizer(List<Id> values, String batchKey) Source line 171	Captures request IDs and batch identity for bounded failure recovery.
public void execute(FinalizerContext context) Source line 172	PaymentWork.execute processes saved requests and continues the same approval workflow; PaymentFinalizer.execute records unhandled failures and resumes failure-aware approval handling.
private static void processPayment(Id requestId, Boolean allowTestLead) Source line 185	Locks/rechecks saved state before callouts, verifies account, creates/reuses Price and Link with stable keys, verifies the resulting contract and rechecks facts afterward. Ambiguous attempts older than 23 hours require review.
private static NTEStripeClient.Charge charge(NTE_Payment_Request__c payment) Source line 234	Builds the API client Charge contract solely from the saved payment- request snapshot.
private static Opportunity emailFailure(Id bookingId, String error) Source line 241	Creates a sparse failed approval update for the booking affected by a payment preparation failure.
public static void preloadEmailRequests(Set<Id> bookingIds) Source line 244	Bulk-loads payment requests into a transaction cache for approval rendering.
public static NTE_Payment_Request__c paymentForEmail(Id bookingId) Source line 251	Returns the cached saved Booking request used in the email finance table/payment button.
public static String emailReadinessError(Opportunity booking, Contact recipient) Source line 255	Verifies the current booking/recipient against the saved verified request, environment and recent verification before permitting email delivery.
public static void recordEmailAccepted(Opportunity booking, Opportunity updateRecord, Contact recipient, List<NTE_Payment_Request__c> paymentUpdates) Source line 268	Updates the payment request email audit and appropriate booking quote/invoice milestones after Salesforce accepts the provisional message. It never marks payment received.

NTEStripeClient

public without sharing class NTEStripeClient {. Source:
force-app/main/default/classes/NTEStripeClient.cls.

Public data contracts: Charge.accountId: String; Charge.operationKey: String; Charge.bookingReference: String; Charge.chargeKind: String; Charge.currencyCode: String; Charge.amountMinor: Long; Charge.description: String; PaymentLink.id: String; PaymentLink.url: String; PaymentLink.pricId: String; PaymentLink.amountMinor: Long; PaymentLink.currencyCode: String.

Method signature	Purpose and behaviour
public NTEStripeClient(String credential) Source line 25	Selects an allowed test/live named credential; all subsequent API calls use that protected endpoint identity.
public void verifyAccount(String expectedAccountId) Source line 32	Reads account and balance, checks the expected merchant and mode, and requires charges_enabled for live operation before permitting resource creation.
public String createPrice(Charge charge) Source line 45	Creates the one-time GBP Price with a year-neutral Product name, saved gross minor units, metadata and stable Price idempotency key.
public String createLink(Charge charge, String pricId) Source line 60	Creates a fixed quantity-one card Payment Link for the verified Price. Disables promotion codes, adjustable quantities, automatic tax and invoice creation; limits completed sessions to one.
public PaymentLink verifyLink(Charge charge, String linkId, String pricId) Source line 89	Retrieves the link and expanded Price and validates amount, currency, merchant mode, metadata, enabled options, quantity/session limits and payment URL before use in email.
public static Long toMinorUnits(Decimal amount) Source line 127	Converts GBP to exact pence using the explicit range and decimal-precision contract; rejects unsupported sub-penny or out-of-range charges.
public static Boolean validPaymentUrl(String value, Boolean liveMode) Source line 133	Checks the buy.stripe.com URL shape and test/live path rules, excluding unexpected query/fragment/host variants.
private static void validateCharge(Charge charge) Source line 143	Validates the saved charge identity, reference, amount and metadata needed for Price/Link requests.
private void requireVerifiedAccount(Charge charge) Source line 153	Requires a prior matching merchant/mode verification for the charge before any write or link acceptance.
private void verifyPrice(Charge charge, Map<String, Object> price, String expectedId) Source line 158	Validates the Price ID, active state, unit amount, currency, one-time billing and metadata against the charge snapshot.
private static void requireId(String value, String prefix) Source line 168	Checks the expected Stripe resource prefix and supported identifier shape.
private static Map<String, Object> objectValue(Map<String, Object> source, String key) Source line 171	Requires an object-shaped nested API response property rather than silently accepting an unexpected type.
private static Long longValue(Object value) Source line 175	Parses an API integer amount without accepting incompatible values.

Method signature	Purpose and behaviour
private Map<String, Object> request(String method, String path, Map<String, String> values, String idempotencyKey) Source line 180	Central form-encoded HTTP transport with 20-second timeout, pinned Stripe API version, protected credential, stable idempotency header and bounded error handling. Parses object JSON responses.

NTEUpdateSubmissionJob

public with sharing class NTEUpdateSubmissionJob implements Queueable {. Source: force-app/main/default/classes/NTEUpdateSubmissionJob.cls.

Method signature	Purpose and behaviour
public NTEUpdateSubmissionJob(String leadIdPayload, Boolean skipEmailDelivery) Source line 5	Stores the serialized Lead ID payload and controlled email-bypass flag for after-commit processing.
public void execute(QueueableContext context) Source line 10	Deserialises the exact queued IDs, invokes processLeadIds and records an unexpected worker failure against those source Leads.

NTEUpdateSubmissionService

public with sharing class NTEUpdateSubmissionService {. Source: force-app/main/default/classes/NTEUpdateSubmissionService.cls.

Public data contracts: Request.leadId: Id; AcknowledgementRetryResult.success: Boolean; AcknowledgementRetryResult.message: String; AcknowledgementRetryResult.leadId: Id; OrderedSubmission.submission: Lead.

Method signature	Purpose and behaviour
public OrderedSubmission(Lead submission) Source line 27	Wraps a source Lead for stable chronological processing when several submissions target one booking.
public Integer compareTo(Object otherValue) Source line 28	Orders by CreatedDate and then ID so a batch has deterministic first-valid top-up ownership.
public static void applyUpdates(List<Request> requests) Source line 36	Invocable creation entry point. Resets submitted success/booking-identity audit values and queues supported supplementary Lead IDs; actual booking mutation occurs after commit.
public static void recordUnexpectedFailure(Set<Id> leadIds, Exception exceptionValue) Source line 67	Attempts to persist a bounded unexpected-worker error for the affected submission IDs while preserving accepted/applied evidence.
public static void processLeadIds(Set<Id> leadIds, Boolean skipEmailDelivery) Source line 100	Reloads and orders submissions, matches exact normalised references, rejects missing/ambiguous/invalid targets, validates each update and merges valid changes per booking. Saves booking plus applied audit atomically, sends receipts separately and deletes eligible successful temporary Leads.

Method signature	Purpose and behaviour
private static OpportunityMatchIndex buildOpportunityMatchIndex(List<Opportunity> matchedOpportunities) Source line 301	Indexes eligible NTE booking references and marks duplicates ambiguous. Event code is not a second matching key; a unique reference is authoritative.
private static void applyPartnerStaffFields(Opportunity target, Lead source) Source line 319	Replaces the free partner staff count/names and completion metadata from the accepted roster; does not create exhibitor staff charges.
private static void applyExhibitorStaffFields(Opportunity target, Lead source, Opportunity existing) Source line 326	Applies initial names and the first valid immutable top-up purchase, calculates its separate amount and resets only its own invoice/payment milestones. Later name corrections preserve accepted quantities/finance.
private static Decimal initialStaffCount(Opportunity existing) Source line 355	Resolves the booking initial allocation from saved initial fields with the supported legacy fallback; invalid counts remain invalid.
private static String combineNames(String baseNames, String topUpNames) Source line 360	Joins initial and top-up roster lines into the final staff list while enforcing the stored long-text boundary.
private static Decimal decimalFromText(String value) Source line 367	Parses whole staff counts without turning malformed, fractional or missing values into a valid roster allocation.
private static String validationErrorFor(Lead source, Opportunity existing) Source line 376	Enforces form-to-booking audience, reference, declaration, roster count/name consistency, immutable top-up and complete heavy-item/contact requirements. Logo confirmation has its distinct lighter declaration rule.
private static Boolean incompleteOptionalItem(String description, String registration, String dimensions, String weight) Source line 452	Detects partially completed optional heavy-item groups so a replacement cannot silently clear a previously complete set.
private static Integer integerFromText(String value) Source line 458	Parses whole staff counts without turning malformed, fractional or missing values into a valid roster allocation.
private static Integer nonBlankLineCount(String value) Source line 467	Counts nonempty roster lines; the count must match the declared allocation.
private static void applyHeavyFields(Opportunity target, Lead source) Source line 474	Replaces the heavy item/haulier/delivery/contact fields from a complete valid submission and marks heavy details provided; stale optional fields are explicitly cleared.
private static void applyLogoFields(Opportunity target, Opportunity existing) Source line 498	Idempotently sets logo-provided state/time while retaining previous completion evidence on repeat declarations.
private static Boolean isValidBookingReference(String suppliedReference) Source line 505	Checks the normalised NTE reference grammar used for the exact booking match.
private static String acknowledgementTemplate(String formType) Source line 513	Selects the exhibitor staff, partner staff or heavy-vehicle receipt developer name. Logo updates do not request an acknowledgement email.

Method signature	Purpose and behaviour
private static Id appliedBookingId(Lead submission) Source line 520	Reads the durable booking identity captured when the submission was applied; a current reference alone cannot manufacture that identity.
private static Boolean matchesAppliedBooking(Lead submission, Opportunity booking) Source line 530	Requires the saved applied identity/reference to agree with the booking before any receipt retry.
private static Lead acknowledgementAudit(Id leadId, String error) Source line 537	Builds the source Lead receipt acceptance/failure/timestamp update.
private static Messaging.SingleEmailMessage acknowledgementMessage(Id mergeLeadId, Id templateId, String primaryEmail) Source line 547	Builds the stored Lead-template receipt addressed to the matched booking Primary Contact, while using the preserved submission as merge context.
private static Map<Id, String> sendAcknowledgements(List<Lead> leads, Map<Id, String> templateByLeadId, Map<Id, Id> bookingIdByLeadId, Boolean skipEmailDelivery, AccessLevel contactAccessLevel) Source line 558	Loads templates and exact Primary Contacts in bulk, sends bounded receipt groups and maps outcomes per Lead. More than 100 receipts returns failure/retry guidance without undoing applied booking data.
public static AcknowledgementRetryResult retryAcknowledgement(Id leadId) Source line 615	User action retries only one failed receipt after verifying its applied booking and current Primary Contact. Does not replay booking field updates, rematch to another record or delete the source Lead.
private static Map<String, Id> templateIds(Set<String> developerNames) Source line 665	Maps the requested stored template developer names to Salesforce EmailTemplate IDs.

NTE MasterPanelController

public with sharing class NTE_MasterPanelController {. Source:
force-app/main/default/classes/NTE_MasterPanelController.cls.

Public data contracts: FilterOption.label: String; FilterOption.value: String; SummaryMetric.key: String; SummaryMetric.label: String; SummaryMetric.value: Integer; SummaryMetric.displayValue: String; SummaryMetric.detail: String; SummaryMetric.icon: String; EventOverviewRow.key: String; EventOverviewRow.groupKey: String; EventOverviewRow.label: String; EventOverviewRow.total: Integer; EventOverviewRow.inProgress: Integer; EventOverviewRow.completed: Integer; EventOverviewRow.detail: String; EventOverviewRow.icon: String; EventOverviewRow.viewKey: String; PipelineStep.key: String; PipelineStep.label: String; PipelineStep.count: Integer; PipelineStep.detail: String; PipelineStep.icon: String; PipelineStep.viewKey: String; WorkQueue.key: String; WorkQueue.label: String; WorkQueue.count: Integer; WorkQueue.detail: String; WorkQueue.icon: String; WorkQueue.reportUrl: String; WorkQueue.weeklyReportUrl: String; WorkQueue.listUrl: String; DashboardRow.recordId: Id; DashboardRow.objectApiName: String; DashboardRow.recordUrl: String; DashboardRow.typeLabel: String; DashboardRow.typeIcon: String; DashboardRow.name: String; DashboardRow.organisation: String; DashboardRow.stage: String; DashboardRow.eventCode: String; DashboardRow.ownerName: String; DashboardRow.bookingReference: String; DashboardRow.contactName: String; DashboardRow.contactIssue: String;

DashboardRow.eventDayContactName: String; DashboardRow.eventDayContactEmail: String;
 DashboardRow.eventDayContactPhone: String; DashboardRow.approvalEmailStatus: String;
 DashboardRow.approvalEmailError: String; DashboardRow.approvalEmailSentAt: Datetime;
 DashboardRow.finalPackStatus: String; DashboardRow.finalPackSentAt: Datetime;
 DashboardRow.invitationStatus: String; DashboardRow.invitationSentAt: Datetime;
 DashboardRow.lastReminderSentAt: Datetime; DashboardRow.email: String; DashboardRow.phone:
 String; DashboardRow.packageOrSpace: String; DashboardRow.amount: Decimal;
 DashboardRow.baseAmount: Decimal; DashboardRow.topUpAmount: Decimal;
 DashboardRow.pricingReviewRequired: Boolean; DashboardRow.financeStatus: String;
 DashboardRow.staffStatus: String; DashboardRow.logisticsStatus: String; DashboardRow.logoStatus:
 String; DashboardRow.logoUpdateProvided: Boolean; DashboardRow.logoUpdateProvidedAt: Datetime;
 DashboardRow.quoteRequired: Boolean; DashboardRow.quoteProvided: Boolean;
 DashboardRow.invoiceRequired: Boolean; DashboardRow.invoiceProvided: Boolean;
 DashboardRow.paymentReceived: Boolean; DashboardRow.baseInvoiceRequired: Boolean;
 DashboardRow.baseInvoiceProvided: Boolean; DashboardRow.basePaymentReceived: Boolean;
 DashboardRow.topUpInvoiceRequired: Boolean; DashboardRow.topUpInvoiceProvided: Boolean;
 DashboardRow.topUpPaymentReceived: Boolean; DashboardRow.canMarkQuote: Boolean;
 DashboardRow.canMarkInvoice: Boolean; DashboardRow.canMarkPaid: Boolean;
 DashboardRow.canMarkTopUpInvoice: Boolean; DashboardRow.canMarkTopUpPaid: Boolean;
 DashboardRow.complete: Boolean; DashboardRow.modifiedAt: Datetime; DashboardRow.reportUrl:
 String; DashboardRow.sourceFormType: String; DashboardRow.accompanyingGuestName: String;
 DashboardRow.accompanyingGuestEmail: String; DashboardRow.guestAccessibility: String;
 DashboardRow.interestType: String; DashboardRow.interestAreas: String; DashboardRow.interestDetail:
 String; DashboardRow.preferredContact: String; DashboardRow.quoteRequirement: String;
 DashboardRow.paymentMethod: String; DashboardRow.plannedStaffCount: String;
 DashboardRow.additionalStaffCount: String; DashboardRow.heavyVehicleRequirement: String;
 DashboardRow.vehicleType: String; DashboardRow.vehicleRegistration: String;
 DashboardRow.vehicleDimensions: String; DashboardRow.haulierName: String;
 DashboardResponse.selectedEventCode: String; DashboardResponse.selectedTimeRange: String;
 DashboardResponse.selectedOwnerId: String; DashboardResponse.selectedViewKey: String;
 DashboardResponse.eventOptions: List<FilterOption>; DashboardResponse.ownerOptions:
 List<FilterOption>; DashboardResponse.summary: List<SummaryMetric>; DashboardResponse.overview:
 List<EventOverviewRow>; DashboardResponse.pipeline: List<PipelineStep>;
 DashboardResponse.workQueues: List<WorkQueue>; DashboardResponse.selectedView: WorkQueue;
 DashboardResponse.rows: List<DashboardRow>; DashboardResponse.totalRows: Integer;
 DashboardResponse.pageSize: Integer; DashboardResponse.offsetRows: Integer;
 DashboardResponse.accessibleRows: Integer; DashboardResponse.maxOffsetRows: Integer;
 DashboardResponse.hasNextPage: Boolean; DashboardResponse.rowsLimited: Boolean;
 DashboardResponse.refreshedAt: Datetime; HomeMetric.key: String; HomeMetric.label: String;
 HomeMetric.count: Integer; HomeMetric.value: Decimal; HomePipelineRow.key: String;
 HomePipelineRow.label: String; HomePipelineRow.count: Integer; HomePipelineRow.exhibitorCount:
 Integer; HomePipelineRow.partnerCount: Integer; HomePipelineRow.exhibitorValue: Decimal;
 HomePipelineRow.partnerValue: Decimal; HomePipelineRow.totalValue: Decimal;
 HomeBookingMixSegment.count: Integer; HomeBookingMixSegment.value: Decimal;
 HomeBookingMixSegment.averageValue: Decimal; HomeBookingMix.exhibitor:
 HomeBookingMixSegment; HomeBookingMix.partner: HomeBookingMixSegment;
 HomeDashboardResponse.selectedEventCode: String; HomeDashboardResponse.eventOptions:
 List<FilterOption>; HomeDashboardResponse.headlines: List<HomeMetric>;
 HomeDashboardResponse.pipeline: List<HomePipelineRow>;
 HomeDashboardResponse.revenueReadiness: List<HomeMetric>;
 HomeDashboardResponse.bookingMix: HomeBookingMix;

HomeDashboardResponse.pricingReviewCount: Integer; HomeDashboardResponse.refreshedAt: Datetime; ActionResult.success: Boolean; ActionResult.message: String; ActionResult.completedAt: Datetime; ReminderDraft.viewKey: String; ReminderDraft.title: String; ReminderDraft.matchingCount: Integer; ReminderDraft.recipientCount: Integer; ReminderDraft.missingEmailCount: Integer; ReminderDraft.recipientLimit: Integer; ReminderDraft.canSend: Boolean; ReminderDraft.subject: String; ReminderDraft.messageBody: String; ReminderSendResult.success: Boolean; ReminderSendResult.sentCount: Integer; ReminderSendResult.failedCount: Integer; ReminderSendResult.skippedCount: Integer; ReminderSendResult.message: String; ReminderSendResult.completedAt: Datetime; ReminderRecipient.booking: Opportunity; ReminderRecipient.primaryContact: Contact; ReminderRecipient.updateUrl: String; UpdateEmailIssue.leadId: Id; UpdateEmailIssue.formType: String; UpdateEmailIssue.error: String.

Method signature	Purpose and behaviour
public FilterOption(String labelValue, String storedValue) Source line 62	Constructs one label/value filter option consumed by the LWC.
public SummaryMetric(String metricKey, String metricLabel, Integer metricValue, String display, String metricDetail, String iconName) Source line 75	Constructs the named response record for summary counters, breakdown/progress rows, operational queues or commercial charts. Values are assembled by the corresponding aggregate helpers; constructors do not mutate records.
public EventOverviewRow(String rowKey, String rowGroup, String rowLabel, Integer totalValue, Integer progressValue, Integer completedValue, String rowDetail, String iconName, String targetView) Source line 95	Constructs the named response record for summary counters, breakdown/progress rows, operational queues or commercial charts. Values are assembled by the corresponding aggregate helpers; constructors do not mutate records.
public PipelineStep(String stepKey, String stepLabel, Integer stepCount, String stepDetail, String iconName, String targetView) Source line 116	Constructs the named response record for summary counters, breakdown/progress rows, operational queues or commercial charts. Values are assembled by the corresponding aggregate helpers; constructors do not mutate records.
public WorkQueue(String queueKey, String queueLabel, Integer queueCount, String queueDetail, String iconName, String relatedReportUrl, String relatedListUrl) Source line 135	Constructs the named response record for summary counters, breakdown/progress rows, operational queues or commercial charts. Values are assembled by the corresponding aggregate helpers; constructors do not mutate records.
public Integer compareTo(Object value) Source line 221	Sorts combined Lead/Opportunity dashboard rows deterministically by modification time and record ID, keeping pagination stable across tied timestamps.
private Integer compareRecordIds(DashboardRow other) Source line 230	Sorts combined Lead/Opportunity dashboard rows deterministically by modification time and record ID, keeping pagination stable across tied timestamps.
public HomeMetric(String metricKey, String metricLabel, Integer metricCount, Decimal metricValue) Source line 266	Constructs the named response record for summary counters, breakdown/progress rows, operational queues or commercial charts. Values are assembled by the corresponding aggregate helpers; constructors do not mutate records.
public HomePipelineRow(String rowKey, String rowLabel) Source line 283	Constructs the named response record for summary counters, breakdown/progress rows, operational queues or commercial charts. Values are assembled by the corresponding aggregate helpers; constructors do not mutate records.

Method signature	Purpose and behaviour
public HomeBookingMixSegment() Source line 299	Constructs the named response record for summary counters, breakdown/progress rows, operational queues or commercial charts. Values are assembled by the corresponding aggregate helpers; constructors do not mutate records.
public HomeBookingMix() Source line 309	Constructs the named response record for summary counters, breakdown/progress rows, operational queues or commercial charts. Values are assembled by the corresponding aggregate helpers; constructors do not mutate records.
public ReminderRecipient(Opportunity bookingValue, Contact primaryContactValue, String formUrl) Source line 357	Captures a booking, exact Primary Contact and resolved form URL for the retained legacy reminder draft API.
public static HomeDashboardResponse getHomeDashboard(String eventCode) Source line 364	Builds the selected edition commercial portfolio: pending/approved value, independently invoiced/paid/outstanding base and top-up amounts, pricing-review count, readiness and participant mix. Excludes closed losses and unrelated record types.
public static DashboardResponse getDashboard(String eventCode, String timeRange, String ownerId, String viewKey, Integer pageSize, Integer offsetRows) Source line 530	Normalises event/time/owner/view/pagination, executes USER_MODE counts and row queries, and returns consistent cards, refiners, report links, details and navigation limits.
public static List<Id> getCommunicationRecordIds(String eventCode, String timeRange, String ownerId, String viewKey) Source line 566	Reloads the complete filtered target selection for a composer action, with strict stale-filter checks and a 501-record sentinel beyond the 500-recipient capacity. It does not use only the current page.
public static List<UpdateEmailIssue> getUpdateEmailIssues(Id opportunityId) Source line 595	Returns up to 100 recent failed supplementary receipts associated by saved booking reference, including submissions whose event code differs from the booking edition.
public static ActionResult updateLeadDecision(Id leadId, String decisionName) Source line 613	Locks and rechecks one active interest/application. Supports the permitted not-progressed/rejected decision, preserves accepted invitation/converted history and rejects stale or retired manual progression actions.
public static ReminderDraft getReminderDraft(String eventCode, String timeRange, String ownerId, String viewKey) Source line 675	Retained legacy read-only reminder API: returns audience/subject/body and a bounded eligible recipient draft. Current LWC uses NTEEmailDispatchService instead.
public static ReminderSendResult sendUpdateReminders(String eventCode, String timeRange, String ownerId, String viewKey, String subject, String messageBody) Source line 716	Retired send entry point always raises a handled instruction to use the reviewed communication composer. It does not send messages.
public static ActionResult updateMilestone(Id opportunityId, String actionName) Source line 722	Locks an eligible booking in USER_MODE, validates quote/base/top-up invoice/payment order, stamps the exact flag/time/user and rejects repeated actions. First base payment queues one confirmation; top-up payment does not.
private static Map<String, Integer> counts(String leadBase, String opportunityBase, Map<String, Object> leadBinds, Map<String, Object> opportunityBinds) Source line 835	Runs the scoped aggregate queries behind all operational counters using the shared finance/readiness clauses.

Method signature	Purpose and behaviour
private static List<SummaryMetric> summary(Map<String, Integer> counts) Source line 879	Transforms scoped counts into top-level cards, event breakdowns, stage navigation or queue options respectively. These are views of the same bookings, not additive disjoint totals.
private static List<EventOverviewRow> overview(Map<String, Integer> counts) Source line 891	Transforms scoped counts into top-level cards, event breakdowns, stage navigation or queue options respectively. These are views of the same bookings, not additive disjoint totals.
private static List<PipelineStep> pipeline(Map<String, Integer> counts) Source line 916	Transforms scoped counts into top-level cards, event breakdowns, stage navigation or queue options respectively. These are views of the same bookings, not additive disjoint totals.
private static List<WorkQueue> workQueues(Map<String, Integer> counts, Map<String, String> reports) Source line 930	Transforms scoped counts into top-level cards, event breakdowns, stage navigation or queue options respectively. These are views of the same bookings, not additive disjoint totals.
private static WorkQueue queue(String key, String label, Map<String, Integer> counts, String detail, String icon, Map<String, String> reports, String listUrl) Source line 958	Constructs one queue with its count, explanatory detail, related report and native-list URL.
private static WorkQueue selectedView(String viewKey, Map<String, Integer> counts, Map<String, String> reports, List<WorkQueue> queues) Source line 964	Resolves the current queue descriptor from the normalised view key and computed counts.
private static List<DashboardRow> rows(String viewKey, String leadBase, String opportunityBase, Map<String, Object> leadBinds, Map<String, Object> opportunityBinds, Integer pageSize, Integer offsetRows, String reportUrl) Source line 969	Queries the required Lead/Opportunity fields for the chosen view, sorts/pages results, and for Recent merges both object types before slicing.
private static DashboardRow leadRow(Lead recordValue, String reportUrl) Source line 1044	Maps one Lead to panel columns/details, contact data, decision/invitation status and permitted review actions.
private static DashboardRow opportunityRow(Opportunity recordValue, String reportUrl) Source line 1102	Maps one booking and its exact Primary Contact to panel details, saved finance/readiness facts, missing-data reasons and next actions.
public static Boolean isComplete(Opportunity booking) Source line 1180	Single in-memory completion rule: resolved quote, known/settled applicable base and top-up finance, staff and logo provided, and No heavy vehicles or Yes plus details provided. Pack sending is separate.
private static Boolean isUpdateRequired(Opportunity booking) Source line 1192	Identifies missing staff/logo or unresolved required logistics; finance readiness is evaluated separately.
private static Decimal knownLeadValue(Lead recordValue) Source line 1199	Returns the known application listed value; unknown/review-required pricing is excluded rather than treated as free.
private static Decimal knownOpportunityValue(Opportunity recordValue) Source line 1205	Returns the known combined base and separate top-up commitment for commercial aggregation.

Method signature	Purpose and behaviour
private static Decimal knownBaseOpportunityValue(Opportunity recordValue) Source line 1210	Resolves the known saved base amount without including later top-up money.
private static void addToMetric(HomeMetric metric, Decimal value) Source line 1217	Adds a qualifying record and known value to one Home metric.
private static void addToPipeline(HomePipelineRow row, Boolean exhibitor, Decimal value) Source line 1222	Adds count/value to the exhibitor or partner segment of a Home pipeline row.
private static void addToBookingMix(HomeBookingMix mix, Boolean exhibitor, Decimal value) Source line 1235	Accumulates exhibitor/partner counts and values for the booking mix.
private static void finalizeBookingMix(HomeBookingMix mix) Source line 1241	Calculates totals/segment proportions after accumulating the selected edition mix.
private static List<HomeMetric> orderedMetrics(Map<String, HomeMetric> metrics, List<String> keys) Source line 1248	Returns metrics or pipeline rows in the explicit display order rather than map iteration order.
private static List<HomePipelineRow> orderedPipeline(Map<String, HomePipelineRow> rowsByKey, List<String> keys) Source line 1254	Returns metrics or pipeline rows in the explicit display order rather than map iteration order.
private static Boolean isBaseBillable(Opportunity booking) Source line 1260	Returns true for Invoice Required Yes, a positive listed base total or pricing requiring review. Keeping unknown pricing billable prevents an incomplete record bypassing finance.
private static Boolean leadPricingNeedsReview(Lead recordValue) Source line 1266	Identifies missing/invalid pricing for an application Lead or booking; used to expose review work and withhold misleading financial readiness.
private static Boolean pricingNeedsReview(Opportunity booking) Source line 1271	Identifies missing/invalid pricing for an application Lead or booking; used to expose review work and withhold misleading financial readiness.
private static Boolean hasKnownPricing(String pricingStatus, Decimal listedTotal) Source line 1275	Implements the supported Calculated/non-null and known positive legacy pricing rule. Invalid/missing zero pricing is not accepted as complimentary.
private static Boolean isTopUpBillable(Opportunity booking) Source line 1281	Returns true when Top Up Invoice Required is set or the separate staff top-up amount is positive.
private static Boolean isBillable(Opportunity booking) Source line 1286	Returns whether either the base charge or the separate top-up requires finance.
private static Boolean baseInvoiceComplete(Opportunity booking) Source line 1290	Evaluates the named charge/milestone pair, treating a known non-billable charge as complete and requiring its own saved flag for a positive charge.

Method signature	Purpose and behaviour
private static Boolean topUpInvoiceComplete(Opportunity booking) Source line 1294	Evaluates the named charge/milestone pair, treating a known non-billable charge as complete and requiring its own saved flag for a positive charge.
private static Boolean basePaymentComplete(Opportunity booking) Source line 1298	Evaluates the named charge/milestone pair, treating a known non-billable charge as complete and requiring its own saved flag for a positive charge.
private static Boolean topUpPaymentComplete(Opportunity booking) Source line 1302	Evaluates the named charge/milestone pair, treating a known non-billable charge as complete and requiring its own saved flag for a positive charge.
private static Decimal valueOrZero(Decimal value) Source line 1306	Converts null to zero after known-price eligibility has been determined.
private static String financeStatus(DashboardRow row) Source line 1310	Presents the next unresolved quote/invoice/payment or pricing-review state from the mapped booking facts.
private static String typeLabel(String formType) Source line 1321	Maps the supported form type to the participant label or icon used in panel rows.
private static String typeIcon(String formType) Source line 1329	Maps the supported form type to the participant label or icon used in panel rows.
private static String leadStage(Lead recordValue) Source line 1337	Presents recorded Converted, Rejected, Invited, Queued or current review state without reopening a decided Lead.
private static String preferredContact(String method, String timeValue) Source line 1351	Combines the saved preferred contact method and timing for the detail panel.
private static String leadViewClause(String viewKey) Source line 1356	Adds the exact interest/application/guest/recent Lead filter for a normalised queue key.
private static String activeInterestClause() Source line 1367	Excludes converted, progressed and not-progressed interests from active review.
private static String activeApplicationClause() Source line 1372	Excludes converted and rejected applications from active review.
private static String opportunityViewClause(String viewKey) Source line 1376	Selects the quote/invoice/payment, preparation, completed or approved booking subset for the chosen view.
private static String logisticsOutstandingClause() Source line 1399	Expresses unresolved heavy-vehicle state in SOQL, including unknown answers rather than assuming No.
private static String completeClause() Source line 1404	SOQL counterpart of isComplete, used by counts and final-pack/completed selection. Must stay aligned with the in-memory rule.
private static String billableClause() Source line 1413	Returns the SOQL predicate for any, base or separate top-up charge respectively.
private static String baseBillableClause() Source line 1417	Returns the SOQL predicate for any, base or separate top-up charge respectively.

Method signature	Purpose and behaviour
private static String pricingReadyClause() Source line 1421	Returns the SOQL known-price or review-required predicate used consistently in finance queues.
private static String pricingReviewClause() Source line 1426	Returns the SOQL known-price or review-required predicate used consistently in finance queues.
private static String topUpBillableClause() Source line 1432	Returns the SOQL predicate for any, base or separate top-up charge respectively.
private static String anyInvoiceOutstandingClause() Source line 1436	Selects bookings with an unresolved applicable base or top-up invoice.
private static String allInvoicesProvidedClause() Source line 1441	Requires both applicable invoices or known non-billable exceptions.
private static String actionablePaymentClause() Source line 1446	Selects a payment that can be recorded now, respecting quote, invoice and booking-first order while allowing independent top-up invoice work.
private static String allPaymentsReceivedClause() Source line 1452	Requires both applicable base and top-up payments, allowing known non-billable charges to pass.
private static String quoteResolvedClause() Source line 1457	Accepts no quote requirement or a saved provided quote.
private static String notBillableClause() Source line 1461	Returns the complementary known non-billable predicates for combined, base or top-up finance. Unknown pricing is not equivalent to free.
private static String baseNotBillableClause() Source line 1465	Returns the complementary known non-billable predicates for combined, base or top-up finance. Unknown pricing is not equivalent to free.
private static String topUpNotBillableClause() Source line 1471	Returns the complementary known non-billable predicates for combined, base or top-up finance. Unknown pricing is not equivalent to free.
private static Integer viewCount(String viewKey, Map<String, Integer> counts) Source line 1476	Returns the count associated with a normalised view key.
private static void configurePagination(DashboardResponse response, Integer requestedOffset) Source line 1480	Clamps page size/offset to a valid accessible last page and the 2000-row browser cap, even when queues shrink between requests.
private static Integer countLead(String whereClause, Map<String, Object> binds) Source line 1491	Executes the named object bound aggregate count in USER_MODE.
private static Integer countOpportunity(String whereClause, Map<String, Object> binds) Source line 1495	Executes the named object bound aggregate count in USER_MODE.
private static String leadBaseWhere(String eventCode, String ownerId, Datetime sinceAt) Source line 1499	Builds the supported NTE Lead/event/owner/creation-date base predicate.
private static String opportunityBaseWhere(String eventCode, String ownerId, Datetime sinceAt) Source line 1507	Builds the NTE record type, supported participant, nonblank event, open-or-won, owner and creation-date base predicate.

Method signature	Purpose and behaviour
private static Map<String, Object> baseBinds(String eventCode, String ownerId, Datetime sinceAt) Source line 1520	Produces bind variables for event, owner, time and required record type/form choices.
private static Map<String, Object> copyBindsWith(Map<String, Object> source, String bindName, Object bindValue) Source line 1532	Copies a query bind map before adding a view-specific parameter.
private static List<FilterOption> eventOptions() Source line 1539	Collects nonblank event codes from relevant main Leads/bookings and sorts them descending. Legacy codes remain selectable; unrelated/supplementary-only events do not become empty choices.
private static List<FilterOption> ownerOptions() Source line 1571	Returns selectable owner label/ID options for the dashboard scope.
private static Map<String, String> reportUrls() Source line 1582	Resolves the stored NTE report IDs and builds native Lightning URLs, including the weekly finance report.
private static String resolveEventCode(String requested, List<FilterOption> options) Source line 1595	Preserves an explicit available edition; otherwise selects the highest available canonical NTE plus four-digit year, then falls back to the first option only if no canonical code exists.
private static String communicationEventCode(String requested) Source line 1605	Strictly validates a communication edition rather than silently substituting another when a draft action is stale.
private static String normalizeTimeRange(String value) Source line 1612	Normalises dashboard time-range input to the supported choices.
private static String communicationTimeRange(String requested) Source line 1617	Rejects unsupported/stale communication time ranges instead of widening the intended recipient scope.
private static String normalizeViewKey(String value) Source line 1625	Maps aliases and supported panel view keys to the canonical queue; falls back only for ordinary dashboard navigation.
private static String normalizeOwnerId(String value) Source line 1640	Validates the selected owner ID or recognised all-owner choice before binding the query.
private static String normalizeReminderView(String value) Source line 1651	Restricts the retained reminder API to the supported outstanding preparation views.
private static List<Opportunity> reminderBookings(String eventCode, String timeRange, String ownerId, String viewKey) Source line 1659	Loads up to 2000 scoped candidate bookings for the retained legacy reminder draft, ordered by Account/name.
private static Map<Id, Contact> primaryContactsByOpportunity(List<Opportu nity> bookings) Source line 1678	Delegates exact Primary Contact resolution for the selected reminder bookings.
private static String reminderTitle(String viewKey) Source line 1686	Supplies legacy kind-specific reminder presentation text; the active composer defaults are in NTEEmailDispatchService.

Method signature	Purpose and behaviour
private static String reminderSubject(String viewKey) Source line 1692	Supplies legacy kind-specific reminder presentation text; the active composer defaults are in NTEEmailDispatchService.
private static String reminderBody(String viewKey) Source line 1698	Supplies legacy kind-specific reminder presentation text; the active composer defaults are in NTEEmailDispatchService.
private static String reminderUrl(String viewKey, String sourceFormType, NTE_Routing_Config__mdt routing) Source line 1711	Resolves the legacy reminder form destination from view, participant type and routing metadata.
private static String personaliseReminder(String templateBody, ReminderRecipient recipient) Source line 1720	Expands the retained legacy reminder body against one recipient snapshot.
private static Task reminderAuditTask(ReminderRecipient recipient, String viewKey, String subject, Boolean sent, String errorMessage) Source line 1734	Builds the historical reminder audit Task shape. The retired send entry point cannot dispatch through this path.
private static String closedTaskStatus() Source line 1757	Finds a usable closed Task status for audit creation rather than assuming a target-specific label.
private static Datetime sinceAt(String timeRange) Source line 1770	Converts the supported time-range choice into a CreatedDate lower-bound timestamp; all time has no lower bound.
private static String safeMessage(Exception exceptionValue) Source line 1778	Returns bounded useful exception text for the operator without replacing a specific controlled validation message.
private static AuraHandledException handled(String message) Source line 1784	Creates an AuraHandledException for a controlled Lightning-visible error.

VolunteerInboundLeadService

public with sharing class VolunteerInboundLeadService {. Source:
force-app/main/default/classes/VolunteerInboundLeadService.cls.

Public data contracts: Request.leadId: Id; Request.isNewSubmission: Boolean.

Method signature	Purpose and behaviour
public List<Messaging.SendEmailResult> send(List<Messaging.SingleEmailMessage> messages) Source line 22	Default send adapter calls Messaging.sendEmail for the complete list; tests substitute controlled per-message results.
Dispatch(Id leadId, Boolean applicant, Messaging.SingleEmailMessage message) Source line 33	Keeps the Lead, applicant/internal side and message together for exact result mapping.
public static void notifyOwner(List<Request> requests) Source line 40	Flow entry point restricted to the matching volunteer form type and LeadSource. Resets forged new-record acceptance, resolves applicant and current active owner independently, sends the two volunteer templates and preserves already accepted sides on retry.

Method signature	Purpose and behaviour
private static void dispatchAndRecord(List<Dispatch> dispatches, Map<Id, Lead> audits, Map<Id, List<String>> errors) Source line 134	Wraps message and audit processing so persistence problems leave a recoverable outcome rather than pretending the stored audit is complete.
private static void sendDispatches(List<Dispatch> dispatches, Map<Id, Lead> audits, Map<Id, List<String>> errors) Source line 154	Sends the accumulated volunteer messages using the remaining shared invocation budget; records partial failures and missing results individually.
private static void writeAudits(Map<Id, Lead> audits, Map<Id, List<String>> errors) Source line 180	Saves the volunteer applicant/internal acceptance fields and errors on the source Lead.
private static Boolean isUsableEmail(String email) Source line 192	Rejects missing or malformed applicant/owner addresses before delivery.
private static void setStatus(Lead audit, Boolean applicant, String status) Source line 196	Writes the correct volunteer applicant or internal status field.
private static void fail(Lead audit, Boolean applicant, Map<Id, List<String>> errors, String message) Source line 201	Accumulates an error and marks just the affected volunteer delivery side Failed.

Apex test coverage by feature

These are the 17 packaged test classes. The named scenarios specify project invariants and provide examples for rebuilding behaviour. Fixture constructors, mocks and assertion helpers are omitted from the scenario list; they are retained in the source archive. No test class is a production trigger or scheduled job.

NTEBookingPaymentEmailTest

Source: force-app/main/default/classes/NTEBookingPaymentEmailTest.cls.

booking Payment Confirms Each Exact Primary And Participant Template Once; stripe Confirmations Show Saved Paid Totals Without Another Payment Request; staff Top Up Never Repeats The Booking Confirmation; failed Provisional Does Not Delay Recorded Payment Confirmation; unusable Preparation Reference Keeps Payment And a Recoverable Confirmation; inconsistent Itemisation Cannot Be Sent As a Paid Confirmation; complimentary Top Up Payment Does Not Create a Booking Email; missing Primary Keeps Payment And Failed Request Then Retries After Repair; send Failure Keeps Payment And Retry Uses The Same Dispatch Only Once; missing Template Is Retryable Without Changing Payment; changed Primary Never Receives An Old Queued Snapshot; changed Booked Amount Leaves The Payment Confirmation Unsent; paid Confirmation Cannot Be Sent Through The Editable Mass Draft; milestone Queues An After Commit Worker.

NTEConversionFlowTest

Source: force-app/main/default/classes/NTEConversionFlowTest.cls.

converted Application Copies Nte Fields To Opportunity; complimentary Conversion Confirms Only When No Extras Are Charged; partner Bank Transfer Conversion Sends Partner Provisional Email; twelve

Conversions Cross The Old Limit Without Flow Errors; mixed Conversions Use Their Exact Booking After Another Booking Is Modified; existing Synthetic Account And Contact Keep Their Identity And Receive Their Exact Booking; conversion Reprices Current Inputs Without Changing Older Booking Facts; incomplete Current Selection Cannot Reuse Its Earlier Calculated Price; mismatched Converted Lead Does Not Send To Either Booking; public Retry Reports Queue Failure Truthfully Without Losing The Booking; public Retry Reports Only Its Exact Queued Booking; document Native No Opportunity Conversion Pending Owner Decision; document Native Existing Booking Conversion Pending Owner Decision.

NTEEmailDispatchServiceTest

Source: force-app/main/default/classes/NTEEmailDispatchServiceTest.cls.

invitation Draft Routes Each Interest And Explains Exclusions; future Event Invitations Use Reusable Participant Links; exact Selection Is Idempotent And Progresses Only After Accepted Send; changed Email Before Queue Requires Another Reviewed Draft; changed Primary Contact After Queue Does Not Receive The Frozen Email; failed Only Retry Reuses Dispatch And Preserves Successful History; failed Retry Does Not Silently Switch To a New Recipient; queued Job Processes Only Its Saved Selection With Delivery Bypassed; completed Details And Missing Primary Contact Are Skipped; unpriced Zero Booking Does Not Become Eligible For a Final Pack; final Pack Needs Configured Event And Completion And Keeps Sent History; preview Escapes Editable Text And Routes Each Update Type; oversized Selection And Missing Or Unsafe Link Cannot Queue; json Preview And Queue Preserve Browser Payload And Exact Selection; json Boundary Rejects Malformed Unknown And Oversized Requests; json Boundary Retains Recipient Change Checks; largest Draft And Queue Keep Only One Html Preview; maximum Message And Selection Fail Before Rows Then Allow a Smaller Selection; combined Personalisation Budget Rejects Otherwise Valid Individual Messages; combined Html Escaping Budget Protects The Worker Payload; full Worker Page Maps Failures And Skips To Their Own Recipients; queued Source Rejects Another Draft Even With Another Run Id; reminder Kinds Remain Independent And Repeatable Until Complete; changed Final Pack Event Or Link Cannot Send Old Draft; token Looking Data Stays Literal And Text Keeps Paragraphs; contact Roles Use Exactly One Primary And Never Fallback; merged Booking Details Changed After Payment Require Retry; tampered Selection Does Not Cross Records Or Email Kinds; expanded Subject And Message Must Still Fit Their Limits; confirmation Still Sends When Provisional Failed And Queue Failure Is Recoverable; late Completer Gets Only Its Own Final Pack And Top Up Preserves Earlier Sent History; unusable Booking Reference Cannot Create Preparation Mail Or a Pack.

NTEExhibitorApprovalEmailServiceTest

Source: force-app/main/default/classes/NTEExhibitorApprovalEmailServiceTest.cls.

text Alternative Preserves Details Without Hidden Layout Text; exhibitor Uses Primary Contact And Sends Only Once; partner Uses Partner Template And Preparation Form; complimentary Booking Confirms Only When No Charge Is Due; partner Reservation Uses Selected Names And Preserves Saved Combined Price; missing Primary Email Fails Without Fallback And Can Be Retried; absent Primary Role Fails Despite Usable Applicant And Day Contact; failed Send Retains Visible Failure And Only Successful Retry Is Sent; explicit Requests Coalesce One Post Commit Job; unpriced Booking Cannot Send a Confirmation Even When Marked Paid; blank Pricing Status Preserves Known Charge But Not Unknown Zero; inconsistent Saved Charge Needs Review Without Manual Adjustment; inconsistent Itemised Power Fails Only Its Booking And Can Be Repaired; additional Staff Charge Needs a Whole Quantity And Saved Unit Price; participant Type Cannot Hide An Unitemised Component; malformed Preparation Destinations Fail Only When Applicable; unusable Booking Reference Leaves Preparation Email Unsent; failed Job Recovery Touches Only Pending Bookings In Its Batch; stored Greetings Handle Missing And Escaped

First Names; stored Optional Lead Rows Preserve Partial And Multiline Values; stored Partner Rows Keep Supplied Booking Contacts; literal Template Syntax And Html Looking Names Remain Recipient Text; more Than One Queue Page Drains Every Explicit Booking Exactly Once; salesforce Accepts Contact And Opportunity Template; empty Requests And Already Sent Retry Do Not Enqueue.

NTEInboundLeadServiceTest

Source: force-app/main/default/classes/NTEInboundLeadServiceTest.cls.

routes Supported Lead And Builds Notifications; records Blank Applicant Email Then Retries Only That Message; invalid Configured Owner Does Not Fall Back To Another Recipient; records Salesforce Acceptance Without Duplicate Invocation; all Five Routes Use Their Matching Applicant And Owner Templates; large Mixed Intake Uses One Platform Email Invocation; partial Rejection And Missing Results Remain Retryable; retired Application Receipts Stay Suppressed During Internal Retry; thrown Send Failure Retains Lead And Can Recover; exhausted Invocation Budget Records Failure Instead Of Rolling Back Intake; failed Audit Save Cancels Attempt And Retains Recoverable Failure; forged Creation Decisions Cannot Hide Fresh Interest Or Application; retry Preserves Later Staff Decision And Invitation History; empty And Null Requests And Unsupported Forms Are No Ops; email Validation Rejects Missing Or Malformed Addresses.

NTEMasterPanelFinanceTest

Source: force-app/main/default/classes/NTEMasterPanelFinanceTest.cls.

combined Refiners And Overview Count Each Booking Once; payment Required Contains Only An Actionable Next Payment; booking Invoice Precedes Top Up Without Combining Stored Milestones; booking Payment Precedes Top Up And Preserves Space Confirmation; booking Payment Does Not Wait For The Top Up Invoice; prematurely Invoiced Top Up Still Waits For Booking Payment; complimentary Booking Skips Only Its Own Finance Milestones; quote Must Be Provided Before Either Invoice Can Be Recorded; repeated Actions Preserve Recorded Dates Users And Separate Flags; unknown Pricing Cannot Appear Free Confirmed Or Payable Even With Old Flags; home Preserves Paid Booking Money When Top Up Is Still Outstanding; complimentary Quote Remains Visible Without Inventing a Payment; every Stored Invoice Payment Combination Keeps Actions And Counts Consistent; known Positive Legacy Charge Does Not Require a Migration.

NTEMasterPanelReadinessTest

Source: force-app/main/default/classes/NTEMasterPanelReadinessTest.cls.

logo Alone Blocks Completion And Updates Counters Until Provided; panel Uses Primary Contact And Keeps Day Contact Separate; absent Primary Email Is Flagged Without Replacing It With Day Email; update Email Issues Use Booking Reference Across Submission Event Codes; final Pack Refiners And Communication Selection Separate Sent And Queued; reopened Top Up Finance Preserves Pack History And Never Reenters Unsent; interest Selection Respects Type Event Owner And Decision; queued Or Sent Invitation Cannot Be Rejected; unrecognised Logistics Cannot Disappear From Outstanding Work; every Logistics Staff And Logo Combination Uses One Completion Definition; communication Selection Returns Limit Sentinel Without Expanding Past501.

NTEMetadataReportStressTest

Source: force-app/main/default/classes/NTEMetadataReportStressTest.cls.

confirmed Value Excludes Missing And Invalid Prices; native Finance Views Follow Both Charges And Booking First Order.

NTEPanelStressTest

Source: force-app/main/default/classes/NTEPanelStressTest.cls.

inactive And Wrong Source Bookings Reject Every Stale Finance Action; closed Won Bookings Keep Legitimate Finance Work; stale Communication Filters Cannot Select Another Event Or All Owners; unrelated And Supplementary Events Do Not Become Empty Default Choices; valid Year Default Preserves Explicit Historical Code Selection; recent Rows Show Decisions Instead Of Reopening Review In Their Status; repeated Rejection Cannot Write a Second Decision; pagination Limit And Shrinking Queues Have An Explicit Stable Last Page; merged Recent Pages Remain Deterministic Across Both Record Objects; time Filters Use Submission Creation And Leave Future Years Independent; user Mode Rejects Restricted Reads And Actions Without Mutation.

NTEPricingServiceTest

Source: force-app/main/default/classes/NTEPricingServiceTest.cls.

calculates Partner Packages And Flags Unavailable Selections; calculates Exhibitor Components And Discounts; flags Unknown Selections Instead Of Inventing Prices; prevents Restricted Space Eligibility Bypass; derives Large Space Allowance And Rejects Invalid Staff Totals.

NTEPricingStressTest

Source: force-app/main/default/classes/NTEPricingStressTest.cls.

every Space Has Consistent Lead And Booking Components; every Category Uses Exact Discount And Restricted Space Rules; every Sponsor And Pair Uses Fixed Prices With No Staff Or Power Charge; malformed Duplicate Missing And Removed Packages Cannot Become Calculated; invalid Staff Counts Never Produce Complimentary Or Negative Pricing; invalid Power Counts Are Review Work And No Power Ignores Stale Counts; missing Unknown Or Lookalike Categories Cannot Claim a Power Discount; missing Removed Or Altered Space Labels Never Invent Free Prices; applicant Entered Count Overrides Forged Derived Totals And Prices; booked Initial Staff And Separate Finance Facts Survive Recalculation; bulk Persisted Lead Pricing Restores All Derived Values; conversion Pricing Uses Current Inputs In Request Order Without Saving; conversion Pricing Rejects Missing Or Non Application Requests; non Applications Null Inputs And Numeric Legacy Counts Are Safe.

NTERelatedOpportunityControllerTest

Source: force-app/main/default/classes/NTERelatedOpportunityControllerTest.cls.

npe Opportunity Record Type Id; non Npe Opportunity Record Type Id; account Returns Only Npe Opportunities; contact Returns Its Npe Opportunities; opportunity Returns Account And Contacts; regular Crm Opportunity Cannot Use Npe Relationship Mode; user Mode Prevents Restricted User From Bypassing Crud And Field Access.

NTEStripeBookingServiceTest

Source: force-app/main/default/classes/NTEStripeBookingServiceTest.cls.

exhibitor Request Email Preserves Manual Payment And Exact Gross; partner Email Keeps Partner Preparation And Saved Amount; outage Blocks Email Without Changing Payment; retry Uses Committed Request And The Original Idempotency Keys; failed Email Reuses Verified Link Without Another Charge; changed Amount Or Recipient Cannot Use An Old Request; ambiguous Creation Older Than Idempotency Window Requires Review; recipient Change After Verification Holds Email; disabled Out Of Scope And Unconverted Bookings Cannot Create Links; ordinary Form References Prepare Both Application Types;

ordinary Form Scope Accepts Other Recipients; ordinary Form Scope Preserves Existing Request Identity; paid Cancelled And Wrong Org Hold The Request; bulk Preparation Does Not Query Per Booking; next Year Uses New Opportunity With The Same Account And Contact; live Mode Runs Through The Provisional Email; switching Environment Cannot Reuse An Earlier Test Request; switching Environment After Verification Holds The Email; link Timeout Preserves Price And Recovers The Same Request; past Close Date And Closed Won Do Not Expire a Booking.

NTEStripeClientTest

Source: force-app/main/default/classes/NTEStripeClientTest.cls.

complete Fixed Link Contract And Stable Retries; no Writes Until Account And Mode Are Verified; changed Link Cannot Be Used In An Email; exact Pence And Url Boundaries; verified Live Account Creates The Same Fixed Payment Contract; live Configuration Rejects Wrong Mode And Unavailable Merchant.

NTEUpdateSubmissionServiceTest

Source: force-app/main/default/classes/NTEUpdateSubmissionServiceTest.cls.

logo Update Matches Every Event Code And Retains Audit Leads; repeated Logo Update Is Idempotent And Retained; invalid Logo References Are Retained Without Changing Bookings; logo Update Cannot Target Regular Or Incomplete Nte Opportunities; unmatched Reference Retains Lead Without Changing Opportunity; non Nte Opportunity With Matching Reference Is Not Eligible; opportunity Match Index Rejects Ambiguous Reference; exhibitor Top Up Is Separated From Initial Booking Value; exact Reference Applies Heavy Vehicle Details; heavy Submission Sets Requirement Yes For Every Prior State; bulk Staff And Heavy Updates For One Booking Are Merged Without Duplicate Id Failure; empty And Unsupported Requests Are Handled Safely; invalid Payload Is Retained Without Marking Booking Complete; incomplete Heavy Payload Is Retained Without Marking Logistics Complete; missing Top Up Answer Remains Outstanding And Retains Lead; partner Staff Update Is Free And Becomes The Roster Source Of Truth; staff Forms Cannot Update The Wrong Booking Type; accepted Top Up Rejects Quantity Changes And Preserves Finance On Name Corrections; missing Primary Retains Applied Update And Retry Does Not Replay Its Data; blank Primary Email Does Not Fall Back To Event Contact Or Submitter; email Refusal Keeps Saved Details And Retries Only The Receipt; same Batch Top Ups Use The First Valid Accepted Purchase; oversized Top Up Does Not Consume The Purchase; oversized Batch Entry Cannot Lock Top Up Or Roll Back Other Bookings; invalid Legacy Staff Allocations Cannot Be Rounded Into Valid Rosters; receipts Use The Matched Booking Event Across Staff And Vehicle Forms; logo Confirmations Do Not Require Signature Or Date; other Preparation Forms Still Require Their Declarations; applied Receipt Cannot Be Retargeted By Editing Its Reference; receipt Without Verified Applied Identity Cannot Rematch Another Booking; closed Lost Booking Accepts First Top Up Heavy And Logo After Pack Was Sent; no New Top Up Corrects Base Names Without Changing Accepted Purchase Or Contacts; incomplete Optional Heavy Items Preserve The Full Previous Replacement; partner Rejects Missing Zero Negative And Mismatched Rosters; unexpected Queue Failure Is Recorded Without Throwing.

NTE MasterPanelControllerTest

Source: force-app/main/default/classes/NTE_MasterPanelControllerTest.cls.

nte Opportunity Record Type Id; non Nte Opportunity Record Type Id; dashboard Reconciles Filters Counts Pipeline And Rows; non Nte Record Types Cannot Contaminate Metrics Rows Actions Or Event Filters; home Dashboard Reconciles Counts Values And Finance Requirements; home Dashboard Uses Dynamic Event Selection And Empty Financial Totals; owner Time And Lead Views Are Applied;

application Pagination Is Stable When Records Share a Timestamp; guest Queue Details Are Returned; partner Interest Queue Details Are Returned; exhibitor Interest Queue Details Are Returned; finance Aggregate Is Returned; lead Stage Subtype Views Return Combined And Narrowed Rows; application Subtype View Returns Narrowed Rows; converted Application Moves Into Approved Metrics; recent Converted Applications Show Their Recorded Outcome; approved Stage Subtype Views Return Narrowed Rows; finance And Update Subtype Views Return Narrowed Rows; logo Update View Counts Filters And Refreshes After Status Change; payment Required View Supports Marking Paid; top Up Invoice And Payment Are Tracked After The Booking; unconfirmed Logistics Cannot Be Completed; completion Requires Every Applicable Milestone; milestones Enforce Order And Record Audit; invalid Actions Are Rejected Without Mutation; rejection Leaves Active Queues And Manual Progress Is Retired; every Finance View Links To The Weekly And Cross Event Reports; reminder Draft Uses Primary Recipients And Old Sender Cannot Dispatch; reminder Composer Supports Future Events Without Hard Coded Years.

VolunteerInboundLeadServiceTest

Source: force-app/main/default/classes/VolunteerInboundLeadServiceTest.cls.

saves Revised Volunteer Details And Renders Availability; rejects New Applications Without Current Code Acknowledgement; preserves Legacy Applications Without Retroactive Acknowledgement; records Blank Applicant Email Then Retries Only That Message; records Salesforce Acceptance Without Duplicate Invocation; partial Rejection And Missing Results Remain Retryable; thrown Send Failure Retains Lead And Can Recover; exhausted Invocation Budget Records Failure Instead Of Rolling Back Intake; failed Audit Save Cancels Attempt And Retains Recoverable Failure; empty And Null Requests And Unsupported Forms Are No Ops; email Validation Rejects Missing Or Malformed Addresses; bypass Records Not Attempted And Retains Lead; uses Lead Recipient And Current Active Owner Only; missing Owner Email Retains Lead And Retries Only Internal Notification; ignores Non Volunteer And Mismatched Source Records; forged Creation Acceptance Cannot Suppress Acknowledgements; mixed Nte And Volunteer Batch Shares Platform Budget Without Dropping Messages; full Trigger Batch Retains Every Individual Result.

Form and Lightning component reference

The form specifications below include every Salesforce-mapped control, fixed hidden value, conditional requirement and option set extracted from the current HTML. Controls sharing one field are grouped; checkbox selections post semicolon-separated values. A missing HTML value attribute on an option means its text is the native submitted value. Numeric ranges are shortened only when the set is consecutive.

exhibitor application

Source: exhibitor-application.html. Form configuration: class=main-column; data-web-to-lead=; data-form-kind=exhibitor; data-lead-source=Customer Event; data-use-default-rule=0; data-confirmation-preview=Thank you. We have received your NTE27 exhibitor application. The NTE team will review it and contact you with the outcome..

Section order: Join us at NTE27 → 1 Organisation → 2 Main contact → 3 Previous NTE events → 4 Exhibition space → Select one space → 5 Power and booking total → 6 Operations and accessibility → 7 Quotation and invoicing → 8 Final details and declaration → Application and confirmation emails.

Salesforce Lead field	Control and exact input contract
Logo_Upload_URL__c	type=hidden
Web_Form_Type__c	type=hidden; value=Exhibitor Application
Form_Version__c	type=hidden; value=exhibitor-application-v10
NTE_Event_Code__c	type=hidden
Booking_Reference__c	type=hidden
Event_Contact_Name__c	type=hidden; data-combine-fields=contact-first-name,contact-last-name
Event_Contact_Email__c	type=hidden; data-copy-value-from=email
Event_Contact_Title__c	type=hidden; data-copy-value-from=job-title
Sponsor_Package_Total__c	type=hidden; value=0
Exhibitor_Space_Price__c	type=hidden; value=0
Power_Socket_Unit_Price__c	type=hidden; value=0
Power_Socket_Total__c	type=hidden; value=0
Additional_Staff_Unit_Price__c	type=hidden; value=0
Additional_Staff_Total__c	type=hidden; value=0
Included_Staff_Count__c	type=hidden; value=0
Total_Staff_Count__c	type=hidden; data-copy-value-from=planned-count
Additional_Staff_Required__c	type=hidden; value=No
Additional_Staff_Count__c	type=hidden; value=0
Listed_Price_Total__c	type=hidden; value=0
Pricing_Status__c	type=hidden; value=Calculated
Pricing_Version__c	type=hidden; value=NTE27-2026-09-10
Invoice_Required__c	id=invoice-required; type=hidden; value=No
Company	Organisation name as it should appear in marketing. id=company; required=true

Salesforce Lead field	Control and exact input contract
Exhibitor_Organisation_Category__c	Organisation category. id=organisation-category; required=true. Options: Employer - Automotive Sector; Employer - Manufacturing Sector; Employer - Renewable & Clean Energy Sector; Employer - Defence → Employer - Defence & Security; Employer - Built Environment; Employer - Facilities Management; Employer - Financial and Professional Services; Employer - Digital & Technologies; Employer - Training Provider from any industry; Employer - Landbased industry; Employer - Blue Light & NHS; Employer - Other Sectors not denoted above; Government or Government Agency; Local Government or LG related; Regular or Reserve Services, or Cadets; Trade Association; Charity - member of Cobseo; Charity - not a member of Cobseo; CIC or Not for Profit.
Website	Organisation website. id=website; type=url
Salutation	Title / prefix. id=salutation. Options: Mr.; Ms.; Mrs.; Dr.; Prof.; Mx..
FirstName	First name. id=contact-first-name; required=true
LastName	Surname. id=contact-last-name; required=true
Title	Job title. id=job-title; required=true
Email	Email address. id=email; type=email; required=true
Event_Contact_Mobile__c	Mobile phone. id=mobile; type=tel; required=true
Phone	Landline or work phone. id=phone; type=tel; required=true
Secondary_Contact_Prefix__c	Prefix. id=second-prefix; visible only when second-contact-toggle in Yes
Secondary_Contact_Name__c	Full name. id=second-name; visible only when second-contact-toggle in Yes
Secondary_Contact_Title__c	Job title. id=second-title; visible only when second-contact-toggle in Yes
Secondary_Contact_Email__c	Email. id=second-email; type=email; visible only when second-contact-toggle in Yes
Secondary_Contact_Mobile__c	Mobile phone. id=second-mobile; type=tel; visible only when second-contact-toggle in Yes
Secondary_Contact_Phone__c	Work phone. id=second-phone; type=tel; visible only when second-contact-toggle in Yes
Previous_NTE_Events__c	NTE24. id=nte2024; type=checkbox; value=NTE2024 NTE25. id=nte2025; type=checkbox; value=NTE2025 NTE26. id=nte2026; type=checkbox; value=NTE2026
Planned_Exhibitor_Count__c	How many people do you currently plan to bring, including yourself?. id=planned-count; type=number; required=true; min=1; max=99; step=1
Exhibitor_Space_Selections__c	name=exhibitor-space; type=radio; value=Garage Space - reduced size with power - £599 + VAT; required=true name=exhibitor-space; type=radio; value=Single Garage - Paddock Side with power - £799 + VAT name=exhibitor-space; type=radio; value=Double Garage - Paddock Side with power - £1,299 + VAT name=exhibitor-space; type=radio; value=Single Garage - Track Side - £799 + VAT name=exhibitor-space; type=radio; value=Double Garage - Track Side - £1,299 + VAT name=exhibitor-space; type=radio; value=Clean Energy Zone - Single - £499 + VAT name=exhibitor-space; type=radio; value=Clean Energy Zone - Double - £849 + VAT name=exhibitor-space; type=radio; value=Built Environment Zone - Single

Salesforce Lead field	Control and exact input contract
	- £499 + VAT name=exhibitor-space; type=radio; value=Built Environment Zone - Double - £849 + VAT name=exhibitor-space; type=radio; value=Manufacturing Zone - Single - £499 + VAT name=exhibitor-space; type=radio; value=Manufacturing Zone - Double - £849 + VAT name=exhibitor-space; type=radio; value=Defence & Security Zone - Single - £499 + VAT name=exhibitor-space; type=radio; value=Defence & Security Zone - Double - £849 + VAT name=exhibitor-space; type=radio; value=Digital and Technologies Zone - Single - £499 + VAT name=exhibitor-space; type=radio; value=Digital and Technologies Zone - Double - £849 + VAT name=exhibitor-space; type=radio; value=FM Zone - Single - £499 + VAT name=exhibitor-space; type=radio; value=FM Zone - Double - £849 + VAT name=exhibitor-space; type=radio; value=Professional & Financial Zone - Single - £499 + VAT name=exhibitor-space; type=radio; value=Professional & Financial Zone - Double - £849 + VAT name=exhibitor-space; type=radio; value=Training & Education Zone - Single - £499 + VAT name=exhibitor-space; type=radio; value=Any other business - Single - £499 + VAT name=exhibitor-space; type=radio; value=Any other business - Double - £849 + VAT name=exhibitor-space; type=radio; value=Local Government Authority - Single - £249.50 + VAT name=exhibitor-space; type=radio; value=Blue Light - Single - £249.50 + VAT name=exhibitor-space; type=radio; value=Trade Association - Single - £499 + VAT name=exhibitor-space; type=radio; value=COBSEO Charity - Single - Free name=exhibitor-space; type=radio; value=Non COBSEO Charity - Single - Free
Stand_Power__c	Yes. id=power-required-yes; name=power-required; type=radio; value=Yes; required=true No. name=power-required; type=radio; value=No
Power_Socket_Count__c	Number of sockets. id=power-count; type=number; min=1; max=20; data-required-when-visible=true; visible only when power-required-yes in Yes
Exhibitor_Hall_Schedule__c	For garage exhibits and large stands in the halls, setting up between 14:00-18:00 hrs on Sunday is required. Please indicate you are able to do this.. id=sunday-setup. Options: Yes; No.
Stand_Equipment__c	Equipment beyond display stands and laptops. id=equipment; required=true
Heavy_Vehicle_Required__c	Will you bring cars, tractors or heavy items that need to be dropped off on a flatbed or trailer?. id=heavy-vehicle; required=true. Options: Yes; No; Not known yet.
Has_Special_Requirements__c	Do you have any accessibility requirements?. id=accessibility; required=true. Options: Yes; No.
Stand_Special_Requirements__c	Please tell us what you need. id=accessibility-details; data-required-when-visible=true; visible only when accessibility in Yes

Salesforce Lead field	Control and exact input contract
Quote_Required_for_PO__c	Do you require a quotation before an invoice can be raised?. id=quote-for-po; required=true. Options: Yes; No.
Payment_Method__c	Do you require an invoice to be raised, or will you make payment by Stripe?. id=payment-method. Options: Bank transfer → Yes — invoice and payment by bank transfer; Stripe → No — payment will be via Stripe.
Purchase_Order__c	Do you require a purchase order or reference before an invoice can be issued?. id=purchase-order; data-required-when-visible=true; visible only when invoice-required in Yes. Options: Yes; No.
Purchase_Order_Number__c	Purchase order or reference details. id=purchase-order-number; data-required-when-visible=true; visible only when invoice-required in Yes AND purchase-order in Yes
Supplier_Agreement_Required__c	Will a supplier agreement be required?. id=supplier-agreement; data-required-when-visible=true; visible only when invoice-required in Yes. Options: Yes; No; Don't know.
Invoiced_Company__c	Legal organisation name for quotation and invoicing. id=invoice-company; data-required-when-visible=true; visible only when invoice-required in Yes
Trading_Name__c	Trading name, if different. id=trading-name; visible only when invoice-required in Yes
Invoice_Address__c	Billing address, including postcode. id=invoice-address; data-required-when-visible=true; visible only when invoice-required in Yes
Invoiced_Person__c	Finance contact name. id=invoice-person; data-required-when-visible=true; visible only when invoice-required in Yes
Invoiced_Email__c	Finance contact email address. id=invoice-email; type=email; data-required-when-visible=true; visible only when invoice-required in Yes
Invoice_Contact_Phone__c	Finance contact telephone number. id=invoice-phone; type=tel; data-required-when-visible=true; visible only when invoice-required in Yes
Invoice_Additional_Information__c	Additional quotation or invoice information. id=invoice-additional-information; data-required-when-visible=true; visible only when invoice-required in Yes AND invoice-additional-required in Yes
Industry_Body_Details__c	Industry body or trade association membership. id=industry-body; required=true
Event_Discovery_Source__c	How did you hear about NTE27?. id=discovery; required=true. Options: Previous exhibitor; E-mail invitation; Word of mouth from previous exhibitor; Word of mouth from previous attendees; Website; LinkedIn; Facebook; Instagram.
Declaration_Name__c	Digital signature (full name). id=declaration-name; required=true
Declaration_Date__c	Date. id=declaration-date; type=date; required=true
Terms_and_Conditions__c	I have read and agree to the NTE27 Privacy Policy .. id=terms; type=checkbox; required=true

Additional controls drive visibility, derived values, acknowledgements or submission without posting their own Salesforce field.

Control	Behaviour attributes
Add a second contact person	id=second-contact-toggle; type=checkbox
Is there any additional information that must appear on the quotation or invoice?	id=invoice-additional-required; data-required-when-visible=true Options: Yes; No.

Control	Behaviour attributes
Submit exhibitor application	type=submit

exhibitor interest

Source: exhibitor-interest.html. Form configuration: class=main-column; data-web-to-lead=; data-lead-source=Customer Event; data-use-default-rule=0; data-confirmation-preview=Thank you. We have received your NTE27 exhibitor expression of interest. The NTE team will review it and contact you about the next step..

Section order: About this form → 1 Organisation and contact → 2 Sponsorship and activities → Are you interested in Sponsorship Opportunities? → 3 Follow-up → Messages sent after submission.

Salesforce Lead field	Control and exact input contract
Web_Form_Type__c	type=hidden; value=Exhibitor Expression of Interest
Form_Version__c	type=hidden; value=exhibitor-interest-v3
NTE_Event_Code__c	type=hidden
Company	Organisation name. id=exhibitor-interest-company; required=true
Organisation_Type__c	Organisation type. id=exhibitor-interest-type; required=true. Options: Charity - COBSEO member; Charity - Non COBSEO member; Government Department or Agency; Industry Body / Trade Association; Employer - Automotive; Employer - Clean Energy; Employer - Blue Light Services / NHS; Employer - Built Environment; Employer - Manufacturing; Employer - Defence and Security; Employer - Financial and Professional Services; Employer - Digital and Technologies; Employer - Training and Education; Employer - Land-based; Employer - Other sector.
Website	Website. id=exhibitor-interest-website; type=url
FirstName	First name. id=exhibitor-interest-first-name; required=true
LastName	Surname. id=exhibitor-interest-last-name; required=true
Title	Job title. id=exhibitor-interest-title; required=true
Email	Email address. id=exhibitor-interest-email; type=email; required=true
Phone	Telephone number. id=exhibitor-interest-phone; type=tel; required=true
Exhibitor_Interest_Detail__c	Yes. name=exhibitor-sponsorship-interest; type=radio; value=Yes; required=true No. name=exhibitor-sponsorship-interest; type=radio; value=No Maybe. name=exhibitor-sponsorship-interest; type=radio; value=Maybe
Exhibitor_Community_Contribution__c	We work with a number of organisations that host value-adding activities such as workshops and skills advice at NTE. Is this something you could offer the event?. id=exhibitor-value-adding-activities
Preferred_Contact_Method__c	Preferred contact method. id=exhibitor-contact-method; required=true. Options: Email; Telephone; Video call; No preference.
Preferred_Contact_Time__c	Best time to contact you. id=exhibitor-contact-time
Event_Discovery_Source__c	How did you hear about NTE27?. id=exhibitor-interest-discovery; required=true. Options: Previous NTE event; NTE webinar or brochure; Email invitation; Recommendation or word of mouth; National Transition Event website; Mission Community website; LinkedIn; Other social media; Other.

Salesforce Lead field	Control and exact input contract
Contact_Consent__c	I agree that Mission Community may contact me about exhibiting at NTE27.. id=exhibitor-interest-consent; type=checkbox; value=Yes; required=true
Declaration_Name__c	Digital signature (full name). id=exhibitor-interest-signature; required=true
Declaration_Date__c	Date. id=exhibitor-interest-signature-date; type=date; required=true

Additional controls drive visibility, derived values, acknowledgements or submission without posting their own Salesforce field.

Control	Behaviour attributes
Submit expression of interest	type=submit

exhibitor staff update

Source: exhibitor-staff-update.html. Form configuration: class=main-column; data-web-to-lead=; data-form-kind=exhibitor-staff-update; data-lead-source=Customer Event; data-use-default-rule=0; data-confirmation-preview=Thank you. We have received your exhibitor staff details..

Section order: Before you begin → 1 Find your booking → 2 Names covered by your booking → 3 Additional top-up places → Staff details acknowledgement.

Salesforce Lead field	Control and exact input contract
Web_Form_Type__c	type=hidden; value=Exhibitor Staff Update
Form_Version__c	type=hidden; value=exhibitor-staff-update-v1
Staff_Update_Audience__c	type=hidden; value=Exhibitor
NTE_Event_Code__c	type=hidden
Total_Staff_Count__c	id=exhibitor-base-count; type=hidden
Planned_Exhibitor_Count__c	type=hidden; data-copy-value-from=exhibitor-base-count
Staff_Base_Names__c	type=hidden; data-copy-value-from=exhibitor-staff-names
Top_Up_Staff_Unit_Price__c	type=hidden; value=50
Top_Up_Staff_Total__c	type=hidden; value=0
Company	Organisation name. id=exhibitor-staff-company; required=true
FirstName	Your first name. id=exhibitor-staff-first-name; required=true
LastName	Your surname. id=exhibitor-staff-last-name; required=true
Email	Your email address. id=exhibitor-staff-email; type=email; required=true
Target_Booking_Reference__c	Booking reference. id=exhibitor-staff-reference; required=true; pattern=NTE-[A-Za-z0-9][A-Za-z0-9\-\]{1,74}[A-Za-z0-9]
Top_Up_Staff_Required__c	Do you want to purchase any additional staff places?. id=top-up-required; required=true. Options: Yes; No.
Top_Up_Staff_Count__c	Total number of top-up staff places required. id=top-up-count; type=number; min=1; max=99; step=1; data-required-when-visible=true; visible only when top-up-required in Yes
Top_Up_Staff_Names__c	Names for the top-up places. id=top-up-names; data-required-when-visible=true; visible only when top-up-required in Yes

Salesforce Lead field	Control and exact input contract
Declaration_Name__c	Digital signature (full name). id=exhibitor-staff-signature; required=true
Declaration_Date__c	Date. id=exhibitor-staff-date; type=date; required=true

Additional controls drive visibility, derived values, acknowledgements or submission without posting their own Salesforce field.

Control	Behaviour attributes
Names of staff already covered by your booking	id=exhibitor-staff-names; required=true
Submit staff details	type=submit

guest registration

Source: guest-registration.html. Form configuration: class=main-column; data-web-to-lead=; data-form-kind=guest; data-lead-source=Customer Event; data-use-default-rule=0; data-confirmation-preview=Thank you. We have received your NTE27 guest registration. The event team will send further information closer to the event.

Section order: 1 Your details → 2 Anyone accompanying you → 3 Accessibility → Registration emails.

Salesforce Lead field	Control and exact input contract
Web_Form_Type__c	type=hidden; value=Guest Registration
Form_Version__c	type=hidden; value=guest-registration-v3
NTE_Event_Code__c	type=hidden
Accompanying_Guest_Name__c	type=hidden; data-combine-fields=guest-companion-first-name,guest-companion-last-name
FirstName	First name. id=guest-first-name; required=true
LastName	Surname. id=guest-last-name; required=true
Email	Email address. id=guest-email; type=email; required=true
Phone	Phone number. id=guest-phone; type=tel; required=true
Company	Organisation. id=guest-organisation; required=true
Title	Job title. id=guest-title
Guest_Accompanying__c	Will anyone be accompanying you?. id=guest-accompanying; required=true. Options: Yes; No.
Accompanying_Guest_Email__c	Email address. id=guest-companion-email; type=email; data-required-when-visible=true; visible only when guest-accompanying in Yes
Guest_Accessibility_Required__c	Do you or anyone in your party have accessibility needs so we can make appropriate arrangements?. id=guest-accessibility; required=true. Options: Yes; No.
Guest_Accessibility_Details__c	Please tell us what arrangements would help. id=guest-accessibility-details; data-required-when-visible=true; visible only when guest-accessibility in Yes
Guest_Information_Declaration__c	I confirm that these details are accurate and, where I have provided another person's details, I have their permission to do so.. id=guest-declaration; type=checkbox; value=Yes; required=true
Declaration_Name__c	Digital signature (full name). id=guest-signature; required=true

Salesforce Lead field	Control and exact input contract
Declaration_Date__c	Date. id=guest-signature-date; type=date; required=true

Additional controls drive visibility, derived values, acknowledgements or submission without posting their own Salesforce field.

Control	Behaviour attributes
First name	id=guest-companion-first-name; maxlength=40; data-required-when-visible=true
Surname	id=guest-companion-last-name; maxlength=80; data-required-when-visible=true
Submit guest registration	type=submit

heavy vehicle details

Source: heavy-vehicle-details.html. Form configuration: class=main-column; data-web-to-lead=; data-lead-source=Customer Event; data-use-default-rule=0; data-confirmation-preview=Thank you. We have received your heavy vehicle, equipment and haulier details. The NTE team will reconcile them with your booking and contact you if anything further is needed..

Section order: Delivery and collection → 1 Organisation and contacts → 2 Vehicles and equipment → Item 1 → Item 2 → Item 3 → 3 Haulier → Logistics acknowledgement.

Salesforce Lead field	Control and exact input contract
Web_Form_Type__c	type=hidden; value=Heavy Vehicle Details
Form_Version__c	type=hidden; value=heavy-vehicle-details-v5
NTE_Event_Code__c	type=hidden
Event_Contact_Name__c	type=hidden; data-combine-fields=vehicle-first-name,vehicle-last-name
Event_Contact_Email__c	type=hidden; data-copy-value-from=vehicle-email
Event_Contact_Mobile__c	type=hidden; data-copy-value-from=vehicle-phone
Company	Name of exhibiting organisation. id=vehicle-company; required=true
FirstName	Main contact first name. id=vehicle-first-name; required=true
LastName	Main contact surname. id=vehicle-last-name; required=true
Email	Main contact email. id=vehicle-email; type=email; required=true
Phone	Main contact direct phone. id=vehicle-phone; type=tel; required=true
Target_Booking_Reference__c	Booking reference. id=vehicle-reference; required=true; pattern=NTE-[A-Za-z0-9][A-Za-z0-9\-\{1,74\}[A-Za-z0-9]
Secondary_Contact_Name__c	Second contact. id=vehicle-second-contact; required=true
Secondary_Contact_Email__c	Second contact email. id=vehicle-second-email; type=email; required=true
Secondary_Contact_Phone__c	Second contact phone. id=vehicle-second-phone; type=tel; required=true
Delivery_Window__c	Planned delivery window. id=delivery-window; required=true. Options: Sunday 28 February between 14:00 - 18:00; Monday 1 March between 06:30 - 07:15.
Heavy_Item_1_Description__c	Manufacturer and model, or a clear description of the item being exhibited. id=item1-description; required=true
Heavy_Item_1_Registration__c	Registration, if known and applicable. id=item1-registration

Salesforce Lead field	Control and exact input contract
Heavy_Item_1_Dimensions__c	Dimensions (L × W × H). id=item1-dimensions; required=true
Heavy_Item_1_Gross_Weight__c	Gross weight. id=item1-weight; required=true
Heavy_Item_2_Description__c	Manufacturer and model, or a clear description of the item being exhibited. id=item2-description
Heavy_Item_2_Registration__c	Registration, if known and applicable. id=item2-registration
Heavy_Item_2_Dimensions__c	Dimensions (L × W × H). id=item2-dimensions
Heavy_Item_2_Gross_Weight__c	Gross weight. id=item2-weight
Heavy_Item_3_Description__c	Manufacturer and model, or a clear description of the item being exhibited. id=item3-description
Heavy_Item_3_Registration__c	Registration, if known and applicable. id=item3-registration
Heavy_Item_3_Dimensions__c	Dimensions (L × W × H). id=item3-dimensions
Heavy_Item_3_Gross_Weight__c	Gross weight. id=item3-weight
Haulier_Name__c	Name of haulier delivering / collecting. id=haulier-name; required=true
Haulier_Staff__c	Names of haulier staff, if known. id=haulier-staff
Haulier_Vehicle_Type__c	Type of haulier vehicle. id=haulier-type; required=true
Haulier_Vehicle_Gross_Weight__c	Gross weight without exhibition item. id=haulier-weight; required=true
Haulier_Vehicle_Dimensions__c	Haulier vehicle dimensions (L × W × H). id=haulier-dimensions; required=true
Haulier_Vehicle_Registration__c	Haulier vehicle registration, if known. id=haulier-registration
Declaration_Name__c	Digital signature (full name). id=vehicle-signature; required=true
Declaration_Date__c	Date. id=vehicle-signature-date; type=date; required=true

Additional controls drive visibility, derived values, acknowledgements or submission without posting their own Salesforce field.

Control	Behaviour attributes
Submit logistics details	type=submit

logo upload

Source: logo-upload.html. Form configuration: class=main-column; data-web-to-lead=; data-form-kind=logo-update; data-lead-source=Customer Event; data-use-default-rule=0; data-confirmation-preview=Thank you. Your NTE27 logo update has been submitted..

Section order: 1 Upload your file → 2 Confirm your upload.

Salesforce Lead field	Control and exact input contract
Web_Form_Type__c	type=hidden; value=Logo Update
Form_Version__c	type=hidden; value=logo-update-v2
NTE_Event_Code__c	type=hidden
Company	Organisation name. id=logo-company; required=true
FirstName	Your first name. id=logo-first-name; required=true

Salesforce Lead field	Control and exact input contract
LastName	Your surname. id=logo-last-name; required=true
Email	Your email address. id=logo-email; type=email; required=true
Target_Booking_Reference__c	Booking reference. id=logo-booking-reference; required=true; maxlength=80; pattern=NTE-[A-Za-z0-9][A-Za-z0-9\-\]{1,74}[A-Za-z0-9]

Additional controls drive visibility, derived values, acknowledgements or submission without posting their own Salesforce field.

Control	Behaviour attributes
Confirm logo upload	type=submit

partner sponsor application

Source: partner-sponsor-application.html. Form configuration: class=main-column; data-web-to-lead=; data-lead-source=Customer Event; data-use-default-rule=0; data-confirmation-preview=Thank you. We have received your NTE27 partnership / sponsorship application. The NTE team will review it and contact you with the outcome..

Section order: About NTE27 → 1 Organisation and applicant → Contact on the day of NTE27 → 2 Packages → 3 Exhibition space → 4 Quotation and invoicing → 5 Declaration → Partnership and sponsorship emails.

Salesforce Lead field	Control and exact input contract
Logo_Upload_URL__c	type=hidden
Web_Form_Type__c	type=hidden; value=Partner / Sponsor Application
Form_Version__c	type=hidden; value=partner-sponsor-application-v12
NTE_Event_Code__c	type=hidden
Booking_Reference__c	type=hidden
Sponsored_Name__c	type=hidden; data-combine-fields=partner-first-name,partner-last-name
Event_Contact_Name__c	type=hidden; data-switch-copy=partner-day-contact-same
Event_Contact_Title__c	type=hidden; data-switch-copy=partner-day-contact-same
Event_Contact_Email__c	type=hidden; data-switch-copy=partner-day-contact-same
Event_Contact_Mobile__c	type=hidden; data-switch-copy=partner-day-contact-same
Sponsor_Package_Total__c	type=hidden; value=0
Exhibitor_Space_Price__c	type=hidden; value=0
Power_Socket_Unit_Price__c	type=hidden; value=0
Power_Socket_Total__c	type=hidden; value=0
Additional_Staff_Unit_Price__c	type=hidden; value=0
Additional_Staff_Total__c	type=hidden; value=0
Included_Staff_Count__c	type=hidden; value=0
Total_Staff_Count__c	type=hidden; data-copy-value-from=partner-planned-count
Additional_Staff_Required__c	type=hidden; value=No
Additional_Staff_Count__c	type=hidden; value=0

Salesforce Lead field	Control and exact input contract
Listed_Price_Total__c	type=hidden; value=0
Pricing_Status__c	type=hidden; value=Calculated
Pricing_Version__c	type=hidden; value=NTE27-2026-09-10
Invoice_Required__c	type=hidden; value=Yes
Company	Organisation name as it should appear in marketing. id=partner-company; required=true
FirstName	First name. id=partner-first-name; required=true
LastName	Surname. id=partner-last-name; required=true
Title	Job title. id=partner-title; required=true
Email	Contact email. id=partner-email; type=email; required=true
Phone	Contact telephone. id=partner-phone; type=tel; required=true
Sponsor_Package__c	type=checkbox; value=Headline Partner type=checkbox; value=Gold Partner type=checkbox; value=Premier Partner type=checkbox; value=Champion Partner type=checkbox; value=Zone Sponsor type=checkbox; value=Community Stage Sponsor type=checkbox; value=Podcast Corner Sponsor type=checkbox; value=Event Guide Sponsor type=checkbox; value=Delegate Tote Bag Sponsor type=checkbox; value=Helmet Bay Sponsor type=checkbox; value=Auditorium Sponsor type=checkbox; value=Live Stream Sponsor type=checkbox; value=Wristband Sponsor type=checkbox; value=Escapade Sponsor
Exhibitor_Hall_Schedule__c	For garage exhibits and large stands in the halls, setting up between 14:00-18:00 hrs on Sunday is required. Please indicate you are able to do this.. id=partner-sunday; required=true. Options: Yes; No.
Stand_Power__c	Will you require power on your stand?. id=partner-power; required=true. Options: Yes; No.
Stand_Equipment__c	Equipment beyond display stands and laptops. id=partner-equipment; required=true
Heavy_Vehicle_Required__c	Will you bring cars, tractors or heavy items that need to be dropped off on a flatbed or trailer?. id=partner-heavy-vehicle; required=true. Options: Yes; No; Not known yet.
Has_Special_Requirements__c	Do you have any accessibility requirements?. id=partner-accessibility; required=true. Options: Yes; No.
Stand_Special_Requirements__c	Accessibility details. id=partner-accessibility-details; data-required-when-visible=true; visible only when partner-accessibility in Yes
Planned_Exhibitor_Count__c	How many people do you currently plan to bring, including yourself?. id=partner-planned-count; type=number; required=true; min=1; max=99; step=1
Stand_Extra_Notes__c	Anything else to share about your space?. id=partner-extra-notes; required=true
Quote_Required_for_PO__c	Do you require a quotation before an invoice can be raised?. id=partner-quote; required=true. Options: Yes; No.

Salesforce Lead field	Control and exact input contract
Payment_Method__c	Do you require an invoice to be raised, or will you make payment by Stripe?. id=partner-payment-method; required=true. Options: Bank transfer → Yes — invoice and payment by bank transfer; Stripe → No — payment will be via Stripe.
Purchase_Order__c	Do you require a purchase order or reference before an invoice can be issued?. id=partner-po; required=true. Options: Yes; No.
Purchase_Order_Number__c	Purchase order or reference details. id=partner-po-number; data-required-when-visible=true; visible only when partner-po in Yes
Supplier_Agreement_Required__c	Will a supplier agreement be required?. id=partner-supplier-agreement; required=true. Options: Yes; No; Don't know.
Invoiced_Company__c	Legal organisation name for quotation and invoicing. id=partner-invoice-company; required=true
Trading_Name__c	Trading name, if different. id=partner-trading-name
Invoice_Address__c	Billing address, including postcode. id=partner-invoice-address; required=true
Invoiced_Person__c	Finance contact name. id=partner-invoice-person; required=true
Invoiced_Email__c	Finance contact email address. id=partner-invoice-email; type=email; required=true
Invoice_Contact_Phone__c	Finance contact telephone number. id=partner-invoice-phone; type=tel; required=true
Invoice_Additional_Information__c	Additional quotation or invoice information. id=partner-invoice-additional-information; data-required-when-visible=true; visible only when partner-invoice-additional-required in Yes
Declaration_Name__c	Digital signature (full name). id=partner-declaration-name; required=true
Declaration_Date__c	Date. id=partner-declaration-date; type=date; required=true
Terms_and_Conditions__c	I have read and agree to the NTE27 Privacy Policy .. id=partner-terms; type=checkbox; required=true

Additional controls drive visibility, derived values, acknowledgements or submission without posting their own Salesforce field.

Control	Behaviour attributes
Will the applicant be the main contact on the day of NTE27?	id=partner-day-contact-same; required=true Options: Yes; No.
First name	id=partner-day-first-name; maxlength=40; data-required-when-visible=true
Surname	id=partner-day-last-name; maxlength=80; data-required-when-visible=true
Job title	id=partner-day-title; maxlength=128; data-required-when-visible=true
Email address	id=partner-day-email; type=email; maxlength=80; data-required-when-visible=true
Mobile phone number	id=partner-day-mobile; type=tel; maxlength=40; data-required-when-visible=true
Is there any additional information that must appear on the quotation or invoice?	id=partner-invoice-additional-required; required=true Options: Yes; No.
Submit partner / sponsor application	type=submit

Required checkbox groups: class=options-list; role=group; aria-labelledby=partner-packages-heading; data-required-checkbox-group=; data-required-message=Please select at least one package..

partner sponsor interest

Source: partner-sponsor-interest.html. Form configuration: class=main-column; data-web-to-lead=; data-form-kind=partner-eoi; data-lead-source=Customer Event; data-use-default-rule=0; data-confirmation-preview=Thank you. We have received your expression of interest. A member of the Mission Community team will contact you to explore the most suitable NTE27 opportunities..

Section order: 1 Your organisation → 2 Your interest in NTE27 → 3 How should we contact you? → Messages sent after submission.

Salesforce Lead field	Control and exact input contract
Web_Form_Type__c	type=hidden; value=Partner / Sponsor Expression of Interest
Form_Version__c	type=hidden; value=partner-sponsor-eoi-v3
NTE_Event_Code__c	type=hidden
Company	Organisation name. id=eoi-company; required=true
Organisation_Type__c	Organisation type. id=eoi-organisation-type; required=true. Options: Charity - COBSEO member; Charity - Non COBSEO member; Government Department or Agency; Industry Body / Trade Association; Employer - Automotive; Employer - Clean Energy; Employer - Blue Light Services / NHS; Employer - Built Environment; Employer - Manufacturing; Employer - Defence and Security; Employer - Financial and Professional Services; Employer - Digital and Technologies; Employer - Training and Education; Employer - Land-based; Employer - Other sector.
Website	Website. id=eoi-website; type=url
FirstName	First name. id=eoi-first-name; required=true
LastName	Surname. id=eoi-last-name; required=true
Title	Job title. id=eoi-title; required=true
Email	Email address. id=eoi-email; type=email; required=true
Phone	Telephone number. id=eoi-phone; type=tel; required=true
Partner_Interest_Type__c	Are you interested in partnering, sponsoring, or discussing both?. id=eoi-interest-type; required=true. Options: Partnership; Sponsorship; Both - open to discussion; Not sure - I would like advice.
Partner_Interest_Areas__c	Strategic event partnership Support the wider NTE27 programme and Armed Forces community.. type=checkbox; value=Strategic event partnership Event zone sponsorship Align your organisation with a sector or themed zone.. type=checkbox; value=Event zone sponsorship Stage, content or thought leadership Contribute expertise, insight or stories to the event programme.. type=checkbox; value=Stage, content or thought leadership Branding and delegate experience Explore event-guide, tote-bag, wristband and other visibility opportunities.. type=checkbox; value=Branding and delegate experience Troops' Track Day Discuss opportunities connected with the Silverstone track experience.. type=checkbox; value=Troops' Track Day Other or not sure Tell us what you have in mind below and we will help shape the conversation.. type=checkbox; value=Other or not sure
Partnership_Interest_Detail__c	Additional comments regarding desired sponsorship or partnership. id=eoi-interest-detail; required=true

Salesforce Lead field	Control and exact input contract
Preferred_Contact_Method__c	Preferred contact method. id=eoi-contact-method; required=true. Options: Email; Telephone; Video call; No preference.
Preferred_Contact_Time__c	Best time to contact you. id=eoi-contact-time
Event_Discovery_Source__c	How did you hear about NTE27?. id=eoi-discovery; required=true. Options: Previous NTE event; NTE webinar or brochure; Email invitation; Recommendation or word of mouth; National Transition Event website; Mission Community website; LinkedIn; Other social media; Other.
Contact_Consent__c	I agree that Mission Community may contact me about NTE27 partnership and sponsorship opportunities.. id=eoi-consent; type=checkbox; value=Yes; required=true
Declaration_Name__c	Digital signature (full name). id=eoi-signature; required=true
Declaration_Date__c	Date. id=eoi-signature-date; type=date; required=true

Additional controls drive visibility, derived values, acknowledgements or submission without posting their own Salesforce field.

Control	Behaviour attributes
Submit expression of interest	type=submit

Required checkbox groups: class=choice-grid; role=group; aria-labelledby=eoi-opportunities-label; data-required-checkbox-group=; data-required-message=Please select at least one area of interest..

partner sponsor staff update

Source: partner-sponsor-staff-update.html. Form configuration: class=main-column; data-web-to-lead=; data-form-kind=partner-staff-update; data-lead-source=Customer Event; data-use-default-rule=0; data-confirmation-preview=Thank you. We have received your partner / sponsor staff details..

Section order: Before you begin → 1 Find your booking → 2 Final staff details → Staff details acknowledgement.

Salesforce Lead field	Control and exact input contract
Web_Form_Type__c	type=hidden; value=Partner / Sponsor Staff Update
Form_Version__c	type=hidden; value=partner-sponsor-staff-update-v1
Staff_Update_Audience__c	type=hidden; value=Partner / sponsor
NTE_Event_Code__c	type=hidden
Planned_Exhibitor_Count__c	type=hidden; data-copy-value-from=partner-staff-total
Staff_Base_Names__c	type=hidden; data-copy-value-from=partner-staff-names
Company	Organisation name. id=partner-staff-company; required=true
FirstName	Your first name. id=partner-staff-first-name; required=true
LastName	Your surname. id=partner-staff-last-name; required=true
Email	Your email address. id=partner-staff-email; type=email; required=true
Target_Booking_Reference__c	Booking reference. id=partner-staff-reference; required=true; pattern=NTE-[A-Za-z0-9][A-Za-z0-9\-\]{1,74}[A-Za-z0-9]
Total_Staff_Count__c	Final number attending, including you. id=partner-staff-total; type=number; required=true; min=1; max=99; step=1

Salesforce Lead field	Control and exact input contract
Declaration_Name__c	Digital signature (full name). id=partner-staff-signature; required=true
Declaration_Date__c	Date. id=partner-staff-date; type=date; required=true

Additional controls drive visibility, derived values, acknowledgements or submission without posting their own Salesforce field.

Control	Behaviour attributes
Full names of everyone attending	id=partner-staff-names; required=true
Submit staff details	type=submit

volunteer application

Source: volunteer-application.html. Form configuration: class=main-column; data-web-to-lead=; data-form-kind=volunteer; data-require-code-of-conduct=; data-lead-source=Volunteer Application; data-use-default-rule=0; data-return-path=volunteer-thank-you.html; data-confirmation-preview=Thank you. We have received your volunteer application and a member of the Mission Motorsport team will be in touch..

Section order: 1 Your details → 2 Emergency contact → 3 Armed Forces service → 4 How you would like to help → Which volunteering opportunities interest you? → Which skills or experience could you offer? → Where are you willing to travel? → 5 Availability → Hours willing to give per month → Preference → 6 Privacy and declaration → Volunteer Code of Conduct → Volunteer application emails.

Salesforce Lead field	Control and exact input contract
Web_Form_Type__c	type=hidden; value=Volunteer Application
Volunteer_Form_Version__c	type=hidden; value=volunteer-application-v3
Company	type=hidden; value=Individual Volunteer
Interested_in_Volunteering__c	type=hidden; value=1
Consent_PII__c	type=hidden; data-checkbox-copy-from=volunteer-consent
Consent_Contact__c	type=hidden; data-checkbox-copy-from=volunteer-consent
Consent_Promotion__c	type=hidden; data-checkbox-copy-from=volunteer-consent
FirstName	Forename(s). id=volunteer-first-name; required=true
LastName	Surname. id=volunteer-last-name; required=true
Date_of_Birth__c	Date of birth. id=volunteer-dob; type=date; required=true
MobilePhone	Mobile number. id=volunteer-mobile; type=tel; required=true
Phone	Home telephone. id=volunteer-home-phone; type=tel
Email	Email address. id=volunteer-email; type=email; required=true
Street	Address. id=volunteer-address; required=true
PostalCode	Postcode. id=volunteer-postcode; required=true
NOK_Name__c	Full name. id=volunteer-emergency-name; required=true
NOK_Relationship__c	Relationship to you. id=volunteer-emergency-relationship; required=true
NOK_Phone__c	Telephone number. id=volunteer-emergency-phone; type=tel; required=true

Salesforce Lead field	Control and exact input contract
NOK_Address__c	Emergency contact's address. id=volunteer-emergency-address; required=true; data-required-when-visible=true; visible only when volunteer-emergency-same-address in No type=hidden; data-copy-value-from=volunteer-address; visible only when volunteer-emergency-same-address in Yes
NOK_Postcode__c	Postcode. id=volunteer-emergency-postcode; required=true; data-required-when-visible=true; visible only when volunteer-emergency-same-address in No type=hidden; data-copy-value-from=volunteer-postcode; visible only when volunteer-emergency-same-address in Yes
Volunteer_Armed_Forces_Service__c	Have you served, or are you currently serving, in HM Armed Forces?. id=volunteer-forces-service; required=true. Options: Yes; No.
Volunteer_Service_Details__c	Service, unit, station or ship. id=volunteer-service-details; visible only when volunteer-forces-service in Yes
Volunteer_Service_Dates__c	Dates in Service. id=volunteer-service-dates; visible only when volunteer-forces-service in Yes
Volunteer_Opportunities__c	Fundraising. type=checkbox; value=Fundraising Transport and Logistics Car, van with trailer, minibuss. type=checkbox; value=Transport and Logistics Motorsport event support. type=checkbox; value=Motorsport Event Support Marshalling. type=checkbox; value=Marshalling Community outreach / awareness. type=checkbox; value=Community Outreach / Awareness Professional skills HR, legal, finance, IT or project management. type=checkbox; value=Professional Skills Mentoring and coaching. type=checkbox; value=Mentoring & Coaching Team area co-ordinator. type=checkbox; value=Team Area Co-Ordinator Vehicle maintenance / repairs in Wantage. type=checkbox; value=Vehicle Maintenance / Repairs (Wantage) Pop up shop. type=checkbox; value=Pop up shop Storekeeping in Wantage. type=checkbox; value=Storekeeping (Wantage) Maintenance / DIY in Wantage. type=checkbox; value=Maintenance / DIY (Wantage)
Volunteer_Skills__c	Fundraising. type=checkbox; value=Fundraising Transport and Logistics Car, van with trailer, minibuss. type=checkbox; value=Transport and Logistics Motorsport event support. type=checkbox; value=Motorsport Event Support Marshalling. type=checkbox; value=Marshalling Community outreach / awareness. type=checkbox; value=Community Outreach / Awareness Professional skills HR, legal, finance, IT or project management. type=checkbox; value=Professional Skills Mentoring and coaching. type=checkbox; value=Mentoring & Coaching Team area co-ordinator. type=checkbox; value=Team Area Co-Ordinator Vehicle maintenance / repairs in Wantage. type=checkbox; value=Vehicle Maintenance / Repairs (Wantage) Pop up shop. type=checkbox; value=Pop up shop Storekeeping in Wantage. type=checkbox; value=Storekeeping (Wantage) Maintenance / DIY in Wantage. type=checkbox; value=Maintenance / DIY (Wantage)

Salesforce Lead field	Control and exact input contract
Volunteer_Travel_Regions__c	East Midlands. type=checkbox; value=East Midlands Greater London. type=checkbox; value=Greater London North East England. type=checkbox; value=North East England North West England. type=checkbox; value=North West England Scotland. type=checkbox; value=Scotland South West England. type=checkbox; value=South West England South East England. type=checkbox; value=South East England Wales. type=checkbox; value=Wales West Midlands. type=checkbox; value=West Midlands Yorkshire & the Humber. type=checkbox; value=Yorkshire & the Humber
Volunteer_DBS_Willing__c	Would you be willing to complete a DBS check if the role requires one?. id=volunteer-dbs; required=true. Options: Yes; No.
Volunteer_Hours__c	0–4. type=checkbox; value=0-4 4–8. type=checkbox; value=4-8 8–16. type=checkbox; value=8-16 16+. type=checkbox; value=16+ Don't know. type=checkbox; value=Don't know
Volunteer_Availability__c	Weekdays. type=checkbox; value=Weekdays Weekends. type=checkbox; value=Weekends Any. type=checkbox; value=Any
Volunteer_Code_Consent__c	I have read and understood the Code of Conduct and agree to follow it.. id=volunteer-conduct-acknowledgement; type=checkbox; value=1; required=true
Volunteer_Code_Version__c	type=hidden
Volunteer_Consent__c	Do you consent to Mission Motorsport using your personal information, contacting you about suitable opportunities, using approved images or stories for promotion, and using relevant medical information where needed?. id=volunteer-consent; required=true. Options: Yes; No.
Declaration_Name__c	Digital signature (full name). id=volunteer-signature; required=true
Declaration_Date__c	Date. id=volunteer-signature-date; type=date; required=true

Additional controls drive visibility, derived values, acknowledgements or submission without posting their own Salesforce field.

Control	Behaviour attributes
volunteer-emergency-same-address	id=volunteer-emergency-same-address; type=checkbox
Submit volunteer application	type=submit

Required checkbox groups: class=choice-fieldset; data-required-checkbox-group=; data-required-message=Please select at least one volunteering opportunity.; class=choice-fieldset; data-required-checkbox-group=; data-required-message=Please select at least one skill or area of experience.; class=choice-fieldset; data-required-checkbox-group=; data-required-message=Please select at least one region.; class=choice-fieldset; data-required-checkbox-group=; data-single-choice-group=; data-required-message=Please select the hours you are willing to give per month.; class=choice-fieldset; data-required-checkbox-group=; data-exclusive-choice=Any; data-required-message=Please select your availability preference..

Lightning component methods

All four bundles are listed below, including lifecycle methods, event handlers and derived getters. CSS controls responsive spacing, tables, state colours and dialog layout; it does not decide eligibility or prices. All server writes go through the Apex methods already documented.

nteManagementHome

Exposed=true; API=67.0; targets=target=lightning__HomePage.

Apex imports: getHomeDashboard → NTE_MasterPanelController.getHomeDashboard.

Method or getter and source line	Role
connectedCallback() Line 63	Registers window-focus and document-visibility listeners and loads the event portfolio.
disconnectedCallback() Line 69	Removes both listeners, clears the refresh timer and increments requestSequence to discard any response arriving after removal.
handleWindowFocus = () => Line 76	Schedules a refresh when the window regains focus.
handleVisibilityChange = () => Line 80	Schedules a refresh only when document.visibilityState becomes visible.
scheduleLiveRefresh() Line 86	Replaces any pending refresh with a 150 ms timer, then calls loadDashboard.
get controlsDisabled() Line 94	Disables the event selector and refresh control while loading or when eventOptions is empty.
get showInitialLoading() Line 98	Shows the initial loading state only while loading and before a dashboard has been accepted.
handleEventChange(event) Line 102	Ignores an unchanged edition; otherwise stores event.detail.value, clears hasDashboard and loads the selected edition.
handleRefresh() Line 112	Reloads the currently selected event portfolio.
async loadDashboard() Line 116	Calls getHomeDashboard with the selected edition or null. A monotonically increasing requestSequence discards superseded responses; the latest response is parsed and applied, or the portfolio error state is shown.
applyDashboard(payload) Line 141	Loads event choices, returned edition, refresh time, headlines, pipeline, finance readiness and booking mix. Adds an unlisted returned edition to the selector and shows a pricing-check note only when pricingReviewCount is positive.
parseResponse(response) Line 163	Accepts an object directly, substitutes {} for a missing response, or JSON-parses a string. Invalid JSON throws the dashboard-response error.
normalizeEventOptions(options) Line 174	Accepts an array of strings or objects. Object value precedence is value, code, eventCode; label precedence is label, name, value. Entries without a value are removed.
normalizeHeadline(headline) Line 186	Produces Applications, Approved applications, Invoiced, Still to collect and Paid in that order. Resolves configured aliases from an array or object, formats each value and record count, and highlights Approved applications.

Method or getter and source line	Role
normalizePipeline(rows) Line 205	Accepts stage rows or a keyed object. Resolves exhibitor, partner and total amounts; a missing/zero total falls back to exhibitor plus partner. Each audience bar is scaled against that audience's largest stage. Share uses the supplied nonzero percentage or total divided by the largest stage total; these overlapping stages are not an additive funnel.
normalizeReadiness(readiness) Line 246	Accepts an array or the configured quote/invoice/payment/paid object aliases. Each segment uses its supplied nonzero percentage or its value divided by the sum of the displayed readiness values, then formats the amount and width.
normalizeReadinessItem(item, index) Line 271	Resolves label/name, a normalised key, metricValue and percentage/share/progress; missing labels become Status plus a one-based index.
normalizeBookingMix(bookingMix) Line 282	Resolves exhibitor/exhibitors and partnerSponsor/partner/sponsors groups, totals their records and values, then presents each group's contribution.
bookingGroup(source) Line 293	Reads the group record count and value. Average uses averageValue/average/avgValue when nonzero, otherwise value divided by records, or zero for an empty group.
presentBookingGroup(group, totalRecords, totalValue) Line 300	Formats record count and value with rounded percentages of the combined groups, and formats average booking value. A zero denominator yields 0%.
emptyBookingMix() Line 310	Initialises both participant groups to 0 records, £0 value and £0 average while no portfolio is available.
firstObject(parent, aliases) Line 317	Returns the first alias whose value is neither null nor undefined. Objects pass through; scalar values become { value }; no match returns {}.
metricValue(source) Line 327	Uses the first non-null value among value, amount, totalValue and total, converted through toNumber.
metricRecords(source) Line 331	Uses the first non-null value among records, recordCount and count, converted through toNumber.
toNumber(value) Line 335	Preserves finite numbers. For strings, removes all characters except digits, decimal point and minus sign before Number conversion. Missing, non-string and non-finite values become zero.
toKey(value, index = 0) Line 346	Converts camel case and non-alphanumeric separators to lowercase hyphenated keys; an empty result becomes item-<index>.
widthStyle(value) Line 351	Clamps the numeric percentage to 0–100 and returns a CSS width with two decimal places.
formatCurrency(value) Line 356	Formats the normalised number as GBP using en-GB with zero decimal places for portfolio headlines and charts.
formatDateTime(value) Line 360	Formats a valid Date or date value using en-GB day, abbreviated month, year and 24-hour time in the browser timezone. Invalid dates display an em dash.

nteMasterPanel

Exposed=true; API=65.0; targets=target=lightning__Tab; lightning__AppPage; lightning__HomePage.

Apex imports: getDashboard → NTE_MasterPanelController.getDashboard; getCommunicationRecordIds → NTE_MasterPanelController.getCommunicationRecordIds; buildDraft → NTEEmailDispatchService.buildDraft; previewMessageJson →

NTEEmailDispatchService.previewMessageJson; queueMessagesJson →
 NTEEmailDispatchService.queueMessagesJson; updateLeadDecision →
 NTE_MasterPanelController.updateLeadDecision; updateMilestone →
 NTE_MasterPanelController.updateMilestone.

Method or getter and source line	Role
connectedCallback() Line 95	Registers focus/visibility listeners and loads the initial INTEREST view with All time, all owners and 25 rows per page.
disconnectedCallback() Line 101	Removes listeners; clears refresh, conversion-monitor and preview timers; invalidates dashboard/communication/preview sequences; and clears active communication state.
renderedCallback() Line 116	When modalNeedsFocus is set, focuses the dialog's data-modal-focus control once and clears the flag.
handleWindowFocus = () => Line 123	Schedules a refresh after Salesforce regains focus, including a return from the separate conversion tab.
handleVisibilityChange = () => Line 127	Schedules a refresh when the document becomes visible.
scheduleLiveRefresh() Line 133	Debounce refresh by 150 ms while preserving row selection. Both scheduling and execution are suppressed during a record action, open communication dialog or communication preparation/send.
get eventOptions() Line 144	Returns response.eventOptions or an empty selector list.
get ownerOptions() Line 148	Returns response.ownerOptions; its fallback is one All owners choice with an empty value.
get guestBreakdown() Line 152	Presents overview key guests as pending versus captured.
get interestBreakdown() Line 156	Presents overview key interest as open versus decided.
get applicationBreakdown() Line 160	Presents overview key applications as awaiting review versus approved.
get bookingBreakdown() Line 164	Presents overview key approved as still in progress versus fully complete. Completion is rounded completed/total × 100, or zero when empty; the donut angle is that percentage × 3.6 degrees.
get quoteBreakdown() Line 175	Presents overview key quotes as outstanding versus provided.
get invoiceBreakdown() Line 179	Presents overview key invoices as outstanding versus provided.
get paymentBreakdown() Line 183	Presents overview key payments as outstanding versus received.
get logisticsBreakdown() Line 187	Presents overview key heavy as outstanding versus completed.
get staffBreakdown() Line 191	Presents overview key staff as outstanding versus completed.
get logoBreakdown() Line 195	Presents overview key logos as outstanding versus completed.
buildBreakdownMetric(key, inProgressLabel, completedLabel) Line 199	Finds the requested response.overview key, converts missing totals/counts to zero, clamps each progress width to 0–100%, and creates the accessible total/in-progress/completed description.

Method or getter and source line	Role
get pipeline() Line 218	Decorates response.pipeline with the active-stage class and aria-pressed value. The Completed tile appends the summary complete percentage, defaulting to 0%.
get activeStage() Line 229	Finds the STAGE_CONFIGURATION group containing viewKey; views outside the configured groups fall back to interest for path highlighting.
get stageOptions() Line 233	Maps the active stage's configured refinement keys to response.workQueues and marks the selected option. A missing queue receives its key as label, count zero and the standard record icon.
get hasStageOptions() Line 246	Shows refinement controls when stageOptions contains at least one item.
get selectedQueue() Line 250	Uses response.selectedView for the record-list heading; fallback is NTE records with the selected-filter description.
get isGuestView() Line 257	True only for GUESTS.
get isInterestView() Line 261	True for INTEREST, INTEREST_EXHIBITOR or INTEREST_PARTNER.
get isApplicationView() Line 265	True for APPLICATION_REVIEW, APPLICATION_EXHIBITOR or APPLICATION_PARTNER.
get isFinanceView() Line 269	True for FINANCE_DUE, QUOTE_REQUIRED, INVOICE_REQUIRED, PAYMENT_DUE or PAYMENT_COMPLETE.
get financeAmountLabel() Line 273	Labels finance values Amount (ex VAT); the panel does not present them as gross Stripe charges.
get hasRowActions() Line 277	Shows the action column if any row has an interest/application decision or any visible base/top-up quote, invoice or payment milestone action.
get isApprovedView() Line 283	True for APPROVED, APPROVED_EXHIBITOR or APPROVED_PARTNER.
get isCompletedView() Line 287	True for COMPLETED, FINAL_PACK_DUE or FINAL_PACK_SENT.
get isHeavyView() Line 291	True only for HEAVY_DUE.
get isStaffView() Line 295	True only for STAFF_DUE.
get isLogoView() Line 299	True only for LOGO_DUE.
get isUpdatesView() Line 303	True only for the combined READINESS_DUE view.
get isRecentView() Line 307	True only for RECENT.
get actionColumnLabel() Line 311	Uses Decision in interest views and Action elsewhere.
get canRemindAll() Line 315	Shows the bulk reminder entry point only in HEAVY_DUE, STAFF_DUE or LOGO_DUE.
get canDistributeFinalPack() Line 319	Shows final-pack distribution in COMPLETED and FINAL_PACK_DUE, excluding FINAL_PACK_SENT.
get communicationBusy() Line 323	True during draft preparation or email queuing.

Method or getter and source line	Role
get panelControlsDisabled() Line 327	Locks panel actions/filters during loading, a record action, communication preparation/queuing or any open communication dialog.
get visibleRows() Line 331	Adds the current panel lock to every row action. Invitation actions also keep their own Queued/Sent lock.
get visibleCommunicationRecipients() Line 339	Disables recipient selection while communication is busy or the server has marked that recipient ineligible.
get selectedEmailRecipients() Line 343	Includes only recipients whose selected and eligible flags are both true.
get selectedEmailRecipientCount() Line 347	Counts the eligible selected recipients used in the send request.
get availableRecipientCount() Line 351	Counts every eligible draft recipient, whether selected or not.
get sendCommunicationDisabled() Line 355	Blocks Send while busy, with a stale draft, when draft.canSend is false, with no selected recipient or more than recipientLimit (default 500), with blank trimmed subject/body, or until a current preview is ready and no preview is loading.
get sendCommunicationLabel() Line 363	Displays Queuing emails... during the send request; otherwise Send to <selected count>.
get recipientOptions() Line 367	Builds the preview selector from eligible selected recipients. Labels combine distinct nonempty company/name values; the option value is the source record ID.
get hasSelectedEmailRecipients() Line 374	Shows recipient-dependent preview controls when the selected eligible count is positive.
get tableClass() Line 378	Converts the view key to lowercase with hyphens to select the corresponding data-table CSS layout.
get selectedRecord() Line 382	Finds selectedRecordId among the current page's rows for the detail sidebar.
get hasRows() Line 386	True when the current page contains at least one row.
get hasPrevious() Line 390	True when offsetRows is greater than zero.
get hasNext() Line 394	Prefers the server's hasNextPage flag; if absent, checks offsetRows + 25 against totalRows.
get previousDisabled() Line 398	Disables Previous when the panel is locked or there is no earlier page.
get nextDisabled() Line 402	Disables Next when the panel is locked or there is no later page.
get pageLabel() Line 406	Displays the one-based visible range and total, or 0 records. If rowsLimited is true, appends the server's accessibleRows as the latest records available.
async loadDashboard({ preserveSelection = true } = {}) Line 414	Calls getDashboard with edition, time range, owner/null, view key, page size 25 and offset. Ignores superseded responses, adopts returned scope/pagination and decorates rows. Preserves the selected record if still on the page, otherwise selects the first row. Communication work prevents loading.

Method or getter and source line	Role
decorateRow(row, selectedId) Line 454	Combines server canMark flags with the current finance refinement to expose only relevant base/top-up actions. Derives Lead/Opportunity, guest/interest/application flags, contact links and detail fallbacks. Queued/Sent invitations disable their action; Opportunity details use Primary contact and optional event-day contact.
financeStatusForView(row) Line 521	Check pricing takes priority. Quote view says Quote required; invoice/payment views choose the base booking while its corresponding obligation remains outstanding, then the staff top-up. Paid view says Payment confirmed; combined view keeps the server label.
financeAmountForView(row) Line 536	Quote view uses baseAmount. Invoice/payment refinements use baseAmount while the base obligation is outstanding, then topUpAmount. Combined finance prioritises base quote/invoice, top-up invoice, base payment, then top-up payment. Otherwise returns the combined row.amount.
decorateRows() Line 553	Updates each row's selected CSS class and accessible selection label after a sidebar selection change.
leadConversionPageReference(leadId) Line 562	Builds a standard __component reference to runtime_sales_lead__convertDesktopConsole, with the exact Lead ID in leadConvert__leadId.
statusClass(value) Line 574	Marks complete/provided/paid/payment confirmed/not required/not applicable as complete. Check pricing or text containing required/due/confirmed is due; remaining statuses are neutral.
emailStatusClass(status) Line 585	Maps Sent to complete, Failed to failed, Pending/Queued to due, and other or missing email states to neutral.
handleEventChange(event) Line 592	Stores the edition selector value and resets to the first page without preserving row selection; ignored while the panel is locked.
handleTimeChange(event) Line 598	Stores the All time/Today/7/30/90-day selector value and reloads from the first page; ignored while locked.
handleOwnerChange(event) Line 604	Stores the owner selector value and reloads from the first page; ignored while locked.
handleStageOptionSelect(event) Line 610	Uses the clicked refinement's data-view as viewKey and reloads from page one.
handlePipelineSelect(event) Line 616	Uses the clicked stage's configured combinedView, falling back to its data-view, then reloads from page one.
handleOverviewSelect(event) Line 624	Uses the clicked overview control's data-view and reloads from page one.
handleSelectRow(event) Line 630	Selects the row's data-id unless the click originated in a nested link, button or form control.
handleRowKeyDown(event) Line 637	Selects a focused row on Enter or Space; ignores bubbled key events from controls inside the row.
selectRecord(recordId) Line 644	Stores the selected row ID and updates row highlighting for the detail sidebar; ignored while the panel is locked.
handlePrevious() Line 650	Subtracts 25 from the offset, clamped at zero, and loads the earlier page without preserving row selection.
handleNext() Line 656	Adds 25 to the offset and loads the next page without preserving row selection.
handleRefresh() Line 662	Reloads the current scope and preserves selection when the panel is unlocked.

Method or getter and source line	Role
async handleConvertLead(event) Line 667	Opens a blank tab synchronously, generates the native conversion URL and navigates that tab. A blocked pop-up produces an actionable warning. A 750 ms monitor detects tab closure and schedules refresh; a navigation error closes the blank tab.
async handleLeadDecision(event) Line 708	Accepts INTEREST_NOT_PROGRESSED or APPLICATION_REJECTED from the clicked row, confirms the rejection, calls updateLeadDecision and reloads without preserving selection. Rejection retains the Lead.
handleOpenReminders(event) Line 752	Starts a communication draft using the current HEAVY_DUE, STAFF_DUE or LOGO_DUE view as the email kind.
handleOpenInvitations(event) Line 756	Starts an INVITATION draft for the clicked Lead ID, passed from the row's data-id.
handleOpenFinalPack(event) Line 762	Starts a FINAL_PACK draft for the currently filtered completed/unsent scope.
async openCommunication(kind, event, recordId) Line 766	Uses one supplied record ID or calls getCommunicationRecordIds for the full current filter scope. Rejects empty or more-than-500 selections before buildDraft. Stores the original IDs, initially selects eligible recipients, opens the modal and invalidates competing dashboard requests.
applyCommunicationDraft(draft, selectEligible, selectedIds) Line 801	Stores the server draft and marks it fresh. Selects eligible recipients using either the supplied previous selection IDs or selectEligible. Sets subject/body and recipient labels, chooses the first selected preview recipient and immediately schedules preview.
async handleRefreshCommunication() Line 819	Rebuilds the draft for the original record ID set. Retains edited subject/body and previously selected IDs only when still eligible. Clears preview readiness until the rebuilt draft is previewed; ignores superseded responses.
handleCommunicationSubjectChange(event) Line 843	Stores the input subject and schedules a 300 ms preview refresh; ignored while preparing or queuing.
handleCommunicationMessageChange(event) Line 849	Stores the edited message body and schedules a 300 ms preview refresh; ignored while preparing or queuing.
handleRecipientSelection(event) Line 855	Updates only the clicked recipient's selection, allowing selection only if eligible, then refreshes preview immediately.
handleSelectEligibleRecipients() Line 866	Selects every eligible draft recipient and refreshes preview immediately.
handleClearRecipients() Line 872	Clears all recipient selections and invalidates the preview immediately.
handlePreviewRecipientChange(event) Line 878	Stores the selected preview record ID and immediately requests its merged preview.
communicationRequest() Line 884	Builds kind, runId, subject, messageBody and the selected recipient recordId/fingerprint pairs. The same request contract is used for preview and queuing.
invalidateCommunicationPreview() Line 894	Cancels the timer, increments previewSequence and communicationVersion, clears the HTML and resets preview-ready/loading flags so obsolete content cannot enable Send.
queueCommunicationPreview(delay = 300) Line 903	Invalidates the previous preview, requires a fresh draft, ensures the preview ID is still selected and requires nonblank subject/body. Schedules renderCommunicationPreview after 300 ms by default, or immediately for selection/draft changes.

Method or getter and source line	Role
async renderCommunicationPreview(sequence) Line 916	Calls previewMessageJson with the current request and preview record ID. Accepts only the current sequence while the modal is open; swaps the hosted logo for the local static resource and adapts the preview width. A nonempty result enables preview readiness.
handleCloseCommunication({ deferFocus = false } = {}) Line 935	Closes an idle dialog, invalidates preview/communication responses and clears the draft and recipients. Restores the launching control's focus unless deferred for the post-send refresh.
async handleSendCommunication() Line 948	Snapshots the reviewed request, version and communication sequence, asks for send confirmation, then rechecks those values and preview readiness before queueMessagesJson. Zero queued rows force a recipient refresh; successful queuing closes the modal and reloads the panel. Skipped recipients produce a warning result.
showEmailToast(title, message, variant) Line 985	Displays the supplied queue result; errors remain sticky, while other toasts are dismissible.
handleModalFocus(event) Line 989	Remembers the currently focused dialog control for keyboard-boundary checks.
handleModalKeyDown(event) Line 993	Escape attempts to close the dialog; Tab/Shift+Tab wrap between its first and last enabled visible controls.
modalFocusableControls(dialog) Line 1015	Returns enabled visible buttons, Lightning inputs/textareas/comboboxes, links and tabIndex=0 elements inside the dialog.
handleModalFocusOut(event) Line 1020	Returns escaped focus to the first or last control according to the Tab direction, unless the dialog is closed/busy or focus remains inside.
restoreModalFocus() Line 1027	On the next timer turn, returns focus to the connected launch control; if unavailable, uses the header refresh button.
resetAndLoad() Line 1036	Sets offsetRows to zero and calls loadDashboard with preserveSelection false.
async handleMilestone(event) Line 1041	Accepts only the five known base/top-up quote, invoice and payment actions, confirms the clicked booking/action, calls updateMilestone and reloads with that booking selected. Displays an Update not saved error on failure.
readError(error) Line 1084	Uses error.body.message, then error.message, then the Master Panel loading fallback.

nteRelatedOpportunities

Exposed=true; API=67.0; targets=target=lightning__RecordPage. Target configuration: targetConfig=objects=object=Account; Contact; Opportunity.

Apex imports: getRelationships → NTERelatedOpportunityController.getRelationships.

Method or getter and source line	Role
wiredRelationships({ data, error }) Line 31	Reactively calls getRelationships for recordId/objectApiName. On success adopts the server title/mode/empty text and normalises its account, contacts and opportunities; on failure shows the relationships loading error.
get showsOpportunities() Line 47	Shows the booking-history view when the server mode is opportunities.
get showsRelationships() Line 51	Shows the account/contact view when the server mode is relationships.

Method or getter and source line	Role
get objectApiNamelsContact() Line 55	True on Contact records, allowing Contact-specific presentation.
get hasOpportunities() Line 59	True when the returned booking-history list has at least one Opportunity.
get hasContacts() Line 63	True when the returned linked-contact list is nonempty.
get hasOpportunityRelationships() Line 67	True when the booking has an Account or at least one linked Contact to display.
normalizeOpportunity(item) Line 71	Adds the Lightning record URL, GBP amount with up to two decimals, and en-GB close date parsed at local noon. Missing amount/date displays an em dash; the contact label distinguishes Primary contact from Linked contact.
normalizeAccount(item) Line 81	Adds the Account's /lightning/r/Account/<id>/view record link.
normalizeContact(item) Line 88	Adds the Contact record link, primary/role/linked-contact label, phone/email fallbacks and a mailto link only when an address exists.

nteRetryEmail

Exposed=true; API=67.0; targets=target=lightning__RecordAction. Target configuration: targetConfig=actionType=Action.

Apex imports: retryDispatch → NTEEmailDispatchService.retryDispatch; retryApprovalEmail → NTEExhibitorApprovalEmailService.retryApprovalEmail; retryAcknowledgement → NTEUpdateSubmissionService.retryAcknowledgement.

Method or getter and source line	Role
async invoke() Line 13	Headless action guarded against simultaneous invocation. A 006 ID calls retryApprovalEmail; 00Q calls retryAcknowledgement and adapts its result; other IDs call retryDispatch. Notifies Lightning that the source record changed. A refresh failure retains the action result and asks for a page refresh; finally clears the running guard.

Shared public form engine functions

Source: assets/forms.js. Nested sync/validation closures belong to their named parent setup function.

Function and line	Responsibility
setStatus Line 70	Sets the form status text/type and error/success accessibility presentation.
configureShell Line 80	Applies event/privacy/support/logo-destination configuration to shared page elements.
enableConditionalSections Line 116	Enables/disables conditional sections and their nested required controls when the controlling answer changes.
configureFieldConstraints Line 148	Applies standard/custom length limits and refreshed date boundaries.

Function and line	Responsibility
enableCheckboxChoices Line 174	Wires required checkbox-group validity.
validateCheckboxChoices Line 188	Requires a selection in each active required checkbox group.
syncCombinedFields Line 199	Builds hidden combined/copied/switch-derived values from their visible source controls.
eventCodeFromParts Line 227	Returns the current year before April and following year from April onward.
pureDateParts Line 231	Parses a calendar date without accepting impossible dates.
eventCodeFor Line 244	Derives London-local year/month for the edition rollover.
resolveEventCode Line 262	Uses a valid explicit override or derives the current edition.
bookingReference Line 271	Generates a new reference in the supported NTE grammar using time/random identity.
populateSystemFields Line 285	Populates edition/reference/version-related hidden controls.
setPricingField Line 294	Writes a derived numeric/status field into the active form.
catalogPrice Line 299	Accepts a finite nonnegative fixed catalogue price.
calculatePartnerPricing Line 307	Sums validated selected package prices.
qualifiesForPowerDiscount Line 314	Checks the same five category labels as Apex.
includedStaffForSpace Line 318	Returns the two/four included-staff allowance from the exact space choice.
calculateExhibitorPricing Line 327	Calculates space, allowed sockets and initial additional staff from whole valid counts.
eligibleCategoriesForSpace Line 363	Returns the exact restricted-space eligible categories.
syncExhibitorEligibility Line 374	Disables ineligible space choices and invalidates a stale selection.
setupPackageSummary Line 389	Updates partner selected-package summary and hidden totals.
setupExhibitorEstimate Line 423	Wires exhibitor category/space/staff/socket choices to derived estimate, allowance and invoice state.
nonBlankLines Line 525	Returns nonempty roster lines.
setupStaffUpdates Line 529	Keeps roster-derived counts and separate exhibitor top-up estimate in sync.
collectFields Line 549	Collects only enabled selected/nonempty controls into API-name arrays.
hasBlankRequiredText Line 567	Rejects whitespace-only required text that native required alone would accept.

Function and line	Responsibility
normalizeBookingReferences Line 580	Trims and uppercases supplied target references.
validateBookingReferences Line 586	Enforces the reference grammar before POST.
validateFieldLengths Line 596	Checks configured standard/custom text limits.
formatWebToLeadDate Line 608	Formats ISO browser dates as configured DMY or supported output.
setRuleError Line 614	Attaches a form-specific actionable custom-validity message.
validateCatalogPricing Line 624	Rejects unknown/tampered pricing selections even if a hidden total looks valid.
exhibitorSpacePrice Line 641	Resolves a selected exhibitor option through the actual catalogue.
packagePrice Line 649	Reads and validates the selected package catalogue value.
validateStaffUpdate Line 657	Checks audience, initial/top-up answer/count and roster consistency.
validateHeavyItems Line 688	Requires complete mandatory and partially started optional item groups.
missingFieldIds Line 708	Lists submitted custom API names missing their destination Web-to-Lead ID.
missingProductionConfig Line 714	Checks the actual configured endpoint, org, return destination and required links.
resolveReturnUrl Line 723	Resolves the form-specific or shared return page.
submitToSalesforce Line 737	Builds and submits the hidden native POST with standard names/custom 00N IDs.
syncFormState Line 767	Recomputes visibility, dates, references, derived values and prices immediately before validation.
clearRuleErrors Line 781	Clears earlier custom validity so corrected input can be resubmitted.
restoreSubmitControls Line 785	Restores controls after navigation interruption/back-forward restoration.
enableForms Line 796	Orchestrates all pre-submit checks, review mode, duplicate-click protection and native submission.
setupCodeOfConduct Line 910	Wires open/read-to-end/acknowledgement behaviour to the volunteer conduct reader.

Configuration and workspace reference

These definitions complete the reconstruction specification around the runtime services. Exact lists are retained where order or filters affect the user experience. Source paths identify the matching deployable metadata in the archive.

Runtime configuration records

NTE Routing Config

Source: force-app/main/default/customMetadata/NTE_Routing_Config.Default.md-meta.xml.

Setting	Value
label	Default
protected	false
values	field=Owner_Username__c; value=steven.skyba@euroforce.com.mmuat; field=Heavy_Vehicle_Form_URL__c; value= https://stevostar1234.github.io/nte27-web-to-lead-demo/heavy-vehicle-details.html ; field=Exhibitor_Staff_Form_URL__c; value= https://stevostar1234.github.io/nte27-web-to-lead-demo/exhibitor-staff-update.html ; field=Partner_Staff_Form_URL__c; value= https://stevostar1234.github.io/nte27-web-to-lead-demo/partner-sponsor-staff-update.html ; field=Logo_Update_Form_URL__c; value= https://stevostar1234.github.io/nte27-web-to-lead-demo/logo-upload.html ; field=Application_Event_Code__c; value=NTE2027; field=Exhibitor_Application_URL__c; value= https://stevostar1234.github.io/nte27-web-to-lead-demo/exhibitor-application.html ; field=Partner_Application_URL__c; value= https://stevostar1234.github.io/nte27-web-to-lead-demo/partner-sponsor-application.html ; field=Exhibitor_Final_Pack_URL__c; value=; field=Partner_Final_Pack_URL__c; value=

NTE Stripe Config

Source: force-app/main/default/customMetadata/NTE_Stripe_Config.Default.md-meta.xml.

Setting	Value
label	Default
protected	false
values	field=Enabled__c; value=true; field=Expected_Account_Id__c; value=acct_1UD8GwBcW1MkMYQ1; field=Expected_Org_Id__c; value=00DAd00000A95VIMAJ; field=Reference_Prefix__c; value=; field=Allowed_Email__c; value=; field=Tax_Rate__c; value=20; field=Live_Mode__c; value=false

Named credentials

NTE Stripe Live

Source: force-app/main/default/namedCredentials/NTE_Stripe_Live.namedCredential-meta.xml.

Setting	Value
allowMergeFieldsInBody	false
allowMergeFieldsInHeader	true
calloutStatus	Enabled
generateAuthorizationHeader	false
label	NTE Stripe Live
namedCredentialParameters	parameterName=Url; parameterType=Url; parameterValue= https://api.stripe.com ; externalCredential=NTE_Stripe_Live; parameterName=ExternalCredential; parameterType=Authentication
namedCredentialType	SecuredEndpoint

NTE Stripe Test

Source: force-app/main/default/namedCredentials/NTE_Stripe_Test.namedCredential-meta.xml.

Setting	Value
allowMergeFieldsInBody	false
allowMergeFieldsInHeader	true
calloutStatus	Enabled
generateAuthorizationHeader	false
label	NTE Stripe Test
namedCredentialParameters	parameterName=Url; parameterType=Url; parameterValue= https://api.stripe.com ; externalCredential=NTE_Stripe_Test; parameterName=ExternalCredential; parameterType=Authentication
namedCredentialType	SecuredEndpoint

External credentials

NTE Stripe Live

Source: force-app/main/default/externalCredentials/NTE_Stripe_Live.externalCredential-meta.xml.

Setting	Value
authenticationProtocol	Custom
description	Stripe live account. Populate the ApiKey authentication parameter securely on the NTEApplication principal.

Setting	Value
externalCredentialParameters	parameterName=NTEApplication; parameterType=NamedPrincipal; sequenceNumber=1; parameterName=Authorization; parameterType=AuthHeader; parameterValue={!'Bearer ' & \$Credential.NTE_Stripe_Live.ApiKey}; sequenceNumber=1
label	NTE Stripe Live

NTE Stripe Test

Source: force-app/main/default/externalCredentials/NTE_Stripe_Test.externalCredential-meta.xml.

Setting	Value
authenticationProtocol	Custom
description	Stripe test account. Populate the ApiKey authentication parameter securely on the NTEApplication principal.
externalCredentialParameters	parameterName=NTEApplication; parameterType=NamedPrincipal; sequenceNumber=1; parameterName=Authorization; parameterType=AuthHeader; parameterValue={!'Bearer ' & \$Credential.NTE_Stripe_Test.ApiKey}; sequenceNumber=1
label	NTE Stripe Test

Permission set group

NTE Management Access

Source: force-app/main/default/permissionsetgroups/NTE_Management_Access.permissionsetgroup-meta.xml.

Setting	Value
description	Assign to administrators and authorised staff who manage NTE enquiries, applications, bookings, communications and payments. Uses the configured NTE Stripe test connection.
hasActivationRequired	false
label	NTE Management Access
permissionSets	NTE_Management_User; NTE_Stripe_Test_Operator
status	Updated

Permission sets

NTE Forms Administration

Source: force-app/main/default/permissionsets/NTE_Forms_Administration.permissionset-meta.xml.

The complete custom field grants appear beside every field in the data dictionary.

Setting	Value
applicationVisibilities	application=NTE_Management; visible=true

Setting	Value
description	Manage NTE forms, bookings and finance.
classAccesses	apexClass=NTE_MasterPanelController; enabled=true; apexClass=NTEExhibitorApprovalEmailService; enabled=true; apexClass=NTERelatedOpportunityController; enabled=true; apexClass=NTEEmailDispatchService; enabled=true; apexClass=NTEUpdateSubmissionService; enabled=true
recordTypeVisibilities	recordType=Opportunity.NTE_Event_Opportunity; visible=true
userPermissions	enabled=true; name=EditTask; enabled=true; name=ConvertLeads; enabled=true; name=RunReports
hasActivationRequired	false
label	NTE Forms Administration
objectPermissions	allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Lead; viewAllFields=false; viewAllRecords=false; allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Account; viewAllFields=false; viewAllRecords=false; allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Contact; viewAllFields=false; viewAllRecords=false; allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Opportunity; viewAllFields=false; viewAllRecords=false; allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Task; viewAllFields=false; viewAllRecords=false; allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Event; viewAllFields=false; viewAllRecords=false; allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=NTE_Email_Dispatch__c; viewAllRecords=false; allowCreate=false; allowDelete=false; allowEdit=false; allowRead=true; modifyAllRecords=false; object=NTE_Payment_Request__c; viewAllRecords=false

NTE Management User

Source: force-app/main/default/permissionsets/NTE_Management_User.permissionset-meta.xml.

The complete custom field grants appear beside every field in the data dictionary.

Setting	Value
applicationVisibilities	application=NTE_Management; visible=true
description	Access the NTE Management app, its navigation, NTE event records, conversion actions and reports. Sharing continues to control which records are visible.
classAccesses	apexClass=NTEExhibitorApprovalEmailService; enabled=true; apexClass=NTE_MasterPanelController; enabled=true; apexClass=NTERelatedOpportunityController; enabled=true; apexClass=NTEEmailDispatchService; enabled=true; apexClass=NTEUpdateSubmissionService; enabled=true
recordTypeVisibilities	recordType=Opportunity.NTE_Event_Opportunity; visible=true

Setting	Value
tabSettings	tab=standard-Lead; visibility=Visible; tab=standard-Account; visibility=Visible; tab=standard-Contact; visibility=Visible; tab=standard-Opportunity; visibility=Visible; tab=NTE_Master_Panel; visibility=Visible
userPermissions	enabled=true; name=EditTask; enabled=true; name=ConvertLeads; enabled=true; name=RunReports
hasActivationRequired	false
label	NTE Management User
objectPermissions	allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Lead; viewAllFields=false; viewAllRecords=false; allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Account; viewAllFields=false; viewAllRecords=false; allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Contact; viewAllFields=false; viewAllRecords=false; allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Opportunity; viewAllFields=false; viewAllRecords=false; allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Task; viewAllFields=false; viewAllRecords=false; allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Event; viewAllFields=false; viewAllRecords=false; allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=NTE_Email_Dispatch__c; viewAllRecords=false; allowCreate=false; allowDelete=false; allowEdit=false; allowRead=true; modifyAllRecords=false; object=NTE_Payment_Request__c; viewAllRecords=false

NTE Stripe Test Operator

Source: force-app/main/default/permissionsets/NTE_Stripe_Test_Operator.permissionset-meta.xml.

The complete custom field grants appear beside every field in the data dictionary.

Setting	Value
classAccesses	apexClass=NTStripeClient; enabled=true
description	Allows an authorised NTE operator to use the configured Stripe payment principals.
externalCredentialPrincipalAccesses	enabled=true; externalCredentialPrincipal=NTE_Stripe_Test-NTEApplication; enabled=true; externalCredentialPrincipal=NTE_Stripe_Live-NTEApplication
label	NTE Stripe Payment Operator
objectPermissions	allowCreate=false; allowDelete=false; allowEdit=false; allowRead=true; modifyAllRecords=false; object=NTE_Payment_Request__c; viewAllRecords=false

Volunteer Applications User

Source: force-app/main/default/permissionsets/Volunteer_Applications_User.permissionset-meta.xml.

The complete custom field grants appear beside every field in the data dictionary.

Setting	Value
classAccesses	apexClass=VolunteerInboundLeadService; enabled=true
description	Access Mission Motorsport volunteer applications and their application details.
objectPermissions	allowCreate=true; allowDelete=false; allowEdit=true; allowRead=true; modifyAllRecords=false; object=Lead; viewAllFields=false; viewAllRecords=false
hasActivationRequired	false
label	Volunteer Applications User

Lightning application

NTE Management

Source: force-app/main/default/applications/NTE_Management.app-meta.xml.

Setting	Value
actionOverrides	actionName=Tab; content=NTE_Management_Home; formFactor=Large; skipRecordTypeSelect=false; type=Flexipage; pageOrSubjectType=standard-home; actionName=View; content=NTE_Management_Lead_Record_Page; formFactor=Large; skipRecordTypeSelect=false; type=Flexipage; pageOrSubjectType=Lead; actionName=View; content=NTE_Management_Lead_Record_Page; formFactor=Small; skipRecordTypeSelect=false; type=Flexipage; pageOrSubjectType=Lead; actionName=View; content=NTE_Management_Account_Record_Page; formFactor=Large; skipRecordTypeSelect=false; type=Flexipage; pageOrSubjectType=Account; actionName=View; content=NTE_Management_Account_Record_Page; formFactor=Small; skipRecordTypeSelect=false; type=Flexipage; pageOrSubjectType=Account; actionName=View; content=NTE_Management_Contact_Record_Page; formFactor=Large; skipRecordTypeSelect=false; type=Flexipage; pageOrSubjectType=Contact; actionName=View; content=NTE_Management_Contact_Record_Page; formFactor=Small; skipRecordTypeSelect=false; type=Flexipage; pageOrSubjectType=Contact; actionName=View; content=NTE_Management_Opportunity_Record_Page; formFactor=Large; skipRecordTypeSelect=false; type=Flexipage; pageOrSubjectType=Opportunity; actionName=View; content=NTE_Management_Opportunity_Record_Page; formFactor=Small; skipRecordTypeSelect=false; type=Flexipage; pageOrSubjectType=Opportunity
brand	footerColor=#8E793F; headerColor=#071D2B; logo=NTE_Management_Logo; logoVersion=1; shouldOverrideOrgTheme=true
defaultLandingTab	standard-home
description	Daily workspace for National Transition Event enquiries, applications, participants, bookings, logistics and follow-up.
formFactors	Small; Large
isNavAutoTempTabsDisabled	false

Setting	Value
isNavPersonalizationDisabled	true
isNavTabPersistenceDisabled	false
isOmniPinnedViewEnabled	false
label	NTE Management
navType	Standard
tabs	standard-home; NTE_Master_Panel; standard-Lead; standard-Account; standard-Contact; standard-Opportunity; standard-Task; standard-Event; standard-Dashboard; standard-report
uiType	Lightning

Record actions

Lead

Source: force-app/main/default/quickActions/Lead.Retry_Update_Email.quickAction-meta.xml.

Setting	Value
label	Retry update email
lightningWebComponent	nteRetryEmail
optionsCreateFeedItem	false
type	LightningWebComponent

NTE Email Dispatch

Source: force-app/main/default/quickActions/NTE_Email_Dispatch__c.Retry_Email.quickAction-meta.xml.

Setting	Value
label	Retry email
lightningWebComponent	nteRetryEmail
optionsCreateFeedItem	false
type	LightningWebComponent

Opportunity

Source: force-app/main/default/quickActions/Opportunity.Retry_Booking_Email.quickAction-meta.xml.

Setting	Value
label	Retry booking email
lightningWebComponent	nteRetryEmail
optionsCreateFeedItem	false
type	LightningWebComponent

Sharing rule

Opportunity

Source: force-app/main/default/sharingRules/Opportunity.sharingRules-meta.xml.

Setting	Value
sharingCriteriaRules	fullName=NTE_Opportunities_Internal_Edit; accessLevel=Edit; label=NTE Opportunities - Internal Edit Access; sharedTo=allInternalUsers=; criterialItems=field=RecordTypeId; operation=equals; value=NTE Event Opportunity

Duplicate rules

Lead

Source: force-app/main/default/duplicateRules/Lead.NTE_Web_to_Lead_Duplicate_Report.duplicateRule-meta.xml.

Setting	Value
actionOnInsert	Allow
actionOnUpdate	Allow
description	Allows NTE Web-to-Lead submissions that match an existing Contact while retaining duplicate reporting.
duplicateRuleFilter	booleanFilter=1; duplicateRuleFilterItems=field=LeadSource; operation=equals; sortOrder=1; table=Lead; value=Customer Event
duplicateRuleMatchRules	matchRuleObjectType=Contact; matchingRule=Standard_Contact_Match_Rule_v1_1; objectMapping=inputObject=Lead; mappingFields=inputField=FirstName; outputField=FirstName; inputField=LastName; outputField=LastName; inputField=Phone; outputField=Phone; inputField=Email; outputField=Email; inputField=City; outputField=MailingCity; inputField=Street; outputField=MailingStreet; inputField=PostalCode; outputField=MailingPostalCode; inputField=Title; outputField=Title; inputField=Company; outputField=AccountId; outputObject=Contact
isActive	true
masterLabel	NTE Web-to-Lead Duplicate Report
operationsOnInsert	Report
operationsOnUpdate	Report
securityOption	EnforceSharingRules
sortOrder	3

Lead

Source: force-app/main/default/duplicateRules/Lead.Standard_Rule_for_Leads_with_Duplicate_Contacts.duplicateRule-meta.xml.

Setting	Value
actionOnInsert	Allow

Setting	Value
actionOnUpdate	Allow
alertText	Use one of these records?
description	Identify leads with duplicate contacts.
duplicateRuleFilter	booleanFilter=1; duplicateRuleFilterItems=field=LeadSource; operation=notEqual; sortOrder=1; table=Lead; value=Customer Event
duplicateRuleMatchRules	matchRuleObjectType=Contact; matchingRule=Standard_Contact_Match_Rule_v1_1; objectMapping=inputObject=Lead; mappingFields=inputField=FirstName; outputField=FirstName; inputField=LastName; outputField=LastName; inputField=Phone; outputField=Phone; inputField=Email; outputField=Email; inputField=City; outputField=MailingCity; inputField=Street; outputField=MailingStreet; inputField=PostalCode; outputField=MailingPostalCode; inputField=Title; outputField=Title; inputField=Company; outputField=AccountId; outputObject=Contact
isActive	true
masterLabel	Standard Rule for Leads with Duplicate Contacts
operationsOnInsert	Alert; Report
operationsOnUpdate	Report
securityOption	EnforceSharingRules
sortOrder	2

Shared standard picklists

LeadSource

Source: force-app/main/default/standardValueSets/LeadSource.standardValueSet-meta.xml.

Sorted=false.

API value	Attributes
Advertisement	default=false; label=Advertisement
Customer Event	default=false; label=Customer Event
Employee Referral	default=false; label=Employee Referral
External Referral	default=false; label=External Referral
Google AdWords	default=false; label=Google AdWords
Other	default=false; label=Other
Partner	default=false; label=Partner
Purchased List	default=false; label=Purchased List
Trade Show	default=false; label=Trade Show
Webinar	default=false; label=Webinar
Website	default=false; label=Website
Partner Sponsor Exhibition Space Questions	default=false; label=Partner Sponsor Exhibition Space Questions
Partner Sponsor Application Form	default=false; label=Partner Sponsor Application Form

API value	Attributes
Volunteer Application	default=false; label=Volunteer Application

OpportunityStage

Source: force-app/main/default/standardValueSets/OpportunityStage.standardValueSet-meta.xml.

Sorted=false.

API value	Attributes
Qualification	default=false; description=You've contacted the prospect and they're interested.; label=Qualification; closed=false; forecastCategory=Pipeline; probability=10; won=false
Needs Analysis	default=false; description=You're defining the prospect's needs.; label=Needs Analysis; closed=false; forecastCategory=Pipeline; probability=35; won=false
Proposal	default=false; description=You're developing a sales proposal for the prospect.; label=Proposal; closed=false; forecastCategory=BestCase; probability=75; won=false
Negotiation	default=false; description=You're working with the prospect on the proposal you delivered.; label=Negotiation; closed=false; forecastCategory=Forecast; probability=90; won=false
Closed Won	default=false; description=Sold!; label=Closed Won; closed=true; forecastCategory=Closed; probability=100; won=true
Closed Lost	default=false; description=No sale.; label=Closed Lost; closed=true; forecastCategory=Omitted; probability=0; won=false

Reports

Native report filters apply to the report definition itself; navigating from a panel does not automatically replace every native report filter with the panel owner/time scope. The weekly report uses Last Update in the last seven days; other report date baselines and exact criteria follow.

NTE 01 Guest Check in Accessibility

Source: force-app/main/default/reports/NTE_Operations/NTE_01_Guest_Check_In_and_Accessibility.report-meta.xml.

On-the-day guest register, accompanying guest details and accessibility arrangements for every NTE edition.

Setting	Value
reportType	LeadList
format	Summary
scope	org
filter	criteriaItems=column=Lead.Web_Form_Type__c; columnToColumn=false; isUnlocked=true; operator>equals; value=Guest Registration
timeFrameFilter	dateColumn=CREATED_DATE; interval=INTERVAL_CUSTOM; startDate=2000-01-01

Setting	Value
groupingsDown	dateGranularity=Day; field=Lead.NTE_Event_Code__c; sortOrder=Asc
sortColumn	LAST_NAME
sortOrder	Asc
showDetails	true
showGrandTotal	true
showSubTotals	true

Columns in order: FIRST_NAME; LAST_NAME; COMPANY; TITLE; EMAIL; PHONE;
 Lead.Guest_Accompanying__c; Lead.Accompanying_Guest_Name__c;
 Lead.Accompanying_Guest_Email__c; Lead.Guest_Accessibility_Required__c;
 Lead.Guest_Accessibility_Details__c; Lead.Guest_Information_Declaration__c; STATUS; OWNER;
 CREATED_DATE.

NTE 02 Partner Sponsor Operations

Source: force-app/main/default/reports/NTE_Operations/NTE_02_Partner_Sponsor_Event_Operations.report-meta.xml.

Complete partner and sponsor operating sheet covering contacts, packages, confirmed value, previous events, staff, stand needs, accessibility and vehicle logistics.

Setting	Value
reportType	Opportunity
format	Summary
scope	organization
filter	booleanFilter=(1 AND (2 OR 3)) AND 4; criterialtems=column=Opportunity.NTE_Source_Form_Type__c; columnToColumn=false; isUnlocked=true; operator=equals; value=Partner / Sponsor Application; column=CLOSED; columnToColumn=false; isUnlocked=true; operator=equals; value=false; column=WON; columnToColumn=false; isUnlocked=true; operator=equals; value=true; column=RECORDTYPE; columnToColumn=false; isUnlocked=false; operator=equals; value=Opportunity.NTE_Event_Opportunity
timeFrameFilter	dateColumn=CLOSE_DATE; interval=INTERVAL_CUSTOM; startDate=2000-01-01
groupingsDown	dateGranularity=Day; field=Opportunity.NTE_Event_Code__c; sortOrder=Asc
sortColumn	ACCOUNT_NAME
sortOrder	Asc
showDetails	true
showGrandTotal	true
showSubTotals	true

Columns in order: ACCOUNT_NAME; CONTACT; OPPORTUNITY_NAME;
 Opportunity.Booking_Reference__c; STAGE_NAME; Opportunity.NTE_Attendance_Status__c;
 Opportunity.NTE_Sponsor_Package__c; Opportunity.NTE_Sponsor_Package_Total__c;
 Opportunity.NTE_Previous_Events__c; Opportunity.NTE_Event_Contact_Name__c;

Opportunity.NTE_Event_Contact_Title__c; Opportunity.NTE_Event_Contact_Email__c;
 Opportunity.NTE_Event_Contact_Mobile__c; Opportunity.NTE_Secondary_Contact_Name__c;
 Opportunity.NTE_Secondary_Contact_Email__c; Opportunity.NTE_Secondary_Contact_Mobile__c;
 Opportunity.NTE_Stand_Colleagues__c; Opportunity.NTE_Planned_Exhibitor_Count__c;
 Opportunity.NTE_Additional_Staff_Required__c; Opportunity.NTE_Additional_Staff_Count__c;
 Opportunity.NTE_Additional_Staff_Unit_Price__c; Opportunity.NTE_Additional_Staff_Total__c;
 Opportunity.NTE_Listed_Price_Total__c; Opportunity.NTE_Pricing_Status__c;
 Opportunity.NTE_Initial_Staff_Count__c; Opportunity.NTE_Included_Staff_Count__c;
 Opportunity.NTE_Total_Staff_Count__c; Opportunity.NTE_Top_Up_Staff_Required__c;
 Opportunity.NTE_Top_Up_Staff_Count__c; Opportunity.NTE_Top_Up_Staff_Names__c;
 Opportunity.NTE_Top_Up_Staff_Unit_Price__c; Opportunity.NTE_Top_Up_Staff_Total__c;
 Opportunity.NTE_Top_Up_Invoice_Required__c; Opportunity.NTE_Top_Up_Invoice_Provided__c;
 Opportunity.NTE_Top_Up_Invoice_At__c; Opportunity.NTE_Top_Up_Invoice_By__c;
 Opportunity.NTE_Top_Up_Payment_Received__c; Opportunity.NTE_Top_Up_Payment_At__c;
 Opportunity.NTE_Top_Up_Payment_By__c; Opportunity.NTE_Confirmed_Value__c;
 Opportunity.NTE_Invoice_Required__c; Opportunity.NTE_Payment_Method__c;
 Opportunity.NTE_Quote_Required_for_PO__c; Opportunity.NTE_Quote_Provided__c;
 Opportunity.NTE_Invoice_Provided__c; Opportunity.NTE_Payment_Received__c;
 Opportunity.NTE_Stand_Power__c; Opportunity.NTE_Stand_Equipment__c;
 Opportunity.NTE_Stand_Special_Requirements__c; Opportunity.NTE_Stand_Extra_Notes__c;
 Opportunity.NTE_Exhibitor_Hall_Schedule__c; Opportunity.NTE_Heavy_Vehicle_Required__c;
 Opportunity.NTE_Delivery_Window__c; Opportunity.NTE_Heavy_Item_1_Description__c;
 Opportunity.NTE_Heavy_Item_1_Registration__c; Opportunity.NTE_Heavy_Item_2_Description__c;
 Opportunity.NTE_Heavy_Item_2_Registration__c; Opportunity.NTE_Heavy_Item_3_Description__c;
 Opportunity.NTE_Heavy_Item_3_Registration__c; Opportunity.NTE_Haulier_Name__c;
 Opportunity.NTE_Haulier_Staff__c; Opportunity.NTE_Haulier_Vehicle_Type__c;
 Opportunity.NTE_Haulier_Vehicle_Registration__c; Opportunity.NTE_Last_Update_Processed_At__c;
 FULL_NAME; Opportunity.NTE_Logo_Update_Provided__c;
 Opportunity.NTE_Logo_Update_Provided_At__c; Opportunity.NTE_Final_Pack_Status__c;
 Opportunity.NTE_Final_Pack_Sent_At__c.

NTE 03 Exhibitor Event Operations

Source: force-app/main/default/reports/NTE_Operations/NTE_03_Exhibitor_Event_Operations.report-meta.xml.

Complete exhibitor operating sheet for check-in, confirmed value, space allocation, power, sockets, equipment, staff, accessibility, setup and vehicle logistics.

Setting	Value
reportType	Opportunity
format	Summary
scope	organization
filter	booleanFilter=(1 AND (2 OR 3)) AND 4; criteriaItems=column=Opportunity.NTE_Source_Form_Type__c; columnToColumn=false; isUnlocked=true; operator>equals; value=Exhibitor Application; column=CLOSED; columnToColumn=false; isUnlocked=true; operator>equals; value=false; column=WON; columnToColumn=false; isUnlocked=true; operator>equals; value=true; column=RECORDTYPE; columnToColumn=false; isUnlocked=false; operator>equals; value=Opportunity.NTE_Event_Opportunity

Setting	Value
timeFrameFilter	dateColumn=CLOSE_DATE; interval=INTERVAL_CUSTOM; startDate=2000-01-01
groupingsDown	dateGranularity=Day; field=Opportunity.NTE_Event_Code__c; sortOrder=Asc
sortColumn	ACCOUNT_NAME
sortOrder	Asc
showDetails	true
showGrandTotal	true
showSubTotals	true

Columns in order: ACCOUNT_NAME; CONTACT; OPPORTUNITY_NAME;
 Opportunity.Booking_Reference__c; STAGE_NAME; Opportunity.NTE_Attendance_Status__c;
 Opportunity.NTE_Exhibitor_Organisation_Category__c;
 Opportunity.NTE_Exhibitor_Space_Selections__c; Opportunity.NTE_Exhibitor_Space_Price__c;
 Opportunity.NTE_Previous_Events__c; Opportunity.NTE_Event_Contact_Name__c;
 Opportunity.NTE_Event_Contact_Email__c; Opportunity.NTE_Event_Contact_Mobile__c;
 Opportunity.NTE_Secondary_Contact_Name__c; Opportunity.NTE_Secondary_Contact_Email__c;
 Opportunity.NTE_Secondary_Contact_Mobile__c; Opportunity.NTE_Stand_Colleagues__c;
 Opportunity.NTE_Planned_Exhibitor_Count__c; Opportunity.NTE_Additional_Staff_Required__c;
 Opportunity.NTE_Additional_Staff_Count__c; Opportunity.NTE_Additional_Staff_Unit_Price__c;
 Opportunity.NTE_Additional_Staff_Total__c; Opportunity.NTE_Stand_Power__c;
 Opportunity.NTE_Power_Socket_Count__c; Opportunity.NTE_Power_Socket_Unit_Price__c;
 Opportunity.NTE_Power_Socket_Total__c; Opportunity.NTE_Listed_Price_Total__c;
 Opportunity.NTE_Pricing_Status__c; Opportunity.NTE_Initial_Staff_Count__c;
 Opportunity.NTE_Included_Staff_Count__c; Opportunity.NTE_Total_Staff_Count__c;
 Opportunity.NTE_Top_Up_Staff_Required__c; Opportunity.NTE_Top_Up_Staff_Count__c;
 Opportunity.NTE_Top_Up_Staff_Names__c; Opportunity.NTE_Top_Up_Staff_Unit_Price__c;
 Opportunity.NTE_Top_Up_Staff_Total__c; Opportunity.NTE_Top_Up_Invoice_Required__c;
 Opportunity.NTE_Top_Up_Invoice_Provided__c; Opportunity.NTE_Top_Up_Invoice_At__c;
 Opportunity.NTE_Top_Up_Invoice_By__c; Opportunity.NTE_Top_Up_Payment_Received__c;
 Opportunity.NTE_Top_Up_Payment_At__c; Opportunity.NTE_Top_Up_Payment_By__c;
 Opportunity.NTE_Confirmed_Value__c; Opportunity.NTE_Invoice_Required__c;
 Opportunity.NTE_Payment_Method__c; Opportunity.NTE_Quote_Required_for_PO__c;
 Opportunity.NTE_Quote_Provided__c; Opportunity.NTE_Invoice_Provided__c;
 Opportunity.NTE_Payment_Received__c; Opportunity.NTE_Stand_Equipment__c;
 Opportunity.NTE_Stand_Special_Requirements__c; Opportunity.NTE_Stand_Extra_Notes__c;
 Opportunity.NTE_Exhibitor_Hall_Schedule__c; Opportunity.NTE_Heavy_Vehicle_Required__c;
 Opportunity.NTE_Delivery_Window__c; Opportunity.NTE_Heavy_Item_1_Description__c;
 Opportunity.NTE_Heavy_Item_1_Registration__c; Opportunity.NTE_Heavy_Item_2_Description__c;
 Opportunity.NTE_Heavy_Item_2_Registration__c; Opportunity.NTE_Heavy_Item_3_Description__c;
 Opportunity.NTE_Heavy_Item_3_Registration__c; Opportunity.NTE_Haulier_Name__c;
 Opportunity.NTE_Haulier_Staff__c; Opportunity.NTE_Haulier_Vehicle_Type__c;
 Opportunity.NTE_Haulier_Vehicle_Registration__c; Opportunity.NTE_Last_Update_Processed_At__c;
 FULL_NAME; Opportunity.NTE_Logo_Update_Provided__c;
 Opportunity.NTE_Logo_Update_Provided_At__c; Opportunity.NTE_Final_Pack_Status__c;
 Opportunity.NTE_Final_Pack_Sent_At__c.

NTE 04 Staff Accreditation Roster

Source: force-app/main/default/reports/NTE_Operations/NTE_04_Staff_and_Accreditation_Roster.report-meta.xml.

Partner, sponsor, exhibitor and haulier people roster with primary contacts, expected headcount and accessibility notes.

Setting	Value
reportType	Opportunity
format	Summary
scope	organization
filter	booleanFilter=((1 OR 2) AND (3 OR 4)) AND 5; criteriaItems=column=Opportunity.NTE_Source_Form_Type__c; columnToColumn=false; isUnlocked=true; operator>equals; value=Partner / Sponsor Application; column=Opportunity.NTE_Source_Form_Type__c; columnToColumn=false; isUnlocked=true; operator>equals; value=Exhibitor Application; column=CLOSED; columnToColumn=false; isUnlocked=true; operator>equals; value=false; column=WON; columnToColumn=false; isUnlocked=true; operator>equals; value=true; column=RECORDTYPE; columnToColumn=false; isUnlocked=false; operator>equals; value=Opportunity.NTE_Event_Opportunity
timeFrameFilter	dateColumn=CLOSE_DATE; interval=INTERVAL_CUSTOM; startDate=2000-01-01
groupingsDown	dateGranularity=Day; field=Opportunity.NTE_Event_Code__c; sortOrder=Asc; dateGranularity=Day; field=Opportunity.NTE_Source_Form_Type__c; sortOrder=Asc
sortColumn	ACCOUNT_NAME
sortOrder	Asc
showDetails	true
showGrandTotal	true
showSubTotals	true

Columns in order: Opportunity.NTE_Initial_Staff_Count__c; Opportunity.NTE_Included_Staff_Count__c; Opportunity.NTE_Total_Staff_Count__c; Opportunity.NTE_Top_Up_Staff_Required__c; Opportunity.NTE_Top_Up_Staff_Count__c; Opportunity.NTE_Top_Up_Staff_Names__c; Opportunity.NTE_Top_Up_Staff_Unit_Price__c; Opportunity.NTE_Top_Up_Staff_Total__c; Opportunity.NTE_Top_Up_Invoice_Required__c; Opportunity.NTE_Top_Up_Invoice_Provided__c; Opportunity.NTE_Top_Up_Invoice_At__c; Opportunity.NTE_Top_Up_Invoice_By__c; Opportunity.NTE_Top_Up_Payment_Received__c; Opportunity.NTE_Top_Up_Payment_At__c; Opportunity.NTE_Top_Up_Payment_By__c; ACCOUNT_NAME; CONTACT; OPPORTUNITY_NAME; Opportunity.Booking_Reference__c; Opportunity.NTE_Attendance_Status__c; Opportunity.NTE_Event_Contact_Name__c; Opportunity.NTE_Event_Contact_Email__c; Opportunity.NTE_Event_Contact_Mobile__c; Opportunity.NTE_Secondary_Contact_Name__c; Opportunity.NTE_Secondary_Contact_Email__c; Opportunity.NTE_Secondary_Contact_Mobile__c; Opportunity.NTE_Stand_Colleagues__c; Opportunity.NTE_Planned_Exhibitor_Count__c; Opportunity.NTE_Additional_Staff_Required__c; Opportunity.NTE_Additional_Staff_Count__c; Opportunity.NTE_Haulier_Staff__c; Opportunity.NTE_Has_Special_Requirements__c; Opportunity.NTE_Stand_Special_Requirements__c; Opportunity.NTE_Staff_Update_Completed_At__c.

NTE 05 Heavy Vehicles Logistics

Source: force-app/main/default/reports/NTE_Operations/NTE_05_Heavy_Vehicles_and_Logistics.report-meta.xml.

All NTE bookings requiring heavy-item or vehicle logistics, with every submitted item, registration, dimension, weight, delivery window and haulier detail.

Setting	Value
reportType	Opportunity
format	Summary
scope	organization
filter	booleanFilter=(1 AND (2 OR 3)) AND 4; criteriaItems=column=Opportunity.NTE_Heavy_Vehicle_Required__c; columnToColumn=false; isUnlocked=true; operator=equals; value=Yes; column=CLOSED; columnToColumn=false; isUnlocked=true; operator=equals; value=false; column=WON; columnToColumn=false; isUnlocked=true; operator=equals; value=true; column=RECORDTYPE; columnToColumn=false; isUnlocked=false; operator=equals; value=Opportunity.NTE_Event_Opportunity
timeFrameFilter	dateColumn=CLOSE_DATE; interval=INTERVAL_CUSTOM; startDate=2000-01-01
groupingsDown	dateGranularity=Day; field=Opportunity.NTE_Event_Code__c; sortOrder=Asc
sortColumn	ACCOUNT_NAME
sortOrder	Asc
showDetails	true
showGrandTotal	true
showSubTotals	true

Columns in order: ACCOUNT_NAME; CONTACT; OPPORTUNITY_NAME;
Opportunity.Booking_Reference__c; Opportunity.NTE_Source_Form_Type__c;
Opportunity.NTE_Attendance_Status__c; Opportunity.NTE_Heavy_Vehicle_Required__c;
Opportunity.NTE_Event_Contact_Name__c; Opportunity.NTE_Event_Contact_Email__c;
Opportunity.NTE_Event_Contact_Mobile__c; Opportunity.NTE_Secondary_Contact_Name__c;
Opportunity.NTE_Secondary_Contact_Email__c; Opportunity.NTE_Secondary_Contact_Mobile__c;
Opportunity.NTE_Delivery_Window__c; Opportunity.NTE_Heavy_Item_1_Description__c;
Opportunity.NTE_Heavy_Item_1_Registration__c; Opportunity.NTE_Heavy_Item_1_Dimensions__c;
Opportunity.NTE_Heavy_Item_1_Gross_Weight__c; Opportunity.NTE_Heavy_Item_2_Description__c;
Opportunity.NTE_Heavy_Item_2_Registration__c; Opportunity.NTE_Heavy_Item_2_Dimensions__c;
Opportunity.NTE_Heavy_Item_2_Gross_Weight__c; Opportunity.NTE_Heavy_Item_3_Description__c;
Opportunity.NTE_Heavy_Item_3_Registration__c; Opportunity.NTE_Heavy_Item_3_Dimensions__c;
Opportunity.NTE_Heavy_Item_3_Gross_Weight__c; Opportunity.NTE_Haulier_Name__c;
Opportunity.NTE_Haulier_Staff__c; Opportunity.NTE_Haulier_Vehicle_Type__c;
Opportunity.NTE_Haulier_Vehicle_Registration__c; Opportunity.NTE_Haulier_Vehicle_Dimensions__c;
Opportunity.NTE_Haulier_Vehicle_Gross_Weight__c; Opportunity.NTE_Last_Update_Processed_At__c;
Opportunity.NTE_Heavy_Vehicle_Update_Completed_At__c.

NTE 06 Finance Invoicing

Source: force-app/main/default/reports/NTE_Operations/NTE_06_Finance_and_Invoicing.report-meta.xml.

NTE finance work with pricing checks, quotations, booking and staff top-up charges, payment milestones and billing details. Confirmed value excludes VAT.

Setting	Value
reportType	Opportunity
format	Summary
scope	organization
filter	booleanFilter=((1 OR 2 OR 3 OR 4 OR 6 OR 7) AND (5 OR 8)) AND 9; criteriaItems=column=Opportunity.NTE_Invoice_Required__c; columnToColumn=false; isUnlocked=true; operator=equals; value=Yes; column=Opportunity.NTE_Listed_Price_Total__c; columnToColumn=false; isUnlocked=true; operator=greaterThan; value=0; column=Opportunity.NTE_Top_Up_Invoice_Required__c; columnToColumn=false; isUnlocked=true; operator=equals; value=true; column=Opportunity.NTE_Top_Up_Staff_Total__c; columnToColumn=false; isUnlocked=true; operator=greaterThan; value=0; column=CLOSED; columnToColumn=false; isUnlocked=true; operator=equals; value=false; column=Opportunity.NTE_Quote_Required_for_PO__c; columnToColumn=false; isUnlocked=true; operator=equals; value=Yes; column=Opportunity.NTE_Pricing_Ready__c; columnToColumn=false; isUnlocked=true; operator=equals; value=false; column=WON; columnToColumn=false; isUnlocked=true; operator=equals; value=true; column=RECORDTYPE; columnToColumn=false; isUnlocked=false; operator=equals; value=Opportunity.NTE_Event_Opportunity
timeFrameFilter	dateColumn=CLOSE_DATE; interval=INTERVAL_CUSTOM; startDate=2000-01-01
groupingsDown	dateGranularity=Day; field=Opportunity.NTE_Event_Code__c; sortOrder=Asc; dateGranularity=Day; field=Opportunity.NTE_Source_Form_Type__c; sortOrder=Asc
sortColumn	ACCOUNT_NAME
sortOrder	Asc
showDetails	true
showGrandTotal	true
showSubTotals	true

Columns in order: ACCOUNT_NAME; CONTACT; OPPORTUNITY_NAME;
Opportunity.Booking_Reference__c; STAGE_NAME; Opportunity.NTE_Sponsor_Package__c;
Opportunity.NTE_Sponsor_Package_Total__c; Opportunity.NTE_Exhibitor_Space_Selections__c;
Opportunity.NTE_Exhibitor_Space_Price__c; Opportunity.NTE_Power_Socket_Count__c;
Opportunity.NTE_Power_Socket_Unit_Price__c; Opportunity.NTE_Power_Socket_Total__c;
Opportunity.NTE_Additional_Staff_Count__c; Opportunity.NTE_Additional_Staff_Unit_Price__c;
Opportunity.NTE_Additional_Staff_Total__c; Opportunity.NTE_Listed_Price_Total__c;
Opportunity.NTE_Pricing_Status__c; Opportunity.NTE_Pricing_Version__c;
Opportunity.NTE_Initial_Staff_Count__c; Opportunity.NTE_Included_Staff_Count__c;
Opportunity.NTE_Total_Staff_Count__c; Opportunity.NTE_Top_Up_Staff_Required__c;
Opportunity.NTE_Top_Up_Staff_Count__c; Opportunity.NTE_Top_Up_Staff_Names__c;
Opportunity.NTE_Top_Up_Staff_Unit_Price__c; Opportunity.NTE_Top_Up_Staff_Total__c;

Opportunity.NTE_Top_Up_Invoice_Required__c; Opportunity.NTE_Top_Up_Invoice_Provided__c;
 Opportunity.NTE_Top_Up_Invoice_At__c; Opportunity.NTE_Top_Up_Invoice_By__c;
 Opportunity.NTE_Top_Up_Payment_Received__c; Opportunity.NTE_Top_Up_Payment_At__c;
 Opportunity.NTE_Top_Up_Payment_By__c; Opportunity.NTE_Confirmed_Value__c;
 Opportunity.NTE_Invoice_Required__c; Opportunity.NTE_Payment_Method__c;
 Opportunity.NTE_Quote_Required_for_PO__c; Opportunity.NTE_Quote_Provided__c;
 Opportunity.NTE_Quote_Provided_At__c; Opportunity.NTE_Quote_Provided_By__c;
 Opportunity.NTE_Invoice_Provided__c; Opportunity.NTE_Invoice_Provided_At__c;
 Opportunity.NTE_Invoice_Provided_By__c; Opportunity.NTE_Payment_Received__c;
 Opportunity.NTE_Payment_Received_At__c; Opportunity.NTE_Payment_Recorded_By__c;
 Opportunity.NTE_Invoiced_Company__c; Opportunity.NTE_Trading_Name__c;
 Opportunity.NTE_Invoiced_Person__c; Opportunity.NTE_Invoice_Address__c;
 Opportunity.NTE_Invoiced_Email__c; Opportunity.NTE_Invoice_Contact_Phone__c;
 Opportunity.NTE_Purchase_Order__c; Opportunity.NTE_Purchase_Order_Number__c;
 Opportunity.NTE_Invoice_Additional_Information__c;
 Opportunity.NTE_Supplier_Agreement_Required__c; CLOSE_DATE; FULL_NAME;
 Opportunity.NTE_Pricing_Ready__c; Opportunity.NTE_Finance_Invoice_Due__c;
 Opportunity.NTE_Finance_Payment_Due__c; Opportunity.NTE_Finance_Payment_Confirmed__c.

NTE 07 Application EOI Pipeline

Source: force-app/main/default/reports/NTE_Operations/NTE_07_Application_and_EOI_Pipeline.report-meta.xml.

Unconverted NTE expressions of interest and applications, including recorded decisions, package choices, price components and finance requirements.

Setting	Value
reportType	LeadList
format	Summary
scope	org
filter	booleanFilter=(1 OR 2 OR 3 OR 4) AND 5; criterialtems=column=Lead.Web_Form_Type__c; columnToColumn=false; isUnlocked=true; operator=equals; value=Partner / Sponsor Expression of Interest; column=Lead.Web_Form_Type__c; columnToColumn=false; isUnlocked=true; operator=equals; value=Exhibitor Expression of Interest; column=Lead.Web_Form_Type__c; columnToColumn=false; isUnlocked=true; operator=equals; value=Partner / Sponsor Application; column=Lead.Web_Form_Type__c; columnToColumn=false; isUnlocked=true; operator=equals; value=Exhibitor Application; column=CONVERTED; columnToColumn=false; isUnlocked=true; operator=equals; value=false
timeFrameFilter	dateColumn=CREATED_DATE; interval=INTERVAL_CUSTOM; startDate=2000-01-01
groupingsDown	dateGranularity=Day; field=Lead.NTE_Event_Code__c; sortOrder=Asc; dateGranularity=Day; field=Lead.Web_Form_Type__c; sortOrder=Asc
sortColumn	CREATED_DATE
sortOrder	Asc
showDetails	true
showGrandTotal	true

Setting	Value
showSubTotals	true

Columns in order: FIRST_NAME; LAST_NAME; COMPANY; TITLE; EMAIL; PHONE;
 Lead.Booking_Reference__c; STATUS; OWNER; Lead.NTE_Interest_Progressed__c;
 Lead.NTE_Interest_Not_Progressed__c; Lead.NTE_Application_Rejected__c;
 Lead.Organisation_Type__c; Lead.Partner_Interest_Type__c; Lead.Partner_Interest_Areas__c;
 Lead.Exhibitor_Interest_Detail__c; Lead.Exhibitor_Community_Contribution__c;
 Lead.Sponsor_Package__c; Lead.Exhibitor_Organisation_Category__c;
 Lead.Exhibitor_Space_Selections__c; Lead.Sponsor_Package_Total__c;
 Lead.Exhibitor_Space_Price__c; Lead.Power_Socket_Count__c; Lead.Power_Socket_Unit_Price__c;
 Lead.Power_Socket_Total__c; Lead.Additional_Staff_Count__c; Lead.Additional_Staff_Unit_Price__c;
 Lead.Additional_Staff_Total__c; Lead.Listed_Price_Total__c; Lead.Pricing_Status__c;
 Lead.Invoice_Required__c; Lead.Payment_Method__c; Lead.Quote_Required_for_PO__c;
 Lead.NTE_Applicant_Email_Status__c; Lead.NTE_Internal_Email_Status__c; CREATED_DATE.

NTE 08 Event Delivery Readiness

Source: force-app/main/default/reports/NTE_Operations/NTE_08_Event_Delivery_Readiness.report-meta.xml.

Cross-event NTE booking readiness, including primary and event contacts, staffing, logistics, logos, finance and final-pack history.

Setting	Value
reportType	Opportunity
format	Summary
scope	organization
filter	booleanFilter=((1 OR 2) AND (3 OR 4)) AND 5; criteriaItems=column=Opportunity.NTE_Source_Form_Type__c; columnToColumn=false; isUnlocked=true; operator>equals; value=Partner / Sponsor Application; column=Opportunity.NTE_Source_Form_Type__c; columnToColumn=false; isUnlocked=true; operator>equals; value=Exhibitor Application; column=CLOSED; columnToColumn=false; isUnlocked=true; operator>equals; value=false; column=WON; columnToColumn=false; isUnlocked=true; operator>equals; value=true; column=RECORDTYPE; columnToColumn=false; isUnlocked=false; operator>equals; value=Opportunity.NTE_Event_Opportunity
timeFrameFilter	dateColumn=CLOSE_DATE; interval=INTERVAL_CUSTOM; startDate=2000-01-01
groupingsDown	dateGranularity=Day; field=Opportunity.NTE_Event_Code__c; sortOrder=Asc; dateGranularity=Day; field=Opportunity.NTE_Source_Form_Type__c; sortOrder=Asc
sortColumn	ACCOUNT_NAME
sortOrder	Asc
showDetails	true
showGrandTotal	true
showSubTotals	true

Columns in order: ACCOUNT_NAME; CONTACT; OPPORTUNITY_NAME;
 Opportunity.Booking_Reference__c; STAGE_NAME; Opportunity.NTE_Attendance_Status__c;
 Opportunity.NTE_Event_Contact_Name__c; Opportunity.NTE_Event_Contact_Mobile__c;
 Opportunity.NTE_Stand_Colleagues__c; Opportunity.NTE_Planned_Exhibitor_Count__c;
 Opportunity.NTE_Staff_Update_Completed_At__c; Opportunity.NTE_Exhibitor_Space_Selections__c;
 Opportunity.NTE_Stand_Power__c; Opportunity.NTE_Power_Socket_Count__c;
 Opportunity.NTE_Stand_Equipment__c; Opportunity.NTE_Has_Special_Requirements__c;
 Opportunity.NTE_Stand_Special_Requirements__c; Opportunity.NTE_Heavy_Vehicle_Required__c;
 Opportunity.NTE_Heavy_Vehicle_Update_Completed_At__c; Opportunity.NTE_Last_Update_Type__c;
 Opportunity.NTE_Last_Update_Processed_At__c; Opportunity.NTE_Listed_Price_Total__c;
 Opportunity.NTE_Pricing_Status__c; Opportunity.NTE_Invoice_Required__c;
 Opportunity.NTE_Payment_Method__c; Opportunity.NTE_Quote_Required_for_PO__c;
 Opportunity.NTE_Quote_Provided__c; Opportunity.NTE_Invoice_Provided__c;
 Opportunity.NTE_Payment_Received__c; Opportunity.NTE_Initial_Staff_Count__c;
 Opportunity.NTE_Included_Staff_Count__c; Opportunity.NTE_Total_Staff_Count__c;
 Opportunity.NTE_Top_Up_Staff_Required__c; Opportunity.NTE_Top_Up_Staff_Count__c;
 Opportunity.NTE_Top_Up_Staff_Names__c; Opportunity.NTE_Top_Up_Staff_Unit_Price__c;
 Opportunity.NTE_Top_Up_Staff_Total__c; Opportunity.NTE_Top_Up_Invoice_Required__c;
 Opportunity.NTE_Top_Up_Invoice_Provided__c; Opportunity.NTE_Top_Up_Invoice_At__c;
 Opportunity.NTE_Top_Up_Invoice_By__c; Opportunity.NTE_Top_Up_Payment_Received__c;
 Opportunity.NTE_Top_Up_Payment_At__c; Opportunity.NTE_Top_Up_Payment_By__c;
 Opportunity.NTE_Confirmed_Value__c; FULL_NAME; Opportunity.NTE_Logo_Update_Provided__c;
 Opportunity.NTE_Logo_Update_Provided_At__c; Opportunity.NTE_Final_Pack_Status__c;
 Opportunity.NTE_Final_Pack_Sent_At__c.

Weekly Finance Report

Source: force-app/main/default/reports/NTE_Operations/NTE_09_Weekly_Finance_Report.report-meta.xml.

Rolling seven-day Finance handoff for recently changed NTE bookings, with current quotation, invoice, payment, billing-contact and confirmed-value details. Use NTE 06 - Finance & Invoicing for the complete all-time finance view.

Setting	Value
reportType	Opportunity
format	Summary
scope	organization

Setting	Value
filter	booleanFilter=((1 OR 2 OR 3 OR 4 OR 6 OR 7) AND (5 OR 8)) AND 9; criteriaItems=column=Opportunity.NTE_Invoice_Required__c; columnToColumn=false; isUnlocked=true; operator=equals; value=Yes; column=Opportunity.NTE_Listed_Price_Total__c; columnToColumn=false; isUnlocked=true; operator=greaterThan; value=0; column=Opportunity.NTE_Top_Up_Invoice_Required__c; columnToColumn=false; isUnlocked=true; operator=equals; value=true; column=Opportunity.NTE_Top_Up_Staff_Total__c; columnToColumn=false; isUnlocked=true; operator=greaterThan; value=0; column=CLOSED; columnToColumn=false; isUnlocked=true; operator=equals; value=false; column=Opportunity.NTE_Quote_Required_for_PO__c; columnToColumn=false; isUnlocked=true; operator=equals; value=Yes; column=Opportunity.NTE_Pricing_Ready__c; columnToColumn=false; isUnlocked=true; operator=equals; value=false; column=WON; columnToColumn=false; isUnlocked=true; operator=equals; value=true; column=RECORDTYPE; columnToColumn=false; isUnlocked=false; operator=equals; value=Opportunity.NTE_Event_Opportunity
timeFrameFilter	dateColumn=LAST_UPDATE; interval=INTERVAL_LAST7
groupingsDown	dateGranularity=Day; field=Opportunity.NTE_Event_Code__c; sortOrder=Asc; dateGranularity=Day; field=Opportunity.NTE_Source_Form_Type__c; sortOrder=Asc
sortColumn	LAST_UPDATE
sortOrder	Desc
showDetails	true
showGrandTotal	true
showSubTotals	true

Columns in order: ACCOUNT_NAME; CONTACT; OPPORTUNITY_NAME;
 Opportunity.Booking_Reference__c; STAGE_NAME; Opportunity.NTE_Sponsor_Package__c;
 Opportunity.NTE_Sponsor_Package_Total__c; Opportunity.NTE_Exhibitor_Space_Selections__c;
 Opportunity.NTE_Exhibitor_Space_Price__c; Opportunity.NTE_Power_Socket_Count__c;
 Opportunity.NTE_Power_Socket_Unit_Price__c; Opportunity.NTE_Power_Socket_Total__c;
 Opportunity.NTE_Initial_Staff_Count__c; Opportunity.NTE_Included_Staff_Count__c;
 Opportunity.NTE_Additional_Staff_Count__c; Opportunity.NTE_Additional_Staff_Unit_Price__c;
 Opportunity.NTE_Additional_Staff_Total__c; Opportunity.NTE_Total_Staff_Count__c;
 Opportunity.NTE_Top_Up_Staff_Required__c; Opportunity.NTE_Top_Up_Staff_Count__c;
 Opportunity.NTE_Top_Up_Staff_Unit_Price__c; Opportunity.NTE_Top_Up_Staff_Total__c;
 Opportunity.NTE_Listed_Price_Total__c; Opportunity.NTE_Confirmed_Value__c;
 Opportunity.NTE_Pricing_Status__c; Opportunity.NTE_Pricing_Version__c;
 Opportunity.NTE_Invoice_Required__c; Opportunity.NTE_Payment_Method__c;
 Opportunity.NTE_Quote_Required_for_PO__c; Opportunity.NTE_Quote_Provided__c;
 Opportunity.NTE_Quote_Provided_At__c; Opportunity.NTE_Quote_Provided_By__c;
 Opportunity.NTE_Invoice_Provided__c; Opportunity.NTE_Invoice_Provided_At__c;
 Opportunity.NTE_Invoice_Provided_By__c; Opportunity.NTE_Payment_Received__c;
 Opportunity.NTE_Payment_Received_At__c; Opportunity.NTE_Payment_Recorded_By__c;
 Opportunity.NTE_Top_Up_Invoice_Required__c; Opportunity.NTE_Top_Up_Invoice_Provided__c;
 Opportunity.NTE_Top_Up_Invoice_At__c; Opportunity.NTE_Top_Up_Invoice_By__c;
 Opportunity.NTE_Top_Up_Payment_Received__c; Opportunity.NTE_Top_Up_Payment_At__c;
 Opportunity.NTE_Top_Up_Payment_By__c; Opportunity.NTE_Invoiced_Company__c;

Opportunity.NTE_Trading_Name__c; Opportunity.NTE_Invoiced_Person__c;
Opportunity.NTE_Invoice_Address__c; Opportunity.NTE_Invoiced_Email__c;
Opportunity.NTE_Invoice_Contact_Phone__c; Opportunity.NTE_Purchase_Order__c;
Opportunity.NTE_Purchase_Order_Number__c; Opportunity.NTE_Supplier_Agreement_Required__c;
Opportunity.NTE_Invoice_Additional_Information__c; LAST_UPDATE; FULL_NAME;
Opportunity.NTE_Pricing_Ready__c; Opportunity.NTE_Finance_Invoice_Due__c;
Opportunity.NTE_Finance_Payment_Due__c; Opportunity.NTE_Finance_Payment_Confirmed__c.

NTE Operations Finance

Source: force-app/main/default/reports/NTE_Operations.reportFolder-meta.xml.

folderShares=accessLevel=View; sharedTo=AllInternalUsers; sharedToType=Organization; name=NTE
Operations & Finance

Native list views

These are all 25 packaged views, including the three retained legacy separate top-up views. Native lists operate on their own scope; their existence does not add new Master Panel stages.

NTE Organisations

Object Account. API NTE_Organisations. Scope Everything.

Filter logic: AND. Criteria: field=NTE_Participant__c; operation=equals; value=1.

Columns: ACCOUNT.NAME; ACCOUNT.TYPE; NTE_Event_Code__c; NTE_Source_Form_Type__c;
NTE_Booking_Reference__c; NTE_Last_Application_Date__c.

NTE Contacts

Object Contact. API NTE_Contacts. Scope Everything.

Filter logic: AND. Criteria: field=NTE_Participant__c; operation=equals; value=1.

Columns: FULL_NAME; CONTACT.TITLE; CONTACT.EMAIL; NTE_Event_Code__c;
NTE_Source_Form_Type__c; NTE_Booking_Reference__c; NTE_Last_Application_Date__c.

NTE All Web Submissions

Object Lead. API NTE_All_Web_Submissions. Scope Everything.

Filter logic: AND. Criteria: field=NTE_Event_Code__c; operation=notEqual.

Columns: FULL_NAME; LEAD.COMPANY; LEAD.EMAIL; Web_Form_Type__c; NTE_Event_Code__c;
Booking_Reference__c; Target_Booking_Reference__c; LEAD.STATUS; LEAD.CREATED_DATE.

NTE Applications

Object Lead. API NTE_Applications. Scope Everything.

Filter logic: AND. Criteria: field=Web_Form_Type__c; operation=equals; value=Partner / Sponsor
Application,Exhibitor Application; field=LEAD.CONVERTED; operation=equals; value=0;
field=NTE_Application_Rejected__c; operation=equals; value=0; field=NTE_Event_Code__c;
operation=notEqual.

Columns: FULL_NAME; LEAD.COMPANY; LEAD.EMAIL; Web_Form_Type__c; Booking_Reference__c; Payment_Method__c; NTE_Event_Code__c; NTE_Application_Rejected__c; LEAD.STATUS; LEAD.CREATED_DATE.

NTE Exhibitor Applications

Object Lead. API NTE_Exhibitor_Applications. Scope Everything.

Filter logic: AND. Criteria: field=Web_Form_Type__c; operation=equals; value=Exhibitor Application; field=LEAD.CONVERTED; operation=equals; value=0; field=NTE_Application_Rejected__c; operation=equals; value=0; field=NTE_Event_Code__c; operation=notEqual.

Columns: FULL_NAME; LEAD.COMPANY; LEAD.EMAIL; Booking_Reference__c; Payment_Method__c; NTE_Event_Code__c; NTE_Application_Rejected__c; LEAD.STATUS; LEAD.CREATED_DATE.

NTE Expressions of Interest

Object Lead. API NTE_Expressions_of_Interest. Scope Everything.

Filter logic: AND. Criteria: field=Web_Form_Type__c; operation=equals; value=Partner / Sponsor Expression of Interest,Exhibitor Expression of Interest; field=LEAD.CONVERTED; operation=equals; value=0; field=NTE_Interest_Progressed__c; operation=equals; value=0; field=NTE_Interest_Not_Progressed__c; operation=equals; value=0; field=NTE_Event_Code__c; operation=notEqual.

Columns: FULL_NAME; LEAD.COMPANY; LEAD.EMAIL; Web_Form_Type__c; NTE_Event_Code__c; NTE_Interest_Progressed__c; NTE_Interest_Not_Progressed__c; LEAD.STATUS; LEAD.CREATED_DATE.

NTE Guest Registrations

Object Lead. API NTE_Guest_Registrations. Scope Everything.

Filter logic: AND. Criteria: field=Web_Form_Type__c; operation=equals; value=Guest Registration; field=LEAD.CONVERTED; operation=equals; value=0.

Columns: FULL_NAME; LEAD.COMPANY; LEAD.EMAIL; NTE_Event_Code__c; LEAD.STATUS; LEAD.CREATED_DATE.

NTE Partner Sponsor Applications

Object Lead. API NTE_Partner_Sponsor_Applications. Scope Everything.

Filter logic: AND. Criteria: field=Web_Form_Type__c; operation=equals; value=Partner / Sponsor Application; field=LEAD.CONVERTED; operation=equals; value=0; field=NTE_Application_Rejected__c; operation=equals; value=0; field=NTE_Event_Code__c; operation=notEqual.

Columns: FULL_NAME; LEAD.COMPANY; LEAD.EMAIL; Booking_Reference__c; Payment_Method__c; NTE_Event_Code__c; NTE_Application_Rejected__c; LEAD.STATUS; LEAD.CREATED_DATE.

NTE Unmatched Updates

Object Lead. API NTE_Unmatched_Updates. Scope Everything.

Filter logic: AND. Criteria: field=NTE_Update_Status__c; operation=equals; value=No Matching Booking,Ambiguous Booking Reference,Failed.

Columns: FULL_NAME; LEAD.COMPANY; LEAD.EMAIL; Web_Form_Type__c;
Target_Booking_Reference__c; NTE_Update_Status__c; NTE_Update_Error__c;
LEAD.CREATED_DATE.

NTE Update Emails Failed

Object Lead. API NTE_Update_Emails_Failed. Scope Everything.

Filter logic: AND. Criteria: field=NTE_Update_Status__c; operation=equals; value=Matched and Applied;
field=NTE_Applicant_Email_Status__c; operation=equals; value=Failed.

Columns: FULL_NAME; LEAD.COMPANY; Web_Form_Type__c; Target_Booking_Reference__c;
NTE_Update_Status__c; NTE_Applicant_Email_Status__c; LEAD.CREATED_DATE.

Volunteer Applications

Object Lead. API Volunteer_Applications. Scope Everything.

Filter logic: AND. Criteria: field=Web_Form_Type__c; operation=equals; value=Volunteer Application.

Columns: FULL_NAME; LEAD.EMAIL; LEAD.MOBILE_PHONE; Volunteer_Opportunities__c;
Volunteer_Travel_Regions__c; Volunteer_DBS_Willing__c; LEAD.STATUS; LEAD.CREATED_DATE.

NTE Email Failures

Object NTE_Email_Dispatch__c. API NTE_Email_Failures. Scope Everything.

Filter logic: AND. Criteria: field=Status__c; operation=equals; value=Failed.

Columns: NAME; Kind__c; Recipient__c; Event_Code__c; Status__c; Opportunity__c; Lead__c;
CREATED_DATE.

NTE Recent Emails

Object NTE_Email_Dispatch__c. API NTE_Recent_Emails. Scope Everything.

Filter logic: AND. Criteria: .

Columns: NAME; Kind__c; Recipient__c; Status__c; Sent_At__c; Opportunity__c; Lead__c;
CREATED_DATE.

NTE Payment Requests

Object NTE_Payment_Request__c. API NTE_Payment_Requests. Scope Everything.

Filter logic: AND. Criteria: .

Columns: NAME; Opportunity__c; Kind__c; Status__c; Reference__c; Delivered_At__c.

NTE Event Participation

Object Opportunity. API NTE_Event_Participation. Scope Everything.

Filter logic: AND. Criteria: field=OPPORTUNITY.RECORDTYPE; operation=equals;
value=Opportunity.NTE_Event_Opportunity; field=NTE_Event_Code__c; operation=notEqual.

Columns: OPPORTUNITY.NAME; ACCOUNT.NAME; NTE_Event_Code__c;
NTE_Source_Form_Type__c; Booking_Reference__c; NTE_Attendance_Status__c;
OPPORTUNITY.STAGE_NAME; OPPORTUNITY.CLOSE_DATE.

NTE Heavy Vehicle Updates Due

Object Opportunity. API NTE_Heavy_Vehicle_Updates_Due. Scope Everything.

Filter logic: 1 AND 2 AND 3 AND (4 OR 5) AND ((6 AND 7) OR 8 OR (9 AND 10)). Criteria:
field=OPPORTUNITY.RECORDTYPE; operation=equals; value=Opportunity.NTE_Event_Opportunity;
field=NTE_Event_Code__c; operation=notEqual; field=NTE_Source_Form_Type__c; operation=equals;
value=Exhibitor Application,Partner / Sponsor Application; field=OPPORTUNITY.CLOSED;
operation=equals; value=0; field=OPPORTUNITY.WON; operation=equals; value=1;
field=NTE_Heavy_Vehicle_Required__c; operation=notEqual; value=Yes;
field=NTE_Heavy_Vehicle_Required__c; operation=notEqual; value=No;
field=NTE_Heavy_Vehicle_Required__c; operation=equals; value=;
field=NTE_Heavy_Vehicle_Required__c; operation=equals; value=Yes;
field=NTE_Heavy_Vehicle_Update_Completed_At__c; operation=equals; value=.

Columns: OPPORTUNITY.NAME; ACCOUNT.NAME; NTE_Event_Code__c; Booking_Reference__c;
NTE_Heavy_Vehicle_Required__c; NTE_Heavy_Vehicle_Update_Completed_At__c.

NTE Invoice Required

Object Opportunity. API NTE_Invoices_Required. Scope Everything.

Filter logic: 1 AND 2 AND 3 AND (4 OR 5) AND (6). Criteria: field=OPPORTUNITY.RECORDTYPE;
operation=equals; value=Opportunity.NTE_Event_Opportunity; field=NTE_Event_Code__c;
operation=notEqual; field=NTE_Source_Form_Type__c; operation=equals; value=Exhibitor
Application,Partner / Sponsor Application; field=OPPORTUNITY.CLOSED; operation=equals; value=0;
field=OPPORTUNITY.WON; operation=equals; value=1; field=NTE_Finance_Invoice_Due__c;
operation=equals; value=1.

Columns: OPPORTUNITY.NAME; ACCOUNT.NAME; NTE_Event_Code__c; NTE_Listed_Price_Total__c;
NTE_Top_Up_Staff_Total__c; NTE_Invoice_Provided__c; NTE_Top_Up_Invoice_Provided__c;
NTE_Payment_Received__c; NTE_Top_Up_Payment_Received__c; NTE_Pricing_Status__c.

NTE Logo Updates Due

Object Opportunity. API NTE_Logo_Updates_Due. Scope Everything.

Filter logic: 1 AND 2 AND 3 AND (4 OR 5) AND (6). Criteria: field=OPPORTUNITY.RECORDTYPE;
operation=equals; value=Opportunity.NTE_Event_Opportunity; field=NTE_Event_Code__c;
operation=notEqual; field=NTE_Source_Form_Type__c; operation=equals; value=Exhibitor
Application,Partner / Sponsor Application; field=OPPORTUNITY.CLOSED; operation=equals; value=0;
field=OPPORTUNITY.WON; operation=equals; value=1; field=NTE_Logo_Update_Provided__c;
operation=equals; value=0.

Columns: OPPORTUNITY.NAME; ACCOUNT.NAME; NTE_Event_Code__c; Booking_Reference__c;
NTE_Source_Form_Type__c; NTE_Logo_Update_Provided__c; NTE_Logo_Update_Provided_At__c.

NTE Payment Confirmed

Object Opportunity. API NTE_Payment_Confirmed. Scope Everything.

Filter logic: 1 AND 2 AND 3 AND (4 OR 5) AND (6). Criteria: field=OPPORTUNITY.RECORDTYPE; operation=equals; value=Opportunity.NTE_Event_Opportunity; field=NTE_Event_Code__c; operation=notEqual; field=NTE_Source_Form_Type__c; operation=equals; value=Exhibitor Application,Partner / Sponsor Application; field=OPPORTUNITY.CLOSED; operation=equals; value=0; field=OPPORTUNITY.WON; operation=equals; value=1; field=NTE_Finance_Payment_Confirmed__c; operation=equals; value=1.

Columns: OPPORTUNITY.NAME; ACCOUNT.NAME; NTE_Event_Code__c; NTE_Listed_Price_Total__c; NTE_Top_Up_Staff_Total__c; NTE_Invoice_Provided__c; NTE_Top_Up_Invoice_Provided__c; NTE_Payment_Received__c; NTE_Top_Up_Payment_Received__c; NTE_Pricing_Status__c.

NTE Payment Required

Object Opportunity. API NTE_Payments_Due. Scope Everything.

Filter logic: 1 AND 2 AND 3 AND (4 OR 5) AND (6). Criteria: field=OPPORTUNITY.RECORDTYPE; operation=equals; value=Opportunity.NTE_Event_Opportunity; field=NTE_Event_Code__c; operation=notEqual; field=NTE_Source_Form_Type__c; operation=equals; value=Exhibitor Application,Partner / Sponsor Application; field=OPPORTUNITY.CLOSED; operation=equals; value=0; field=OPPORTUNITY.WON; operation=equals; value=1; field=NTE_Finance_Payment_Due__c; operation=equals; value=1.

Columns: OPPORTUNITY.NAME; ACCOUNT.NAME; NTE_Event_Code__c; NTE_Listed_Price_Total__c; NTE_Top_Up_Staff_Total__c; NTE_Invoice_Provided__c; NTE_Top_Up_Invoice_Provided__c; NTE_Payment_Received__c; NTE_Top_Up_Payment_Received__c; NTE_Pricing_Status__c.

NTE Quotes Required

Object Opportunity. API NTE_Quotes_Required. Scope Everything.

Filter logic: 1 AND 2 AND 3 AND (4 OR 5) AND (6 AND 7). Criteria: field=OPPORTUNITY.RECORDTYPE; operation=equals; value=Opportunity.NTE_Event_Opportunity; field=NTE_Event_Code__c; operation=notEqual; field=NTE_Source_Form_Type__c; operation=equals; value=Exhibitor Application,Partner / Sponsor Application; field=OPPORTUNITY.CLOSED; operation=equals; value=0; field=OPPORTUNITY.WON; operation=equals; value=1; field=NTE_Quote_Required_for_PO__c; operation=equals; value=Yes; field=NTE_Quote_Provided__c; operation=equals; value=0.

Columns: OPPORTUNITY.NAME; ACCOUNT.NAME; NTE_Event_Code__c; NTE_Quote_Required_for_PO__c; NTE_Quote_Provided__c; NTE_Listed_Price_Total__c; NTE_Pricing_Status__c.

NTE Staff Updates Due

Object Opportunity. API NTE_Staff_Updates_Due. Scope Everything.

Filter logic: 1 AND 2 AND 3 AND (4 OR 5) AND (6). Criteria: field=OPPORTUNITY.RECORDTYPE; operation=equals; value=Opportunity.NTE_Event_Opportunity; field=NTE_Event_Code__c; operation=notEqual; field=NTE_Source_Form_Type__c; operation=equals; value=Exhibitor Application,Partner / Sponsor Application; field=OPPORTUNITY.CLOSED; operation=equals; value=0; field=OPPORTUNITY.WON; operation=equals; value=1; field=NTE_Staff_Update_Completed_At__c; operation=equals; value=.

Columns: OPPORTUNITY.NAME; ACCOUNT.NAME; NTE_Event_Code__c; Booking_Reference__c; NTE_Staff_Update_Completed_At__c.

NTE Staff Top up Invoices Required

Object Opportunity. API NTE_Top_Up_Invoices_Required. Scope Everything.

Filter logic: 1 AND 2 AND 3 AND (4 OR 5) AND 6. Criteria: field=OPPORTUNITY.RECORDTYPE; operation=equals; value=Opportunity.NTE_Event_Opportunity; field=NTE_Event_Code__c; operation=notEqual; field=OPPORTUNITY.STAGE_NAME; operation=notEqual; value=Closed Lost; field=NTE_Top_Up_Invoice_Required__c; operation=equals; value=1; field=NTE_Top_Up_Staff_Total__c; operation=greaterThan; value=0; field=NTE_Top_Up_Invoice_Provided__c; operation=equals; value=0.

Columns: OPPORTUNITY.NAME; ACCOUNT.NAME; NTE_Event_Code__c; NTE_Top_Up_Staff_Total__c; NTE_Top_Up_Invoice_Provided__c; NTE_Top_Up_Payment_Received__c.

NTE Staff Top up Paid

Object Opportunity. API NTE_Top_Up_Paid. Scope Everything.

Filter logic: 1 AND 2 AND 3 AND (4 OR 5) AND 6 AND 7. Criteria: field=OPPORTUNITY.RECORDTYPE; operation=equals; value=Opportunity.NTE_Event_Opportunity; field=NTE_Event_Code__c; operation=notEqual; field=OPPORTUNITY.STAGE_NAME; operation=notEqual; value=Closed Lost; field=NTE_Top_Up_Invoice_Required__c; operation=equals; value=1; field=NTE_Top_Up_Staff_Total__c; operation=greaterThan; value=0; field=NTE_Top_Up_Invoice_Provided__c; operation=equals; value=1; field=NTE_Top_Up_Payment_Received__c; operation=equals; value=1.

Columns: OPPORTUNITY.NAME; ACCOUNT.NAME; NTE_Event_Code__c; NTE_Top_Up_Staff_Total__c; NTE_Top_Up_Invoice_Provided__c; NTE_Top_Up_Payment_Received__c.

NTE Staff Top up Payments Due

Object Opportunity. API NTE_Top_Up_Payments_Due. Scope Everything.

Filter logic: 1 AND 2 AND 3 AND (4 OR 5) AND 6 AND 7. Criteria: field=OPPORTUNITY.RECORDTYPE; operation=equals; value=Opportunity.NTE_Event_Opportunity; field=NTE_Event_Code__c; operation=notEqual; field=OPPORTUNITY.STAGE_NAME; operation=notEqual; value=Closed Lost; field=NTE_Top_Up_Invoice_Required__c; operation=equals; value=1; field=NTE_Top_Up_Staff_Total__c; operation=greaterThan; value=0; field=NTE_Top_Up_Invoice_Provided__c; operation=equals; value=1; field=NTE_Top_Up_Payment_Received__c; operation=equals; value=0.

Columns: OPPORTUNITY.NAME; ACCOUNT.NAME; NTE_Event_Code__c; NTE_Top_Up_Staff_Total__c; NTE_Top_Up_Invoice_Provided__c; NTE_Top_Up_Payment_Received__c.

Record pages and layouts

Dynamic Forms sections below list their actual field order by region. Standard highlights, tabs, related lists and activity components coexist with the custom relationship component. The NTE Management Home uses the supplied full-width Aura template; that template defines one region and no business logic.

NTE OneRegionHomeTemplate

Source: force-app/main/default/aura/NTE_OneRegionHomeTemplate/NTE_OneRegionHomeTemplate.cmp-meta.xml.

apiVersion=67.0; description=Full-width one-region Home template for the NTE Management app.

NTE Management Logo

Source: force-app/main/default/contentassets/NTE_Management_Logo.asset-meta.xml.

format=Original; isVisibleByExternalUsers=false; language=en_US; masterLabel=NTE Management Logo; relationships=organization=access=VIEWER; versions=version=number=1; pathOnClient=NTE_Management_Logo.png

NTE Management Account Record Page

Source: force-app/main/default/flexipages/NTE_Management_Account_Record_Page.flexipage-meta.xml.

Page settings: description=App-scoped NTE workspace for Account records, organised in the order the event team works.; masterLabel=NTE Management Account Record Page; objectType=Account; template=name=flexipage:recordHomeTemplateDesktop; type=RecordPage.

Region	Fields and components in order
header / Region	force:highlightsPanel: name=actionNames; valueList=valueListItems=value=Edit; value=Global.NewContact; value=Global.NewOpportunity; value=ChangeOwnerOne; value=Global.NewTask; value=Global.NewEvent; value=Delete; name=collapsed; value=false; name=enableActionsConfiguration; value=true; name=enableActionsInNative; value=true; name=hideChatterActions; value=false; name=hideSlackAction; value=false; name=numVisibleActions; value=5
NTE_Section_1_Left / Facet	Record.NTE_Participant__c (name=uiBehavior; value=none); Record.NTE_Source_Form_Type__c (name=uiBehavior; value=none); Record.NTE_Last_Application_Date__c (name=uiBehavior; value=none)
NTE_Section_1_Right / Facet	Record.NTE_Event_Code__c (name=uiBehavior; value=none); Record.NTE_Booking_Reference__c (name=uiBehavior; value=none); Record.OwnerId (name=uiBehavior; value=none)
NTE_Section_1_Columns / Facet	flexipage:column: name=body; value=NTE_Section_1_Left; flexipage:column: name=body; value=NTE_Section_1_Right
NTE_Section_2_Left / Facet	Record.Name (name=uiBehavior; value=none); Record.Type (name=uiBehavior; value=none); Record.AccountSource (name=uiBehavior; value=none); Record.Website (name=uiBehavior; value=none); Record.AnnualRevenue (name=uiBehavior; value=none)
NTE_Section_2_Right / Facet	Record.ParentId (name=uiBehavior; value=none); Record.Industry (name=uiBehavior; value=none); Record.Phone (name=uiBehavior; value=none); Record.NumberOfEmployees (name=uiBehavior; value=none); Record.Description (name=uiBehavior; value=none)

Region	Fields and components in order
NTE_Section_2_Columns / Facet	flexipage:column: name=body; value=NTE_Section_2_Left; flexipage:column: name=body; value=NTE_Section_2_Right
NTE_Section_3_Left / Facet	Record.RecordTypeId (name=uiBehavior; value=none); Record.LastModifiedById (name=uiBehavior; value=none)
NTE_Section_3_Right / Facet	Record.CreatedById (name=uiBehavior; value=none)
NTE_Section_3_Columns / Facet	flexipage:column: name=body; value=NTE_Section_3_Left; flexipage:column: name=body; value=NTE_Section_3_Right
NTE_Detail_Tab_Content / Facet	flexipage:fieldSection: name=columns; value=NTE_Section_1_Columns; name=horizontalAlignment; value=false; name=label; value=NTE participation; flexipage:fieldSection: name=columns; value=NTE_Section_2_Columns; name=horizontalAlignment; value=false; name=label; value=Organisation details; flexipage:fieldSection: name=columns; value=NTE_Section_3_Columns; name=horizontalAlignment; value=false; name=label; value=Record information; force:recordDetailPanelMobile:
NTE_Related_Tab_Content / Facet	nteRelatedOpportunities: ; force:relatedListContainer: name=relatedListComponentOverride; value=NONE; name=rowsToDisplay; value=10; name=showActionBar; value=true
NTE_Main_Tabs / Facet	flexipage:tab: name=active; value=true; name=body; value=NTE_Detail_Tab_Content; name=title; value=Standard.Tab.detail; flexipage:tab: name=body; value=NTE_Related_Tab_Content; name=title; value=Standard.Tab.relatedLists
main / Region	flexipage:tabset: name=tabs; value=NTE_Main_Tabs
sidebar / Region	runtime_sales_activities:activityPanel: name=showLegacyActivityComposer; value=false; force:relatedListQuickLinksContainer: name=hideHeader; value=false

NTE Management Contact Record Page

Source: force-app/main/default/flexipages/NTE_Management_Contact_Record_Page.flexipage-meta.xml.

Page settings: description=App-scoped NTE workspace for Contact records, organised in the order the event team works.; masterLabel=NTE Management Contact Record Page; objectType=Contact; template=name=flexipage:recordHomeTemplateDesktop; type=RecordPage.

Region	Fields and components in order
header / Region	force:highlightsPanel: name=actionNames; valueList=valueListItems=value=Edit; value=Global.NewTask; value=Global.NewEvent; value=Clone; value=ChangeOwnerOne; value=Delete; name=collapsed; value=false; name=enableActionsConfiguration; value=true; name=enableActionsInNative; value=true; name=hideChatterActions; value=false; name=hideSlackAction; value=false; name=numVisibleActions; value=5
NTE_Section_1_Left / Facet	Record.NTE_Participant__c (name=uiBehavior; value=none); Record.NTE_Source_Form_Type__c (name=uiBehavior; value=none); Record.NTE_Last_Application_Date__c (name=uiBehavior; value=none)
NTE_Section_1_Right / Facet	Record.NTE_Event_Code__c (name=uiBehavior; value=none); Record.NTE_Booking_Reference__c (name=uiBehavior; value=none); Record.NTE_Contact_Role__c (name=uiBehavior; value=none)

Region	Fields and components in order
NTE_Section_1_Columns / Facet	flexipage:column: name=body; value=NTE_Section_1_Left; flexipage:column: name=body; value=NTE_Section_1_Right
NTE_Section_2_Left / Facet	Record.Name (name=uiBehavior; value=none); Record.Title (name=uiBehavior; value=none); Record.Email (name=uiBehavior; value=none); Record.MobilePhone (name=uiBehavior; value=none); Record.ReportsTold (name=uiBehavior; value=none); Record.AssistantPhone (name=uiBehavior; value=none); Record.OwnerId (name=uiBehavior; value=none)
NTE_Section_2_Right / Facet	Record.AccountId (name=uiBehavior; value=none); Record.Department (name=uiBehavior; value=none); Record.Phone (name=uiBehavior; value=none); Record.LeadSource (name=uiBehavior; value=none); Record.AssistantName (name=uiBehavior; value=none); Record.Description (name=uiBehavior; value=none)
NTE_Section_2_Columns / Facet	flexipage:column: name=body; value=NTE_Section_2_Left; flexipage:column: name=body; value=NTE_Section_2_Right
NTE_Section_3_Left / Facet	Record.RecordTypeId (name=uiBehavior; value=none); Record.LastModifiedById (name=uiBehavior; value=none)
NTE_Section_3_Right / Facet	Record.CreatedById (name=uiBehavior; value=none)
NTE_Section_3_Columns / Facet	flexipage:column: name=body; value=NTE_Section_3_Left; flexipage:column: name=body; value=NTE_Section_3_Right
NTE_Detail_Tab_Content / Facet	flexipage:fieldSection: name=columns; value=NTE_Section_1_Columns; name=horizontalAlignment; value=false; name=label; value=NTE participation; flexipage:fieldSection: name=columns; value=NTE_Section_2_Columns; name=horizontalAlignment; value=false; name=label; value=Contact details; flexipage:fieldSection: name=columns; value=NTE_Section_3_Columns; name=horizontalAlignment; value=false; name=label; value=Record information; force:recordDetailPanelMobile:
NTE_Related_Tab_Content / Facet	nteRelatedOpportunities: ; force:relatedListContainer: name=relatedListComponentOverride; value=NONE; name=rowsToDisplay; value=10; name=showActionBar; value=true
NTE_Main_Tabs / Facet	flexipage:tab: name=active; value=true; name=body; value=NTE_Detail_Tab_Content; name=title; value=Standard.Tab.detail; flexipage:tab: name=body; value=NTE_Related_Tab_Content; name=title; value=Standard.Tab.relatedLists
main / Region	flexipage:tabset: name=tabs; value=NTE_Main_Tabs
sidebar / Region	runtime_sales_activities:activityPanel: name=showLegacyActivityComposer; value=false; force:relatedListQuickLinksContainer: name=hideHeader; value=false

NTE Management Home

Source: force-app/main/default/flexipages/NTE_Management_Home.flexipage-meta.xml.

Page settings: masterLabel=NTE Management Home;
template=name=c:NTE_OneRegionHomeTemplate; type=HomePage.

Region	Fields and components in order
main / Region	nteManagementHome:

NTE Management Lead Record Page

Source: force-app/main/default/flexipages/NTE_Management_Lead_Record_Page.flexipage-meta.xml.

Page settings: description=App-scoped NTE workspace for Lead records, organised in the order the event team works.; masterLabel=NTE Management Lead Record Page; objectType=Lead; template=name=flexipage:recordHomeTemplateDesktop; type=RecordPage.

Region	Fields and components in order
header / Region	force:highlightsPanel: name=actionNames; valueList=valueListItems=value=Convert; value=Edit; value=Clone; value=ChangeOwnerOne; value=ChangeRecordType; value=Global.NewTask; value=Global.NewEvent; value=Delete; value=Lead.Retry_Update_Email; name=collapsed; value=false; name=enableActionsConfiguration; value=true; name=enableActionsInNative; value=true; name=hideChatterActions; value=false; name=hideSlackAction; value=false; name=numVisibleActions; value=5
NTE_Section_1_Left / Facet	Record.Web_Form_Type__c (name=uiBehavior; value=none); Record.Form_Version__c (name=uiBehavior; value=none); Record.Booking_Reference__c (name=uiBehavior; value=none); Record.NTE_Interest_Progressed__c (name=uiBehavior; value=none); Record.NTE_Application_Rejected__c (name=uiBehavior; value=none); Record.NTE_Applicant_Email_Status__c (name=uiBehavior; value=none); Record.NTE_Email_Error__c (name=uiBehavior; value=none)
NTE_Section_1_Right / Facet	Record.NTE_Event_Code__c (name=uiBehavior; value=none); Record.LeadSource (name=uiBehavior; value=none); Record.Status (name=uiBehavior; value=none); Record.NTE_Interest_Not_Progressed__c (name=uiBehavior; value=none); Record.OwnerId (name=uiBehavior; value=none); Record.NTE_Internal_Email_Status__c (name=uiBehavior; value=none)
NTE_Section_1_Columns / Facet	flexipage:column: name=body; value=NTE_Section_1_Left; flexipage:column: name=body; value=NTE_Section_1_Right
NTE_Section_2_Left / Facet	Record.Name (name=uiBehavior; value=none); Record.Title (name=uiBehavior; value=none); Record.Phone (name=uiBehavior; value=none); Record.Website (name=uiBehavior; value=none); Record.Sponsored_Name__c (name=uiBehavior; value=none)
NTE_Section_2_Right / Facet	Record.Company (name=uiBehavior; value=none); Record.Email (name=uiBehavior; value=none); Record.MobilePhone (name=uiBehavior; value=none); Record.Organisation_Type__c (name=uiBehavior; value=none); Record.Alternative_Organisation_Name__c (name=uiBehavior; value=none)
NTE_Section_2_Columns / Facet	flexipage:column: name=body; value=NTE_Section_2_Left; flexipage:column: name=body; value=NTE_Section_2_Right
NTE_Section_3_Left / Facet	Record.Event_Contact_Name__c (name=uiBehavior; value=none); Record.Event_Contact_Email__c (name=uiBehavior; value=none); Record.Secondary_Contact_Prefix__c (name=uiBehavior; value=none); Record.Secondary_Contact_Title__c (name=uiBehavior; value=none); Record.Secondary_Contact_Mobile__c (name=uiBehavior; value=none)
NTE_Section_3_Right / Facet	Record.Event_Contact_Title__c (name=uiBehavior; value=none); Record.Event_Contact_Mobile__c (name=uiBehavior; value=none); Record.Secondary_Contact_Name__c (name=uiBehavior; value=none); Record.Secondary_Contact_Email__c (name=uiBehavior; value=none); Record.Secondary_Contact_Phone__c (name=uiBehavior; value=none)

Region	Fields and components in order
NTE_Section_3_Columns / Facet	flexipage:column: name=body; value=NTE_Section_3_Left; flexipage:column: name=body; value=NTE_Section_3_Right
NTE_Section_4_Left / Facet	Record.Partner_Interest_Type__c (name=uiBehavior; value=none); Record.Partnership_Interest_Detail__c (name=uiBehavior; value=none); Record.Exhibitor_Interest_Detail__c (name=uiBehavior; value=none); Record.Preferred_Contact_Method__c (name=uiBehavior; value=none); Record.Contact_Consent__c (name=uiBehavior; value=none); Record.Industry_Body_Details__c (name=uiBehavior; value=none)
NTE_Section_4_Right / Facet	Record.Partner_Interest_Areas__c (name=uiBehavior; value=none); Record.Exhibitor_Interest_Areas__c (name=uiBehavior; value=none); Record.Exhibitor_Community_Contribution__c (name=uiBehavior; value=none); Record.Preferred_Contact_Time__c (name=uiBehavior; value=none); Record.Event_Discovery_Source__c (name=uiBehavior; value=none)
NTE_Section_4_Columns / Facet	flexipage:column: name=body; value=NTE_Section_4_Left; flexipage:column: name=body; value=NTE_Section_4_Right
NTE_Section_5_Left / Facet	Record.Sponsor_Package__c (name=uiBehavior; value=none); Record.Exhibitor_Space_Selections__c (name=uiBehavior; value=none); Record.Exhibitor_Space_Position__c (name=uiBehavior; value=none); Record.Previous_NTE_Events__c (name=uiBehavior; value=none); Record.Power_Socket_Count__c (name=uiBehavior; value=none); Record.Stand_Special_Requirements__c (name=uiBehavior; value=none); Record.Stand_Extra_Notes__c (name=uiBehavior; value=none); Record.Total_Staff_Count__c (name=uiBehavior; value=none); Record.Additional_Staff_Required__c (name=uiBehavior; value=none); Record.Staff_Update_Audience__c (name=uiBehavior; value=none); Record.Top_Up_Staff_Required__c (name=uiBehavior; value=none); Record.Top_Up_Staff_Names__c (name=uiBehavior; value=none); Record.Has_Special_Requirements__c (name=uiBehavior; value=none); Record.Declaration_Name__c (name=uiBehavior; value=none); Record.Terms_and_Conditions__c (name=uiBehavior; value=none)
NTE_Section_5_Right / Facet	Record.Exhibitor_Organisation_Category__c (name=uiBehavior; value=none); Record.Exhibitor_Space_Size__c (name=uiBehavior; value=none); Record.Exhibitor_Hall_Schedule__c (name=uiBehavior; value=none); Record.Stand_Power__c (name=uiBehavior; value=none); Record.Stand_Equipment__c (name=uiBehavior; value=none); Record.Stand_Colleagues__c (name=uiBehavior; value=none); Record.Planned_Exhibitor_Count__c (name=uiBehavior; value=none); Record.Included_Staff_Count__c (name=uiBehavior; value=none); Record.Additional_Staff_Count__c (name=uiBehavior; value=none); Record.Staff_Base_Names__c (name=uiBehavior; value=none); Record.Top_Up_Staff_Count__c (name=uiBehavior; value=none); Record.Heavy_Vehicle_Required__c (name=uiBehavior; value=none); Record.Logo_Upload_URL__c (name=uiBehavior; value=none); Record.Declaration_Date__c (name=uiBehavior; value=none)
NTE_Section_5_Columns / Facet	flexipage:column: name=body; value=NTE_Section_5_Left; flexipage:column: name=body; value=NTE_Section_5_Right
NTE_Section_6_Left / Facet	Record.Guest_Accompanying__c (name=uiBehavior; value=none); Record.Accompanying_Guest_Email__c (name=uiBehavior; value=none); Record.Guest_Accessibility_Details__c (name=uiBehavior; value=none)

Region	Fields and components in order
NTE_Section_6_Right / Facet	Record.Accompanying_Guest_Name__c (name=uiBehavior; value=none); Record.Guest_Accessibility_Required__c (name=uiBehavior; value=none); Record.Guest_Information_Declaration__c (name=uiBehavior; value=none)
NTE_Section_6_Columns / Facet	flexipage:column: name=body; value=NTE_Section_6_Left; flexipage:column: name=body; value=NTE_Section_6_Right
NTE_Section_7_Left / Facet	Record.Sponsor_Package_Total__c (name=uiBehavior; value=none); Record.Power_Socket_Unit_Price__c (name=uiBehavior; value=none); Record.Additional_Staff_Unit_Price__c (name=uiBehavior; value=none); Record.Top_Up_Staff_Unit_Price__c (name=uiBehavior; value=none); Record.Listed_Price_Total__c (name=uiBehavior; value=none); Record.Pricing_Version__c (name=uiBehavior; value=none)
NTE_Section_7_Right / Facet	Record.Exhibitor_Space_Price__c (name=uiBehavior; value=none); Record.Power_Socket_Total__c (name=uiBehavior; value=none); Record.Additional_Staff_Total__c (name=uiBehavior; value=none); Record.Top_Up_Staff_Total__c (name=uiBehavior; value=none); Record.Pricing_Status__c (name=uiBehavior; value=none)
NTE_Section_7_Columns / Facet	flexipage:column: name=body; value=NTE_Section_7_Left; flexipage:column: name=body; value=NTE_Section_7_Right
NTE_Section_8_Left / Facet	Record.Invoice_Required__c (name=uiBehavior; value=none); Record.Invoiced_Company__c (name=uiBehavior; value=none); Record.Invoice_Address__c (name=uiBehavior; value=none); Record.Invoiced_Email__c (name=uiBehavior; value=none); Record.Purchase_Order__c (name=uiBehavior; value=none); Record.Quote_Required_for_PO__c (name=uiBehavior; value=none); Record.Supplier_Agreement_Required__c (name=uiBehavior; value=none)
NTE_Section_8_Right / Facet	Record.Payment_Method__c (name=uiBehavior; value=none); Record.Trading_Name__c (name=uiBehavior; value=none); Record.Invoiced_Person__c (name=uiBehavior; value=none); Record.Invoice_Contact_Phone__c (name=uiBehavior; value=none); Record.Purchase_Order_Number__c (name=uiBehavior; value=none); Record.Invoice_Additional_Information__c (name=uiBehavior; value=none)
NTE_Section_8_Columns / Facet	flexipage:column: name=body; value=NTE_Section_8_Left; flexipage:column: name=body; value=NTE_Section_8_Right
NTE_Section_9_Left / Facet	Record.Delivery_Window__c (name=uiBehavior; value=none); Record.Heavy_Item_1_Registration__c (name=uiBehavior; value=none); Record.Heavy_Item_1_Gross_Weight__c (name=uiBehavior; value=none); Record.Heavy_Item_2_Registration__c (name=uiBehavior; value=none); Record.Heavy_Item_2_Gross_Weight__c (name=uiBehavior; value=none); Record.Heavy_Item_3_Registration__c (name=uiBehavior; value=none); Record.Heavy_Item_3_Gross_Weight__c (name=uiBehavior; value=none); Record.Haulier_Staff__c (name=uiBehavior; value=none); Record.Haulier_Vehicle_Gross_Weight__c (name=uiBehavior; value=none); Record.Haulier_Vehicle_Registration__c (name=uiBehavior; value=none)

Region	Fields and components in order
NTE_Section_9_Right / Facet	Record.Heavy_Item_1_Description__c (name=uiBehavior; value=none); Record.Heavy_Item_1_Dimensions__c (name=uiBehavior; value=none); Record.Heavy_Item_2_Description__c (name=uiBehavior; value=none); Record.Heavy_Item_2_Dimensions__c (name=uiBehavior; value=none); Record.Heavy_Item_3_Description__c (name=uiBehavior; value=none); Record.Heavy_Item_3_Dimensions__c (name=uiBehavior; value=none); Record.Haulier_Name__c (name=uiBehavior; value=none); Record.Haulier_Vehicle_Type__c (name=uiBehavior; value=none); Record.Haulier_Vehicle_Dimensions__c (name=uiBehavior; value=none)
NTE_Section_9_Columns / Facet	flexipage:column: name=body; value=NTE_Section_9_Left; flexipage:column: name=body; value=NTE_Section_9_Right
NTE_Section_10_Left / Facet	Record.Target_Booking_Reference__c (name=uiBehavior; value=none); Record.NTE_Update_Booking_Id__c (name=uiBehavior; value=readonly); Record.CreatedById (name=uiBehavior; value=none)
NTE_Section_10_Right / Facet	Record.NTE_Update_Status__c (name=uiBehavior; value=none); Record.NTE_Update_Error__c (name=uiBehavior; value=none); Record.LastModifiedById (name=uiBehavior; value=none)
NTE_Section_10_Columns / Facet	flexipage:column: name=body; value=NTE_Section_10_Left; flexipage:column: name=body; value=NTE_Section_10_Right
NTE_Detail_Tab_Content / Facet	flexipage:fieldSection: name=columns; value=NTE_Section_1_Columns; name=horizontalAlignment; value=false; name=label; value=Submission and ownership; flexipage:fieldSection: name=columns; value=NTE_Section_2_Columns; name=horizontalAlignment; value=false; name=label; value=Person and organisation; flexipage:fieldSection: name=columns; value=NTE_Section_3_Columns; name=horizontalAlignment; value=false; name=label; value=Event contacts; flexipage:fieldSection: name=columns; value=NTE_Section_4_Columns; name=horizontalAlignment; value=false; name=label; value=Expressions of interest; flexipage:fieldSection: name=columns; value=NTE_Section_5_Columns; name=horizontalAlignment; value=false; name=label; value=Partnership and exhibition application; flexipage:fieldSection: name=columns; value=NTE_Section_6_Columns; name=horizontalAlignment; value=false; name=label; value=Guest registration; flexipage:fieldSection: name=columns; value=NTE_Section_7_Columns; name=horizontalAlignment; value=false; name=label; value=Pricing; flexipage:fieldSection: name=columns; value=NTE_Section_8_Columns; name=horizontalAlignment; value=false; name=label; value=Invoicing and procurement; flexipage:fieldSection: name=columns; value=NTE_Section_9_Columns; name=horizontalAlignment; value=false; name=label; value=Heavy vehicle and logistics; flexipage:fieldSection: name=columns; value=NTE_Section_10_Columns; name=horizontalAlignment; value=false; name=label; value=Processing and conversion; force:recordDetailPanelMobile:
NTE_Related_Tab_Content / Facet	force:relatedListContainer: name=relatedListComponentOverride; value=NONE; name=rowsToDisplay; value=10; name=showActionBar; value=true
NTE_Main_Tabs / Facet	flexipage:tab: name=active; value=true; name=body; value=NTE_Detail_Tab_Content; name=title; value=Standard.Tab.detail; flexipage:tab: name=body; value=NTE_Related_Tab_Content; name=title; value=Standard.Tab.relatedLists
main / Region	flexipage:tabset: name=tabs; value=NTE_Main_Tabs

Region	Fields and components in order
sidebar / Region	runtime_sales_activities:activityPanel: name=showLegacyActivityComposer; value=false; force:relatedListQuickLinksContainer: name=hideHeader; value=false

NTE Management Opportunity Record Page

Source: force-app/main/default/flexipages/NTE_Management_Opportunity_Record_Page.flexipage-meta.xml.

Page settings: description=App-scoped NTE workspace for Opportunity records, organised in the order the event team works.; masterLabel=NTE Management Opportunity Record Page;
subjectType=Opportunity; template=name=flexipage:recordHomeTemplateDesktop; type=RecordPage.

Region	Fields and components in order
header / Region	force:highlightsPanel: name=actionNames; valueList=valueListItems=value=Edit; value=Clone; value=ChangeOwnerOne; value=ChangeRecordType; value=Global.NewTask; value=Global.NewEvent; value=Delete; value=Opportunity.Retry_Booking_Email; name=collapsed; value=false; name=enableActionsConfiguration; value=true; name=enableActionsInNative; value=true; name=hideChatterActions; value=false; name=hideSlackAction; value=false; name=numVisibleActions; value=5
NTE_Section_1_Left / Facet	Record.AccountId (name=uiBehavior; value=none); Record.CloseDate (name=uiBehavior; value=none); Record.Type (name=uiBehavior; value=none); Record.CampaignId (name=uiBehavior; value=none); Record.Booking_Reference__c (name=uiBehavior; value=none); Record.NTE_Source_Form_Type__c (name=uiBehavior; value=none); Record.NTE_Attendance_Status__c (name=uiBehavior; value=none); Record.ForecastCategoryName (name=uiBehavior; value=none)
NTE_Section_1_Right / Facet	Record.StageName (name=uiBehavior; value=none); Record.Amount (name=uiBehavior; value=none); Record.LeadSource (name=uiBehavior; value=none); Record.OwnerId (name=uiBehavior; value=none); Record.NTE_Event_Code__c (name=uiBehavior; value=none); Record.NTE_Form_Version__c (name=uiBehavior; value=none); Record.Probability (name=uiBehavior; value=none); Record.NextStep (name=uiBehavior; value=none)
NTE_Section_1_Columns / Facet	flexipage:column: name=body; value=NTE_Section_1_Left; flexipage:column: name=body; value=NTE_Section_1_Right
NTE_Section_2_Left / Facet	Record.NTE_Event_Contact_Name__c (name=uiBehavior; value=none); Record.NTE_Event_Contact_Email__c (name=uiBehavior; value=none); Record.NTE_Secondary_Contact_Prefix__c (name=uiBehavior; value=none); Record.NTE_Secondary_Contact_Title__c (name=uiBehavior; value=none); Record.NTE_Secondary_Contact_Mobile__c (name=uiBehavior; value=none)
NTE_Section_2_Right / Facet	Record.NTE_Event_Contact_Title__c (name=uiBehavior; value=none); Record.NTE_Event_Contact_Mobile__c (name=uiBehavior; value=none); Record.NTE_Secondary_Contact_Name__c (name=uiBehavior; value=none); Record.NTE_Secondary_Contact_Email__c (name=uiBehavior; value=none); Record.NTE_Secondary_Contact_Phone__c (name=uiBehavior; value=none)

Region	Fields and components in order
NTE_Section_2_Columns / Facet	flexipage:column: name=body; value=NTE_Section_2_Left; flexipage:column: name=body; value=NTE_Section_2_Right
NTE_Section_3_Left / Facet	Record.NTE_Sponsored_Name__c (name=uiBehavior; value=none); Record.NTE_Sponsor_Package__c (name=uiBehavior; value=none); Record.NTE_Industry_Body_Details__c (name=uiBehavior; value=none); Record.NTE_Declaration_Date__c (name=uiBehavior; value=none)
NTE_Section_3_Right / Facet	Record.NTE_Alternative_Organisation_Name__c (name=uiBehavior; value=none); Record.NTE_Event_Discovery_Source__c (name=uiBehavior; value=none); Record.NTE_Declaration_Name__c (name=uiBehavior; value=none); Record.NTE_Terms_Accepted__c (name=uiBehavior; value=none)
NTE_Section_3_Columns / Facet	flexipage:column: name=body; value=NTE_Section_3_Left; flexipage:column: name=body; value=NTE_Section_3_Right
NTE_Section_4_Left / Facet	Record.NTE_Exhibitor_Organisation_Category__c (name=uiBehavior; value=none); Record.NTE_Exhibitor_Space_Size__c (name=uiBehavior; value=none); Record.NTE_Exhibitor_Hall_Schedule__c (name=uiBehavior; value=none); Record.NTE_Has_Special_Requirements__c (name=uiBehavior; value=none)
NTE_Section_4_Right / Facet	Record.NTE_Exhibitor_Space_Selections__c (name=uiBehavior; value=none); Record.NTE_Exhibitor_Space_Position__c (name=uiBehavior; value=none); Record.NTE_Previous_Events__c (name=uiBehavior; value=none)
NTE_Section_4_Columns / Facet	flexipage:column: name=body; value=NTE_Section_4_Left; flexipage:column: name=body; value=NTE_Section_4_Right
NTE_Section_5_Left / Facet	Record.NTE_Stand_Power__c (name=uiBehavior; value=none); Record.NTE_Stand_Equipment__c (name=uiBehavior; value=none); Record.NTE_Stand_Colleagues__c (name=uiBehavior; value=none); Record.NTE_Planned_Exhibitor_Count__c (name=uiBehavior; value=none); Record.NTE_Included_Staff_Count__c (name=uiBehavior; value=none); Record.NTE_Additional_Staff_Required__c (name=uiBehavior; value=none); Record.NTE_Top_Up_Staff_Required__c (name=uiBehavior; value=none); Record.NTE_Top_Up_Staff_Names__c (name=uiBehavior; value=none)
NTE_Section_5_Right / Facet	Record.NTE_Power_Socket_Count__c (name=uiBehavior; value=none); Record.NTE_Stand_Special_Requirements__c (name=uiBehavior; value=none); Record.NTE_Stand_Extra_Notes__c (name=uiBehavior; value=none); Record.NTE_Initial_Staff_Count__c (name=uiBehavior; value=none); Record.NTE_Total_Staff_Count__c (name=uiBehavior; value=none); Record.NTE_Additional_Staff_Count__c (name=uiBehavior; value=none); Record.NTE_Top_Up_Staff_Count__c (name=uiBehavior; value=none); Record.NTE_Heavy_Vehicle_Required__c (name=uiBehavior; value=none)
NTE_Section_5_Columns / Facet	flexipage:column: name=body; value=NTE_Section_5_Left; flexipage:column: name=body; value=NTE_Section_5_Right

Region	Fields and components in order
NTE_Section_6_Left / Facet	Record.NTE_Sponsor_Package_Total__c (name=uiBehavior; value=none); Record.NTE_Power_Socket_Unit_Price__c (name=uiBehavior; value=none); Record.NTE_Additional_Staff_Unit_Price__c (name=uiBehavior; value=none); Record.NTE_Top_Up_Staff_Unit_Price__c (name=uiBehavior; value=none); Record.NTE_Listed_Price_Total__c (name=uiBehavior; value=none); Record.NTE_Pricing_Version__c (name=uiBehavior; value=none)
NTE_Section_6_Right / Facet	Record.NTE_Exhibitor_Space_Price__c (name=uiBehavior; value=none); Record.NTE_Power_Socket_Total__c (name=uiBehavior; value=none); Record.NTE_Additional_Staff_Total__c (name=uiBehavior; value=none); Record.NTE_Top_Up_Staff_Total__c (name=uiBehavior; value=none); Record.NTE_Pricing_Status__c (name=uiBehavior; value=none)
NTE_Section_6_Columns / Facet	flexipage:column: name=body; value=NTE_Section_6_Left; flexipage:column: name=body; value=NTE_Section_6_Right
NTE_Section_7_Left / Facet	Record.NTE_Invoice_Required__c (name=uiBehavior; value=none); Record.NTE_Invoiced_Company__c (name=uiBehavior; value=none); Record.NTE_Invoice_Address__c (name=uiBehavior; value=none); Record.NTE_Invoiced_Email__c (name=uiBehavior; value=none); Record.NTE_Purchase_Order__c (name=uiBehavior; value=none); Record.NTE_Quote_Required_for_PO__c (name=uiBehavior; value=none); Record.NTE_Supplier_Agreement_Required__c (name=uiBehavior; value=none); Record.NTE_Quote_Provided_At__c (name=uiBehavior; value=none); Record.NTE_Invoice_Provided__c (name=uiBehavior; value=none); Record.NTE_Invoice_Provided_By__c (name=uiBehavior; value=none); Record.NTE_Payment_Received_At__c (name=uiBehavior; value=none); Record.NTE_Top_Up_Invoice_Required__c (name=uiBehavior; value=none); Record.NTE_Top_Up_Invoice_At__c (name=uiBehavior; value=none); Record.NTE_Top_Up_Payment_Received__c (name=uiBehavior; value=none); Record.NTE_Top_Up_Payment_By__c (name=uiBehavior; value=none)
NTE_Section_7_Right / Facet	Record.NTE_Payment_Method__c (name=uiBehavior; value=none); Record.NTE_Trading_Name__c (name=uiBehavior; value=none); Record.NTE_Invoiced_Person__c (name=uiBehavior; value=none); Record.NTE_Invoice_Contact_Phone__c (name=uiBehavior; value=none); Record.NTE_Purchase_Order_Number__c (name=uiBehavior; value=none); Record.NTE_Invoice_Additional_Information__c (name=uiBehavior; value=none); Record.NTE_Quote_Provided__c (name=uiBehavior; value=none); Record.NTE_Quote_Provided_By__c (name=uiBehavior; value=none); Record.NTE_Invoice_Provided_At__c (name=uiBehavior; value=none); Record.NTE_Payment_Received__c (name=uiBehavior; value=none); Record.NTE_Payment_Recorded_By__c (name=uiBehavior; value=none); Record.NTE_Top_Up_Invoice_Provided__c (name=uiBehavior; value=none); Record.NTE_Top_Up_Invoice_By__c (name=uiBehavior; value=none); Record.NTE_Top_Up_Payment_At__c (name=uiBehavior; value=none)
NTE_Section_7_Columns / Facet	flexipage:column: name=body; value=NTE_Section_7_Left; flexipage:column: name=body; value=NTE_Section_7_Right

Region	Fields and components in order
NTE_Section_8_Left / Facet	Record.NTE_Delivery_Window__c (name=uiBehavior; value=none); Record.NTE_Heavy_Item_1_Registration__c (name=uiBehavior; value=none); Record.NTE_Heavy_Item_1_Gross_Weight__c (name=uiBehavior; value=none); Record.NTE_Heavy_Item_2_Registration__c (name=uiBehavior; value=none); Record.NTE_Heavy_Item_2_Gross_Weight__c (name=uiBehavior; value=none); Record.NTE_Heavy_Item_3_Registration__c (name=uiBehavior; value=none); Record.NTE_Heavy_Item_3_Gross_Weight__c (name=uiBehavior; value=none); Record.NTE_Haulier_Staff__c (name=uiBehavior; value=none); Record.NTE_Haulier_Vehicle_Gross_Weight__c (name=uiBehavior; value=none); Record.NTE_Haulier_Vehicle_Registration__c (name=uiBehavior; value=none)
NTE_Section_8_Right / Facet	Record.NTE_Heavy_Item_1_Description__c (name=uiBehavior; value=none); Record.NTE_Heavy_Item_1_Dimensions__c (name=uiBehavior; value=none); Record.NTE_Heavy_Item_2_Description__c (name=uiBehavior; value=none); Record.NTE_Heavy_Item_2_Dimensions__c (name=uiBehavior; value=none); Record.NTE_Heavy_Item_3_Description__c (name=uiBehavior; value=none); Record.NTE_Heavy_Item_3_Dimensions__c (name=uiBehavior; value=none); Record.NTE_Haulier_Name__c (name=uiBehavior; value=none); Record.NTE_Haulier_Vehicle_Type__c (name=uiBehavior; value=none); Record.NTE_Haulier_Vehicle_Dimensions__c (name=uiBehavior; value=none)
NTE_Section_8_Columns / Facet	flexipage:column: name=body; value=NTE_Section_8_Left; flexipage:column: name=body; value=NTE_Section_8_Right
NTE_Section_9_Left / Facet	Record.NTE_Staff_Update_Completed_At__c (name=uiBehavior; value=none); Record.NTE_Logo_Update_Provided__c (name=uiBehavior; value=none); Record.NTE_Last_Update_Type__c (name=uiBehavior; value=none); Record.NTE_Last_Update_Processed_At__c (name=uiBehavior; value=none); Record.NTE_Last_Update_Declaration_Date__c (name=uiBehavior; value=none); Record.Description (name=uiBehavior; value=none); Record.LastModifiedById (name=uiBehavior; value=none)
NTE_Section_9_Right / Facet	Record.NTE_Heavy_Vehicle_Update_Completed_At__c (name=uiBehavior; value=none); Record.NTE_Logo_Update_Provided_At__c (name=uiBehavior; value=none); Record.NTE_Last_Update_Form_Version__c (name=uiBehavior; value=none); Record.NTE_Last_Update_Declaration_Name__c (name=uiBehavior; value=none); Record.NTE_Last_Update_Error__c (name=uiBehavior; value=none); Record.CreatedById (name=uiBehavior; value=none)
NTE_Section_9_Columns / Facet	flexipage:column: name=body; value=NTE_Section_9_Left; flexipage:column: name=body; value=NTE_Section_9_Right

Region	Fields and components in order
NTE_Detail_Tab_Content / Facet	flexipage:fieldSection: name=columns; value=NTE_Section_1_Columns; name=horizontalAlignment; value=false; name=label; value=Booking and commercial status; flexipage:fieldSection: name=columns; value=NTE_Section_2_Columns; name=horizontalAlignment; value=false; name=label; value=Event contacts; flexipage:fieldSection: name=columns; value=NTE_Section_3_Columns; name=horizontalAlignment; value=false; name=label; value=Partnership and sponsorship; flexipage:fieldSection: name=columns; value=NTE_Section_4_Columns; name=horizontalAlignment; value=false; name=label; value=Exhibition space; flexipage:fieldSection: name=columns; value=NTE_Section_5_Columns; name=horizontalAlignment; value=false; name=label; value=Stand requirements and staff; flexipage:fieldSection: name=columns; value=NTE_Section_6_Columns; name=horizontalAlignment; value=false; name=label; value=Pricing; flexipage:fieldSection: name=columns; value=NTE_Section_7_Columns; name=horizontalAlignment; value=false; name=label; value=Invoicing and procurement; flexipage:fieldSection: name=columns; value=NTE_Section_8_Columns; name=horizontalAlignment; value=false; name=label; value=Heavy vehicle and logistics; flexipage:fieldSection: name=columns; value=NTE_Section_9_Columns; name=horizontalAlignment; value=false; name=label; value=Update audit; force:recordDetailPanelMobile:
NTE_Related_Tab_Content / Facet	nteRelatedOpportunities: ; force:relatedListContainer: name=relatedListComponentOverride; value=NONE; name=rowsToDisplay; value=10; name=showActionBar; value=true
NTE_Main_Tabs / Facet	flexipage:tab: name=active; value=true; name=body; value=NTE_Detail_Tab_Content; name=title; value=Standard.Tab.detail; flexipage:tab: name=body; value=NTE_Related_Tab_Content; name=title; value=Standard.Tab.relatedLists
main / Region	flexipage:tabset: name=tabs; value=NTE_Main_Tabs
sidebar / Region	runtime_sales_activities:activityPanel: name=showLegacyActivityComposer; value=false; force:relatedListQuickLinksContainer: name=hideHeader; value=false

NTE Email Dispatch NTE Email Dispatch

Source: force-app/main/default/layouts/NTE_Email_Dispatch__c-NTE Email Dispatch.layout-meta.xml.

Section Email details; OneColumn.

Column 1: layoutItems=behavior=Readonly; field=Name; behavior=Readonly; field=Kind__c; behavior=Readonly; field=Status__c; behavior=Readonly; field=Recipient__c; behavior=Readonly; field=Contact__c; behavior=Readonly; field=Lead__c; behavior=Readonly; field=Opportunity__c; behavior=Readonly; field=Event_Code__c; behavior=Readonly; field=Subject__c; behavior=Readonly; field=Message__c; behavior=Readonly; field=Link__c; behavior=Readonly; field=Sent_At__c; behavior=Readonly; field=Error__c.

Other layout settings: platformActionList=actionListContext=Record; platformActionListItems=actionName=NTE_Email_Dispatch__c.Retry_Email; actionType=QuickAction; sortOrder=0; showEmailCheckbox=false; showHighlightsPanel=false; showInteractionLogPanel=false; showRunAssignmentRulesCheckbox=false; showSubmitAndAttachButton=false.

NTE Payment Request NTE Payment Request

Source: force-app/main/default/layouts/NTE_Payment_Request__c-NTE Payment Request.layout-meta.xml.

Section Payment request; OneColumn.

Column 1: layoutItems=behavior=Readonly; field=Name; behavior=Readonly; field=Opportunity__c; behavior=Readonly; field=Charge_Key__c; behavior=Readonly; field=Kind__c; behavior=Readonly; field=Status__c; behavior=Readonly; field=Live_Mode__c; behavior=Readonly; field=Amount_Minor__c; behavior=Readonly; field=Net_Minor__c; behavior=Readonly; field=Tax_Rate__c; behavior=Readonly; field=Currency__c; behavior=Readonly; field=Stripe_Account__c; behavior=Readonly; field=Source_Fingerprint__c; behavior=Readonly; field=Source_Lead_Id__c; behavior=Readonly; field=Reference__c; behavior=Readonly; field=Description__c; behavior=Readonly; field=Price_Id__c; behavior=Readonly; field=Link_Id__c; behavior=Readonly; field=Payment_URL__c; behavior=Readonly; field=First_Attempt_At__c; behavior=Readonly; field=Verified_At__c; behavior=Readonly; field=Error__c; behavior=Readonly; field=Delivered_At__c; behavior=Readonly; field=Recipient__c; behavior=Readonly; field=Batch_Key__c.

Other layout settings: showEmailCheckbox=false; showHighlightsPanel=false; showInteractionLogPanel=false; showRunAssignmentRulesCheckbox=false; showSubmitAndAttachButton=false.

NTE Management Logo

Source: force-app/main/default/staticresources/NTE_Management_Logo.resource-meta.xml.

cacheControl=Public; contentType=image/png

NTE Master Panel

Source: force-app/main/default/tabs/NTE_Master_Panel.tab-meta.xml.

label=Master Panel; lwcComponent=nteMasterPanel; motif=Custom75: Ticket

Source coverage and references

What this baseline contains

The coverage inventory accounts for 764 maintained files and 473 metadata XML definitions. The functional reference covers 342 packaged fields, 12 implementation Apex classes with 301 methods and constructors, 17 Apex test classes, four LWC bundles with 148 methods/getters and bound handlers, 46 top-level public form-engine functions, ten Web-to-Lead form routes containing 374 mapped controls, four active flows, nineteen stored email templates, nine reports and their folder, and twenty-five native list views. Repeated generated assets and dated audit evidence are indexed in the companion manifest rather than described as separate business features.

The archive includes the current source, configuration, forms, email sources/examples, metadata, scripts and tests needed to reconstruct the implemented behaviour. It also includes this manual's Markdown chapters, extraction/build scripts and original screenshots. SHA256SUMS.txt identifies the exact bytes; documentation/source-analysis/file-coverage.csv maps the reviewed source files to their role/reference section. Authentication caches, credentials, Git internals, temporary native retrieves, raw business exports and operating-system files are excluded. Exclusion is not a claim that an excluded file supplies an implemented feature.

Trace a feature to its implementation

Feature	Primary implementation	Reference sections
Interest and guest intake	Public form, NTE_Inbound_Lead_Routing, NTEInboundLeadService	Workflow, forms, flow reference, Lead dictionary, email catalogue.
Invitation and decision	nteMasterPanel, NTE_MasterPanelController, NTEEmailDispatchService	Workflow, runtime, Apex methods, dispatch schema.
Application and pricing	Partner/exhibitor pages, assets/forms.js, NTEPricingService	Form control contracts, price catalogue, Lead/Opportunity mapping.
Conversion and approval	Native conversion, NTE_Copy_Converted_Lead_to_Oppor tunity, NTEExhibitorApprovalEmailService	Workflow, conversion sequence, exact Flow assignments, approval methods.
Initial Stripe booking link	NTEStripeBookingService, NTEStripeClient, payment/configuration metadata	Finance contract, payment request dictionary, credentials and reconstruction.
Quote invoice and payment milestones	NTE_MasterPanelController, Opportunity formulas, finance reports	Finance predicates, button operations, fields and native report definitions.
Staff top-up and heavy vehicle updates	Supplementary form pages, NTEUpdateSubmissionJob/Service	Update workflow, matching and validation, exact field definitions.
Logo confirmation	logo-upload.html and supplementary handler	Workflow, external file destination configuration and retained logo audit Lead.
Editable reminders and final packs	nteMasterPanel and NTEEmailDispatchService	Composer screenshots, snapshot/retry rules, routing and dispatch fields.

Feature	Primary implementation	Reference sections
Portfolio and relationship history	nteManagementHome, nteRelatedOpportunities, related Apex controllers	Home values, Account/Contact/OCR model, methods and page layouts.
Retry record actions	nteRetryEmail and three quick-action definitions	Supported recovery table and exact object-specific Apex route.
Volunteer intake and conduct	volunteer-application.html, conduct configuration, volunteer Flow/service	Form reference, validation rule, independent owner/applicant receipts.
Generated metadata and previews	build-metadata and helper generators	Reconstruction order, catalogue, configuration and source archive.

Evidence precedence

The current source and the confirmed desired-workflow/decision records define this manual's implemented behaviour. The live screenshots establish the actual rendered operator surfaces and the displayed configuration-dependent outcome at capture time. The read-only native retrieve compared selected deployed code/email bodies with the local source; it did not recreate production configuration or prove every future execution path.

client needs.docx is the earlier requirements traceability review, with an evidence window ending 1 September 2026. Its historical implementation gaps are not automatically current defects. Later approved September changes include booking/payment email sequencing, staff pricing, volunteer content/Code of Conduct, application access and the owner-controlled Stripe test route. The original client boundary leaves general attendee ticketing in Eventbrite and manual quote/invoice work in the finance system, with logos/artwork held externally. No Eventbrite, Xero or SharePoint synchronisation is implemented by this source. Invited commercial application links are reusable public URLs; the package does not implement authenticated or expiring invitation tokens.

NTE_DESIRED_WORKFLOW.md and NTE_CHANGE_PROPOSALS.md preserve accepted requirements and approvals. NTE_AUDIT_RESUME.md and the numbered September stress audit preserve completed fixtures, results and unresolved P-numbered decisions. The separate PROJECT_DOCUMENTATION_ISSUES.md records findings from this documentation review and distinguishes confirmed defects, configuration dependencies, operating limits and unselected policy changes.

Salesforce documentation sources

The manual follows Salesforce's guidance to explain the purpose, operation and maintenance of a solution, and to use separate focused architecture/process/data views. Salesforce does not prescribe one universal Word template for every implementation. This is alignment with the cited guidance, not a claim of Salesforce certification.

Salesforce Architects reference diagrams guidance:

<https://architect.salesforce.com/docs/architect/reference-diagrams/guide/introduction.html>. Applied here through separate system, data and process diagrams with explicit scope and readable flow direction.

Salesforce Architects data model notation: <https://architect.salesforce.com/docs/architect/reference-diagrams/guide/data-model-notation>. Applied through logical and API names, relationship direction, cardinality and an explicit distinction between lookups, role associations and conversion references.

Salesforce Admins documentation guidance: <https://admin.salesforce.com/?p=185399>. Applied through workflow-first instructions, feature purpose, configuration and source traceability. These primary sources were researched for this documentation task on 12 September 2026. All project-specific rules, values and API names come from the supplied implementation and verified project records.

Reconstruction completeness

The implemented software can be rebuilt from the companion archive using the build/configuration sequence and exact references in this manual. A complete production operating service additionally needs the client-owned values listed in Reconstruction and administration: target org IDs and setup, routing user, production hosting, logo/final-pack destinations, sender settings, client merchant/credentials and financial policy. Their current absence is stated at the point where the feature depends on them. The manual does not conceal those gaps by inventing production settings or treating unapproved proposals as existing functionality.