Displaying a Custom Modal Dialog in the Thin Client

If you need to display a modal dialog and get feedback from the user, it's recommended to use a Bootstrap modal dialog. As an example, this new **Create Package(s)** button in the Thin Client will open this dialog, and the dialog field values and OK button will be handled in the CBR code:

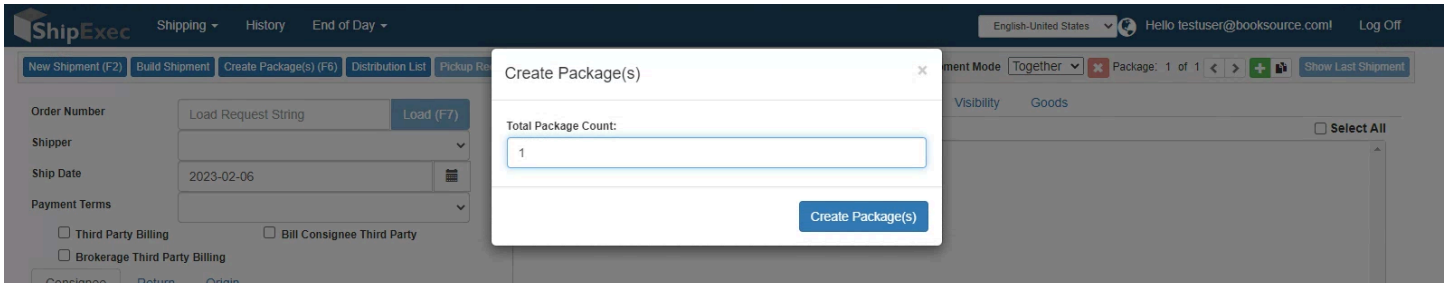

The basic steps are:

- Add the dialog css/html to a Custom Template in Management Studio
- Add a button in the template to open the dialog
- In the CBR, add code to manage the dialog

1. Assuming there isn't a custom template already, create one in Management Studio. Set the Template Type as Shipping and Load Template if it's a new template.

2. Insert the blue code as follows. Add the dialog's css/html at the top of the template so it's easier to locate and work with. The style section belongs at the very top, the modal dialog belongs below the first bootstrap row div, and the new button belongs in the list of top row buttons:

```
<style>
  .markup-padding {
     margin-top: 6px;
  }
  .modal-title {
     font-size: 18px;
     font-weight: 500;
  }
  .modal-group {
     margin: 0 0 3px;
  }
  .modal-dialog {
     width: 500px;
     margin: 50px auto;
```

```
  }
</style>

<div class="row">    ← this is usually the top line of the template, but the dialog goes below it

  <!-- custom Create Package dialog to mimic 1.x -->
  <div id="GFPShipment_panel" class="modal fade" tabindex="-1" role="dialog" data-backdrop="static">
    <div class="modal-dialog" role="document">
      <div class="modal-content">
        <div class="modal-header">
          <span class="modal-title">Create Package(s)</span>
          <button type="button" class="close" data-dismiss="modal" aria-label="Close">
            <span aria-hidden="true">&times;</span>
          </button>
        </div>
        <div class="modal-body">
          <div class="row">
            <div class="row modal-group">
              <div class="col-md-12 no-left-right-padding">
                <label class="control-label">Total Package Count:</label>
              </div>
              <div class="col-md-12 no-left-right-padding">
                <input id="gfpshipment_box_count_txt" name="gfpshipment_box_count"  type="number"
min="1" value="1" tabIndex=0 class="form-control" autofocus>
              </div>
            </div>

          </div>
        </div>
        <div class="modal-footer">
          <button id="GFPShipment_build_btn" type="button" class="btn btn-md btn-primary">Create
Package(s)</button>
        </div>
      </div>
    </div>
  </div>

  <keyboard-event key="F2" on-keypress="vm.newShipment()"></keyboard-event>
  <keyboard-event key="F7" on-keypress="vm.load()" ng-disabled="!(vm.loadValue) ||
vm.profile.FieldOptions.Load.IsHidden"></keyboard-event>
  <keyboard-event key="F8" ng-disabled="vm.lastShipmentRequest == null"
on-keypress="vm.repeatShipment()"></keyboard-event>
  <keyboard-event key="F9" on-keypress="vm.rate()"></keyboard-event>
  <keyboard-event key="F12" on-keypress="vm.checkShip()"
ng-disabled="vm.profile.ProfileSetting.DisableShip"></keyboard-event>
  <div ng-class="{ 'col-md-10': vm.showLastShipmentPanel==true , 'col-md-12': vm.showLastShipmentPanel
== false  }">
    <div class="row top-tool-bar">
      <div class="pull-left">
```

```
        <button class="btn btn-xs btn-primary" ng-click="vm.newShipment()"
ng-hide="{{vm.profile.FieldOptions.NewShipment.IsHidden}}">{{vm.newShipmentButtonCaption}}
(F2)</button>
        <button class="btn btn-xs btn-primary" ng-disabled="vm.lastShipmentRequest == null"
ng-click="vm.repeatShipment()"
ng-hide="{{vm.profile.FieldOptions.RepeatShipment.IsHidden}}">{{vm.repeatShipmentButtonCaption}}
(F8)</button>
        <button class="btn btn-xs btn-primary" ng-click="vm.buildShipment()" ng-class="{'disablelink ':
vm.disableShipMode}"
ng-hide="{{vm.profile.FieldOptions.BuildShipment.IsHidden}}">{{vm.buildShipmentButtonCaption}}</button>
        <button class="btn btn-xs btn-primary" id="addPackageButton"
ng-click="vm.gfpShipmentClick()">Create Package(s) (F6)</button>
        <button class="btn btn-xs btn-primary" ng-click="vm.getDistributionLists()"
ng-hide="{{vm.profile.FieldOptions.DistributionList.IsHidden}}">{{vm.distributionListButtonCaption}}</button>
        <button class="btn btn-xs btn-primary" ng-click="vm.createPickupRequestClick()"
ng-hide="{{vm.profile.FieldOptions.PickupRequest.IsHidden}}"
ng-disabled="!(vm.profile.ProfilePickupConfigurations && vm.profile.ProfilePickupConfigurations.length >
0)">{{vm.pickupRequestButtonCaption}}</button>
```

…etc

3. In the default or main profile's Template page, set the Shipping setting as the new template.
4. Add code in the CBR:
    a. In the Page Loaded function, add the call to manage the dialog

        ```
        manageDialog();
        ```

    b. In the NewShipment CBR function, bind the button handler click function. This isn't done in the PageLoaded since the this.vm isn't exposed there. This binding creates a function in the angular view model for the shipping page.
    (Note: depending on what you need to access or do with the shipping page in the button click, you may need to use JQuery here instead for the button click handler.)

        ```
        // bind button click to angular vm
        this.vm.gfpShipmentClick = openPackagesDialog;
        ```

5. In the CBR add the following functions, preferably after the PageLoaded and NewShipment functions, or at the very end.

```
function openPackagesDialog() {
        // show Create Packages dialog and set focus if not already visible
        if (!$('#GFPShipment_panel').is(':visible')) {
                $('#GFPShipment_panel').modal('show');
                $('#GFPShipment_panel').on('shown.bs.modal', function() {
                        $(this).find('[autofocus]').focus();
                });
        }
}

function manageDialog() {
```

```
        // OK button
        $("#GFPShipment_build_btn").click(function () {
                debugger;
                var pkgcount = $('#gfpshipment_box_count_txt').val();

                // do something with dialog here before closing

                $("#GFPShipment_panel").modal('hide');
        });
}
```

6. Reload the Thin Client page and the new button should be visible, and clicking it should launch the new dialog.
7. In Chrome open the dev tools and the Source tab. Clicking OK should hit your manageDialog button handler code.