CVT Installation

1. Obtain and run installation executable
2. A new website will be created in IIS

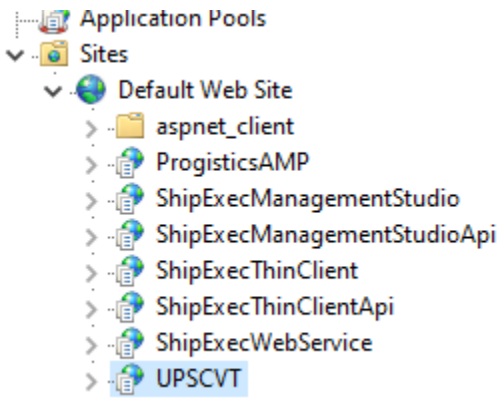

3. Navigate to the website directory

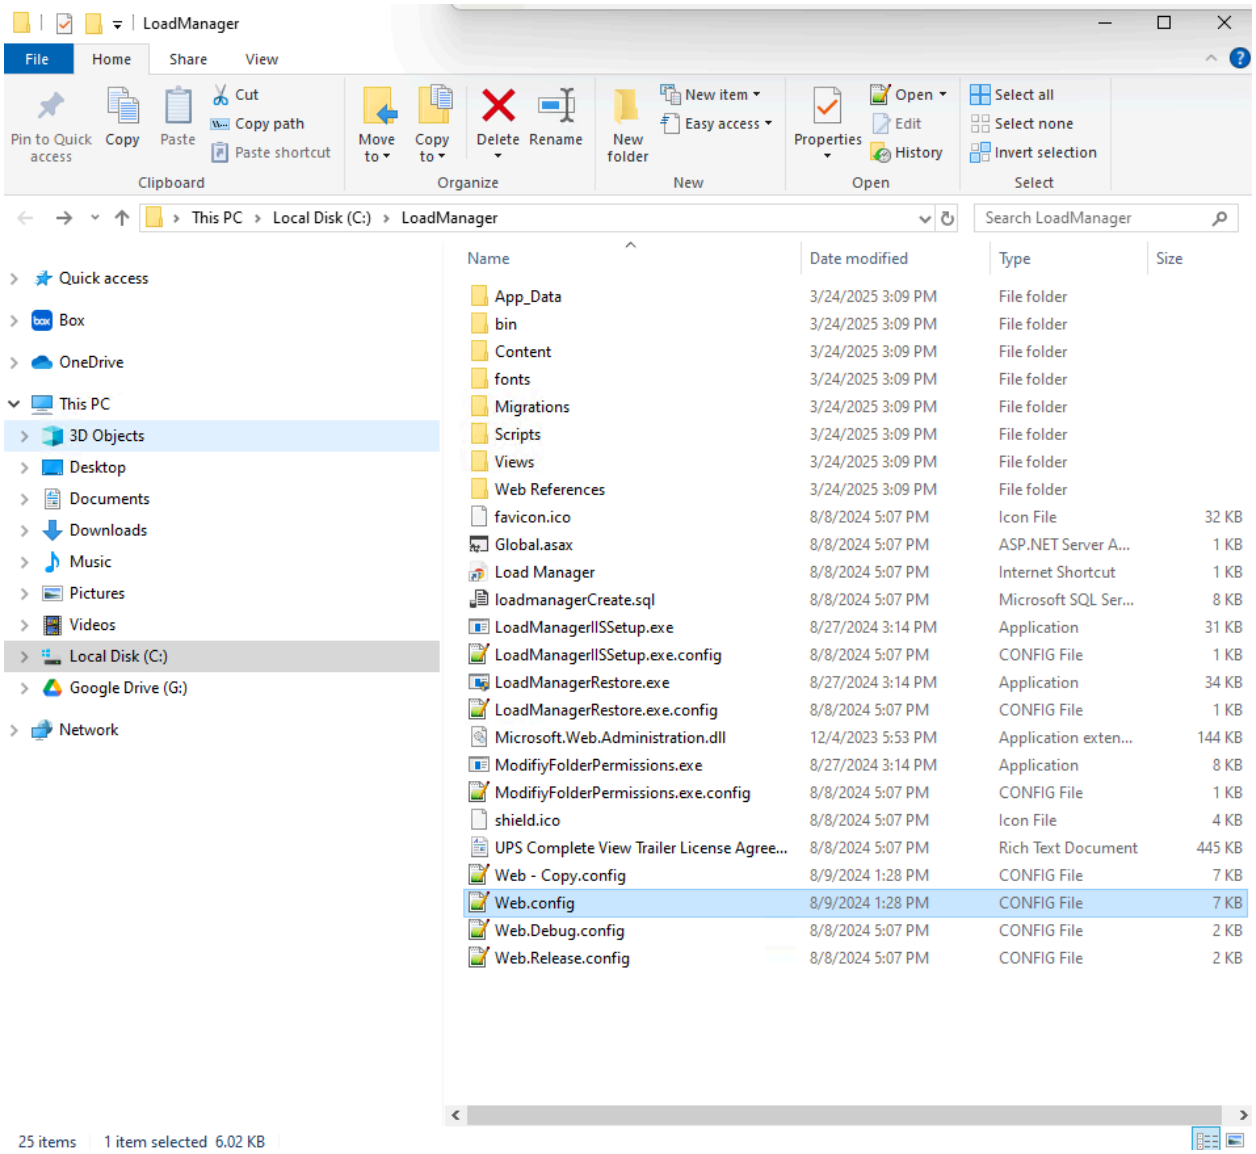

4. Connect to a SQL Server and run the **loadManagerCreate.sql** file (note that some of these steps might be unnecessary but it's what got things working for me)
    a. Create the Database LoadManager manually
        i. CREATE DATABASE [LoadManager]
        ii. use master
            ALTER DATABASE [LoadManager] set single_user with rollback immediate

            DROP DATABASE [LoadManager]
    b. Create the login manually
        i. CREATE LOGIN LoadManager with password = <password>
        ii. DROP LOGIN [LoadManager]
    c. Create the user manually

        i. CREATE USER [LoadManager] FOR LOGIN [LoadManager] WITH DEFAULT_SCHEMA=[dbo]
        ii. DROP USER [LoadManager]
    d. Comment out or remove the following:
        i. ALTER DATABASE section for SIZE changes (won't need it when using a full SQL Server installation)
        ii. The CREATE DATABASE line
        iii. The CREATE LOGIN line
        iv. The CREATE USER line
    e. Run the script
    f. Ensure you can connect to the database using the new login (usually by logging into SSMS with that user)
    g. Get the connection string
        i. server=BLACKBOXDB;database=LoadManager;user id=LoadManager;password=<password>;
5. Alter Website Files
    a. Make a backup of web.config
    b. Alter web.config
        i. Change the connection string. Important note here is that it is an EF / DBContext connection string so the structure is different
        ii. <add name="DataContext" connectionString="Data Source=BLACKBOXDB;Initial Catalog=LoadManager;MultipleActiveResultSets=true;Persist Security Info=True;User ID=LoadManager;Password="<password>" providerName="System.Data.SqlClient" />
    c. If not using a proxy, clear those settings
    d. Add the new url to the csv list for ValidUrls
        i. https://onlinetoolsuat.ups.com/api/webservices/CVIS [UAT]
        ii. https://onlinetools.ups.com/api/webservices/CVIS [PROD]
    e. Set the company name
    f. FTP info can be cleared but doesn't have to be [?]
    g. Client Id and Secret need to be entered by customer
    h. Set the OauthTokenUrl
        i. https://onlinetoolsuat.ups.com/security/v1/oauth/token [UAT]
        ii. https://onlinetools.ups.com/security/v1/oauth/token [PROD]

```
-->
<configuration>
    <configSections>

        <section name="entityFramework" type="System.Data.Entity.Internal.ConfigFile.EntityFrameworkSection, EntityFramework, Version=6.0.0.0, Culture=neutral, PublicKeyToken=b77a5c561934e089" requirePermission="false" />
        <sectionGroup name="applicationSettings" type="System.Configuration.ApplicationSettingsGroup, System, Version=4.0.0.0, Culture=neutral, PublicKeyToken=b77a5c561934e089">
            <section name="Tundra.Properties.Settings" type="System.Configuration.ClientSettingsSection, System, Version=4.0.0.0, Culture=neutral, PublicKeyToken=b77a5c561934e089" requirePermission="false" />
        </sectionGroup>
        <!-- For more information on Entity Framework configuration, visit http://go.microsoft.com/fwlink/?LinkID=237468 -->
    </configSections>
    <connectionStrings>
        <add name="DataContext" connectionString="Data Source=BLACKBOXDB;Initial Catalog=MohwakDB2;MultipleActiveResultSets=true;Persist Security Info=True;User ID=progistics;Password=progistics" providerName="System.Data.Sq
    </connectionStrings>
    <system.webServer>
        <!-- Prior to iis 7 with patch, this line was mandatory.  With patch the line is no longer needed nor recommended.-->
        <modules runAllManagedModulesForAllRequests="true" />
    </system.webServer>
    <appSettings>
        <add key="webpages:Version" value="3.0.0.0" />
        <add key="webpages:Enabled" value="false" />
        <add key="ClientValidationEnabled" value="true" />
        <add key="UnobtrusiveJavaScriptEnabled" value="true" />
        <add key="AccessList" value="COMMASEPARATEDADMINUSERLIST" />
        <add key="ValidUrls" value="https://onlinetoolsuat.ups.com/api/webservices/CVIS,http://wwwcie.ups.com/api/webservices/CVIS,https://wwwcie.ups.com/api/webservices/CVIS" />
        <add key="ProxyUserId" value="" />
        <add key="ProxyPassword" value="" />
        <add key="ProxyUrl" value="" />
        <add key="Company" value="Mohawk" />
        <add key="FTPUrl" value="ftp://ftp2.ups.com/" />
        <add key="FTPUser" value="YOURFTPUSERID" />
        <add key="FTPPassword" value="YOURFTPPASSWORD" />
        <add key="BeaconUrl" value="https://vs1-completeview.ups.com/cvisbeacon/images/cvb.gif" />
        <add key="ClientId" value="abcdefg" />
        <add key="ClientSecret" value="abcdefg" />
        <add key="OauthTokenUrl" value="https://onlinetoolsuat.ups.com/security/v1/oauth/token" />
    </appSettings>
```

Getting Approved

1. Contact Darlene Hampton and provide the client Id
2. She will look up the company info and send it back
3. Use that info to setup tests
    a. Setup Locations
    b. Setup Destinations
    c. Create the CVT Load
    d. Upload test data
4. ?

Locations

Setting up Locations

1. Admin -> Locations -> Add/Edit

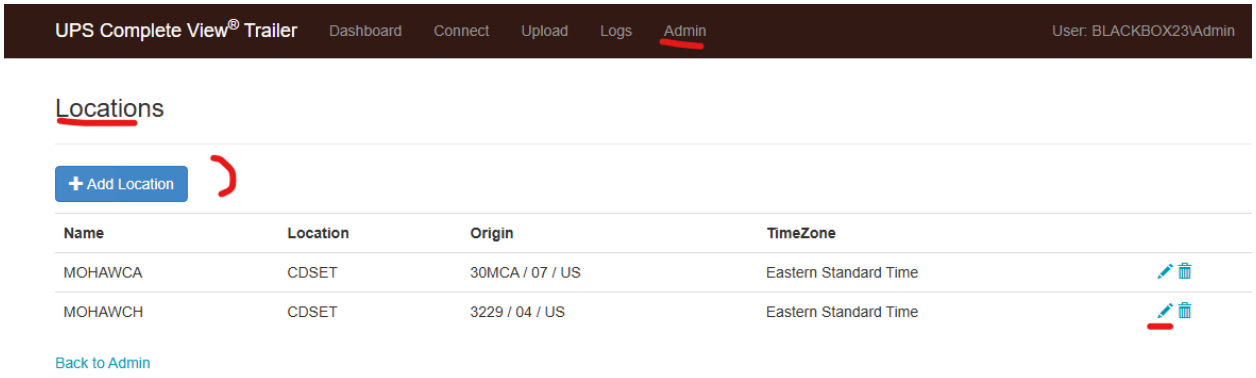

2. Fill in the location info from the data provided

UPS Complete View® Trailer Dashboard Connect Upload Log

Edit Location

Name	
Location	
Location Time Zone	(UTC-05:00) Eastern Time (US & Can
Tundra Key	
CVIS Url	
User Name	
Device Name	
App Version	
Discriminator	DOMESTIC
OriginCountry	
OriginSlic	
OriginSortCode	

☑ Are the origin and processing data the same?

ULDType	04
Service	004

Location Data Mapping

Name

Local Lane (CPU)			
Local Lane Origin SLIC (CPU). *Note: CPX Slic no longer used*	Local Lane Origin Sort (Select from list)	Destination SLIC (HUB SLIC)	Destination Sort (Select from List)
30ZK	07 - Local Sort	3033	04 - Twilight
3078	07 - Local Sort	3070	07 - Local Sort
30MCH	07 - Local Sort	3033	04 - Twilight
30MCA	07 - Local Sort	3033	04 - Twilight

Location

		STEP #1 - TEST SERVER TESTING DATA					
UAT Location ID	Tundra UAT Key	TCR_User_ID	APP Version	Device Name	Pkg Loc Role	UAT Trailer Number	UAT Sample Tracking #1
		CS_MOHAWCA					
		CS_MOHAWCH					
CDSET	UAT_CDSET_c9d4b85a-b2e2-4516-88e8-1c1fc829218b	MOHAWCH	5.2.0.4	CVIS	06	UPST240618	1ZMOHWCH0146182893
CDSET	UAT_CDSET_c9d4b85a-b2e2-4516-88e8-1c1fc829218b	MOHAWCA	5.2.0.4	CVIS	06	UPST240617	1ZMOHWCA0146182931

Location Time Zone

	SITE ADDRESS AND CONTACT IN						
Enterprise Group Number (EGN)	Customer / Company Name	Shipping Location Street Address	City	State	ZIP Code	Country	*Time Zone* (Select from List)
	Mohawk Industries	1093 MARINE DR	CALHOUN	GA	30701	US	Robert Cole
	Mohawk Industries	99 HIGHLAND RD	CHATSWORTH	GA	30705	US	Robert Cole
Note: 5/23/2024 Customer is in the process of going from an Agent Scan to a location/origin scan this is a request for a origin slic change and a package role change. C							
	MOHAWK	99 HIGHLAND RD	CHATSWORTH	GA	30705	US	US/Eastern (GMT-05:00)
	MOHAWK	1093 MARINE DR	CALHOUN	GA	30701	US	US/Eastern (GMT-05:00)

Tundra Key

	STEP #1 - TEST SERVER TESTING DATA						
ID	Tundra UAT Key	TCR_User_ID	APP Version	Device Name	Pkg Loc Role	UAT Trailer Number	UAT Sample Trackir
		CS_MOHAWCA					
		CS_MOHAWCH					
	UAT_CDSET_[redacted]8b	MOHAWCH	5.2.0.4	CVIS	06	UPST240618	1ZMOHWCH0146
	UAT_CDSET_c9d4b85a-[redacted]29218b	MOHAWCA	5.2.0.4	CVIS	06	UPST240617	1ZMOHWCA0146

CVIS Url

https://onlinetoolsuat.ups.com/api/webservices/CVIS [UAT]
https://onlinetools.ups.com/api/webservices/CVIS [PROD]

This URL MUST be in the ValidUrls list in the web.config in order to work

User Name

STEP #1 - TEST SERVER TESTING DATA					
TCR_User_ID	APP Version	Device Name	Pkg Loc Role	UAT Trailer Number	UAT Sample Tracking #1
CS_MOHAWCA					
CS_MOHAWCH					
MOHAWCH	5.2.0.4	CVIS	06	UPST240618	1ZMOHWCH0146182893
MOHAWCA	5.2.0.4	CVIS	06	UPST240617	1ZMOHWCA0146182931

Device Name / App Version

STEP #1 - TEST SERVER TESTING DATA					
D	APP Version	Device Name	Pkg Loc Role	UAT Trailer Number	UAT Sample Trac
	5.2.0.4	CVIS	06	UPST240618	1ZMOHWCH01
	5.2.0.4	CVIS	06	UPST240617	1ZMOHWCA01

Discriminator

??????
DOMESTIC

OriginCountry

?????????

US

OriginSlic / OriginSortCode

	UAT Sample Tracking #5	UAT Origin SLIC	UAT Origin Sort Code	Pr
8	1ZMOHWCH0146182937	3229	04	
8	1ZMOHWCA0146182977	3229	04	

ULDType

??????????

04

Service

??????
0004

PkgLocRole

STEP #1 - TEST SERVER TESTING DATA					
	APP Version	Device Name	Pkg Loc Role	UAT Trailer Number	UAT Sample Tracking #1
	5.2.0.4	CVIS	06	UPST240618	1ZMOHWCH0146182893
	5.2.0.4	CVIS	06	UPST240617	1ZMOHWCA0146182931

Disposition

??????
00

Destinations

Setting up Destinations

1. Admin -> Locations -> Add/Edit

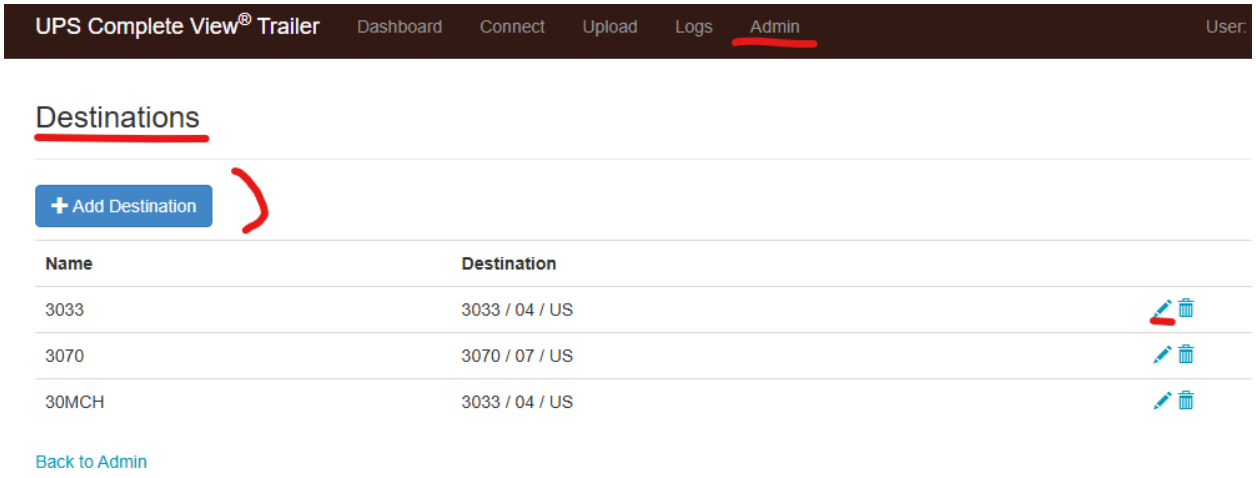

2. Fill out or edit the data.

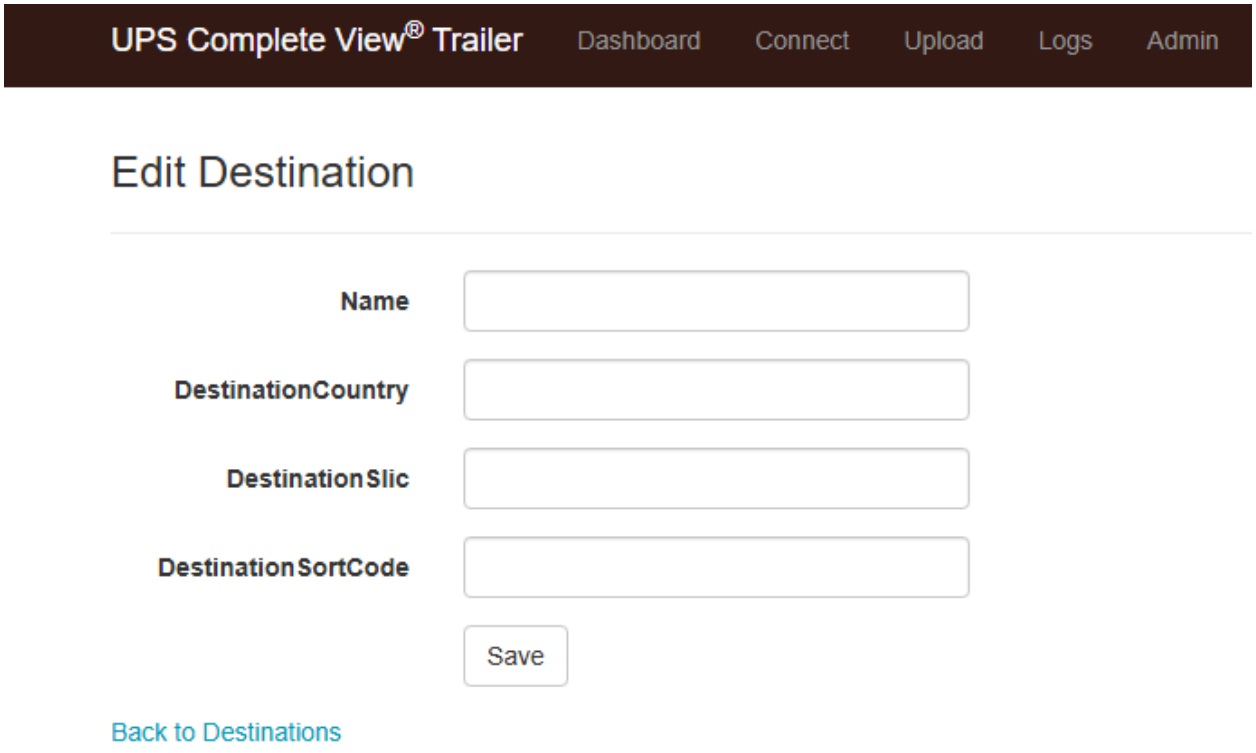

Destination Data Mapping

Name

????????

DestinationCountry

??????????
US

DestinationSlic / DestinationSortCode

ng e	UAT Dest SLIC	UAT Dest Sort Code
	0709	04
	0709	04

CVT Load

Dashboard -> Add Load

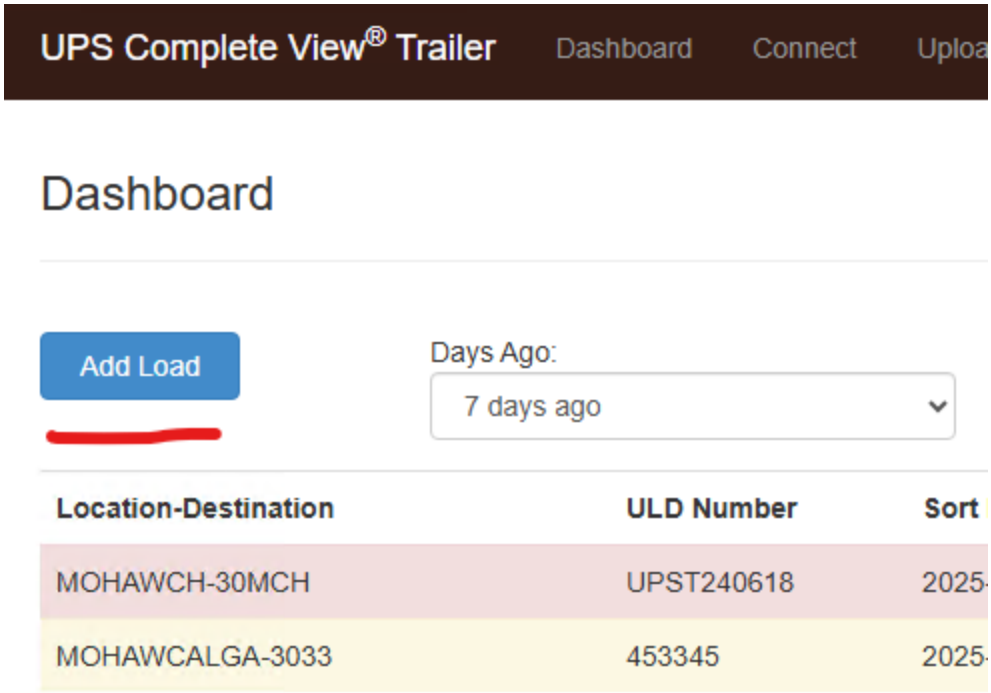

2. Fill out the data

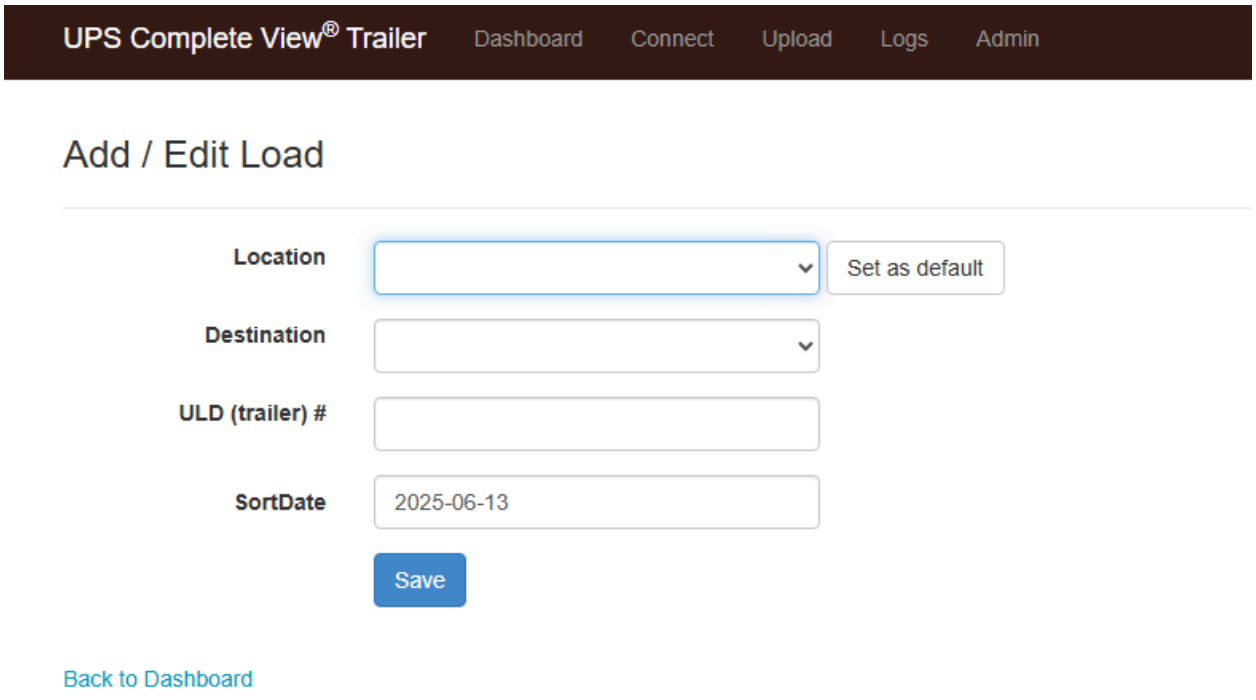

Location should be the newly created location from the above. If there is more than one location, it should be on the same row as the account that is being tested.

Destination should follow the same pattern as Location.

ULD / Trailer Number

STEP #1 - TEST SERVER TESTING DATA						
er_ID	APP Version	Device Name	Pkg Loc Role	UAT Trailer Number	UAT Sample Tracking #1	U. Sample T
CA						
CH						
	5.2.0.4	CVIS	06	UPST240618	1ZMOHWCH0146182893	1ZMOHWCH
	5.2.0.4	CVIS	06	UPST240617	1ZMOHWCA0146182931	1ZMOHWCA

Sort date can be today.

Create Tracking Data

1. To create test data, find the appropriate row in the data sheet

UAT Sample Tracking #1	UAT Sample Tracking #2	UAT Sample Tracking #3	UAT Sample Tracking #4	UAT Sample Tracking #5
1ZMOHWCH0146182893	1ZMOHWCH0146182900	1ZMOHWCH0146182919	1ZMOHWCH0146182928	1ZMOHWCH0146182937

2. Create a csv file (testing.csv)
3. Paste the tracking numbers in, each on a new line without a trailing comma

```
1ZMOHWCH0146182893
1ZMOHWCH0146182900
1ZMOHWCH0146182919
1ZMOHWCH0146182928
1ZMOHWCH0146182937
```

Upload Test Data

Upload -> Import

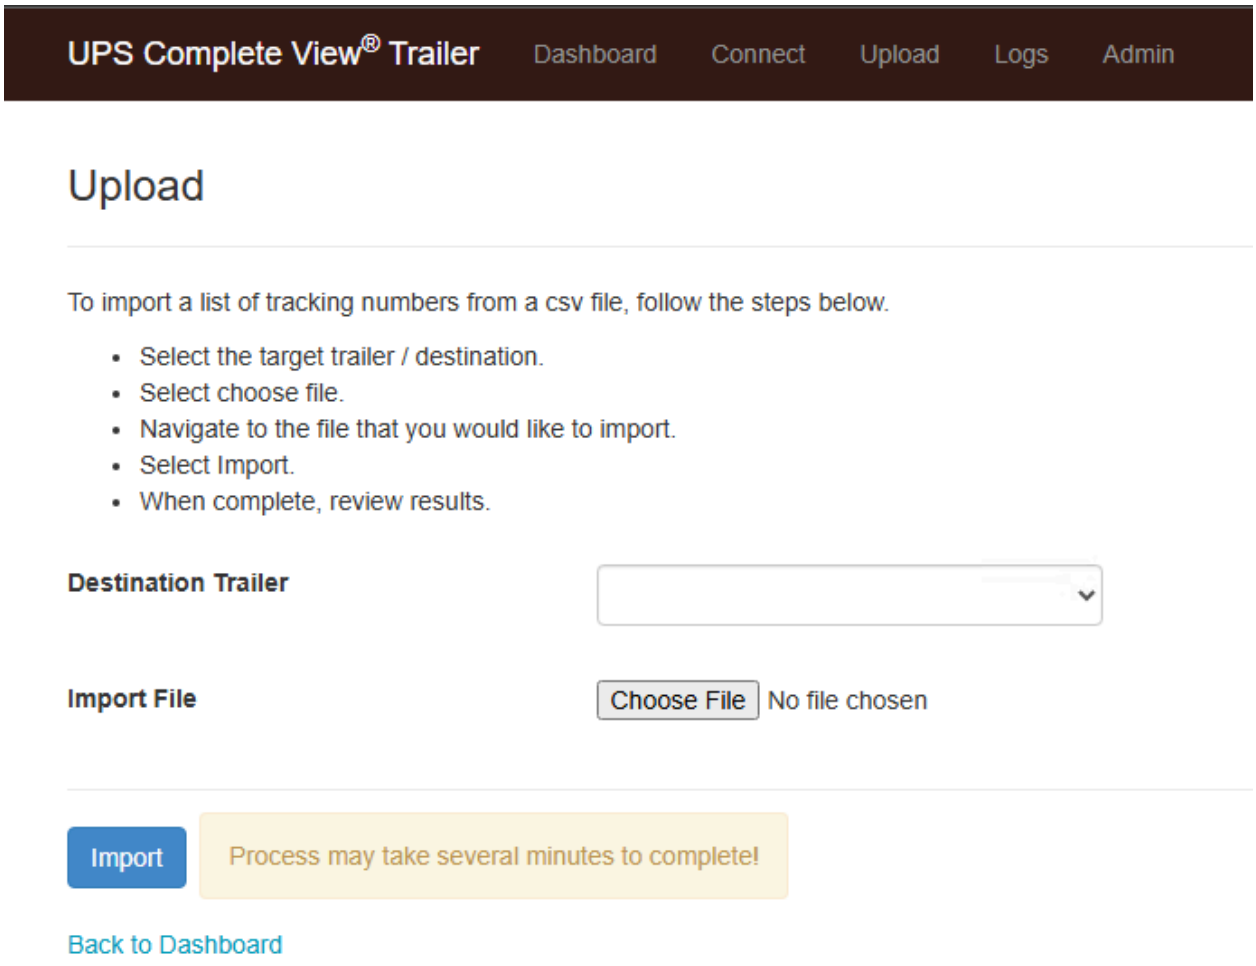

Select the new destination trailer and import the created test csv file.

Scripts

Delete DB and Users

```
USE LoadManager
DROP USER [LoadManager]

use master
alter database [LoadManager] set single_user with rollback immediate

drop database [LoadManager]

USE master
DROP LOGIN [LoadManager]
```

Create Database

```
CREATE DATABASE [LoadManager]
```

Create User/Login

```
 USE [LoadManager]
GO
create login LoadManager with password = 'loadManager'
go

USE LoadManager
CREATE USER [LoadManager] FOR LOGIN [LoadManager] WITH DEFAULT_SCHEMA=[dbo]
```

Final Script with Commented Out Lines

```
USE [master]
GO
/****** Object:  Database [LoadManager]    Script Date: 9/18/2014 7:13:14 PM ******/
--CREATE DATABASE [LoadManager]

--ALTER DATABASE [LoadManager] MODIFY FILE
--( NAME = N'LoadManager' , SIZE = 5952KB , MAXSIZE = UNLIMITED, FILEGROWTH =
1024KB )
--GO
--ALTER DATABASE [LoadManager] MODIFY FILE
--( NAME = N'LoadManager_log' , SIZE = 11456KB , MAXSIZE = UNLIMITED , FILEGROWTH
= 10%)
--GO

IF (1 = FULLTEXTSERVICEPROPERTY('IsFullTextInstalled'))
begin
EXEC [LoadManager].[dbo].[sp_fulltext_database] @action = 'enable'
end
GO

USE [LoadManager]
--GO
--create login LoadManager with password = 'loadManager'
--go
/****** Object:  User [LoadManager]    Script Date: 9/18/2014 7:13:14 PM ******/
--CREATE USER [LoadManager] FOR LOGIN [LoadManager] WITH
DEFAULT_SCHEMA=[dbo]
--GO
ALTER ROLE [db_owner] ADD MEMBER [LoadManager]
GO
ALTER ROLE [db_datareader] ADD MEMBER [LoadManager]
GO
ALTER ROLE [db_datawriter] ADD MEMBER [LoadManager]
GO
/****** Object:  Table [dbo].[LoadInfoes]    Script Date: 9/18/2014 7:13:14 PM ******/
SET ANSI_NULLS ON
GO
SET QUOTED_IDENTIFIER ON
GO
SET ANSI_PADDING ON
GO
```

```
CREATE TABLE [dbo].[LoadInfoes](
	[Id] [int] IDENTITY(1,1) NOT NULL,
	[LocalLoadKeyId] [int] NOT NULL,
	[UldNumber] [varchar](20) NULL,
	[SortDate] [datetime] NOT NULL,
	[SortKey] [varchar](1000) NULL,
	[Status] [varchar](20) NULL,
	[StatusDetails] [varchar](max) NULL,
	[LocalLoadKeyName] [varchar](200) NULL,
	[PctFull] [varchar](10) NULL,
	[TrackCount] [int] NOT NULL CONSTRAINT [DF__LoadInfoe__Track__6E01572D]
DEFAULT ((0)),
	[LockId] [nvarchar](max) NULL,
	[Created] [datetime] NOT NULL DEFAULT ('1900-01-01T00:00:00.000'),
	[FileName] [varchar](1000) NULL,
 CONSTRAINT [PK_dbo.LoadInfoes] PRIMARY KEY CLUSTERED
(
	[Id] ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, IGNORE_DUP_KEY =
OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON) ON [PRIMARY]
) ON [PRIMARY] TEXTIMAGE_ON [PRIMARY]



GO
SET ANSI_PADDING OFF
GO
/****** Object:  Table [dbo].[LocalAppLoggings]    Script Date: 9/18/2014 7:13:14 PM ******/
SET ANSI_NULLS ON
GO
SET QUOTED_IDENTIFIER ON
GO
SET ANSI_PADDING ON
GO
CREATE TABLE [dbo].[LocalAppLoggings](
	[Id] [int] IDENTITY(1,1) NOT NULL,
	[Level] [varchar](50) NULL,
	[LoadInfoId] [int] NOT NULL CONSTRAINT [DF__LocalAppL__LoadI__5AEE82B9]
DEFAULT ((0)),
	[ActionType] [varchar](50) NULL,
	[Message] [nvarchar](max) NULL,
	[TimeStamp] [datetime] NOT NULL CONSTRAINT
[DF__LocalAppL__TimeS__5BE2A6F2]  DEFAULT ('1900-01-01T00:00:00.000'),
```

```
 CONSTRAINT [PK_dbo.LocalAppLoggings] PRIMARY KEY CLUSTERED
(
	[Id] ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, IGNORE_DUP_KEY =
OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON) ON [PRIMARY]
) ON [PRIMARY] TEXTIMAGE_ON [PRIMARY]

GO
SET ANSI_PADDING OFF
GO
/****** Object:  Table [dbo].[LocalAppSettings]    Script Date: 9/18/2014 7:13:14 PM ******/
SET ANSI_NULLS ON
GO
SET QUOTED_IDENTIFIER ON
GO
SET ANSI_PADDING ON
GO
CREATE TABLE [dbo].[LocalAppSettings](
	[Id] [int] IDENTITY(1,1) NOT NULL,
	[AppKey] [varchar](50) NULL,
	[AppValue] [varchar](200) NULL,
 CONSTRAINT [PK_dbo.LocalAppSettings] PRIMARY KEY CLUSTERED
(
	[Id] ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, IGNORE_DUP_KEY =
OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON) ON [PRIMARY]
) ON [PRIMARY]

GO
SET ANSI_PADDING OFF
GO
/****** Object:  Table [dbo].[LocalEvents]    Script Date: 9/18/2014 7:13:14 PM ******/
SET ANSI_NULLS ON
GO
SET QUOTED_IDENTIFIER ON
GO
SET ANSI_PADDING ON
GO
CREATE TABLE [dbo].[LocalEvents](
	[Id] [int] IDENTITY(1,1) NOT NULL,
	[Action] [varchar](10) NULL,
	[Input] [varchar](10) NULL,
	[Mode] [varchar](10) NULL,
	[Item] [varchar](20) NULL,
```

```
	[EventTime] [varchar](20) NULL,
	[Status] [varchar](50) NULL,
	[StatusDetails] [nvarchar](max) NULL,
	[LoadInfoId] [int] NOT NULL,
	[Created] [datetime] NOT NULL,
 CONSTRAINT [PK_dbo.LocalEvents] PRIMARY KEY CLUSTERED
(
	[Id] ASC
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, IGNORE_DUP_KEY =
OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON) ON [PRIMARY]
) ON [PRIMARY] TEXTIMAGE_ON [PRIMARY]

GO
SET ANSI_PADDING OFF
GO
/****** Object:  Table [dbo].[LocalLoadKeys]    Script Date: 9/18/2014 7:13:14 PM ******/
SET ANSI_NULLS ON
GO
SET QUOTED_IDENTIFIER ON
GO
SET ANSI_PADDING ON
GO
CREATE TABLE [dbo].[LocalLoadKeys](
	[Id] [int] IDENTITY(1,1) NOT NULL,
	[Discriminator] [varchar](20) NULL,
	[OriginCountry] [varchar](2) NULL,
	[OriginSlic] [varchar](10) NULL,
	[OriginSortCode] [varchar](2) NULL,
	[DestinationCountry] [varchar](2) NULL,
	[DestinationSlic] [varchar](10) NULL,
	[DestinationSortCode] [varchar](2) NULL,
	[ProcessingCountry] [varchar](2) NULL,
	[ProcessingSlic] [varchar](10) NULL,
	[ProcessingSortCode] [varchar](2) NULL,
	[ULDType] [varchar](10) NULL,
	[Service] [varchar](10) NULL,
	[PkgLocRole] [varchar](10) NULL,
	[Disposition] [varchar](10) NULL,
	[Name] [varchar](200) NULL,
	[ProcessingSameAsOrigin] [bit] NOT NULL CONSTRAINT
[DF__LocalLoad__Proce__34C8D9D1]  DEFAULT ((0)),
 CONSTRAINT [PK_dbo.LocalLoadKeys] PRIMARY KEY CLUSTERED
(
	[Id] ASC
```

```
)WITH (PAD_INDEX = OFF, STATISTICS_NORECOMPUTE = OFF, IGNORE_DUP_KEY =
OFF, ALLOW_ROW_LOCKS = ON, ALLOW_PAGE_LOCKS = ON) ON [PRIMARY]
) ON [PRIMARY]

GO
SET ANSI_PADDING OFF
GO
USE [master]
GO
ALTER DATABASE [LoadManager] SET  READ_WRITE
GO

use LoadManager
go
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'SystemType',
N'ConnectShip')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'Archive', N'30')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'CVISUrl',
N'https://wwwcie.ups.com/webservices/CVIS')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'Location', N'UPSCSS')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'ArchiveLoad', N'90')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'ArchiveLog', N'90')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'ArchivePLD', N'7')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'DeviceName',
N'TESTDEVICE')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'UserName',
N'USERID0001')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'AppVersion', N'5.0.1.5')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'Discriminator',
N'DOMESTIC')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'ULDType', N'04')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'Service', N'004')
```

```
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'PkgLocRole', N'12')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'Disposition', N'00')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'SaveTracking', N'No')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'TundraKey', N'')
GO
INSERT [dbo].[LocalAppSettings] ([AppKey], [AppValue]) VALUES (N'ConnectUrl',
N'http://localhost:8888/cvis/api/rest/')
GO
```