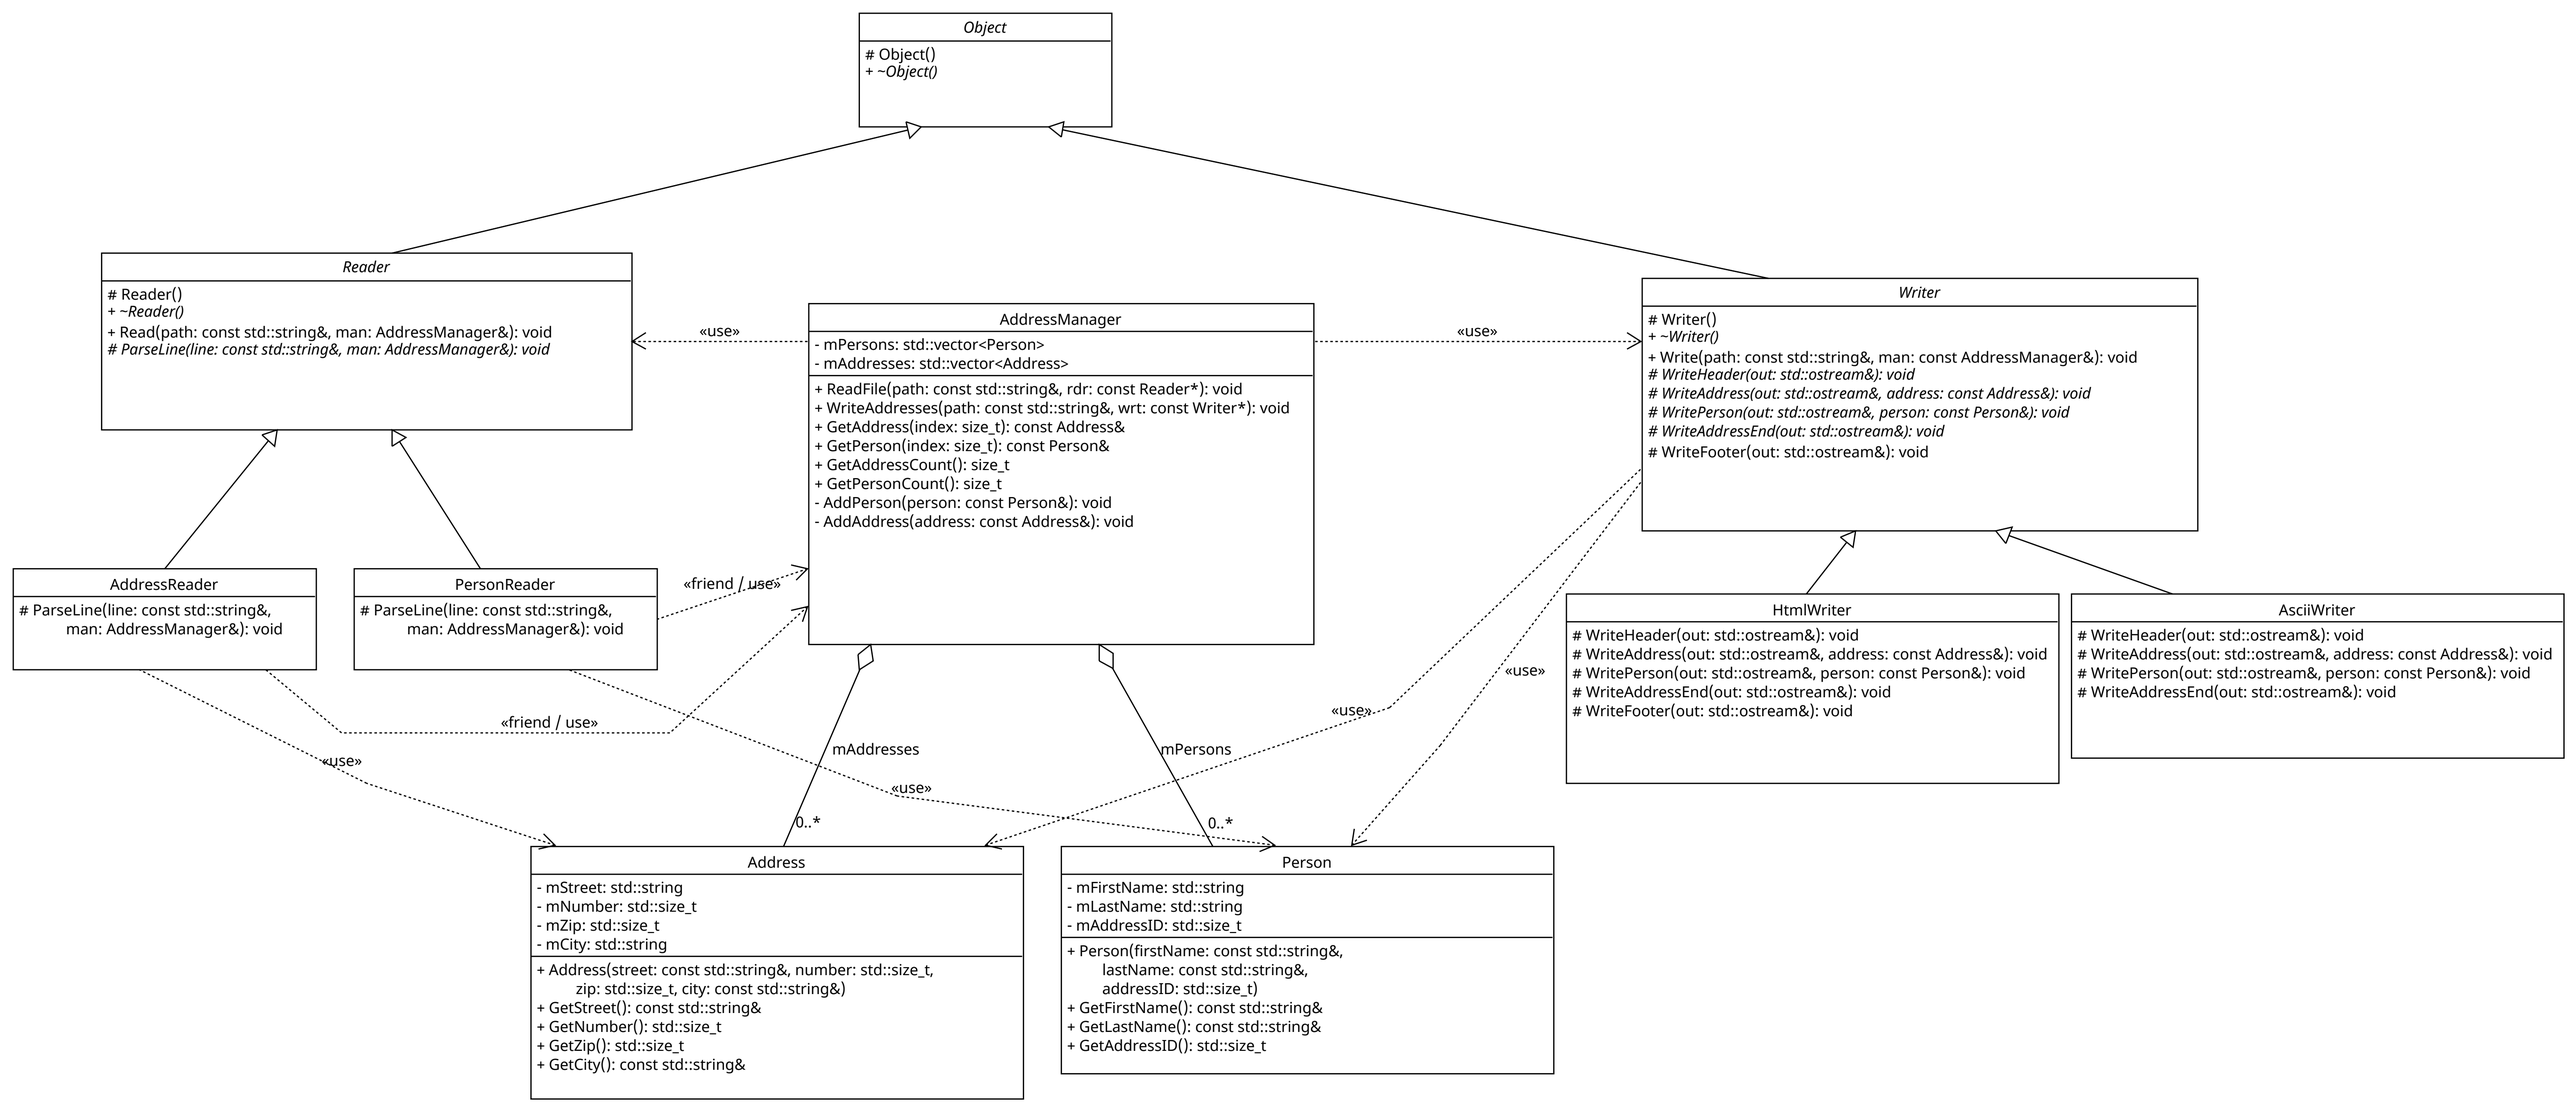
Object
Object()
+ ~Object()
Reader
Reader()
+ ~Reader()
+ Read(path: const std::string&, man: AddressManager&): void
# ParseLine(line: const std::string&, man: AddressManager&): void
«use»
AddressManager
- mPersons: std::vector<Person>
- mAddresses: std::vector<Address>
+ ReadFile(path: const std::string&, rdr: const Reader*): void
+ WriteAddresses(path: const std::string&, wrt: const Writer*): void
+ GetAddress(index: size_t): const Address&
+ GetPerson(index: size_t): const Person&
+ GetAddressCount(): size_t
+ GetPersonCount(): size_t
- AddPerson(person: const Person&): void
- AddAddress(address: const Address&): void
«use»
Writer
Writer()
+ ~Writer()
+ Write(path: const std::string&, man: const AddressManager&): void
# WriteHeader(out: std::ostream&): void
# WriteAddress(out: std::ostream&, address: const Address&): void
# WritePerson(out: std::ostream&, person: const Person&): void
# WriteAddressEnd(out: std::ostream&): void
# WriteFooter(out: std::ostream&): void
AddressReader
ParseLine(line: const std::string&, man: AddressManager&): void
PersonReader
ParseLine(line: const std::string&, man: AddressManager&): void
«friend / use»
«friend / use»
«use»
«use»
«use»
«use»
mAddresses
0..*
mPersons
0..*
HtmlWriter
WriteHeader(out: std::ostream&): void
WriteAddress(out: std::ostream&, address: const Address&): void
WritePerson(out: std::ostream&, person: const Person&): void
WriteAddressEnd(out: std::ostream&): void
WriteFooter(out: std::ostream&): void
AsciiWriter
WriteHeader(out: std::ostream&): void
WriteAddress(out: std::ostream&, address: const Address&): void
WritePerson(out: std::ostream&, person: const Person&): void
WriteAddressEnd(out: std::ostream&): void
Address
- mStreet: std::string
- mNumber: std::size_t
- mZip: std::size_t
- mCity: std::string
+ Address(street: const std::string&, number: std::size_t, zip: std::size_t, city: const std::string&)
+ GetStreet(): const std::string&
+ GetNumber(): std::size_t
+ GetZip(): std::size_t
+ GetCity(): const std::string&
Person
- mFirstName: std::string
- mLastName: std::string
- mAddressID: std::size_t
+ Person(firstName: const std::string&, lastName: const std::string&, addressID: std::size_t)
+ GetFirstName(): const std::string&
+ GetLastName(): const std::string&
+ GetAddressID(): std::size_t