

Nama : Setiawan Rizky Putra Wicaksono

Nim : 235410019

Kelas : Informatika-1

TUGAS FRAMEWORK WEB

OPERASI CRUD

SOAL:

buatlah operasi CRUD untuk tabel barang (id, nama_barang, satuan, harga, stok). hasil: kode program dan hasil pengujian

PENYELASAIAN:

1. Membuat model barang

```
PS C:\Users\intanfadlilah\Downloads\SEMESTER 5\PRAKTIK1> php artisan make:model barang  
  
INFO Model [C:\Users\intanfadlilah\Downloads\SEMESTER 5\PRAKTIK1\app\Models\barang.php] created successfully.
```

2. Edit model barang.php

```
app > Models > barang.php  
1  <?php  
2  namespace App\Models;  
3  use Illuminate\Database\Eloquent\Factories\HasFactory;  
4  use Illuminate\Database\Eloquent\Model;  
5  
6  class barang extends Model  
7  {  
8      use HasFactory;  
9  
10     protected $table = 'barang';  
11     protected $fillable = [  
12         'nama_barang',  
13         'satuan',  
14         'harga',  
15         'stok',  
16     ];  
17 }
```

3. Menambahkan tabel barang dengan migration

```
PS C:\Users\intanfadlilah\Downloads\SEMESTER 5\PRAKTIK1> php artisan make:migration create_barang_table  
  
INFO Migration [C:\Users\intanfadlilah\Downloads\SEMESTER 5\PRAKTIK1\database\Migrations\2025_10_26_075752_create_barang_table.php] created successfully.
```

4. Edit file migration

```
database > migrations > 2025_10_26_075752_create_barang_table.php
1  <?php
2  use Illuminate\Database\Migrations\Migration;
3  use Illuminate\Database\Schema\Blueprint;
4  use Illuminate\Support\Facades\Schema;
5  return new class extends Migration
6  {
7      /**
8       * Run the migrations.
9       */
10     public function up(): void
11     {
12         Schema::create('barang', function (Blueprint $table) {
13             $table->id();
14             $table->string('nama_barang');
15             $table->string('satuan', 50);
16             $table->decimal('harga', 10, 2);
17             $table->integer('stok');
18             $table->timestamps();
19         });
20     }
21     /**
22      * Reverse the migrations.
23      */
24     public function down(): void
25     {
26         Schema::dropIfExists('barang');
27     }
28 };
```

5. Jalankan migrasi

```
PS C:\Users\intanfadhilah\Downloads\SEMESTER 5\PRAKTIK1> php artisan migrate
..... 46.12ms DONE
```

6. Membuat seeder

```
PS C:\Users\intanfadhilah\Downloads\SEMESTER 5\PRAKTIK1> php artisan make:seeder barangSeeder

INFO Seeder [C:\Users\intanfadhilah\Downloads\SEMESTER 5\PRAKTIK1\database\seeders\barangSeeder.php] created successfully.
```

7. Edit file barangSeeder.php

```
<?php
namespace Database\Seeders;
use Illuminate\Database\Seeder;
use App\Models\barang;
use Illuminate\Support\Facades\DB;
use Illuminate\Support\Facades\Schema;
class barangSeeder extends Seeder
{
    /**
```

```

* Run the database seeds.
*/
public function run(): void
{
    if (! Schema::hasTable('barang')) {
        if ($this->command) {
            $this->command->warn('Tabel `barang` tidak
ditemukan – barangSeeder dilewati. Jalankan migrasi terlebih
dahulu.');
```

8. Edit file DatabaseSeeder.php

```

database > seeders > DatabaseSeeder.php
1  <?php
2
3  namespace Database\Seeders;
4
5  use Illuminate\Database\Seeder;
6
7  class DatabaseSeeder extends Seeder
8  {
9      public function run(): void
10     {
11         $this->call([barangSeeder::class
12         ]);
13     }
14 }

```

9. Jalankan seeder

```

PS C:\Users\intanfadlilah\Downloads\SEMESTER 5\PRAKTIK1> php artisan db:seed
INFO Seeding database.

```

10. Tampilan di database jika tersimpan

←T→			id	nama_barang	satuan	harga	stok	created_at	updated_at
☐	Ubah	Salin	2	infinix	Pcs	450000.00	43	2025-10-26 09:13:42	2025-10-26 09:13:42
☐	Ubah	Salin	3	samsung	Unit	790000.00	25	2025-10-26 09:13:42	2025-10-26 09:13:42
☐	Ubah	Salin	5	lenovo	unit	2000000.00	5	2025-10-26 10:12:50	2025-10-26 10:12:50

11. Membuat controller

```

PS C:\Users\intanfadlilah\Downloads\SEMESTER 5\PRAKTIK1> php artisan make:controller barangController --resource
INFO Controller [C:\Users\intanfadlilah\Downloads\SEMESTER 5\PRAKTIK1\app\Http\Controllers\barangController.php] created successfully.

```

12. Edit file barangController.php

```
<?php
```

```
namespace App\Http\Controllers;
```

```
use Illuminate\Http\Request;
```

```
use App\Models\Barang;
```

```
class BarangController extends Controller
```

```
{
```

```
    public function index()
```

```
    {
```

```
        $data = Barang::all();
```

```
        return view('barang.index', compact('data'));
    }
```

```
}
```

```

public function create()
{
    return view('barang.create');
}

public function store(Request $request)
{
    $request->validate([
        'nama_barang' => 'required',
        'satuan' => 'required',
        'harga' => 'required|numeric',
        'stok' => 'required|numeric',
    ]);

    Barang::create($request->all());
    return redirect()->route('barang.index')->with('success',
'Barang berhasil ditambahkan!');
}
public function edit($id)
{
    // Ambil data barang berdasarkan ID
    $barang = \App\Models\Barang::findOrFail($id);

    // Tampilkan ke view edit.blade.php
    return view('barang.edit', compact('barang'));
}

public function update(Request $request, $id)
{
    // Validasi data
    $request->validate([
        'nama_barang' => 'required|string|max:255',
        'satuan' => 'required|string|max:50',
        'harga' => 'required|numeric',
        'stok' => 'required|integer',
    ]);

    // Update data

```

```

$barang = \App\Models\Barang::findOrFail($id);
$barang->update($request->all());

// Redirect ke halaman utama
return redirect()->route('barang.index')->with('success', 'Data
berhasil diperbarui!');
}
public function destroy($id)
{
    $barang = \App\Models\Barang::findOrFail($id);
    $barang->delete();

    return redirect()->route('barang.index')->with('success', 'Barang
berhasil dihapus');
}
}

```

13. Edit routes/web.php

```

routes > web.php
1  <?php
2
3  use Illuminate\Support\Facades\Route;
4  use App\Http\Controllers\barangController;
5
6  Route::get('/barang', [barangController::class, 'index']->name('barang.index'));
7  Route::get('/barang/create', [barangController::class, 'create']->name('barang.create'));
8  Route::post('/barang', [barangController::class, 'store']->name('barang.store'));
9  Route::get('/barang/{id}/edit', [barangController::class, 'edit']->name('barang.edit'));
10 Route::put('/barang/{id}', [barangController::class, 'update']->name('barang.update'));
11 Route::delete('/barang/{id}', [barangController::class, 'destroy']->name('barang.destroy'));
12
13
14 Route::resource('data', barangController::class);
15
16

```

14. Membuat folder baru di resource/view dengan folder barang

15. Didalam folder barang buat file index.blade.php

```

<!DOCTYPE html>
<html>
<head>
    <title>Edit Barang</title>

```

```

    <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bootstrap.
min.css" rel="stylesheet">
</head>
<body class="p-4">
<div class="container">
    <h2>Edit Barang</h2>

    <form    action="{{    route('barang.update',    $barang->id)    }}"
method="POST">
        @csrf
        @method('PUT')

        <div class="mb-3">
            <label>Nama Barang</label>
            <input type="text" name="nama_barang" class="form-control"
value="{{ $barang->nama_barang }}" required>
        </div>
        <div class="mb-3">
            <label>Satuan</label>
            <input type="text" name="satuan" class="form-control"
value="{{ $barang->satuan }}" required>
        </div>
        <div class="mb-3">
            <label>Harga</label>
            <input type="number" name="harga" class="form-control"
value="{{ $barang->harga }}" required>
        </div>
        <div class="mb-3">
            <label>Stok</label>
            <input type="number" name="stok" class="form-control"
value="{{ $barang->stok }}" required>
        </div>

        <button type="submit" class="btn btn-success">Update</button>
        <a href="{{ route('barang.index') }}" class="btn btn-
secondary">Kembali</a>
    </form>
</div>

```

```
</body>
</html>
```

16. Kemudian buat juga file create.blade.php

```
<!DOCTYPE html>
<html>
<head>
    <title>Tambah Barang</title>
    <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bootstrap.
min.css" rel="stylesheet">
</head>
<body class="p-4">
<div class="container">
    <h2>Tambah Barang Baru</h2>

    <!-- Notifikasi sukses -->
    @if(session('success'))
        <div class="alert alert-
success">{{ session('success') }}</div>
    @endif

    <!-- Form tambah barang -->
    <form action="{{ route('barang.store') }}" method="POST">
        @csrf
        <div class="mb-3">
            <label>Nama Barang</label>
            <input type="text" name="nama_barang" class="form-control"
required>
        </div>
        <div class="mb-3">
            <label>Satuan</label>
            <input type="text" name="satuan" class="form-control"
required>
        </div>
        <div class="mb-3">
            <label>Harga</label>
            <input type="number" name="harga" class="form-control"
required>
```



```

        </div>
        <div class="mb-3">
            <label>Stok</label>
            <input type="number" name="stok" class="form-control"
required>
        </div>

        <button type="submit" class="btn btn-success">Simpan</button>
        <a href="{{ route('barang.index') }}" class="btn btn-
secondary">Kembali</a>
    </form>
</div>
</body>
</html>

```

17. Selanjutnya buat file edit.blade.php

```

<!DOCTYPE html>
<html>
<head>
    <title>Edit Barang</title>
    <link
href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bootstra
p.min.css" rel="stylesheet">
</head>
<body class="p-4">
<div class="container">
    <h2>Edit Barang</h2>

    <form action="{{ route('barang.update', $barang->id) }}"
method="POST">
        @csrf
        @method('PUT')

        <div class="mb-3">
            <label>Nama Barang</label>
            <input type="text" name="nama_barang" class="form-
control" value="{{ $barang->nama_barang }}" required>
        </div>
        <div class="mb-3">

```

```

        <label>Satuan</label>
        <input type="text" name="satuan" class="form-control"
value="{{ $barang->satuan }}" required>
    </div>
    <div class="mb-3">
        <label>Harga</label>
        <input type="number" name="harga" class="form-control"
value="{{ $barang->harga }}" required>
    </div>
    <div class="mb-3">
        <label>Stok</label>
        <input type="number" name="stok" class="form-control"
value="{{ $barang->stok }}" required>
    </div>

    <button type="submit" class="btn btn-
success">Update</button>
    <a href="{{ route('barang.index') }}" class="btn btn-
secondary">Kembali</a>
</form>
</div>
</body>
</html>

```

18. Jalankan projek

```

PS C:\Users\intanfadhilah\Downloads\SEMESTER 5\PRAKTIK1> php artisan serve

INFO Server running on [http://127.0.0.1:8000].

Press Ctrl+C to stop the server

```

19. Tampilan index.blade.php

Daftar Barang

Tambah Barang Baru

Barang berhasil dihapus

ID	Nama Barang	Satuan	Harga	Stok	Aksi	
2	infinix	Pcs	Rp 450.000	43	Edit	Hapus
3	samsung	Unit	Rp 790.000	25	Edit	Hapus
5	lenovo	unit	Rp 2.000.000	5	Edit	Hapus

20. Tampilan create.blade.php

Tambah Barang Baru

Nama Barang

Satuan

Harga

Stok

Simpan

Kembali

21. Tampilan edit.blead.php

Edit Barang

Nama Barang

infinix

Satuan

Pcs

Harga

450000.00


Stok

43

Update

Kembali

22. Untuk menghapus klik hapus kemudian tampil

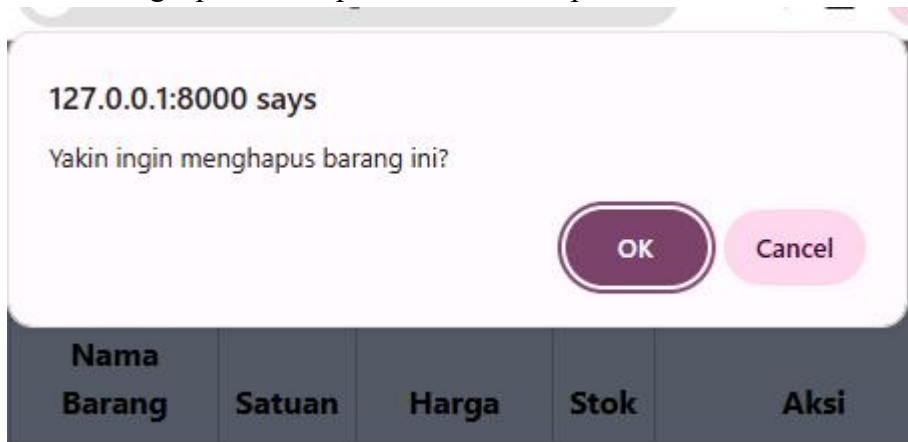

Jika klik ok maka data terhapus

