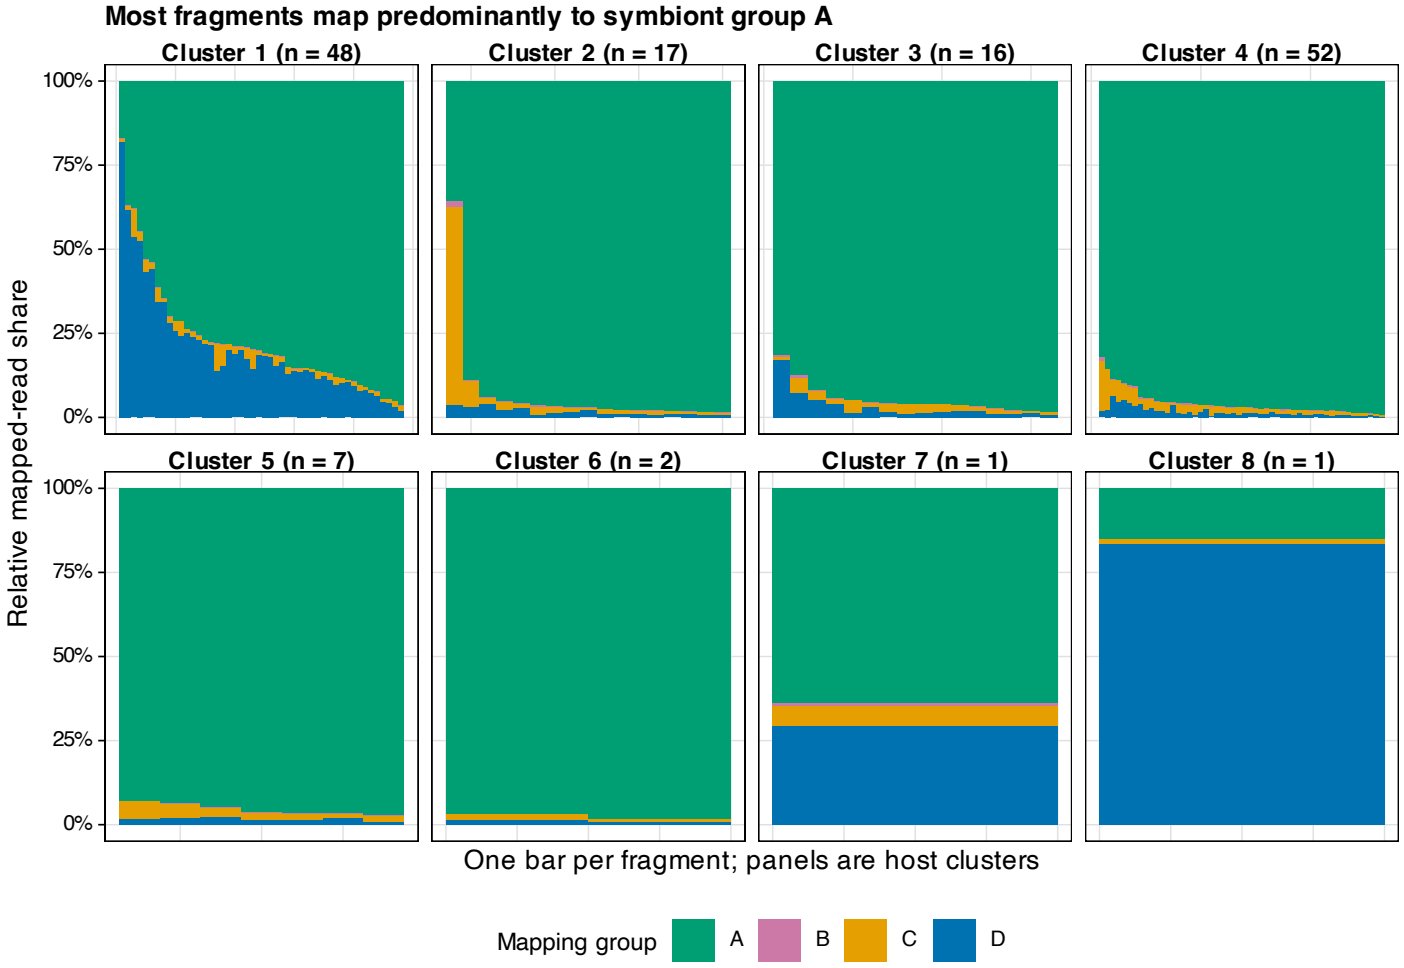
Most fragments map predominantly to symbiont group A
Cluster 1 (n = 48)
Cluster 2 (n = 17)
Cluster 3 (n = 16)
Cluster 4 (n = 52)
Cluster 5 (n = 7)
Cluster 6 (n = 2)
Cluster 7 (n = 1)
Cluster 8 (n = 1)
100%
75%
50%
25%
0%
Relative mapped-read share
One bar per fragment; panels are host clusters
Mapping group
A
B
C
D