
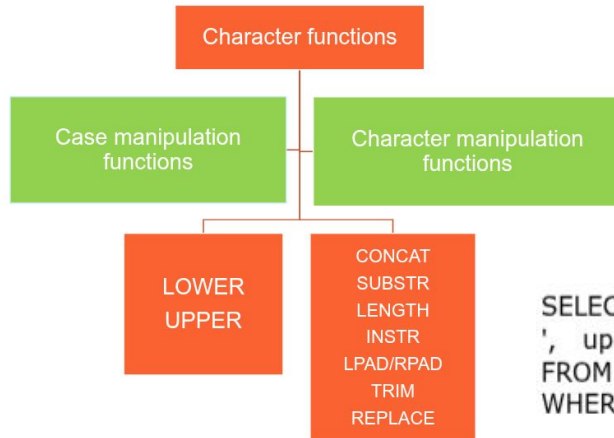


Last week

Scalar functions

Show an overview of all match players in the following way: "Player 'Engelen' was born on 01/09/1997, lives in GEEL and has bondnumber 2411". (10 results)

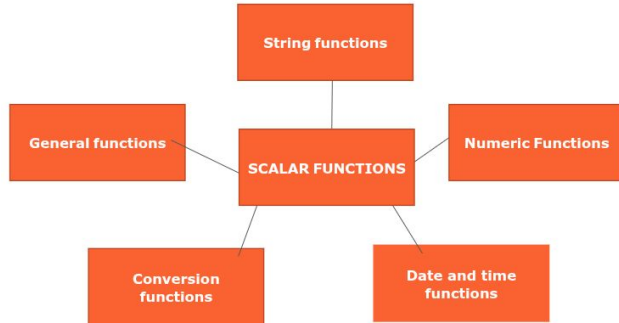

matchplayer
Player 'Engelen' was born on 01/09/1997, lives in GEEL and has bondnumber 2411
Player 'Peeters' was born on 25/06/1998, lives in GEEL and has bondnumber 8467
Player 'Nagels' was born on 08/07/2000, lives in KASTERLEE and has bondnumber 2983
Player 'Cools' was born on 28/12/1999, lives in LICHTAART and has bondnumber 2513
Player 'Bakker, de' was born on 09/01/1998, lives in KASTERLEE and has bondnumber 1124
Player 'Gorp, van' was born on 17/08/2001, lives in GEEL and has bondnumber 6409
Player 'Henderickx' was born on 11/11/2001, lives in GEEL and has bondnumber 1608
Player 'Peeters' was born on 28/02/1998, lives in GEEL and has bondnumber 6524
Player 'Mertens' was born on 10/05/2000, lives in LICHTAART and has bondnumber 7060
Player 'Balen, van' was born on 01/10/1998, lives in MOL and has bondnumber 1319

<https://dev.mysql.com/doc/refman/8.0/en/date-and-time-functions.html>

```
SELECT concat('Player ', name, ' was born on ', DATE_FORMAT(birthdate,'%d/%m/%Y'), ' , lives in ', upper(city), ' and has bondnumber ', bondNumber) as matchplayer
FROM tennis.player
WHERE bondNumber is not null;
```

Set functions

What is the total amount of fines paid for players from Lichtaart? Show at the same time the number of different players from Lichtaart who have been fined.

	amount	number
▶	225.00	2

COUNT(*) or COUNT(playerId)

MIN(numeric value)

MAX(numeric value)

AVG(numeric value)

SUM(numeric value)

```
SELECT SUM(amountFine) as amount, COUNT(DISTINCT playerId) number
FROM   Tennis.fine
WHERE  playerId IN (SELECT playerId
                    FROM   Tennis.player
                    WHERE  city = 'Lichtaart');
```

Correlated Subqueries

For each player who has been fined, show the player number, the highest fine and the date on which the fine was paid. Sort this list by the amount of the fine.

	playerId	Highest fine	date
▶	8	25.00	08/12/2019
	104	50.00	08/12/2018
	44	75.00	05/05/2019
	6	100.00	08/12/2018
	27	100.00	10/09/2017

<https://dev.mysql.com/doc/refman/8.0/en/date-and-time-functions.html>

```
select playerId, amountFine as "Highest fine",  
       DATE_FORMAT(dateFine, '%d/%m/%Y') as date  
from   tennis.fine f  
where  amountFine =  
       (select MAX(amountFine)  
        from   tennis.fine f1  
        where  f1.playerId = f.playerId)  
  
order by 2;
```

Correlated Subqueries

Determine the three smallest bond numbers.

	bondNumber
▶	1124
	1319
	1608

```
SELECT bondNumber
FROM   tennis.player p1
WHERE  3 >
        (SELECT COUNT(*)
         FROM   tennis.player p2
          WHERE p2.bondNumber < p1.bondNumber)
AND    bondNumber IS NOT NULL
order by bondNumber;
```

Correlated Subqueries

Show the player number and the name of each player who has won at least two competitions

	playerId	name
▶	6	Peeters

```
select playerId, name
from   tennis.player p
where  (select COUNT(*)
        from   tennis.competition
        where  playerId = p.playerId
        and    winnerSets > loserSets) >= 2;
```

Correlated Subqueries

For each competition, show the competition number and the name of the player who played the match. Use a subquery in the SELECT component. Sort in ascending order by competition number.

	competitionId	Name player
►	1	R. Peeters
	2	R. Peeters
	3	R. Peeters
	4	E. Bakker, de
	5	P. Henderickx
	6	R. Engelen
	7	M. Gorp, van
	8	B. Nagels
	9	F. Cools
	10	L. Mertens
	11	J. Balen, van
	12	J. Balen, van
	13	B. Nagels

```
select competitionId,  
       (select concat(initials, '. ', name)  
        from  tennis.player  
        where playerId = c.playerId) as "Name player"  
from  tennis.competition c  
order by competitionId;
```


Correlated Subqueries

For each fine, show the payment number, the amount and the sum of all amounts with a payment number less than or equal to that number. The effect is that cumulative values are printed.

	fineId	amountFine	Cumulative amount
►	1	100.00	100.00
	2	75.00	175.00
	3	100.00	275.00
	4	50.00	325.00
	5	25.00	350.00
	6	25.00	375.00
	7	30.00	405.00
	8	75.00	480.00

```
select f.fineId, f.amountFine,  
       (select SUM(amountFine)  
        from   tennis.fine  
        where  fineId <= f.fineId)  
       as "Cumulative amount"  
from tennis.fine f;
```