


Supplementary Figure S1 | Protocol A.1 redefines the measurable Bader–fidelity landscape

The archived order–preserving float32 probe is provenance only; all current eligibility and certification use Protocol A.1.


A | A.1 exposes much larger Bader instability

Paired archived float32 vs five–seed A.1 floors; n = 254

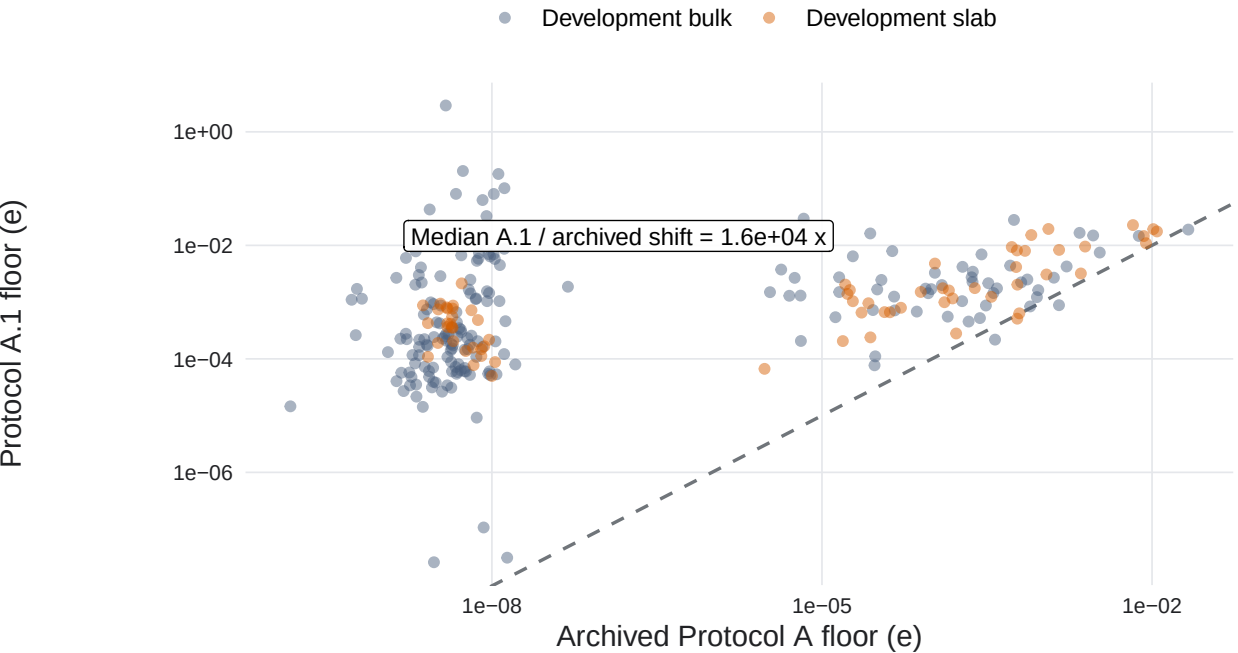


B | Qualification changes the non–evaluable rate

Overall 319–system stability universe

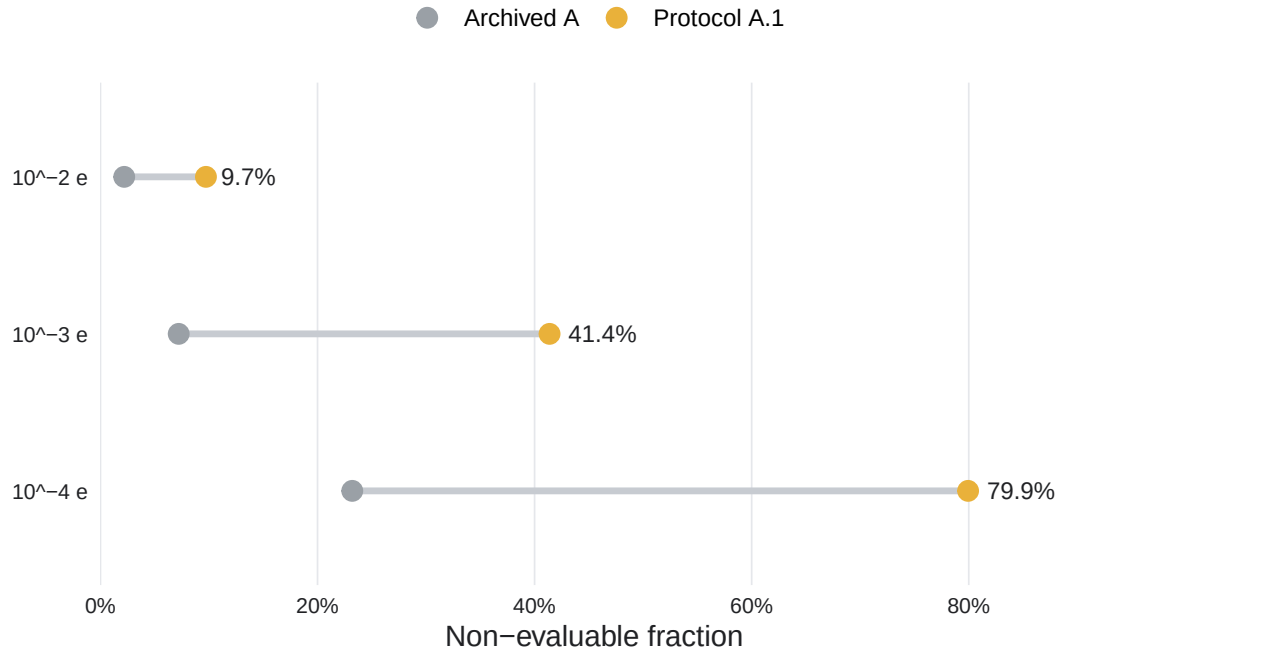

C | Numerical eligibility is material– and tolerance–dependent

Protocol A.1; the structural–class contrast is not universal

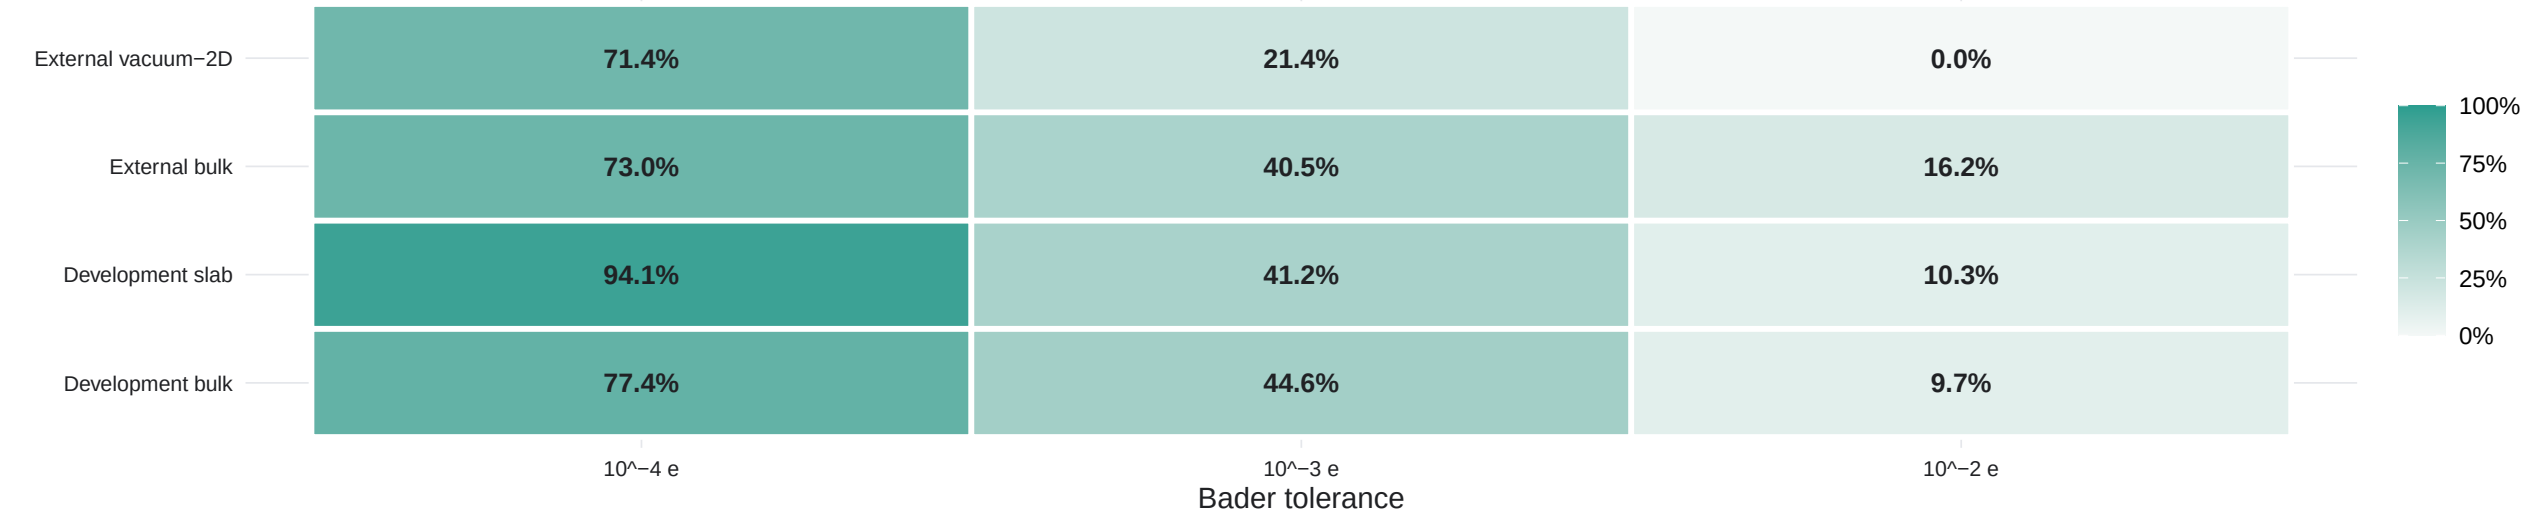

A, paired archived and A.1 floors. B, overall non–evaluable fractions. C, Protocol A.1 rates by analysis stratum. Non–evaluable is neither codec pass nor codec failure.