



# Case1 simple without using git branch just core concept

## 1.1 git merge → ok! u git pull

5 You  
I don't understand git merge and git conflict could you give me a simple real scenario which scenario would make and don't make conflict

6 ChatGPT  
Certainly! Let's consider a simple scenario involving two developers, Alice and Bob, working on the same project to illustrate how `git merge` works and when merge conflicts can occur.

**Initial Setup:**  
Imagine there's a project with one file called `README.md` in a Git repository. Alice and Bob both clone this repository to their local machines at the same point in time, so they start with the same version of the file.

**Scenario 1: No Conflict (Non-Conflicting Changes)**  
Step 1: Alice makes changes to the first line of `README.md` on her local machine and commits her changes.  
Step 2: Bob makes changes to the third line of `README.md`, different from the part Alice edited. He does this without pulling Alice's changes first.  
Step 3: Alice pushes her changes to the repository.  
Step 4: Bob tries to push his changes but is prompted by Git that his branch is behind the remote branch (because Alice's changes are now on the remote but not on Bob's local machine). Bob then runs `git pull`.

**What happens:**

- Git automatically fetches and tries to merge Alice's changes into Bob's local branch.
- Since Alice and Bob edited different parts of the file, Git successfully merges the changes without any intervention, creating a new "merge commit" if needed. Bob can now push his changes.

**Scenario 2: Conflict (Conflicting Changes)**  
Step 1: Alice and Bob both edit the same line in `README.md`. For instance, Alice changes the first line to "Hello World" and Bob changes the same first line to "Hello Git".  
Step 2: Alice commits her changes and pushes them to the repository.  
Step 3: Bob tries to commit and push his changes but, like before, finds that the remote has updates he doesn't have. He runs `git pull`.

**What happens:**

- Git fetches Alice's changes and tries to merge them into Bob's local branch.
- Both edited the same line in conflicting ways. Git can't automatically decide which version to keep—Alice's "Hello World" or Bob's "Hello Git".
- Git marks the file as having a conflict and halts the merge process. Bob is now responsible for resolving this conflict.

**Resolving the Conflict:**

- Git will modify the `README.md` to show both versions of the conflicting line, something like this:  

```
diff --git a/README.md b/README.md
index 1234567..8901234
--- a/README.md
+++ b/README.md
@@ -1 +1 @@
-Hello Git!
+Hello World!
```
- Bob needs to edit this file to resolve the conflict. He might decide to combine the changes or choose one over the other. After editing, the file might look like:  

```
diff --git a/README.md b/README.md
index 1234567..8901234
--- a/README.md
+++ b/README.md
@@ -1 +1 @@
Hello World and Git!
```
- Bob then marks the conflict as resolved by adding the file to the staging area and commits the change. Now, he can push his merge commit.

**Summary:**

- No Conflict:** Occurs when changes are made in different parts of a file or in different files. Git can automatically merge these changes.
- Conflict:** Occurs when the same parts of a file are modified in different ways in the same lines. Human intervention is required to decide how to integrate these conflicting changes.

Understanding these scenarios should help you better anticipate when conflicts might arise and how `git merge` operates in both smooth and complex workflows.

5 You  
Are you sure that editing the same file in the first case would not cause git conflict?

6 ChatGPT  
Yes, editing the same file does not necessarily result in a Git conflict as long as the edits are made to different parts of the file. Git is quite capable of automatically merging changes that occur in non-overlapping sections of the same file. Here's a breakdown to clarify:

**Automatic Merging**  
Git uses a line-by-line strategy to merge changes from different branches or different commits. When two edits are made in separate parts of the file, Git can seamlessly combine these edits without any conflict. This process is generally smooth and happens under the hood during a `git merge` or `git pull` operation.

**Example:**

- Alice edits line 1 in `README.md` to say "Hello from Alice."
- Bob edits line 3 in the same `README.md` to say "Hello from Bob."

Even though both edits are made to the same file, they are on different lines. When Bob pulls Alice's changes before pushing his own, Git will see that the changes do not overlap and will automatically merge them. The resulting `README.md` might look something like this:

```
css
Hello from Alice.
(original line 2 content)
Hello from Bob.
```

**Conflict Scenario**  
A conflict arises only when the changes affect the same lines. This scenario requires manual intervention because Git cannot autonomously decide which version of the conflicting lines to keep.

**Example of a Conflict:**

- Alice changes line 1 in `README.md` to "Good morning from Alice."
- Bob changes the same line 1 in `README.md` to "Good evening from Bob."

Since both made changes to the same line, Git will mark this as a conflict. When Bob attempts to pull Alice's changes, he will see a conflict marker in `README.md` that looks something like this:

```
css
<<<< HEAD
Good evening from Bob.
=====
Good morning from Alice.
>>>> main
```

Bob must manually resolve this by choosing one of the changes, combining them, or writing something entirely new.

**Summary**  
Editing the same file does not inherently lead to conflicts unless the edits occur on the same lines or in sections of the file that Git cannot automatically merge. This flexibility allows multiple developers to work on different parts of the same file simultaneously with minimal disruption, as long as their changes do not directly interfere with each other.

Merge branch a to b is adding file (and changed) from a to b  
Ex. (Not commonly real use case just use as an example) merge branch main to branch1  
Steps 1. Checkout branch1  
2. git merge main  
Now new files (and changed) from main will be in branch1

\* file ?u branch1  
in 111ao?u main ?u  
oi111ao?u 7Jlun

## 1.2 git pull → merge file into your local branch

ex. lsit check out branches

### 2. git pull origin main

now merge main to branches  
(branch & file in main)

or file in branches into  
main & so it's working

**You**  
How about git pull? How does that work?

**ChatGPT**  
The `git pull` command is a commonly used Git command that integrates changes from a remote repository into the current branch in your local working directory. It's essentially a combination of two other Git commands: `git fetch` followed by `git merge`. Here's how it works and what happens when you execute a `git pull`:

**Breakdown of "git pull"**

- Fetch Remote Changes
  - Command: `git fetch`
  - Function: This step retrieves updates from the remote repository—such as new branches, updates to existing branches, tags, etc.—but does not modify your working directory or current branch. It creates the remote-tracking branches (e.g., `origin/main`).
- Merge Changes into Local Branch
  - Command: `git merge`
  - Function: This step merges the fetched updates from the remote-tracking branch (like `origin/main`) into your local branch. This is the step where your working files get updated to reflect the remote changes.

**Detailed Steps**

- Starting Point:** You begin with a local Git repository and a branch checked out (for example, the `main` branch).
- Run "git pull":** When you execute `git pull`, Git first contacts the remote repository linked with your current branch (typically identified as `origin` unless you've configured it otherwise).
- Remote Interaction:**
  - Git fetches changes from the remote, including any new commits that have been pushed to the remote since your last pull or fetch. These changes are stored in your local repository's corresponding remote-tracking branch (like `origin/main`).
- Merge Process:**
  - After fetching, Git attempts to merge these changes into your local branch. This merge can be:
    - Fast-forward:** If there have been no local changes and the remote has moved ahead, Git simply moves the local branch pointer forward to match the remote's current state.
    - True Merge (With Merge Commit):** If you have made commits to your local branch that are not on the remote, and there are new commits on the remote, Git will create a merge commit that combines the histories of both branches.
- Conflict Resolution:**
  - If there are conflicts, they must be resolved manually. Git will pause the process and ask you to resolve the conflicts manually. Once resolved, you can complete the merge with a commit.

**Optimizations and Variations**

- git pull --rebase:** Instead of using merge, you can rebase your local changes on top of the fetched branch commits. This rewrites your local branch's history to appear as if your local changes were made on top of the new changes from the remote, creating a cleaner, linear history.
- git pull --no-commit:** This merges changes but stops before making a commit, allowing you to review or continue merging manually.
- Safety Considerations:** Modern versions of Git will warn you if you're about to pull from a repository that doesn't have a trusted history, helping prevent attacks like history rewriting.

**Practical Use**

You'll typically use `git pull` to synchronize your local repository with a shared remote repository, especially in collaborative environments where multiple people are making and sharing changes through a common repository. This keeps everyone on the team updated and reduces the likelihood of major conflicts or integration headaches later on.

**You**  
So in team development, we should git pull before pushing any new feature if we work on main branch right?

**ChatGPT**  
Yes, that's correct! In a team development environment, it's a best practice to regularly `git pull` from the main branch (or whatever branch you are working on) before pushing your changes. This practice helps to minimize conflicts and ensures that your local branch is up-to-date with the latest work from your teammates. Here's why this is important and beneficial:

**1. Avoiding Conflicts**  
Pulling before you push helps to reduce the likelihood of conflicts. If someone else has made changes to the same parts of the same files you have worked on, pulling these changes first allows you to resolve any conflicts locally and then push a clean update. This makes the merge on the remote repository simpler and avoids breaking the build or functionality for others who might pull after you.

**2. Ensuring Compatibility**  
By pulling the latest changes first, you can test your updates against the most current version of the project. This is crucial for ensuring that your changes are compatible with other recent changes made by your team. It's especially important in projects where multiple components or features are being developed simultaneously.

**3. Keeping Your Local Branch Up to Date**  
Regularly pulling from the main branch also ensures that your local branch doesn't diverge significantly from the main branch. Large divergences can lead to complex merges and can sometimes introduce subtle bugs if not handled carefully.

**4. Facilitating Continuous Integration**  
In environments where continuous integration (CI) is used, keeping your branch up to date can help ensure that your changes will pass automatically tested when they are merged into the main branch. This practice supports a smoother CI process and helps prevent last-minute scrambles to fix unexpected issues.

**Practical Workflow Example**

- Start Your Work:** When you begin working on a new feature or bug fix, it's often good practice to start by pulling the latest changes from the main branch to ensure you're working with the most recent codebase.
- Develop:** Make your changes in your feature branch, commit them locally as you reach meaningful points in your development.
- Push:**

```
git checkout main
git pull origin main
git checkout -b new-feature-branch
```
- Develop:** Make your changes in your feature branch, commit them locally as you reach meaningful points in your development.
- Push:**

```
git add .
git commit -m "Add new feature"
```
- Push Before Merging or Pushing:** Before you merge your feature branch back into the main branch or before pushing to the remote repository, pull the latest changes from main to your feature branch and resolve any conflicts if necessary.
- Final Push:** Once your branch is up-to-date and merged with the latest from main, and you have tested your changes, you can push your feature branch to the remote repository and create a pull request.
- Review and Merge:** After peer review, you can merge your feature into the main branch (often done via a merge button in tools like GitHub, gitLab, or Bitbucket).

Adopting such practices can greatly enhance team productivity and reduce integration headaches, especially as team size and project complexity grow.

**You**  
Now, give me a real simple scenario where git pull would work and does not work

**ChatGPT**  
Certainly! Let's explore a simple scenario where `git pull` works smoothly, and another scenario where it does not work, resulting in additional steps required to resolve issues.

**Scenario Where Git Pull Works Smoothly**  
Context: Suppose you and your colleague, Alex, are working on a project with a shared repository. You are both working on different features.

**Steps:**

- Initial Setup:** Both you and Alex clone the same repository at the same starting point.
- Parallel Work:**
  - You work on adding a new page called `"about.html"`.
  - Alex works on updating the styling in `"style.css"`.
- Alex's Commit and Push:**
  - Alex completes his styling changes and commits them.
  - Alex pushes his changes to the main branch.
- Your Turn to Push:**
  - Before pushing your changes, you perform a `"git pull"`.
  - Since you are working on a separate file (`"about.html"`) and Alex has modified `"style.css"`, Git successfully pulls Alex's changes without any conflicts.
- Successful Merge:**
  - Your local branch now includes both your unpushed changes and Alex's updates.
  - You can now push your changes to the main branch without any issues.

**Result:** The `"git pull"` command successfully merges the changes from the main branch into your local branch without any manual intervention required, as the changes do not conflict.

**Scenario Where Git Pull Does Not Work Smoothly**  
Context: Suppose now you and Alex are working on the same project but decide to update the same file, `"index.html"`.

**Steps:**

- Initial Setup:** Both start from the same commit in the main branch.
- Parallel Work:**
  - You add a new section to `"index.html"`.
  - Alex modifies the header of the same `"index.html"`.
- Alex's Commit and Push:**
  - Alex completes the header update, commits, and pushes to the main branch.
- Your Turn to Push:**
  - Before pushing your changes, you execute a `"git pull"` to fetch and merge changes from the main branch.
- Merge Conflict:**
  - Git attempts to merge the changes but finds conflicts in `"index.html"` because both you and Alex have altered the same parts of the file.
  - Git pauses the merge and marks the file as conflicted, asking you to resolve the issues manually.
- Conflict Resolution:**
  - You open `"index.html"` and see both of your changes and Alex's changes marked by Git.
  - You decide how to integrate both sets of changes, edit the file to resolve the conflicts, and then save it.
- Completing the Merge:**
  - After resolving the conflicts, you add the resolved file to the staging area and commit the merge.
  - Now, you can push your changes to the main branch.

**Result:** The `"git pull"` command does not smoothly integrate the changes because of a conflict. Manual intervention is required to resolve the conflict before successfully merging and pushing the changes.

**Summary**

- Git Pull Works:** When changes made by different team members do not conflict, typically when editing different files or different parts of the same file.
- Git Pull Does Not Work Smoothly:** When team members edit the same lines in the same file, leading to conflicts that require manual resolution.

These scenarios highlight the importance of regular communication within teams and possibly coordinating work on files that are often changed by multiple people.

# 1.3 git fetch

You  
Now, explain me about git fetch? What is it? Are there any cases of error? If yes give me a simple real scenario with error and not

ChatGPT  
**What's 'git fetch'?**  
`'git fetch'` is a command in Git that allows you to retrieve updates from a remote repository without merging those changes into your current working branch. It updates only your local copy of the remote repository, including branches and tags, giving you access to all the latest commits and metadata but leaving your actual working files unchanged.

**Key Points of 'git fetch':**

- Updates Remote-tracking Branches: It synchronizes your local remote-tracking branches like `'origin/main'` with the remote repository. This means it pulls down all the new data from the remote repository (like new branches or updates to existing branches) but doesn't affect your working directory.
- No Changes to Local Branches: It doesn't automatically merge any of the new data into your local branches. You can inspect the changes before deciding to merge them into your branches manually using `'git merge'` or `'git rebase'`.

**When Does 'git fetch' Work Smoothly?**

Scenario: Checking for New Changes

- Initial Setup: You and a colleague, Emily, are working on a project. You both have cloned the same repository.
- Emily's Updates: Emily pushes new commits to a shared branch named `'feature'`.
- Your Action: You run `'git fetch'`. This command updates your local copy of the `'feature'` branch (`'origin/feature'`) with Emily's changes.
- Post-fetch: You can see the updates using `'git log'` or by comparing branches (`'git diff origin/feature feature'`) but your local `'feature'` branch remains unchanged until you decide to merge.

**Result:** `'git fetch'` operates smoothly by giving you access to the latest changes without altering your current working state.

**Scenario Where 'git fetch' Might Encounter an Issue**

Scenario: Network Issues or Permissions

- Initial Setup: You are working remotely and need to check for updates from the main repository.
- Network Problems: You attempt to run `'git fetch'` but encounter a network issue, such as an unstable connection or a VPN that blocks access to the Git server.
- Error Message: Git responds with an error such as "fatal: unable to access '<https://github.com/example/repo.git>?': Could not resolve host: github.com'".

**Result:** `'git fetch'` fails due to external factors like network issues, preventing you from fetching the latest updates.

**Resolving Fetch Issues**

- Check Network Connection: Ensure that your internet connection is stable and that you can reach the Git server (e.g., GitHub, Bitbucket).
- Check Repository URL: Use `'git remote -v'` to verify that the repository URL is correct.
- Check Access Rights: Make sure you have the necessary permissions to fetch from the repository.
- Firewall or VPN Settings: Adjust settings that might be blocking your access to the repository.

**Summary**

`'git fetch'` is generally a safe and non-destructive command for updating your local repository with changes from a remote source. It becomes particularly useful in collaborative environments for keeping track of what others are doing without immediately affecting your local development work. Errors with `'git fetch'` are typically related to network issues, access permissions, or configuration problems, rather than issues with the command itself or the way it interacts with Git repositories.

You  
How can we differentiate which one is local branch and which one is remote branch especially when we work on the same branch name if we use git fetch

ChatGPT  
In Git, understanding the distinction between local branches and remote-tracking branches is crucial, especially when you work with the same branch name locally and remotely. Here's how you can differentiate between them and manage your branches effectively:

**Local Branches**

Local branches are branches that exist on your local machine. You can check, commit to, and modify these branches independently of their remote counterparts until you decide to sync them.

**Example of Checking Local Branches:**

```
bash
git branch
Copy code
```

This command will list all local branches in your repository. The branch you are currently on will be marked with an asterisk (\*).

**Remote-tracking Branches**

Remote-tracking branches are references to the state of branches on your remote repository. They are read-only copies of the branches in the remote repository at the time you last fetched from or pushed to them. These branches are typically named with the format `'remote/branch-name'`.

**Example of Checking Remote-tracking Branches:**

```
bash
git branch -r
Copy code
```

This command will list all remote-tracking branches you have fetched. You'll see entries like `'origin/main'` or `'origin/feature-branch'`, where `'origin'` is the default name for your remote.

**Differentiating Between Local and Remote-tracking Branches**

**1. Viewing All Branches:**  
You can view both local and remote-tracking branches together using:

```
bash
git branch -a
Copy code
```

This will list all branches, local and remote. Local branches will appear as simple branch names like `'main'` or `'feature-branch'`, while remote-tracking branches will be prefixed with `'remote/'`, such as `'origin/main'`.

**2. Understanding Naming Conventions:**

- Local branches: Just the branch name (`'main'`, `'feature-branch'`).
- Remote-tracking branches: Prefixed with remote name followed by the branch name (`'origin/main'`). The `'origin'` part is the default name for your remote, but it can be different if you've named your remote differently.

**3. Fetching and Comparing:**  
When you run `'git fetch'`, Git updates your remote-tracking branches. This does not affect your local branches unless you explicitly merge these changes into your local branches:

```
bash
git fetch origin
git diff main origin/main
Copy code
```

This command sequence fetches updates from `'origin'` and then compares your local `'main'` branch with the fetched branch `'origin/main'`.

**4. Synchronizing Local Branch with Remote-tracking Branch:**  
To synchronize your local branch with changes in the remote-tracking branch (after fetching):

```
bash
git checkout main
git merge origin/main
Copy code
```

Or, if you prefer rebase:


```
bash
git checkout main
git rebase origin/main
Copy code
```

This merges or rebases the latest changes from `'origin/main'` into your local `'main'` branch.

**Practical Usage**

When working in a team or on a project where branches are frequently updated by multiple contributors, regularly fetching and reviewing remote-tracking branches helps keep your local development in sync with the collective progress. Always ensure that before pushing changes, your local branch is up-to-date with its remote counterpart to avoid conflicts and streamline collaboration.

Using these strategies, you can effectively manage and differentiate between your local and remote branches, ensuring that you maintain a robust workflow and handle the branches appropriately.

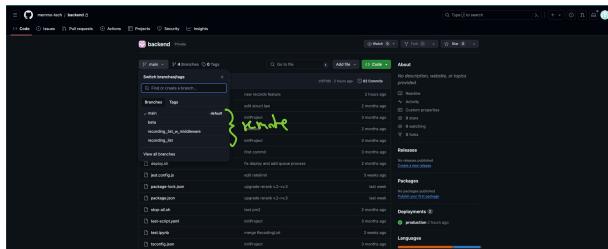

in visual

```
● (base) sirasittanrattanawong@Sirasits-MacBook-Air backend % git branch
* main
  recording_list
  recording_list_w middleware
● (base) sirasittanrattanawong@Sirasits-MacBook-Air backend % git branch -a
* main
  recording_list
  recording_list_w middleware
  remotes/origin/HEAD -> origin/main
  remotes/origin/beta
  remotes/origin/main
  remotes/origin/recording_list
  remotes/origin/recording_list_w middleware
○ (base) sirasittanrattanawong@Sirasits-MacBook-Air backend %
```

A terminal session showing the output of 'git branch' and 'git branch -a'. The local branches are listed under the first command, and the remote branches (including the remote HEAD) are listed under the second. Handwritten green curly braces group the local branches and the remote branches respectively.

## 2. Git branch

>You Now, if we use git branch, give me a simple real scenario that will cause a problem and not when working as a team and need to use with git pull, git merge and git push.

ChatGPT When working in a team setting with Git, coordination and communication are essential, especially when your workflow involves frequent uses of 'git branch', 'git pull', 'git merge', and 'git push'. Let's explore both a scenario where this setup does not cause problems and one where it might lead to complications.

**Scenario Where There Is No Problem**

Context: A well-coordinated team is working on a web application. They use feature branches for each new feature to keep development organized.

Steps:

1. Initial Setup:

- The team agrees on a workflow where everyone updates their local 'main' branch before creating a new feature branch.
- Each team member is responsible for pulling the latest changes from 'main' before starting work:

```
bash git checkout main
git pull origin main
Copy code
```

2. Creating and Working on a New Feature:

- Alice decides to add a new contact form.
- She updates her local 'main' branch and creates a new branch:

```
bash git checkout -b add-contact-form
Copy code
```

Alice completes the contact form, commits her changes, and pushes her branch:

```
bash git add .
git commit -m "Add contact form"
git push origin add-contact-form
Copy code
```

3. Review and Merge:

- The team uses pull requests for code review.
- After review, Alice's changes are approved, and she merges them into 'main':

```
bash git checkout main
git pull origin main
git merge add-contact-form
git push origin main
Copy code
```

Result: The process goes smoothly because the team maintains an up-to-date 'main' branch, uses feature branches effectively, and follows best practices for merging and pushing changes.

**Scenario Where There Is a Problem**

Context: The same team but with a lapse in following established workflow practices.

Steps:

1. Outdated Local 'main':

- Bob decides to start working on a new dashboard feature.
- He forgets to pull the latest changes from 'main' and creates a new branch based on an outdated 'main':

```
bash git checkout main
git checkout -b add-dashboard
Copy code
```

2. Development and Late Update:

- Bob works on the dashboard feature for several days.
- Meanwhile, other team members have made significant changes to the 'main' branch, including database schema updates that affect Bob's work.

3. Attempting to Merge:

- Bob completes his feature and tries to merge 'main' into his branch before pushing:

```
bash git pull origin main
Copy code
```

He encounters numerous merge conflicts because his branch base is significantly behind, and the changes affect the same files he modified.

- The conflicts are complex and stem from structural changes in the code that Bob was unaware of.

4. Difficult Conflict Resolution:

- Resolving the conflicts takes a considerable amount of time and requires Bob to refactor much of his work to align with the latest 'main' branch updates.

Result: Bob's development process encounters significant hurdles because he did not start with the latest version of 'main'. The late merging of a significantly diverged 'main' causes complex conflicts, leading to a time-consuming and error-prone resolution process.

**Best Practices to Prevent Issues**

- Always Update First: Before starting new work, ensure your base branch (typically 'main') is up-to-date to minimize merge conflicts later.
- Frequent Commits and Pulls: Regularly commit your changes and pull updates from 'main' into your feature branch during development, not just at the end.
- Communication: Keep in constant communication with your team about changes that may affect multiple aspects of the project, especially those that might lead to merge conflicts.

Following these best practices helps maintain a smooth and efficient team workflow, minimizing the chance of significant conflicts and ensuring that integration processes are as seamless as possible.

You give me a simple real scenario we need to do this "ดูว่าเมื่อ conflict ที่จะมี ให้ก็ merge dev เข้า branch ที่มีกิจกรรมอยู่ merge branch ที่จะเข้า dev มีปัญหานะ"

ChatGPT Let's take a simple real-world scenario that involves multiple developers working on different features for a website project. This scenario will demonstrate why and how the recommended workflow of merging from 'dev' into a personal feature branch, resolving conflicts, and then merging back into 'dev' is necessary.

**Scenario: Website Development with Multiple Features**

Project Setup:

- You have a main website project with two main branches:
  - 'main': Used for production-ready code.
  - 'dev': Used as the development branch where all features are integrated before they are released to production.

Team Members:

- Alice is working on updating the user login functionality.
- Bob is working on adding a new user profile page.
- Carol is managing the 'dev' branch and ensuring everything runs smoothly.

Steps and Workflow:

Step 1: Branching Out

- Alice creates a new branch from 'dev' called 'feature-login-update' to work on the login functionality.
- Bob simultaneously creates another branch from 'dev' called 'feature-profile-page' to work on the user profile page.

Step 2: Development and Initial Completion

- Alice and Bob work on their respective features in their branches. They commit their changes and are ready to integrate them back into the 'dev' branch.

Step 3: Preparing for Integration

Alice:

- Before merging her changes into 'dev', Alice fetches the latest updates from 'dev' and merges them into her 'feature-login-update' branch to make sure she's working with the latest code.
- She runs:

```
bash git checkout feature-login-update
git pull origin dev # Ensures latest dev is merged into her feature branch
Copy code
```

Alice encounters some conflicts because Bob's changes, which have already been merged into 'dev', affect some of the same files she was working on.

- Alice resolves these conflicts in her 'feature-login-update' branch, ensuring that both her updates and Bob's updates work harmoniously.

Bob:

- Bob follows a similar process, merging 'dev' into his 'feature-profile-page' branch and resolving any conflicts.

Step 4: Merging Back to 'dev'

- After resolving the conflicts in their respective branches, Alice and Bob each merge their updated and conflict-free feature branches back into 'dev':

Alice:

```
bash git checkout dev
git merge feature-login-update # No conflicts this time
git push origin dev
Copy code
```

Bob:

```
bash git checkout dev
git merge feature-profile-page # No conflicts because he already handled them
git push origin dev
Copy code
```

Result:

- Both features are integrated into 'dev' without disrupting the development flow or causing integration headaches. Carol, the branch manager, finds it easier to prepare 'dev' for a smooth transition to 'main' for the next release.

**Why This Process?**

This process ensures that each feature branch is compatible with the current state of 'dev' before it gets integrated back. By resolving conflicts on their feature branches first, Alice and Bob prevent introducing errors into 'dev', which is crucial for keeping the development process stable and efficient.

In this scenario, merging 'dev' into their feature branches first allows Alice and Bob to handle conflicts on their own terms, in their development environment, without impacting the rest of the team. This approach promotes a cleaner, more manageable merge process when they finally integrate their features back into 'dev'.

**How to Set Upstream Branch on Git?**

What you need to know about upstream branches, how to work with them, and how to set them up.

**Prerequisites**

- A local Git repository or your Git project itself.

**What is an upstream branch?**

An upstream branch is a branch in a remote repository such as GitHub or Bitbucket, the "upstream source" of the remote branch located on GitHub or Bitbucket. If you branch from an upstream branch, you can push changes back to it without specifying the remote name.

**How to Set Upstream Branches in Git?**

Using the Git Push command with the "-u" option for the upstream branch.

**Set Upstream Branch using Git Push command**

Create a new branch with the name, and switch to the current branch using the "S option".

git push -u origin new\_branch

Pushing the latest commit causes failure.

What you need to do is to force the local branch set and then to use the command "git pull". After running the below command:

```
$ git push
    fatal: current branch new_branch has no upstream branch
    to push the current branch and set the remote as upstream, use
    git push --set-upstream origin new_branch
```

Now, you need to set the upstream branch by using the Git Push command with the -u option. Replace branch name with your branch name.

git push -u origin new\_branch

Alternatively, you can use the "git config" command to set the upstream branch.

git config --add remote.origin.fetch +refs/heads/\*:refs/heads/\*

## Definition of "downstream" and "upstream"

Asked 14 years ago Modified 2 years, 5 months ago Viewed 380k times

I've started playing with Git and have come across the terms "upstream" and "downstream". I've seen these before but never understood them fully. What do these terms mean in the context of SCMs ([Software Configuration Management](#) tools) and source code?

1064 answers · [git](#) · [version-control](#) · [versioning](#) · [terminology](#) · [definition](#)

- Share Improve this question Follow edited Jun 7, 2019 at 14:17 asked Apr 29, 2010 at 17:18 ThomasMcLeod 7,689 4 44 80 brendan 12k 3 27 26
- 20 There are two different contexts for upstream/downstream in git: remotes, and time/history. Upstream/downstream with respect to remotes is, the downstream repo will be pulling from the upstream repo (changes will flow downstream naturally). Upstream/downstream with respect to time/history can be confusing, because upstream in time means downstream in history, and vice-versa (genealogy terminology works much better here - parent/ancestor/child/descendant). – charlesred1 Jul 18, 2015 at 5:06
- 8 Related: [What does 'upstream' mean?](#) at OS - kenor Aug 20, 2015 at 15:48
- 6 Related: [Difference between origin and upstream](#) on GitHub - RBT Aug 12, 2017 at 2:50

Add a comment

## 6 Answers

Sorted by: Highest score (default)

- In terms of source control, you're **downstream** when you copy (clone, checkout, etc) from a repository. Information flowed "downstream" to you.
- 841 When you make changes, you usually want to send them back "upstream" so they make it into that repository so that everyone pulling from the same source is working with all the same changes. This is mostly a social issue of how everyone can coordinate their work rather than a technical requirement of source control. You want to get your changes into the main project so you're not tracking divergent lines of development.
- Sometimes you'll read about package or release managers (the people, not the tool) talking about submitting changes to "upstream". That usually means they had to adjust the original sources so they could create a package for their system. They don't want to keep making those changes, so if they send them "upstream" to the original source, they shouldn't have to deal with the same issue in the next release.

## Quick question, what does the 'u' stand for in 'git push -u origin master'? And is it optional?

I've been reading tonnes of guides on git lately, many of them mentioning "git push -u origin master", but none of them have bothered to say with the -u means, or does. Also, I see some guides even omit the -u. Is it optional?

udmennikov · Promoted

Download embeddable .NET library for running workflows in .NET applications with integrated HTML5 graphical workflow designer.  
optimizely.com

+ Add a Comment

Sort by: Best Search Comments

p13832v2 · 3y ago

The option -u is for "git upstream". It configures the local branch to track the remote branch. You don't need to use it more than once. If you initially created the local branch by pulling it from the remote, you probably don't need to use it at all—pulled branches are automatically configured to track the remote from which they were pulled.

When create repository, you would see this

Quick setup — if you've done this kind of thing before  
... or create a new repository on the command line  
echo "# AIProjectsShowcase" >> README.md  
git init  
git add README.md  
git commit -m "first commit"  
git branch -M main  
git remote add origin https://github.com/stmlichty/AIProjectsShowcase  
git push -u origin main  
... or push an existing repository from the command line  
git remote add origin https://github.com/stmlichty/AIProjectsShowcase  
git branch -M main  
git push -u origin main

Copy + paste

a shorthand name for the remote repository that a project was originally cloned from.

Same

#### 4. Lets try

0. Default create repository and add commit push file1 in main branch

A screenshot of a terminal window titled 'gitPractice'. It shows the command 'git branch -D branch1' being run, which results in an error message: 'error: branch 'branch1' not found.' A blue circle highlights the number '4.1' in the top left corner.

1. Create new branch (branch1)
  2. Create new file (2)
  3. Git add commit push without -u
- You would see that there is no branch in remote repo
4. You need to use git push -u origin branch1

A screenshot of a terminal window titled 'gitPractice'. It shows the command 'git push -u origin branch1' being run, resulting in the message 'Branch branch1 set up to track remote branch branch1 from origin.' A purple arrow points from the text 'This branch is set up to track' to the word 'origin' in the message.

5. Now you have new branch with file2 in remote repo

6.2

## Simple scenario without conflict

At d1

- person1 clone main and create new branch1 (create new file 2)
- person2 clone main and create new branch2 (create new file 3)

At d2

- person1 finish file2
- person1 pull origin main to branch1 (no update)
- person1 add commit push branch1 to remote branch (git push -u origin branch1)
- person1 pr and merge branch1 to main

At d3

- person2 finish file3
- person2 pull origin main to branch2 (there is an update) (git pull origin main) (no conflict) *merge main to branch 1 to file 2 น่าจะดี*
- person2 add commit push branch2 to remote branch (git push -u origin branch2)
- person2 pr and merge branch2 to main



คนpush ลง file 1 ก็ push


ให้ git push -u origin main ไม่ได้ branch2

คนpush git ไม่ได้ allow

```
(base) air@airitan:~/Desktop$ ls -l
total 0
(base) air@airitan:~/Desktop$ git_practice_and_test % git push -u origin main
To https://github.com/airitan/git_practice_and_test.git
  ! [rejected]        main <main> (non-fast-forward)
error: failed to push non-empty branch: main
hint: Updates were rejected because a pushed branch tip is behind its remote
hint: counterpart. Check out the branch to integrate the remote changes
hint: or, if you intended to push an empty branch, use --force.
hint: See the documentation of "git push --force" for details.
(base) air@airitan:~/Desktop$ git_practice_and_test %
```

At d7, continue working


- person1 pull origin main to local main
  - person2 pull origin main to local main
- continue working by creating new branch from main

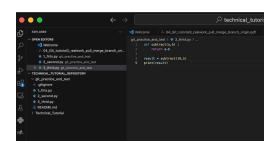

4.2

## Scenario with conflict

4.7.1 change file not in conflict

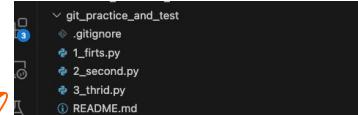

At d8

- person1 create new branch3 from main
- person3 pull origin main to local main
- person3 create new branch4 from main
- person5 pull origin main to local main
- person5 create new branch5 from main

At d9

- person1 create new file4 and fix bug in file1
- person1 pull origin main to branch3 ("git pull origin main" in branch3)
- person p1 add commit push to remote branch 3
- merge branch3 to main

\* can be merged even though  
file1 is changed because  
no one else change the file

At d10

- person4 create new file5
- person4 pull origin main in branch4
- person4 add commit push to remote branch4
- person4 merge to main

(file1 is changed)

## 4.7.2 change file with conflict

At d11

- person5 create new file6
- person5 change file1 as well
- person5 git pull origin main  
but found a conflict


```
(base) sirsasittraattanawong@Straits-MacBook-Air git_practice_and_test % git pull origin main
remote: Enumerating objects: 1, done.
remote: Total 1 (delta 0), reused 0 (delta 0), pack-reused 0
Unpacking objects: 100% (1/1), 899 bytes | 898.00 KiB/s, done.
From https://github.com/sirsasittraattanawong/git_practice_and_test
 * branch            main      -> FETCH_HEAD
Updating 896c2ae...fcfc72...
error: Your local changes to the following files would be overwritten by merge:
        .gitignore
Please commit your changes or stash them before you merge.
Aborting
```

(both person1 and 5 change file1)

(both version differ from original file which is pull in d8)

(diff in d8 == error will occur in d11)

- person5 add commit push to remote branch5  
(push -u origin branch5)
- person5 want to merge but he need to solve conflict

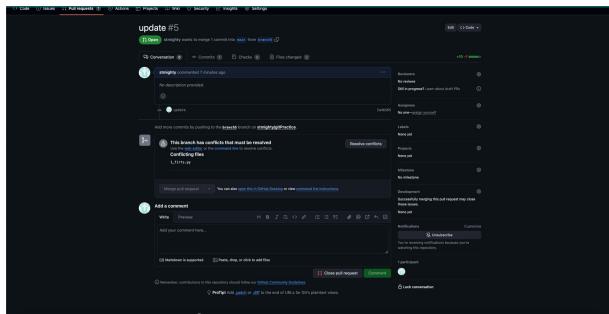

resolve conflict (consult team)

git pull \_\_\_\_\_ (ex. origin main) —no-rebase and manually resolve


↑  
branch names = merge rev

ans git branch -b reserve branch 1&2

## 5. how to pull remote branch to local



```
fetch the branch locally:  
218 git fetch origin <branchName>  
  
move to that branch:  
git checkout <branchName>
```

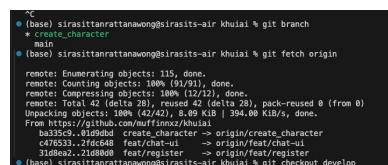

```
^C  
● (base) sirasittanattanawong@sirasits-air khuial % git branch  
* create_character  
...  
● (base) sirasittanattanawong@sirasits-air khuial % git fetch origin  
remote: Enumerating objects: 115, done.  
remote: Counting objects: 100% (112/112), done.  
remote: Compressing objects: 100% (112/112), done.  
remote: Total 115 (delta 28), pack-reused 0 (from 0)  
Unpacking objects: 100% (112/112), 8.69 MiB | 394.88 KiB/s, done.  
From https://github.com/mufifinxz/khuial  
 ba335c9..01d9dbd create_character -> origin/create_character  
 ced3a2a..31d8ea2 feat/register -> origin/feat/register  
 31d8ea2..21108000 feat/register -> origin/feat/register  
● (base) sirasittanattanawong@sirasits-air khuial % git checkout develop
```

You can attach the remote repository name, which by default is

origin:

```
git fetch origin
```

→ all remote branch

## 6. Normal flow example

Scenario2

At day1

- There are 3 branches on remote
  - o Main (production) (version day1)
  - o Develop (dev) (version day1)
  - o feat/chat-ui (version day1)

At day2

- I have cloned the git repo and create new branch create\_character
- There are 3 branches on remote
  - o Main (production) (version day1)
  - o Develop (dev) (version day1)
  - o feat/chat-ui (version day1)
- There are 4 branches on my local
  - o Main (production) (version day1)
  - o Develop (dev) (version day1)
  - o feat/chat-ui (version day1)
  - o create\_character (version day2)

At day3

- Pete create new branch feat/register and Pr to J to merge to dev
- There are 4 branches on remote
  - o Main (production) (version day1)
  - o Develop (dev) (version day3)
  - o feat/chat-ui (version day1)
  - o feat/register (version day3)
- There are 4 branches on my local
  - o Main (production) (version day1)
  - o Develop (dev) (version day1)
  - o feat/chat-ui (version day1)
  - o create\_character (version day2)

At day4

- I have finished create\_character branch and want to merge to dev
- There are 4 branches on remote
  - o Main (production) (version day1)
  - o Develop (dev) (version day3)
  - o feat/chat-ui (version day1)
  - o feat/register (version day3)
- There are 4 branches on my local
  - o Main (production) (version day1)
  - o Develop (dev) (version day1)
  - o feat/chat-ui (version day1)
  - o create\_character (version day4)
- You would see that I want to merge from create\_character to dev. But my dev is not up-to-date so, I need to 1. checkout develop 2. Pull remote develop to local 3. merge develop to create\_character 4. Push create\_character to remote and PR  
In theory, you can PR (pull request) your branch (create\_character) directly into develop without merging develop into your branch however, you should merge first because
  - 1. (Ensure Your Changes Are Compatible with the Latest Code)
  - 2. Prevent Merge Conflicts in the PR
  - 3. Testing the Integrated Code
  - 4. Cleaner PR and Easier Review

## อีกตัวอย่างของ 2คน แก้ไฟล์เดียวกัน

Day1 เรามี main

```
git_practice_and_3
├── 1_branch_main.py
├── 2_branch_main.py
├── 3_branch_main.py
└── 4_branch_main_change_for_branch.py
  └── README.md
```

person1 และ 2 pull ไปแล้ว create branch  
person1 และ person2 แต่ยังไม่แก้อะไร

Day2 person1 branch person1

```
git_practice_and_3
├── 1_branch_main.py
├── 2_branch_main.py
├── 3_branch_main.py
└── 4_branch_main_change_for_branch.py
  └── README.md
```

person2 branch person2



```
git_practice_and_3
├── 1_branch_main.py
├── 2_branch_main.py
├── 3_branch_main.py
└── 4_branch_main_change_for_branch.py
  └── README.md
```

ส่วนที่มีปัญหาคือตรงนี้ เพราะแก้ที่เดียวกัน ในโฉนดจริงๆ คือแค่ person1 อาจ  
จะเพิ่งตัวแบบไร้ซึ้งมา person2 ก็อีกตัวแบบที่ไม่เกี่ยวข้องกันเลย  
แต่มันอาจจะอยู่ที่เดียวกัน เลย conflict

Day3 หัวหน้าทีมมา merge

merge person1 ไป main ให้





บรรจุกันจะ merge person2 ที่ conflict

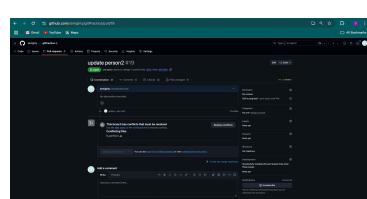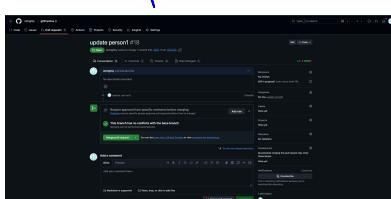

ໃໝ່ branch person2 (ຕ້ອງກຳລົດເວລັບສ່ວນ pull request)

git pull origin main —no-rebase

```
git pull origin main --no-rebase
```

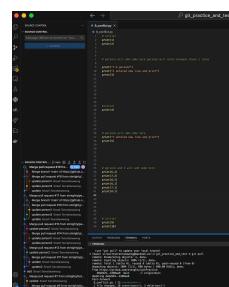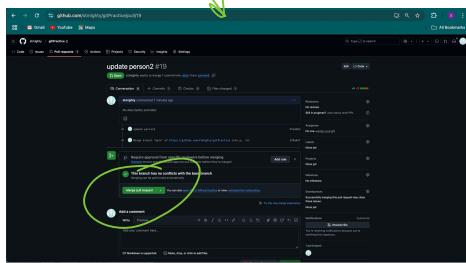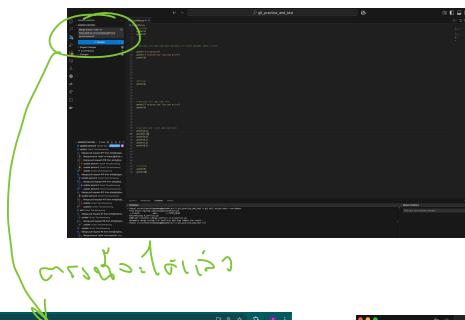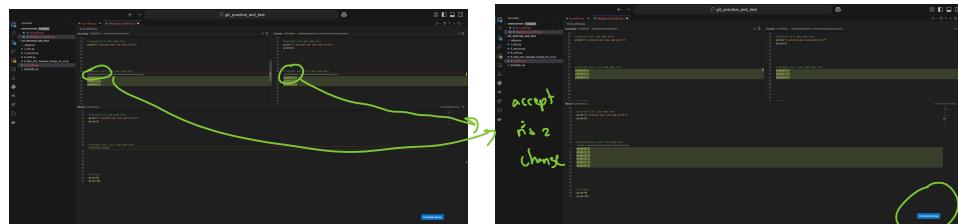

git checkout main  
ແລ້ວ pull request

