
Instant user guide

Instant is **instant film developing in front of you, for Resolume Arena and Avenue**, as an FFGL effect. A Take exposes the clip's frame as an integral instant print, and the print then develops in the open, stage by stage, in the order the chemistry sets.

None of it is a grade fading in. The dark green-grey start, the pale blue-cyan picture that warms as it arrives, the green of cold film and the warmth of hot film, the dark corners of a short spread and the repeating mark of a dirty roller are all just that process doing what it does.

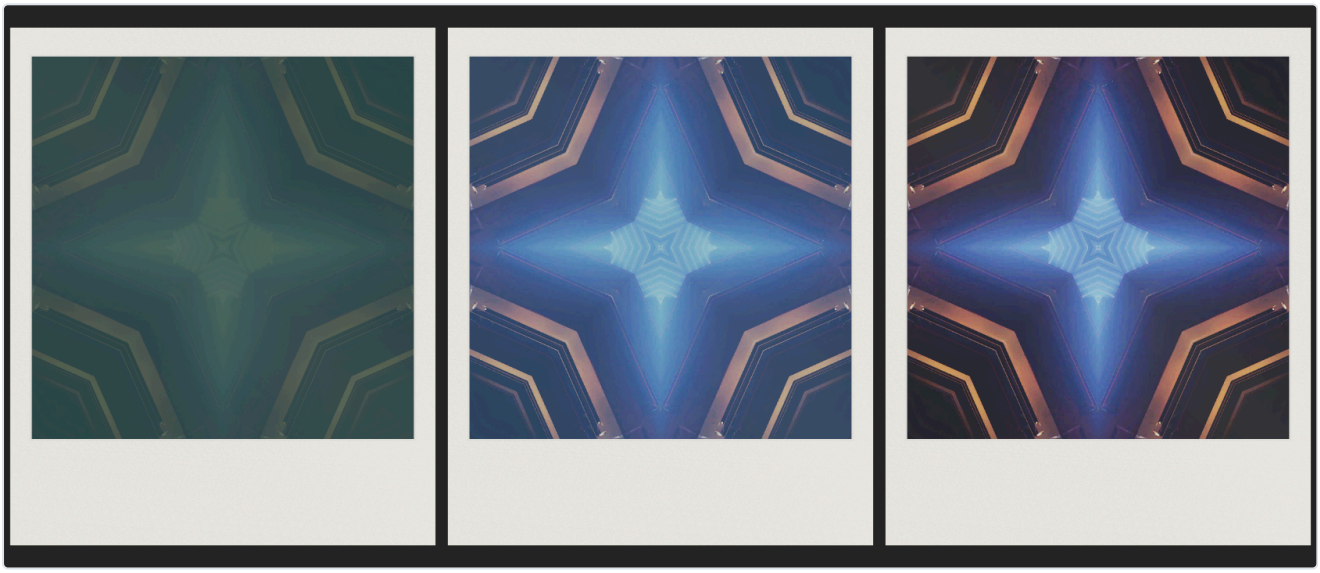

Resolume's bundled demo clip IntoTheGlow through the plugin at the defaults, rendered by the offline harness rather than captured from Resolume: half a second, two seconds and eleven seconds after the take, at 64x.

> **Before you rely on this:** it's released at **v0.1.1**, and it's still early days. The process is measured rather than asserted, by a harness that drives the real plugin class and reads each claim back out of what it renders, at two rasters and on a software renderer: each dye layer's density follows its first-order law with the stated time constant (70, 120 and 200 s for cyan, magenta and yellow, recovered to 1e-5); four minutes in, a neutral grey reads R 0.68 > G 0.61 > B 0.52, a blue-cyan print, and then moves only towards neutral, reaching it at the stop; the time constants at 14 and 34 °C stand in the Arrhenius ratio for each layer at its own activation energy and for the timing layer; a neutral grey comes out green when cold, neutral at 24 °C and warm when hot; each row starts developing at its distance from the pod over the front's speed; the dirty roller's mark repeats at exactly its circumference; the print develops from the captured frame however the clip changes, and survives a resize; and the camera's meter prints two exposures alike. Nine models broken on purpose are each shown to fail their check, and all 12 controls are shown to change the picture. **The checks verify the stated model, not a real print**: most of the chemistry's numbers are assumptions, listed under Where the numbers come from. It has **never been loaded into Resolume on macOS**; there the one host it's run in is the fleet's own test host, `oxbow`, for 120 frames. On Windows, the v0.1.1 build loads, registers and renders in Resolume Arena 7.27.1 on software rendering (win-lab, Mesa llvmpipe, no GPU), with all 18 host controls matching what the plugin declares, in the fleet's Arena gate (9 of 9 checks, 2026-09-25). The gate's picture is a still: eight controls read as moving the picture, Temperature and Speed were inconclusive (Speed only acts while a print develops, and the gate's print is finished 9.4 s after its take; Temperature read weakly live on v0.1.0's run, and the gate's thumbnail served the bare clip on five grabs this time), and Mode and Interval weren't measured, because they only act at the next take and the next print of a still is the same print. Software rendering says nothing about a GPU or about speed. Try it on a spare layer before you put it in a show.
>
> This codebase was created with AI assistance, directed and reviewed by a human author.

Installing

Every download has one effect in it, **SW Instant**. Drop it into Resolume's effects folder and restart Resolume:

```
macOS    ~/Documents/Resolume Arena/Extra Effects/
Windows  %USERPROFILE%\Documents\Resolume Arena\Extra Effects\
```

Avenue uses the same layout under its own folder name. The effect then turns up in the effects browser as **SW Instant**.

The macOS download is a universal build (Apple silicon and Intel), as a `.dmg` or a `.zip`. It's Developer ID-signed and notarised by the release pipeline after publication, so the bundle just loads. If macOS refuses a download, it predates the signing, so download it again. The Windows

download is an x64 installer or a `.zip`. It isn't code-signed, so the installer trips SmartScreen once: **More info** → **Run anyway**.

The process, not the look

An integral instant print, the kind an SX-70 or 600-type camera ejects, is exposed through its front. As the camera pushes it out, its rollers burst a pod of reagent in the print's thick bottom border and spread it up the frame. Dye developers leave the negative's three layers and migrate to the image layer, each at its own rate, held back wherever silver developed, so the print is a positive. A dark opacifier in the reagent shields the negative from light while this happens, and clears as a timing layer drops the pH, which also ends development.

Instant runs all of that, on the host's clock:

stage	what you see
a Take captures the frame, and the camera's meter sets the exposure	the print is of that moment, and keeps developing from it whatever the clip does next
a positive curve with instant film's short latitude	soft highlights, dense shadows, about four stops from black to white
the reagent front leaving the pod edge	the print develops bottom-first (by a second at most: see Speed)
each dye layer first-order, cyan fastest, yellow slowest	pale and blue-cyan first, warming as the magenta and yellow arrive
the opacifier clearing	the dark green-grey the picture comes up through
the timing layer ending development, with a lower activation energy than the dyes	cold film stops short and pale; hot film finishes, warm
too little paste, or paste dried with age	dark corners, where the reagent never reached
dirt on a roller	a mark repeating at the roller's circumference

None of that is painted on. The colour drift, for one, is three time constants and nothing else: four minutes in at 24 °C a neutral grey reads density R 0.68, G 0.61, B 0.52, and from then on it only moves towards neutral.

Start here

1. Put **SW Instant** on a layer with a clip. The defaults are Continuous mode, colour film at 24 °C, a new print every 16 seconds, at **64x**.

2. The first frame takes a print. It comes up out of a dark green-grey in a second or two, pale and blue-cyan, and warms; development ends **9.4 seconds after the take**. The finished print then holds for about six seconds, and the next take starts a new one.
3. Set **Mode** to **Take** and press **Take** when the clip shows something worth printing. Until the first press in Take mode, the plugin shows the clip untouched (a viewfinder).
4. Lower **Speed** to watch a print come up slowly. **1x is real time**: a real print takes about ten minutes to the stop, and is readable after two.
5. Try **Temperature** at its ends before a take: cold film comes out pale and green, hot film warm.

The print floats in its white frame, and outside it the output is transparent, so the layer below shows round it. Set **Border** to 0 to run the process full-frame.

Speed, and what "real time" means

A real integral print takes about ten minutes to the stop. **Speed** scales the film's clock: 1x is real time, and it runs geometrically to 256x (64x by default). At 24 °C:

Speed	picture readable	development stops
1x (real time)	about 2 minutes	10 minutes
8x	about 15 s	75 s
64x (default)	1 to 2 s	9.4 s
256x	about half a second	2.3 s

Cold film stops later, hot film sooner: see Temperature.

Speed acts on a print that's developing, so you can take at 1x and speed it up half way; it changes nothing once development has stopped. The film's clock is the host's, so pausing the composition pauses the print, which a real print wouldn't do.

You can't see the bottom-first development. The reagent front crosses the frame in one film-second, and the picture takes about a minute to come through the opacifier, so the bottom of a print leads the top by a level or two at most, less than the frame's own shine. The harness measures the front row by row (to 5e-6 s), but your eye can't. Where you *can* see the front is at the far end of a short spread (Spread, below).

The Film group

Film picks the stock:

- **Colour**: three dye layers, cyan 70 s, magenta 120 s, yellow 200 s at 24 °C; a short latitude (four stops) and a maximum density of 1.65.
- **Black & White**: one image, 90 s, a longer latitude and a deeper black. Its channels are one.
- **Vintage**: slower dyes (90, 170, 230 s), a shorter latitude, a warm base stain and weaker cyan: an older, warmer, paler print.

Temperature, 4 to 36 °C, default 24. Every rate follows the Arrhenius law, and each dye layer has its own activation energy: yellow 67.4 kJ/mol, fitted to a published development chart; cyan 103.6 and magenta 106.85 kJ/mol, fitted to the manufacturer's description of a cold print (see below); the timing layer half the chart's figure. So cold film slows the dyes more than it slows the stop, and magenta most of all: development ends short, and the print is pale, low in contrast and **green**. Hot film finishes: every layer reaches its asymptote, and the slow yellow a little past its balance, so the print is a little warm, yellow-red. Cold also takes longer to stop: at 64x, about 25 s at 4 °C, 9.4 s at 24 °C and 5.5 s at 36 °C.

Measured through the plugin, the centre of a flat mid-grey clip (sRGB 128) at the defaults, printed at 256x, after the stop, 8-bit:

	R	G	B	in v0.1.0
4 °C	151	176	146	124, 134, 146
6 °C	143	167	142	123, 131, 142
14 °C	124	135	129	121, 124, 129
24 °C	120	120	119	the same
34 °C	120	120	116	the same
36 °C	120	120	116	the same

The cold cast is strong; the hot cast is slight. This is what the manufacturer's support page on temperature describes: below 13 °C prints come out over-exposed, lacking colour contrast and "with a green tint", and above 28 °C colour prints take a yellow/red tint. v0.1.0 gave the cold print a blue-cyan cast instead, because all three dyes shared one activation energy and the slowest, yellow, was the one cut short. The page gives no numbers, and no published per-layer figure was found, so the cyan and magenta activation energies are **fitted to the page's words**: at 6 °C a mid grey comes out with red and blue equal (the hue green, neither cyan- nor yellow-green), and its cast is as strong as v0.1.0's cyan one was. The order the picture arrives in at 24 °C is unchanged: every factor is 1 there.

Temperature is live for a developing print (a real print cares about the temperature it develops at, not the one it was exposed at), and it changes nothing after the stop.

Expired (0 to 1): old film. The paste has dried, so it reaches less far up the frame (up to 30% less), the dyes lose density (cyan most, so an old print goes pink), and the base stains toward magenta and yellow.

The Exposure group

Take (a button). Exposes a print of the frame on screen now. In Continuous mode it also restarts the interval. The take is edge-triggered: one press, one print.

Mode: **Take** prints only when you press Take (and shows the clip untouched until the first press); **Continuous** takes a new print every Interval seconds, the first on the first frame. Switching modes keeps the print that exists.

Interval, 0.5 to 128 s, default 16: how often Continuous mode takes. At the default Speed a print is finished 9.4 s after its take, so 16 s leaves a finished print on screen for about six seconds. An interval shorter than the development time shows prints that never finish.

Exposure, ±2 stops, default 0. **The camera meters.** At every take an averaging meter reads the image window's mean brightness and sets the exposure to bring it to photographic mid grey, within a range of −2 to +3 stops (a camera can't lift a nearly black frame to grey). Exposure is the lighten/darken wheel on top of what the meter chose. So a dark clip and a bright one print at a similar brightness, as they would in a camera. The meter is an averaging one: a small bright subject on black is metered as a dark scene and prints light and washed out; turn Exposure down.

The meter wasn't in the plugin's first design. Resolume's demo clips are mostly CG on black, and at the clip's own levels every print came out nearly black. A camera would have metered, so now the plugin does too.

The Chemistry group

Spread: how the reagent spread.

- **Full**: it reaches the whole image, with room to spare.
- **Short**: too little paste. It falls short at the top, most at the top corners, which stay dark: there, the negative shows through, dark blue-black.
- **Uneven**: the paste ran in lanes, so the far edge is ragged.

Expired shortens any spread further.

Dirty Roller (0 to 1): dirt on one of the camera's rollers. Every time it comes round it takes up to 60% of the dye in a band across the print, so the mark repeats down the print at the roller's circumference (5/16 of the image height), and every repeat is the same mark, because it's the same dirt. It lightens.

Speed: see Speed, above.

The Print group

Border (0 to 1): at 1, the print in its frame, a square image window in a white plastic frame with the wide bottom border that held the pod, fitted to 92% of the raster. At 0, the image fills the frame and the process runs full-frame. In between, the frame grows in. Outside the print the output is transparent (colour and alpha both 0), so the print floats over the layer below.

Mix (0 to 1): fades back to the clip, and to the clip's own alpha.

A Border change moves the image window under a print that's already developing. It isn't a resize, and it restarts nothing.

Where the numbers come from

Most of these are choices rather than measurements, so here's where each one comes from.

number	value	status
yellow dye's activation energy (and the black-and-white image's)	67.41 kJ/mol	**fitted** to 40 cells of ILFORD's film development time/temperature compensation chart (2002), standard error 0.62 kJ/mol. That chart is for black-and-white silver development; using it for dye diffusion is an **assumption**.
cyan and magenta dyes' activation energies	103.6 and 106.85 kJ/mol	**fitted to a description**, not a measurement: the manufacturer's cold print is green, so at 6 °C a mid grey has red equal to blue and a cast as strong as v0.1.0's (`tools/cast_fit.py`). No published per-layer figure was found.
timing layer's activation energy	33.7 kJ/mol	**assumed**: half the chart's figure. No source.
dye time constants at 24 °C	70, 120, 200 s	**assumed**: in the order the process is known for (blue-cyan first, warming), sized so the print is done in about ten minutes.
black and white; vintage	90 s; 90, 170, 230 s	**assumed**
opacifier	45 s	**assumed**: unreadable for about a minute, readable by two
the stop	600 s	**assumed**: about ten minutes
reference temperature	24 °C	a choice inside the manufacturer's stated working range of 13 to 28 °C
front speed	one image height a second	**assumed**: a camera ejects a print in about a second
roller circumference	5/16 of the image height	**assumed**
the curve, densities, colours of the opacifier, white and frame		chosen by eye; not measured
meter	mid grey 0.18, −2 to +3 stops	the target is the photographic mid grey; the range is **assumed**

The 13 to 28 °C range and the casts are from the manufacturer's support page on temperature, read through the Internet Archive's copies of February 2023 and April 2026 (the live page won't talk to scripted readers). It gives no numbers; the cyan and magenta activation energies are fitted to its words (see Temperature). The development time of about ten to fifteen minutes is the manufacturer's figure as quoted by search results; it wasn't read at its source.

Nothing measures the casts that Temperature, Expired and Vintage produce against a real print. The harness measures the rates behind them, and checks the hue of Temperature's casts on a

neutral grey (green cold, neutral at 24 °C, warm hot); how strong they are, and the Expired and Vintage casts, were judged by eye on Resolume's demo clips.

How it works

1. **Capture** (at a take). The host's frame, sRGB-decoded and premultiplied by its alpha, into a half-float buffer.
2. **Meter** (at a take). The capture's luminance over the image window on a 64 × 64 grid, averaged to one value; the gain that brings it to mid grey, clamped, plus Exposure.
3. **Develop** (every frame, every texel). Two doses per texel: the dye dose and the stop dose, each the film-seconds since the reagent reached that point, weighted by its Arrhenius rate. The dye dose stops growing once the stop dose reaches the stop.
4. **Print** (to the host). Per layer, the density the exposure would reach, times (1 − e^(−dose/τ)); the opacifier, e^(−stop dose/τ); reflection off the reagent's white pigment through both, or the negative where the reagent never reached; the frame, a little texture and shine; sRGB; Mix.

Resolume's clock overflows a float, so all time is kept on the CPU in double, and the shaders see only the print's age at the frame's start and the frame's length. A frame longer than a quarter of a second is clamped, so a stalled host doesn't jump a print to the end. The print survives a change of resolution: its buffers are resampled, not cleared.

Performance

Measured by the offline harness on an M4 Max at the defaults, best of three, `glFinish` both sides, on a GPU shared with other work: 0.089 ms a frame at 1280 × 720, 0.164 at 1920 × 1080 and 0.635 at 3840 × 2160 (3.8% of a 60 fps frame), holding 35, 79 and 316 MB (the capture and two dose buffers, 40 bytes a pixel). Those are v0.1.1's figures. v0.1.0 measured 0.051, 0.071 and 0.37 ms, holding 21, 47 and 190 MB at 24 bytes a pixel, on a quieter GPU. A take adds one capture pass and the meter. I haven't timed anything inside Resolume, or on Windows.

If it looks wrong

The picture is a dark green-grey. The print is still under the opacifier. At 64x it clears in about a second; at 1x it takes a minute or two.

The print is black. The frame was black when the print was taken. Many clips open on black, and the meter can't lift black. In Continuous mode the next print comes an Interval later; in Take mode press Take again.

The print doesn't follow the clip. It isn't meant to: a print is of the moment it was taken. Use Continuous mode, or press Take.

The print never finishes. Interval is shorter than the development time at this Speed and Temperature. Raise Speed or Interval.

Everything outside the print is transparent. That's the frame floating over the layer below. Set Border to 0 for the process full-frame.

The top corners are dark. Spread is Short or Uneven, or Expired is up.

SW Instant isn't in the effects browser. Check the folder under Installing, and that Resolume was restarted.

The effect does nothing at all. A shader that won't compile looks just like that, and the actual error is in the log:

```
macOS    ~/Library/Logs/instant/instant.YYYY-MM-DD.log
Windows  %LOCALAPPDATA%\instant\logs\instant.YYYY-MM-DD.log
```

It records the GL vendor, renderer and version at load, which pass failed if one did, and the host's clock and the unit the plugin decided it's in.

Known limits

- **The chemistry's numbers are mostly assumptions** (see Where the numbers come from). One is fitted to a chart for a different process, two to a manufacturer's description in words.
- **Each dye absorbs only its own channel.** Real dyes have unwanted absorptions and spectral curves; interimage effects aren't modelled either.
- **The spread is a straight front** with a stated reach, not a fluid; the reagent trap at the top of the print, flash, double exposure and light fogging a print ejected into the sun aren't modelled.
- **Development ends sharply at the stop.** A real print goes on changing slightly for hours.
- **The controls stay live after a take.** Film, Exposure, Expired, Spread and Dirty Roller change the print that's developing, where physically only Temperature could. A VJ tool whose sliders did nothing after a take would look broken.
- **Pausing the host pauses the print.**
- **No check measures the stop time directly**, only what it causes.
- **Never loaded into Resolume on macOS.** Everything numeric was compiled, rendered and measured offline against the real plugin class in a headless CGL context, plus an `oxbow` load.
- **Never seen on camera footage**, only on Resolume's bundled CG loops.
- **Checked at 320 × 180 and 1280 × 720** in the harness, and only timed at 4K.

- **Only ever run on an Apple M4 Max**, although the macOS build contains an Intel slice. On Windows, see the note at the top of this guide.
- **No presets and no OpenFX version.**
- **There's a browser demo** at instant-demo.stoatworks-labs.com. It's a port to a web page rather than the plugin: the shaders run in WebGL2, and the clock, the take and the meter are rewritten in JavaScript. The page lists what it doesn't reproduce.

About

The last group, **About**, has the plugin's name, version, licence and maker, and buttons that open this user guide (stoatworks-labs.com/software/instant/guide/), the project page, the source on GitHub and the support page in your browser.

"Instant" describes the process. The plugin is not affiliated with, or endorsed by, any maker of instant film; product names above are used only to describe the kind of print it models.

Reporting something

github.com/stoatworks-labs/instant/issues. Shout there if something's wrong. A screenshot, the Film, Exposure and Chemistry settings, and the composition's resolution and frame rate are usually enough for me to go on. If the effect did nothing, attach the log.
