Credentials Troubleshooting

Tags	Credentials, cyberark credential gateway, credential_test.py, python3, lookup error, UnicodeDecodeError 'ascii' codec can't decode byte , autocomplete, load_cred_ssh
Team Owner	Bizards (UI & GQL) and Proc n Roll (Python & REST API)
Status	ACTIVE
Last Audited	Mar 4, 2024

- Access Hooks
  - CRED_VIEW_PASSWORDS
- AP2
  - Cannot create SSH Key.
    - Versions Prior to 11.1.0
    - Versions Post 11.1.0
  - AP2 Credential Inventory is displaying no results on load, but populates when a search or filter is applied
  - A credential is not showing up on a Distributed Stack
  - A specific Credential SubType is not showing up in the Create Dropdown (especially Firefox)
  - IN DEV: SNMP RO/RW strings are not decrypting properly
  - Encrypted fields are not in EKMS format despite the database setting indicating they should be
  - EKMS: slsctl credentials initialize fails due to a universal credential
  - The AWS Credentials Stopped Working (missing credential fields error message) (in Versions >=11.2)
- PowerPack Engine
  - Error importing SOAP Credential in Versions >=11.2
  - Cannot delete powerpack with credentials in it (Versions >=11.3)
- Still Not working?
- 📎 Related articles
- Theory
  - repo:sl_credential_gateway
  - command:clipasswordsdk
- Post Mortem Articles
  - 2024-11-25 EM-71318: Cyberark integration issues
  - 2024-11-05 EM-71020: Retriving SSH key from CyberArk vault
  - 2024-08-26 EM-66541:[Unilever]Collections not working for all devices after 12.1.1 upgrade
  - 2024-07-30 EM-66203: Multiple System events in Science Logic Console
  - 2024-07-02 EM-65658: Error with Credentials
  - 2024-06-28 EM-65624: Linux Base Pack v111 - DA objects collection not re-enabled
  - 2024-06-14 EM-65445: SL1 UI - Autocomplete HTML Attribute not explicitly set to 'off'
  - 2024-05-21 EM-65090: CyberArk - SL1 integration is not working for Linux, Aix servers

- 2024-05-15 EM-64990: Pull and Process Credentials from SL1 step gql query is failing with this The loader.load() function must be called with a value, but got: null. TypeError:
- 2024-05-07 EM-64860: Critical Ping failure after SL1 upgrade - Drop File requested.
- 2024-04-22 EM-64548 Credential errors on Python 3 apps
- 2024-04-09 EM-64236: UnicodeDecodeError: 'ascii' codec can't decode byte 0xf1 in position 1: ordinal not in range(128)
- 2024-02-05 EM-63205: Powershell error updating credential cache
- 2024-01-30 EM-63125 Credential Tests Periodically hang and would not complete
- 2024-01-19 EM-62595: Unable to install Cyberark credential gateway

Access Hooks

CRED_VIEW_PASSWORDS

Versions Post 12.2.1

CRED_VIEW_PASSWORDS hook is disabled by default in versions 12.2.1 and higher. See the following for more information

SysEng: Moving MUD/STIG specific setting to Defaults

How-To: Disable password viewing with browser inspect / Disable DB-Tool access globally

AP2

Cannot create SSH Key.

Stricter validation on the PEM Key was enforced in 11.1.0 in both EM7 & AP2, behavior is split up below:

Versions Prior to 11.1.0

- AP2 does not allow Empty Key
- GQL Fails both PEM type and Non PEM Private Keys
- Work-around is to use the iFrame

Versions Post 11.1.0

- PEM Validation was introduced in both EM7 & AP2
  - Use 64 character-lined PEM Keys
  - Neither PHP/classic UI or AP2 accepts openSSH-formatted key (70 chars / line)
    - There is no work-around to this
- Key is not required in both EM7 & AP2

> AWS keys default to 70 characters a line. Select .ppk format from AWS to get the 64 character lined Key

[Relevant Comment on Pull Request]

[Slack Conversation]

AP2 Credential Inventory is displaying no results on load, but populates when a search or filter is applied

Are you on a system running on Aurora? Such as an AWS/SAAS deployment?

1. Check your deployment's `GROUP_CONCAT_MAX_LEN` setting. You can do this by running `select * from information_schema.global_variables where VARIABLE_NAME='GROUP_CONCAT_MAX_LEN'`. If it's `1024`, which is the default for Aurora, a credential can only be aligned to 44 organizations before it breaks the entire Credential Inventory Table.
2. Try upping the `GROUP_CONCAT_MAX_LEN` setting to `10000` (which is the number we have used in previous fixes) or `1048576` (which is the default number MariaDB uses).
   a. This should allow a credential to be aligned to over 400 organizations, and fix the credential table.

> If you have applied this fix on a deployment, and then patch it, you will most likely have to reapply this fix.

> Making changes to the `GROUP_CONCAT_MAX_LEN` in AWS is restricted to SRE through CMS request, or by someone with admin access to make changes to the dev/qa stack's RDS group parameters in dev/qa (post in #workgroup-tooling for help if you do not have this).

To apply the change in dev/QA environment:

1. find the name of the affected stack (assuming deployed by DoIT): `doit env create <name>`
2. go to the RDS section and click on Parameter groups on the left menu
3. narrow your search to stack name

a. assuming a stack name of `pilotone` it should look something like this

4. update the `GROUP_CONCAT_MAX_LEN` parameter to `10000` in both cluster & db parameter group

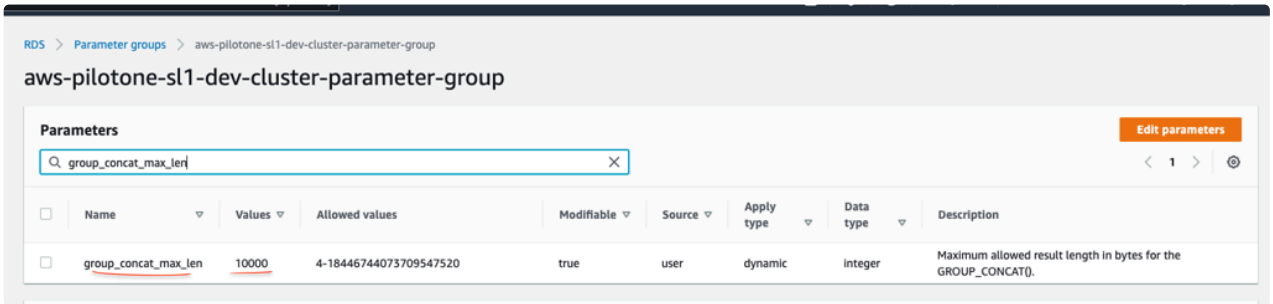

a. What it looks like when changing the param in dev/QA deployment

If you cannot change the `GROUP_CONCAT_MAX_LEN`, you should be able to use a less ideal workaround in the form of inputting a search string in any of the columns in the cred table.

[Escalation]

[CMS]

A credential is not showing up on a Distributed Stack

Make sure there is at least 1 CUG on the stack

[Slack Conversation]

A specific Credential SubType is not showing up in the Create Dropdown (especially Firefox)

1. Log out & Log Back In
2. If it still doesn't show, verify the `credentialField` associated with the desired SubType is included in the following GQL Query (you can modify the search value to be `search: {subType: {eq: "VALUE"}}` where `VALUE` is the SubType you desire):

a.
```
query getCredentialFields {
  credentialFields(
    order: [{field: "type", direction: asc}, {field: "subType", direction: asc}]
    search: {subType: {neq: ""}}
  ) {
    pageInfo {
```

```
      hasNextPage
      __typename
    }
    __typename
    edges {
      __typename
      node {
        __typename
        type
        typeDescription
        subType
      }
      cursor
    }  }
    }
```

3. If it is not in the set returned by the above, check the `master.credential_fields` table & if it does not exist, insert it.

IN DEV: SNMP RO/RW strings are not decrypting properly

Believe it or not this is to be expected. This is because the encryption you are running locally is different from the encryption on your VM. Carry on.

Encrypted fields are not in EKMS format despite the database setting indicating they should be

Configuring and starting EKMS takes more than toggling the database setting, and is not enabled by default. In order for EKMS to function, the following are the steps to get EKMS up and running:

1. Check `sl_Vault_service` with `select * from master.system_settings_general`
   a. 0 means EKMS disabled
   b. 1 means EKMS enabled
2. Enable manually from CDB only, `update master.system_settings_general set value =1 where param ='sl_vault_service'`
3. Start EKMS service but this only enable the feature as stand by `sudo systemctl start sl_vault`
4. And finally to take effect over credentials run `sudo slsctl credentials initialize`
5. If you want a new version of encryption of credentials run `sudo slsctl credentials rotate`

6. To disabled new encryption `sudo slsctl credentials rollback`

https://sciencelogic.atlassian.net/wiki/spaces/ENG/pages/27809415252 Request access

EKMS: slsctl credentials initialize fails due to a universal credential

Affected Versions including but not limited to: 11.3.1

If you are getting an error like the following when trying to run `slsctl credentials initialize` while enabling EKMS, you may have an invalid universal credential on your system.

error stack trace

```
$ sudo slsctl credentials initialize
[sudo] password for em7admin:
Logging to stdout and syslog ...
Setting Log level to INFO ...
Use of Encryption Key Service for SL1 Credentials is already enabled.
Current credentials key version: 1
Ensuring all credential secrets are migrated to using new key...
Traceback (most recent call last):
  File "/opt/em7/bin/slsctl", line 8, in <module>
    sys.exit(main())
  File "/opt/em7/lib/python3/slsctl/cli.py", line 277, in main
    cli()
  File "/opt/em7/lib/python3/click/core.py", line 722, in __call__
    return self.main(*args, **kwargs)
  File "/opt/em7/lib/python3/click/core.py", line 697, in main
    rv = self.invoke(ctx)
  File "/opt/em7/lib/python3/click/core.py", line 1066, in invoke
    return _process_result(sub_ctx.command.invoke(sub_ctx))
  File "/opt/em7/lib/python3/click/core.py", line 1066, in invoke
    return _process_result(sub_ctx.command.invoke(sub_ctx))
  File "/opt/em7/lib/python3/click/core.py", line 895, in invoke
    return ctx.invoke(self.callback, **ctx.params)
  File "/opt/em7/lib/python3/click/core.py", line 535, in invoke
    return callback(*args, **kwargs)
  File "/opt/em7/lib/python3/slsctl/cli.py", line 203, in credentials_initialize
    credentials_cmd.initialize_cmd(vault_host, verbose)
  File "/opt/em7/lib/python3/slsctl/credentials_cmd.py", line 62, in initialize_cmd
    initialize(mdb_conn.cursor(), vault_client)
  File "/opt/em7/lib/python3/slsctl/credentials/cmd_initialize.py", line 70, in initialize
    result = cmd_common.migrate_credential(dbc, vault_client, cred, convert_to_vault)
  File "/opt/em7/lib/python3/slsctl/credentials/cmd_common.py", line 48, in migrate_credential
    extended_secrets, universal_cred = mdb.get_extended_secrets(dbc, cred_id, cred_type)
  File "/opt/em7/lib/python3/slsctl/credentials/mdb.py", line 268, in get_extended_secrets
    universal_cred = universal_cred_model.decode_cred(encoded_cred)
  File "/opt/em7/lib/python3/slsctl/credentials/universal_cred_model.py", line 92, in decode_cred
    return json.loads(encoded)
  File "/usr/lib64/python3.6/json/__init__.py", line 348, in loads
    'not {!r}'.format(s.__class__.__name__))
```

```
TypeError: the JSON object must be str, bytes or bytearray, not 'NoneType'
```

What constitutes an “invalid universal credential” in this case? A credential with a record in `master.system_credentials` of type `8`, but no corresponding entry in the `master.universal_credentials` table.

The resolution is to remove any credential of type 8 in `master.system_credentials` that does not have a corresponding entry in the `master.universal_credentials` table.

Related Issues: SLS-837: universal_cred_model.py is throwing an error when slsctl credentials initialize is executed CLOSED A known instance of this is with the `Rest ToolKit PowerPack rev1352` and a credential named `API-Invalid-Test` GUID `CLB49W5LXGKTMFIOY4WJR1GBI`.

The AWS Credentials Stopped Working (missing credential fields error message) (in Versions >=11.2)

Did the Amazon Web Services PowerPack get uninstalled? As of 11.2.0, the AWS credential subTypes are aligned to the Amazon Web Services PowerPack, however, since the PowerPack has yet to bump its minimum version, it does not include these credential subTypes. They only exist in the EM7 init data script.

Therefore, it is possible to wipe out the credential subTypes via PowerPack uninstall, without the ability to recreate them via PowerPack.

The fix: reinsert the credential subTypes via the following SQL:

11.2.0 AWS Credential Fields SQL Insert Statements

```
INSERT INTO `credential_fields` (`guid`, `ppguid`, `cred_field_name`, `type`, `sub_type`, `definition`) VALUES (
    '43A70160D1D0E2CA3DEB2735A7CE7196',
    '3CD53F11C68808FAB0A59D2E44440F46',
    'AWS IAM',
    8,
    'aws iam',
    '{
        "fields": [
            {
                "propName": "AwsAccessKeyId",
                "displayName": "AWS Access Key ID",
                "helperText": "20 characters, upper case only.",
                "description": "Your AWS access key.",
                "type": "string",
                "defaultValue": "",
                "validationExpression": "(?<![A-Z0-9])[A-Z0-9]{20}(?![A-Z0-9])",
                "required": true
```

```
            },
            {
                "propName": "AwsSecretAccessKey",
                "displayName": "AWS Secret Access Key",
                "helperText": "40 characters",
                "description": "Your AWS secret access key.",
                "type": "string",
                "defaultValue": "",
                "encryption": true,
                "validationExpression": "(?<![A-Za-z0-9/+=])[A-Za-z0-9/+=]{40}(?![A-Za-z0-9/+=])",
                "required": true
            },
            {
                "propName": "AwsEndpoint",
                "displayName": "Cloud Type",
                "description": "The type of AWS cloud you are utilizing.",
                "type": "enum",
                "defaultValue": "https://organizations.us-east-1.amazonaws.com",
                "values": {
                    "Standard": "https://organizations.us-east-1.amazonaws.com",
                    "GovCloud": "https://organizations.us-gov-west-1.amazonaws.com",
                    "Beijing": "https://organizations.cn-northwest-1.amazonaws.com.cn"
                },
                "selectionLimit": "1"
            },
            {
                "propName": "Config",
                "displayName": "Configuration",
                "description": "The configuration used to discover regions and services.",
                "type": "enum",
                "defaultValue": "",
                "values": {
                    "Default": "",
                    "AwsConfig": "AUTO",
                    "AwsCloudwatch": "FILTER"
                },
                "selectionLimit": "1"
            },
            {
                "propName": "ProxyHost",
                "displayName": "Proxy Hostname/IP (optional)",
                "description": "The hostname/IP of your proxy server (optional).",
                "type": "string",
                "validationExpression": "[a-zA-Z0-9.-]{0,}"
            },
            {
                "propName": "ProxyPort",
                "displayName": "Proxy Port (number optional)",
                "description": "The port used by your proxy server (optional).",
                "type": "string",
                "defaultValue": "",
                "validationExpression": "[0-9]{0,}"
            },
            {
                "propName": "ProxyUser",
                "displayName": "Proxy User (optional)",
```

```
                "description": "The username for your proxy user (optional).",
                "type": "string"
            },
            {
                "propName": "ProxyPasswd",
                "displayName": "Proxy Password (optional)",
                "description": "The password for your proxy user (optional).",
                "type": "string",
                "encryption": true
            },
            {
                "propName": "Regions",
                "displayName": "Regions (optional)",
                "helperText": "e.g.: us-east-1,us-east-2,...",
                "description": "The regions where devices will be discovered (optional).",
                "type": "string",
                "defaultValue": "ALL",
                "validationExpression": "(ALL)|(us(-gov)?|ap|ca|cn|eu|sa)-(central|(north|south)?(east|west)?)-[0-9](?:,|$)"
            },
            {
                "propName": "Tags",
                "displayName": "Filter by Tags (optional)",
                "helperText": "Options: equals, notEquals, contains and notContains, e.g.: equals#<Tag name>#<Tag Value>",
                "description": "The tags that should match/contain devices to be discovered (optional).",
                "type": "string",
                "defaultValue": "",
                "validationExpression": "[a-zA-Z0-9#,-]{0,}"
            }
        ],
        "layout": {
            "sections": [
                {
                    "border": true,
                    "lines": [
                        {
                            "fields": [
                                "AwsAccessKeyId",
                                "AwsSecretAccessKey"
                            ]
                        },
                        {
                            "fields": [
                                "AwsEndpoint"
                            ]
                        }
                    ]
                },
                {
                    "border": true,
                    "lines": [
                        {
                            "fields": [
                                "Config"
                            ]
```

```
                        },
                        {
                            "fields": [
                                "Regions"
                            ]
                        },
                        {
                            "fields": [
                                "Tags"
                            ]
                        }
                    ]
                },
                {
                    "border": true,
                    "lines": [
                        {
                            "fields": [
                                "ProxyHost",
                                "ProxyPort"
                            ]
                        },
                        {
                            "fields": [
                                "ProxyUser",
                                "ProxyPasswd"
                            ]
                        }
                    ]
                }
            ]
        }
    }'
);

INSERT INTO `credential_fields` (`guid`, `ppguid`, `cred_field_name`, `type`, `sub_type`, `definition`) VALUES (
    '803531c3406a4097912e591d5add14ar',
    '3CD53F11C68808FAB0A59D2E44440F46',
    'AWS ASSUME ROLE',
    8,
    'aws assume role',
    '{
        "fields": [
            {
                "propName": "AwsAccessKeyId",
                "displayName": "AWS Access Key ID",
                "helperText": "20 characters, upper case only.",
                "description": "Your AWS access key.",
                "type": "string",
                "defaultValue": "",
                "validationExpression": "(?<![A-Z0-9])[A-Z0-9]{20}(?![A-Z0-9])",
                "required": true
            },
            {
                "propName": "AwsSecretAccessKey",
                "displayName": "AWS Secret Access Key",
                "helperText": "40 characters",
```

```
                "description": "Your AWS secret access key.",
                "type": "string",
                "defaultValue": "",
                "encryption": true,
                "validationExpression": "(?<![A-Za-z0-9/+=])[A-Za-z0-9/+=]{40}(?![A-Za-z0-9/+=])",
                "required": true
            },
            {
                "propName": "AwsEndpoint",
                "displayName": "Cloud Type",
                "description": "The type of AWS cloud you are utilizing.",
                "type": "enum",
                "defaultValue": "https://organizations.us-east-1.amazonaws.com",
                "values": {
                    "Standard": "https://organizations.us-east-1.amazonaws.com",
                    "GovCloud": "https://organizations.us-gov-west-1.amazonaws.com",
                    "Beijing": "https://organizations.cn-northwest-1.amazonaws.com.cn"
                },
                "selectionLimit": "1"
            },
            {
                "propName": "Config",
                "displayName": "Configuration",
                "description": "The configuration used to discover regions and services.",
                "type": "enum",
                "defaultValue": "",
                "values": {
                    "Default": "",
                    "AwsConfig": "AUTO",
                    "AwsCloudwatch": "FILTER"
                },
                "selectionLimit": "1"
            },
            {
                "propName": "ProxyHost",
                "displayName": "Proxy Hostname/IP (optional)",
                "description": "The hostname/IP of your proxy server (optional).",
                "type": "string",
                "validationExpression": "[a-zA-Z0-9.-]{0,}"
            },
            {
                "propName": "ProxyPort",
                "displayName": "Proxy Port (number optional)",
                "description": "The port used by your proxy server (optional).",
                "type": "string",
                "defaultValue": "",
                "validationExpression": "[0-9]{0,}"
            },
            {
                "propName": "ProxyUser",
                "displayName": "Proxy User (optional)",
                "description": "The username for your proxy user (optional).",
                "type": "string"
            },
            {
                "propName": "ProxyPasswd",
```

```
                "displayName": "Proxy Password (optional)",
                "description": "The password for your proxy user (optional).",
                "type": "string",
                "encryption": true
            },
            {
                "propName": "Regions",
                "displayName": "Regions (optional)",
                "helperText": "e.g.: us-east-1,us-east-2,...",
                "description": "The regions where devices will be discovered (optional).",
                "type": "string",
                "defaultValue": "ALL",
                "validationExpression": "(ALL)|(us(-gov)?|ap|ca|cn|eu|sa)-(central|(north|south)?(east|west)?)-[0-9](?:,|$)"
            },
            {
                "propName": "AssumeRole",
                "displayName": "Assume Role",
                "description": "The role name that will be used to discover devices.",
                "type": "string",
                "defaultValue": "Sciencelogic-Monitor",
                "required": true,
                "validationExpression": "[a-zA-Z0-9,-]{0,}"
            },
            {
                "propName": "AssumeRoleSession",
                "displayName": "Assume Role Session",
                "description": "The role session name that will be used to discover devices.",
                "type": "string",
                "defaultValue": "SL1",
                "required": true,
                "validationExpression": "[a-zA-Z0-9,-]{0,}"
            },
            {
                "propName": "OrganizationCreation",
                "displayName": "Organization Creation (optional)",
                "description": "Autocreates an SL1 organization for accounts using AssumeRole.",
                "type": "string",
                "defaultValue": "NAME:ID",
                "validationExpression": "[a-zA-Z0-9.,:-]{0,}"
            },
            {
                "propName": "Tags",
                "displayName": "Filter by Tags (optional)",
                "helperText": "Options: equals, notEquals, contains and notContains, e.g.: equals#<Tag name>#<Tag Value>",
                "description": "The tags that should match/contain devices to be discovered (optional).",
                "type": "string",
                "defaultValue": "",
                "validationExpression": "[a-zA-Z0-9#,-]{0,}"
            }
        ],
        "layout": {
            "sections": [
```

```
                {
                    "border": true,
                    "lines": [
                        {
                            "fields": [
                                "AwsAccessKeyId",
                                "AwsSecretAccessKey"
                            ]
                        },
                        {
                            "fields": [
                                "AwsEndpoint"
                            ]
                        }
                    ]
                },
                {
                    "border": true,
                    "lines": [
                        {
                            "fields": [
                                "AssumeRole"
                            ]
                        },
                        {
                            "fields": [
                                "AssumeRoleSession"
                            ]
                        },
                        {
                            "fields": [
                                "OrganizationCreation"
                            ]
                        }
                    ]
                },
                {
                    "border": true,
                    "lines": [
                        {
                            "fields": [
                                "Config"
                            ]
                        },
                        {
                            "fields": [
                                "Regions"
                            ]
                        },
                        {
                            "fields": [
                                "Tags"
                            ]
                        }
                    ]
                },
                {
                    "border": true,
```

```
                    "lines": [
                        {
                            "fields": [
                                "ProxyHost",
                                "ProxyPort"
                            ]
                        },
                        {
                            "fields": [
                                "ProxyUser",
                                "ProxyPasswd"
                            ]
                        }
                    ]
                }
            ]
        }
    }'
);

INSERT INTO `credential_fields` (`guid`, `ppguid`, `cred_field_name`, `type`, `sub_type`, `definition`) VALUES (
    '1FA61A25F9ABD4A3D40D29285873D021',
    '3CD53F11C68808FAB0A59D2E44440F46',
    'AWS EC2',
    8,
    'aws ec2',
    '{
        "fields": [
            {
                "propName": "AwsEndpoint",
                "displayName": "Cloud Type",
                "description": "The type of AWS cloud you are utilizing",
                "type": "enum",
                "defaultValue": "https://organizations.us-east-1.amazonaws.com",
                "values": {
                    "Standard": "https://organizations.us-east-1.amazonaws.com",
                    "GovCloud": "https://organizations.us-gov-west-1.amazonaws.com",
                    "Beijing": "https://organizations.cn-northwest-1.amazonaws.com.cn"
                },
                "selectionLimit": "1"
            },
            {
                "propName": "OrganizationArn",
                "displayName": "Organization Arn",
                "description": "Defines the ARN for the AssumeRole. This is the ARN of the role created in the master billing account.",
                "type": "string",
                "defaultValue": "arn:aws:iam::987654321",
                "validationExpression": "^arn:(?<Partition>[^:n]*):iam:(?<Region>[^:n]*):(?<AccountID>[^:n]*)",
                "required": true
            },
            {
                "propName": "Config",
                "displayName": "Configuration",
                "description": "The configuration used to discover regions and services.",
```

```
                "type": "enum",
                "defaultValue": "",
                "values": {
                    "Default": "",
                    "AwsConfig": "AUTO",
                    "AwsCloudwatch": "FILTER"
                },
                "selectionLimit": "1"
            },
            {
                "propName": "ProxyHost",
                "displayName": "Proxy Hostname/IP (optional)",
                "description": "The hostname/IP of your proxy server (optional).",
                "type": "string",
                "validationExpression": "[a-zA-Z0-9.-]{0,}"
            },
            {
                "propName": "ProxyPort",
                "displayName": "Proxy Port (number optional)",
                "description": "The port used by your proxy server (optional).",
                "type": "string",
                "validationExpression": "[0-9]{0,}"
            },
            {
                "propName": "ProxyUser",
                "displayName": "Proxy User (optional)",
                "description": "The username for your proxy user (optional).",
                "type": "string"
            },
            {
                "propName": "ProxyPasswd",
                "displayName": "Proxy Password (optional)",
                "description": "The password for your proxy user (optional).",
                "type": "string",
                "encryption": true
            },
            {
                "propName": "Regions",
                "displayName": "Regions (optional)",
                "helperText": "e.g.: us-east-1,us-east-2,...",
                "description": "The regions where devices will be discovered (optional).",
                "type": "string",
                "defaultValue": "ALL",
                "validationExpression": "(ALL)|(us(-gov)?|ap|ca|cn|eu|sa)-(central|(north|south)?(east|west)?)-[0-9](?:,|$)"
            },
            {
                "propName": "AssumeRole",
                "displayName": "Assume Role",
                "description": "The role name that will be used to discover devices.",
                "type": "string",
                "defaultValue": "Sciencelogic-Monitor",
                "validationExpression": "[a-zA-Z0-9,-]{0,}",
                "required": true
            },
            {
                "propName": "AssumeRoleSession",
```

```
                "displayName": "Assume Role Session",
                "description": "The role session name that will be used to discover devices (optional).",
                "type": "string",
                "defaultValue": "SL1",
                "validationExpression": "[a-zA-Z0-9,-]{0,}",
                "required": true
            },
            {
                "propName": "OrganizationCreation",
                "displayName": "Organization Creation (optional)",
                "description": "Creates an SL1 organization for accounts using AssumeRole.",
                "type": "string",
                "defaultValue": "NAME:ID",
                "validationExpression": "[a-zA-Z0-9.,:-]{0,}"
            },
            {
                "propName": "Tags",
                "displayName": "Filter by Tags (optional)",
                "helperText": "Options: equals, notEquals, contains and notContains, e.g.: equals#<Tag name>#<Tag Value>",
                "description": "The tags that should match/contain devices to be discovered (optional).",
                "type": "string",
                "defaultValue": "",
                "validationExpression": "[a-zA-Z0-9#,-]{0,}"
            },
            {
                "propName": "IAM",
                "displayName": "IAM user",
                "description": "Default user used in EC2 Credential.",
                "type": "string",
                "defaultValue": "IAM"
            }
        ],
        "layout": {
            "sections": [
                {
                    "border": true,
                    "lines": [
                        {
                            "fields": [
                                "AwsEndpoint"
                            ]
                        }
                    ]
                },
                {
                    "border": true,
                    "lines": [
                        {
                            "fields": [
                                "OrganizationArn"
                            ]
                        },
                        {
                            "fields": [
```

```
                                "AssumeRole"
                            ]
                        },
                        {
                            "fields": [
                                "AssumeRoleSession"
                            ]
                        },
                        {
                            "fields": [
                                "OrganizationCreation"
                            ]
                        }
                    ]
                },
                {
                    "border": true,
                        "lines": [
                        {
                            "fields": [
                                "Config"
                            ]
                        },
                        {
                            "fields": [
                                "Regions"
                            ]
                        },
                        {
                            "fields": [
                                "Tags"
                            ]
                        }
                    ]
                },
                {
                    "border": true,
                    "lines": [
                        {
                            "fields": [
                                "ProxyHost",
                                "ProxyPort"
                            ]
                        },
                        {
                            "fields": [
                                "ProxyUser",
                                "ProxyPasswd"
                            ]
                        }
                    ]
                }
            ]
        }
    }'
);
```

Related Escalation EM-54573: 11.3 CA: AWS Discovery (Guided) icon is missing CLOSED

PowerPack Engine

Error importing SOAP Credential in Versions >=11.2

1. Clear out the `curl_request_pwd` and the `curl_proxy_pwd` fields from the credential before exporting the PP
2. If that doesn't work, remove the credentials from the PowerPack before exporting

Slack Conversation

SOL-19906: SLAP SOAP/XML Credential - 11.2 bug workaround CLOSED

The Fix: SOL-24537: Error with SOAP credential importing from 11.1 → 11.2 CLOSED

Cannot delete powerpack with credentials in it (Versions >=11.3)

Remove any credentials of the PowerShell type.

EM-55088: cannot delete a powerpack from the powerpack manager screen (iframe or em7) CLOSED

Still Not working?

If the problem is with EM7 or the REST API, contact Scrum & Coke

If the problem is with AP2 or GQL, contact ScrumbleBees

Related articles

- Credentials Troubleshooting
- [WIP] Universal Credential Type Manager High Level Design Document
- [WIP] Universal Credential Type Manager Product Requirements Document
- Developing a new Universal Credential
- Universal Credential Framework (UCF) as of 12.1

Theory

repo:sl_credential_gateway

Github:https://github.sciencelogic.com/SL1/sl_credential_gateway/commits/main

TBD

command:clipasswordsdk

TBD

Post Mortem Articles

2024-11-25 EM-71318: Cyberark integration issues

ts_guide_to_jira_link

Link: EM-71318: Cyberark integration issues using a specific delimiter CLOSED

From the description:

```
Observed Behavior: Customer wants to Define a Custom CyberArk Delimiter in
sl_credential_gateway.sh. However, #export CYBERARK_DELIMITER='!' doesn’t exists in
sl_credential_gateway.sh

Expected Behavior: Should be able to define CyberArk Delimiter

Summary of troubleshooting steps taken so far and the current status:
Customer earlier had issue while executing sl_credential_gateway.sh and they got below
error:
I found this similar escalation:
https://sciencelogic.atlassian.net/browse/EM-62959

and provided customer with the sl_credential_gateway.sh mentioned in the escalation. After
running the script the service started properly:
However, customer had question regarding Defining a Custom CyberArk Delimiter:
https://docs.sciencelogic.com/latest/Content/Web_Monitoring_Tools/Discovery_and_Credentials/
discovery_using_external_credentials.htm#defini[…]imiter

It says we need to edit sl_credential_gateway.sh and Uncomment the line #export
CYBERARK_DELIMITER='!' and change the ""!"" character to a different delimiter
character.However, checking the sl_credential_gateway.sh it
doesn't have any such line attached for reference.


Need assistance regarding this

Reason for escalation:
Suggested by team-proc and roll:
https://sciencelogic.slack.com/archives/C04L3KNQLGJ/p1731479889503079
```

2024-11-05 EM-71020: Retriving SSH key from CyberArk vault

ts_guide_to_jira_link

Link: EM-71020: SL1 not retrieving SSH key for SSH credential from CyberArk, when necessary TO DO

From the description:

```
Observed Behavior:  Customer cannot retrieve key

```

```
Expected Behavior:  key is retrieved

Summary of troubleshooting steps taken so far and the current status:
Provided documentation on CyberArk
Worked with  Randy Murdock  from Proc And Roll   he requested escalation
```

2024-08-26 EM-66541:[Unilever]Collections not working for all devices after 12.1.1 upgrade

ts_guide_to_jira_link

Link: EM-66541: [Unilever]Collections not working for all devices after 12.1.1 upgrade CLOSED

From the description:

```
Observed Behavior: After upgrade from 11.2.2 to 12.1.1, there are multiple UHE errors and most of the servers internal collection(vitals,availability) and interface data is not collecting.

Expected Behavior: Upgrade should not impact the monitoring.

Summary of troubleshooting steps taken so far and the current status:

After upgrade from 11.2.2 to 12.1.1, there are multiple UHE errors and most of the servers internal collection(vitals,availability) and interface data is not collecting.

Some collection stopped working from 20th-08-2024 right after the upgrade, all f the collectors are facing the issue and not sure how many servers are impacted.

Unhandled exception: UHE errors:

EM7 critical event: Unhandled exception during collection, process Data Collection: Interface Bandwidth: Traceback (most recent call last): File "/tmp/pip-install-PbZ5ZM/sl-collect/sl_collect/shared.py", line 199, in _run_collect_async File "/usr/lib64/python2.7/multiprocessing/pool.py", line 554, in get raise self._value ChildProcessException: Traceback (most recent call last): File "/tmp/pip-install-PbZ5ZM/sl-process/sl_process/exceptions.py", line 43, in new_f File "/tmp/pip-install-PbZ5ZM/sl-interface/sl_interface/collect_if.py", line 732, in collect File "/tmp/pip-install-PbZ5ZM/sl-interface/sl_interface/collect_if.py", line 708, in collect_interfaces File "/tmp/pip-install-PbZ5ZM/sl-interface/sl_interface/collect_if.py", line 645, in collect_interfaces_legacy File "/tmp/pip-install-PbZ5ZM/sl-credentials/sl_credentials/snmp.py", line 79, in snmph_from_cred_array File "/opt/em7/lib/python/future/types/newstr.py", line 102, in new return super(newstr, cls).new(cls, value) Un
EM7 critical event: Unhandled exception on appliance: 129, process Data Collection: SNMP Detail: Traceback (most recent call last): File "/tmp/pip-install-PbZ5ZM/sl-process/sl_process/proc_pda.py", line 214, in init File "/tmp/pip-install-PbZ5ZM/sl-sysuptime/sl_sysuptime/collect_snmp_detail.py", line 155, in main File "/tmp/pip-install-PbZ5ZM/sl-collect/sl_collect/shared.py", line 134, in run_collection File "/tmp/pip-install-PbZ5ZM/sl-collect/sl_collect/shared.py", line 146, in _run_collect_sync File "/tmp/pip-install-PbZ5ZM/sl-process/sl_process/exceptions.py", line 47, in new_f ChildProcessException: Traceback (most recent call last): File "/tmp/pip-install-PbZ5ZM/sl-process/sl_process/exceptions.py", line 43, in new_f File "/tmp/pip-install-PbZ5ZM/sl-sysuptime/sl_sysuptime/collect_snmp_detail.py", line 86, in collect File "/tmp/pip-install-PbZ5ZM/sl-credentials/sl_credentials/snmp.py", line 79, in snmph_from_cred_array File "/opt/em7/lib/python/future/types/newstr.py", line 102, in _
EM7 critical event: Unhandled exception during collection on appliance: 129, process Data Collection: Availability: Traceback (most recent call last): File "collect_avail.py", line
```

```
646, in _run_collect_async File "/usr/lib64/python2.7/multiprocessing/pool.py", line 554, in get raise self._value ChildProcessException: Traceback (most recent call last): File "/tmp/pip-install-PbZ5ZM/sl-process/sl_process/exceptions.py", line 43, in new_f File "collect_avail.py", line 331, in collect File "/tmp/pip-install-PbZ5ZM/sl-credentials/sl_credentials/snmp.py", line 79, in snmph_from_cred_array File "/opt/em7/lib/python/future/types/newstr.py", line 102, in new return super(newstr, cls).new(cls, value) UnicodeDecodeError: 'ascii' codec can't decode byte 0xc0 in position 0: ordinal not in range(128)
EM7 critical event: Unhandled exception on appliance: 129, process Data Collection: Availability: Traceback (most recent call last): File "/tmp/pip-install-PbZ5ZM/sl-process/sl_process/proc_pda.py", line 214, in init File "collect_avail.py", line 601, in main File "/tmp/pip-install-PbZ5ZM/sl-collect/sl_collect/shared.py", line 136, in run_collection File "collect_avail.py", line 646, in _run_collect_async File "/usr/lib64/python2.7/multiprocessing/pool.py", line 554, in get raise self._value ChildProcessException: Traceback (most recent call last): File "/tmp/pip-install-PbZ5ZM/sl-process/sl_process/exceptions.py", line 43, in new_f File "collect_avail.py", line 331, in collect File "/tmp/pip-install-PbZ5ZM/sl-credentials/sl_credentials/snmp.py", line 79, in snmph_from_cred_array File "/opt/em7/lib/python/future/types/newstr.py", line 102, in new return super(newstr, cls).new(cls, value) UnicodeDecodeError: 'ascii' codec can't decode byte 0xc0 in position 0: ordinal not i

For interface issue, we followed the below KB article:

[CRITICAL] Unhandled exception: process Data Collection: Interface Bandwidth (sciencelogic.com)

We also tried re-creating the SNMP v3 credential.
Rebooted the collector but no luck.
Attached SNMP v3 credential screenshot.
Attached the sample security and privacy passphrase which is using on the credentials. (to verify the ASCII characters)
Collected snmp_detail, availability and interface logs debug logs.
No SIGTERM on the above process which is having the issues. (Attached the screenshot).

Customer is requesting engineering team to join the below Web-ex today by 9AM ET.

https://cisco.webex.com/meet/ivaid
```

From this comment EM-66541: [Unilever]Collections not working for all devices after 12.1.1 upgrade CLOSED

```
Issue was caused by the credential issue in KB below where blank fields are getting corrupted values
https://support.sciencelogic.com/s/article/7403

Most likely the "issue" initially happened during 11.x upgrade (as noted in KB) but wasn't actively effecting collections until after 12.1.1 upgrade (likely due to a code change)
```

From the knowledge base article (KB 7403):

```
Problem Statement:

After upgrading to 11.1 some SNMP credentials show unusual corrupted-looking characters in some of the textboxes. Currently this has only been observed happening on textboxes where the values were empty / blank before performing the upgrade.
This has been observed happening to the following textboxes in SNMP credentials:
    SNMP Community (Read Only)
```

```
    SNMP Community (Read/Write)
    Security Passphrase
    Privacy Protocol Pass Phrase

Here is an example of the problem text:
Example Screenshot of Corrupted SNMP Credential Test
Version Affected:

11.1
Diagnostic Steps:
Open the SNMP credentials under System > Manage > Credentials and review the values in the textboxes.

For textboxes that are masked by dots, the value can be checked by right-clicking on the textbox and selecting the "Inspect" option. A new window will open with the webpage code where you can see the value in the value= attribute for that textbox.
Root Cause:
This seems to be related to a change in how empty values are handled in 11.1.
This defect will be fixed in a future release (EM-49241).

Resolution:
This can be resolved by clearing out the bad text and saving the credential.

Step 1: Open the Credential for Editing (Found in System > Manage > Credentials)
Step 2: Remove Any Bad / Corrupted Text So the TextBox is Empty
Step 3: Click Save
Platform Affected Version
11.1
```

2024-07-30 EM-66203: Multiple System events in Science Logic Console

ts_guide_to_jira_link

Link: EM-66203: UnicodeDecodeError: 'ascii' codec can't decode byte errors occurring during SNMPDetail process run CLOSED

From the description:

```
Which troubleshooting doc(s) were reviewed:  https://sciencelogic.atlassian.net/browse/EM-64860
Observed Behavior:
Expected Behavior:
Summary of troubleshooting steps taken so far and the current status:

This is created to request the dropfile for fixing the following exceptions for SNMP Detail and Availability processes:
silo.snmp_detail_collect.24: Unhandled exception on appliance: 89, process Data Collection: SNMP Detail: Traceback (most recent call last):
 File "/tmp/pip-install-PbZ5ZM/sl-process/sl_process/proc_pda.py", line 214, in _init_
 File "/tmp/pip-install-PbZ5ZM/sl-sysuptime/sl_sysuptime/collect_snmp_detail.py", line 155, in main
 File "/tmp/pip-install-PbZ5ZM/sl-collect/sl_collect/shared.py", line 134, in run_collection
 File "/tmp/pip-install-PbZ5ZM/sl-collect/sl_collect/shared.py", line 146, in _run_collect_sync
 File "/tmp/pip-install-PbZ5ZM/sl-process/sl_process/exceptions.py", line 47, in new_f
ChildProcessException: Traceback (most recent call last):
 File "/tmp/pip-install-PbZ5ZM/sl-process/sl_process/exceptions.py", line 43, in new_f
```

```
 File "/tmp/pip-install-PbZ5ZM/sl-sysuptime/sl_sysuptime/collect_snmp_detail.py", line 86, in collect
 File "/tmp/pip-install-PbZ5ZM/sl-credentials/sl_credentials/snmp.py", line 81, in snmph_from_cred_array
 File "/opt/em7/lib/python/future/types/newstr.py", line 102, in _new_ return super(newstr, cls)._new_(cls, value) UnicodeDecodeError: 'ascii' codec can't decode byte 0xc3 in position 1: ordinal not in range(128)

```

The earlier Jira issue is linked below in this section: Credentials Troubleshooting | 2024 04 22 EM 64860: Critical Ping failure after SL1 upgrade Drop File reques...

2024-07-02 EM-65658: Error with Credentials

ts_guide_to_jira_link

Link: EM-65658: SSH credential not found on collector during collection - system_credentials_ssh tbl has no entry for it on DB CLOSED

From the description:

```
Which troubleshooting doc(s) were reviewed: Found similar kind of Jira card:
https://sciencelogic.atlassian.net/browse/EM-65088

Observed Behavior: Credentials aren't getting pushed down to collectors
Expected Behavior: Fix the issue

Summary of troubleshooting steps taken so far and the current status:
Customer has DA which was developed using low-code tools 101:
Device:
They are using below creds:

and here is the error which we got::
Collecting for App ID: 2077 from Device ID: 17976 on Collector ID: 220
Python version 3.6.8 (default, Jun  9 2023, 11:59:08)
[GCC 4.8.5 20150623 (Red Hat 4.8.5-44.0.3)]
Assigned collector: 220; Root collector: None; This collector: 220
Collector affinity: [5] Assigned collector affinity mode specified. Using assigned collector.
Object 22176 is enabled for collection
Object 22177 is enabled for collection
Unhandled exception on appliance: 220, process Data Collection: Dynamic App:
Traceback (most recent call last):
File "/opt/em7/lib/python3.6/proc_pda.py", line 214, in init
File "/opt/em7/lib/python3.6/collect_dynamic.py", line 2236, in main
File "/opt/em7/lib/python3.6/credentials.py", line 94, in call
File "/opt/em7/lib/python3.6/cred_loaders.py", line 292, in load_cred_ssh
TypeError: 'NoneType' object is not subscriptable

I can see in this slack conversations it is mentioned that:
https://sciencelogic.slack.com/archives/C04L3KNQLGJ/p1716321570701519
”Credentials aren't getting pushed down to collectors on Aurora 3 right now”

Customer is SaaS and they are on 12.1.1 SL1 version

Is the fix slated for 12.1.2?
```

```
https://sciencelogic.atlassian.net/browse/EM-65119
```

2024-06-28 EM-65624: Linux Base Pack v111 - DA objects collection not re-enabled

ts_guide_to_jira_link

Link: EM-65624: Linux Base Pack v111 - DA objects collection not re-enabled CLOSED

From the description:

```
https://sciencelogic.slack.com/archives/C04L3KNQLGJ/p1718802762230379

Observed Behavior:
When Linux Dynamic App objects are disabled by the Dynamic Refresh process each night, these are disabled as expected.
However, when the objects need to be re-enabled when they are found again, this does not occur

Expected Behavior:
The objects should be re-enabled after they have been found again.

Summary of troubleshooting steps taken so far and the current status:
As this is an issue with the Dynamic Refresh process, we collected the dynamic_check logs:
Assessing these logs, at the end of the process the UHE Error below stops the process from completing:
2024-06-14T03:20:10.222637+00:00 localhost silo.dynamic_check.28[1174]: CRITICAL proc_pda.__init__ 259 Unhandled exception on
appliance: 38, process Data Collection: Dynamic Refresh:#012Traceback (most recent call last):#012  File "/tmp/pip-install-PbZ5ZM
/sl-process/sl_process/proc_pda.py", line 214, in __init__#012  File "/tmp/pip-install-PbZ5ZM/sl-collect/sl_collect/collect_dynamic.py",
 line 503, in main#012  File "/tmp/pip-install-PbZ5ZM/sl-collect/sl_collect/collect_dynamic.py", line 816, in populate_devices#012
 File "/tmp/pip-install-PbZ5ZM/sl-credentials/sl_credentials/credentials.py", line 94, in __call__#012
 File "/tmp/pip-install-PbZ5ZM/sl-credentials/sl_credentials/cred_loaders.py", line 292, in load_cred_ssh#012
 TypeError: 'NoneType' object has no attribute '__getitem__'

Just before this fails, the DID: 6349 AID: 2075 was running:
2024-06-14T03:20:10.217687+00:00 localhost silo.dynamic_check.28[1174]: DEBUG collect_dynamic.populate_devices 741 dynamic_app_collection.populate_devices: Attempting to schedule job (did, app_id): (6349, 2075)
2024-06-14T03:20:10.217752+00:00 localhost silo.dynamic_check.28[1174]: DEBUG collect_dynamic.populate_devices 752 Resolved hostname VML-CR8APACHE.dlhmc.ibmcloud.local for did:6349 to 10.23.25.38
2024-06-14T03:20:10.218445+00:00 localhost silo.dynamic_check.28[1174]: UIDEBUG collect_dynamic.filter_non_collectable_cobjs 172 Skipping scheduling of non-collectable Discovery and Label (Config Group) objects: [21590]
2024-06-14T03:20:10.219015+00:00 localhost silo.dynamic_check.28[1174]: UIDEBUG collection_object_filter.filter_disabled_collection_objects 146 Object 21591 was auto-disabled due to unsuccessful collection for an extended period of time, collecting for debug purposes.
2024-06-14T03:20:10.219077+00:00 localhost silo.dynamic_check.28[1174]: UIDEBUG collection_object_filter.filter_disabled_collection_objects 146 Object 21592 was auto-disabled due to unsuccessful collection for an extended period of time, collecting for debug purposes.
```

```
2024-06-14T03:20:10.219131+00:00 localhost silo.dynamic_check.28[1174]: UIDEBUG collection_object_filter.filter_disabled_collection_objects 146 Object 21593 was auto-disabled due to unsuccessful collection for an extended period of time, collecting for debug purposes.
2024-06-14T03:20:10.219183+00:00 localhost silo.dynamic_check.28[1174]: UIDEBUG collection_object_filter.filter_disabled_collection_objects 146 Object 21594 was auto-disabled due to unsuccessful collection for an extended period of time, collecting for debug purposes.

In the scheduling (I've cut a lot of the log), this is has (6349, 2129) as after it fails :
2024-06-14T03:20:06.145908+00:00 localhost silo.dynamic_check.28[1174]: UIDEBUG job_scheduler.get_runnable_policy_ids_and_log 359
Scheduling jobs for policies (did, app_id): [(6342, 44), (6342, 45), (6342, 46), (6342, 1482), (6342, 1493), (6342, 1494),
(6342, 1732), (6342, 1733), (6342, 1734), (6342, 2072), (6342, 2119), (6342, 2120), (6343, 44), (6343, 45), (6343, 46), (6343, 1482),
 (6343, 1493), (6343, 1494), (6343, 1732), (6343, 1733), (6343, 1734), (6343, 2072), (6343, 2119), (6343, 2120), (6345, 1510),
  (6345, 1511), (6345, 1513), (6345, 1516), (6345, 1517), (6345, 1518), (6345, 1519), (6345, 1520), (6345, 1521), (6345, 1522),
   (6345, 1783), (6345, 1793), (6345, 1848), (6345, 1867), (6345, 1877), (6345, 2072), (6345, 2129), (6348, 1510), (6348, 1511),
    (6348, 1513), (6348, 1516), (6348, 1517), (6348, 1518), (6348, 1519), (6348, 1520), (6348, 1521), (6348, 1522), (6348, 1783),
     (6348, 1793), (6348, 1848), (6348, 1867), (6348, 1877), (6348, 2072), (6348, 2129), (6349, 1510), (6349, 1511), (6349, 1513),
      (6349, 1516), (6349, 1517), (6349, 1518), (6349, 1519), (6349, 1520), (6349, 1521), (6349, 1522), (6349, 1783), (6349, 1793),
       (6349, 1848), (6349, 1867), (6349, 1877), (6349, 2045), (6349, 2072), (6349, 2075), (6349, 2129)....

I collected the Credentials for the both of these combinations in case it failed on either of the credentials: (6349, 2075), (6349, 2129)
So, I presume the problem credential here is either ID 245, or 241.
Screenshots:
I got the SQL outputs for the credentials on the collector, and database:

On collector:
mysql -e 'select cred_id, BINARY(ssh_key_data), cred_all_orgs from collector_state.V_credential_ssh;' > sql_collector.out

On DB:
mysql -e 'select cred_id, BINARY(ssh_key_data), cred_all_orgs from collector_state._V_credential_ssh;' > sql_db.out

The credential ID 241 is present, however CredID: 245 is missing in both the collector, and db which is why I assume this UHE is present, but why is this the case?
```

The slack thread where this was discussed is here:

https://app.slack.com/client/E03R7NUFC4X/C04L3KNQLGJ

2024-06-14 EM-65445: SL1 UI - Autocomplete HTML Attribute not explicitly set to 'off'

ts_guide_to_jira_link

Link: EM-65445: SL1 UI - Autocomplete HTML Attribute not explicitly set to 'off' CLOSED

From the description:

```
Observed Behavior: SL1 UI - Autocomplete HTML Attribute not explicitly set to 'off'
Summary of troubleshooting steps taken so far and the current status:

The HTML "autocomplete" attribute is not set as disabled for 'Username' and 'Password" sensitive fields. When autocomplete is enabled for a given HTML form field, the browser attempts to fill in a previously
stored value as the user enters information. Unique values entered into these fields are cached by the browser for later use.

When this field is not explicitly set to off then browsers will ask for saving the creds if autocomplete="off" onto <form> element. So this formation is going to prevent Chrome and Firefox to offer autofill
and autocomplete for all input fields inside the form. Hence the reason Cisco Security scan caught and asking if SL1 can set this form explicitly

Some ref: https://gist.github.com/niksumeiko/360164708c3b326bd1c8?permalink_comment_id=3793032

SL1 Security Team Response : This can also be handled by changing the configuration policies in Chrome and Firefox in Cisco’s organization to not autocomplete forms or passwords. You can probably create a
ticket with engineering for their input or to request the change, given the low severity of the issue outlined.
```

2024-05-21 EM-65090: CyberArk - SL1 integration is not working for Linux, Aix servers

ts_guide_to_jira_link

Link: EM-65090: CyberArk - SL1 integration is not working for Linux, Aix servers CLOSED

From the description:

```
Observed Behavior:
When the clipasswordsdk.exe is run form the collector's command line, they are able to get the CyberArk secret. When they align Linux devices with the credential and attempt to have SL1 use it, all Linux DAs fail to collect.

Expected Behavior:
When SL1 DAs are aligned with this credential it's able to collect the data

Summary of troubleshooting steps taken so far and the current status:
The Safe in the CyberArk web app is "SL1_Linux" The docs say to use only lower case. We have tried both upper and lower case from the command line and both return the secret.
The Name has a space in it but Engineering says this should not be an issue.
I have had them run it from the command line, also, without Folder=Root and it works with it and without it and both return the secret.
```

2024-05-15 EM-64990: Pull and Process Credentials from SL1 step gql query is failing with this The loader.load() function must be called with a value, but got: null. TypeError:

ts_guide_to_jira_link

Link: EM-64990: Pull and Process Credentials from SL1 step gql query is failing with this The loader.load() function must be called with a value, but got: null. TypeError: CLOSED

From the description:

```
Observed Behavior:
Pull and Process Credentials from SL1 step of the Sync Discovery Requirements PowerFlow app is failing because the below gql query it uses is failing with this The loader.load() function must be called with a value, but got: null. TypeError:
query allCreds($first: Int = 100) { credentials (first: $first after: "") { pageInfo { hasNextPage matchCount } edges { cursor node { id guid name definition type } } } }

Expected Behavior:
The GQL query should run successfully.

Summary of troubleshooting steps taken so far and the current status:
I ran the query in the gql interface of the customer's SL1 stack and it is failing with the same error.

Collected nextui logs with trace level logging while running the query in the gql interface and the PF app and the only error I can see is this <error> cacheRegistry.js:32 TypeError: this.getCache(...).clear is not a function one
but it doesn't seem related to the issue with the query. I can see some entries related to a credentials query that I believe are from PF but they don't seem to have any error.

On my lab env running version 12.1.0, ap2 7.0.0-release.464cb317318.0 and sl-em7-gql 66.0.0-release.ed86a59a907.0 the query runs fine.

Discussed this issue with eng in this https://sciencelogic.slack.com/archives/CA9LE93T2/p1715773172854669 slack thread and an escalation was requested.
```

Here is the linked slack thread: https://app.slack.com/client/E03R7NUFC4X/CA9LE93T2

This is one of the forms of the GQL query support was experimenting with on the customer system that shows the problem (but which doesn't reproduce the error on a test system):

```
query allCreds { credentials (first: 100) { pageInfo { hasNextPage matchCount } edges { cursor node { id guid name definition type } } } }
```

2024-05-07 EM-64860: Critical Ping failure after SL1 upgrade - Drop File requested.

ts_guide_to_jira_link

Link: EM-64860: Critical Ping failure after SL1 upgrade - Drop File requested. CLOSED

From the description:

```
Our Platform was upgraded yesterday and we now have a huge amount of critical errors which are reported in the system logs.  we were sent a link to a known bug and we would request a drop file to fix this as we have over 80
collectors to change if we have to enter the workaround on each collector.   The link we were sent was https://support.sciencelogic.com/s/article/13079 and the error we are seeing in out logs are as below .

```

```
silo.snmp_detail_collect.24: Unhandled exception on appliance: 266, process Data Collection: SNMP Detail:
Traceback (most recent call last):
File &quot;/tmp/pip-install-PbZ5ZM/sl-process/sl_process/proc_pda.py&quot;, line 214, in _init_
File &quot;/tmp/pip-install-PbZ5ZM/sl-sysuptime/sl_sysuptime/collect_snmp_detail.py&quot;, line 155, in main
File &quot;/tmp/pip-install-PbZ5ZM/sl-collect/sl_collect/shared.py&quot;, line 134, in run_collection
File &quot;/tmp/pip-install-PbZ5ZM/sl-collect/sl_collect/shared.py&quot;, line 146, in _run_collect_sync
File &quot;/tmp/pip-install-PbZ5ZM/sl-process/sl_process/exceptions.py&quot;, line 47, in new_f
ChildProcessException: Traceback (most recent call last):
File &quot;/tmp/pip-install-PbZ5ZM/sl-process/sl_process/exceptions.py&quot;, line 43, in new_f
File &quot;/tmp/pip-install-PbZ5ZM/sl-sysuptime/sl_sysuptime/collect_snmp_detail.py&quot;, line 86, in collect
File &quot;/tmp/pip-install-PbZ5ZM/sl-credentials/sl_credentials/snmp.py&quot;, line 79, in snmph_from_cred_array
File &quot;/opt/em7/lib/python/future/types/newstr.py&quot;, line 102, in _new_
return super(newstr, cls)._new_(cls, value)

Observed Behavior:Critical Ping failure after SL1 upgrade - Drop File requested.

Expected Behavior: customer requested for drop file

Summary of troubleshooting steps taken so far and the current status:
customer complaining they have received UHE from 80 collector, and they request a drop file to fix this.

silo.snmp_detail_collect.24: Unhandled exception on appliance: 266, process Data Collection: SNMP Detail:
Traceback (most recent call last):
File &quot;/tmp/pip-install-PbZ5ZM/sl-process/sl_process/proc_pda.py&quot;, line 214, in _init_
File &quot;/tmp/pip-install-PbZ5ZM/sl-sysuptime/sl_sysuptime/collect_snmp_detail.py&quot;, line 155, in main
File &quot;/tmp/pip-install-PbZ5ZM/sl-collect/sl_collect/shared.py&quot;, line 134, in run_collection
File &quot;/tmp/pip-install-PbZ5ZM/sl-collect/sl_collect/shared.py&quot;, line 146, in _run_collect_sync
File &quot;/tmp/pip-install-PbZ5ZM/sl-process/sl_process/exceptions.py&quot;, line 47, in new_f
ChildProcessException: Traceback (most recent call last):
File &quot;/tmp/pi-install-PbZ5ZM/sl-process/sl_process/exceptions.py&quot;, line 43, in new_f
File &quot;/tmp/pip-install-PbZ5ZM/sl-sysuptime/sl_sysuptime/collect_snmp_detail.py&quot;, line 86, in collect
File &quot;/tmp/pip-install-PbZ5ZM/sl-credentials/sl_credentials/snmp.py&quot;, line 79, in snmph_from_cred_array
File &quot;/opt/em7/lib/python/future/types/newstr.py&quot;, line 102, in _new_
return super(newstr, cls)._new_(cls, value)
UnicodeDecodeError: 'ascii' codec can't decode byte 0xb3 in position 0: ordinal not in range(128)
Build:
12.1.1
Operating System:
```

```
OL7
Engineering requested me to create an escalation for drop file

This content is a preview of a link.support.sciencelogic.com
support.sciencelogic.com

https://support.sciencelogic.com/s/article/13079Customer
UnicodeDecodeError: 'ascii' codec can't decode byte 0xb3 in position 0: ordinal not in range(128)
```

2024-04-22 EM-64548 Credential errors on Python 3 apps

ts_guide_to_jira_link

Link: EM-64548: Credential errors on Python 3 apps CLOSED

From the description:

```
Hi Support
When running new Python 3 snippets on our test AIO system I get the following error:
lookup error (no credential?) for cred 112
But credential 112 is completely OK on Python 2.7 apps on the same device.
```

2024-04-09 EM-64236: UnicodeDecodeError: 'ascii' codec can't decode byte 0xf1 in position 1: ordinal not in range(128)

ts_guide_to_jira_link

Link: 💔EM-64236: UnicodeDecodeError: 'ascii' codec can't decode byte 0xf1 in position 1: ordinal not in range(128) CLOSED

From the description:

```
Observed Behavior: Following errors seen after upgrading to 12.1.1 UnicodeDecodeError: 'ascii' codec can't decode byte 0xf1 in position 1: ordinal not in range(128
Summary of troubleshooting steps taken so far and the current status:
Since customer upgraded SL1 from 12.1.0.2 to 12.1.1 they are seeing the UHE for multiple Data Collection processes, like availability, SNMP Detail, and Filesystem stats. They all seem to have a similar error
UnicodeDecodeError: 'ascii' codec can't decode byte 0xf1 in position 1: ordinal not in range(128)
```

2024-02-05 EM-63205: Powershell error updating credential cache

ts_guide_to_jira_link

Link: EM-63205: [Hosted-Shared7] Powershell error updating credential cache CLOSED

From the description:

```
Microsoft: Windows Server PPack v116Customer having issues with the Powershell communication for Windows devices and due to that data are not collected for the most of the
time for Windows devices. They are using CyberArk credentials for monitoring of Windows devices.Customer tested fetching credentials from CyberArk from collector manually
```

```
via curl command and it is working fine. Credential gateway process is also running and CyberArk agent is installed. Overall fetching password from the CyberArk vault seems to be working correctly. As per their observation it also seems that the problem is mainly with DAs that are fetching data from the cache, configuration cache and performance cache applications seems to be working correctly.Since this is CyberArk  External Credential Services, I am not sure what further we can troubleshoot here.We have seen below error in DA debug output, but could see the Kerberos ticket is getting obtained as well.
```

From the slackthread linked in the description:

```
OK... I'm out this week, but what this is showing is an issue with libem7 which is a library owned by syseng.
The test script is getting the same error as the container when decrypting the password.When the pass word is
provided as an input to the test script, it works as libem7 is not used. When the credid is used the encrypted
password is read and libem7 used to decrypt and that's where the "empty password' message comes from.You'll
need to escalate and syseng will need to either have the escalations or help out collectables with it
(its not a 50c issue)
```

2024-01-30 EM-63125 Credential Tests Periodically hang and would not complete

ts_guide_to_jira_link

Link: EM-63125: Credential tests periodically hang and would not complete. CLOSED

From the description:

```
Tried to run Credentails_test.py in debug mode in system processes and collect /ver/log/sl1/credential_tsts.log and could not located it
Looked in master_logs.credential_test_log table and could not find any errors related to credential timeout.
Customer asked to have case escalated to Eng. for assistance to diagnose issue.
```

2024-01-19 EM-62595: Unable to install Cyberark credential gateway

ts_guide_to_jira_link

Link: EM-62959: Unable to install Cyberark credential gateway CLOSED

This case is about getting credentials to work when a cyberark credential gateway in involved. This article goes into more depth on how that works: Cyberark Engineering Documentation