PageSpeed Insights

Copy Link Docs

Report from Oct 28, 2026, 6:55:47 PM

https://otesevo.com/

Analyze

Mobile Desktop

Showing results for URL: https://otesevo.com/mk/
Run with original URL

Discover what your real users are experiencing

No Data

Diagnose performance issues


Performance	Accessibility	Best Practices	SEO	Agentic Browsing
72	78	100	92	▲ 1/4



Performance

Values are estimated and may vary. The performance score is calculated directly from these metrics. See calculator.

▲ 0–49 ■ 50–89 ● 90–100

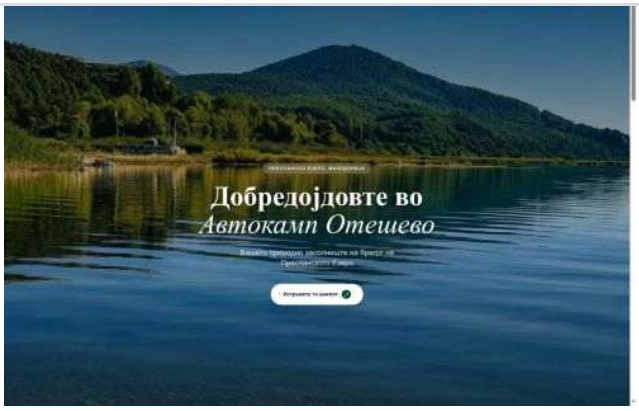


METRICS

Expand view

- First Contentful Paint: 0.6 s
- Largest Contentful Paint: 5.6 s
- Total Blocking Time: 140 ms
- Cumulative Layout Shift: 0
- Speed Index: 1.5 s

Captured at Oct 28, 2026, 6:55 PM GMT+1
Emulated Desktop with Lighthouse 13.5.0
Single page session
Initial page load
Custom throttling
Using HeadlessChromium 153.0.8010.36 with lr

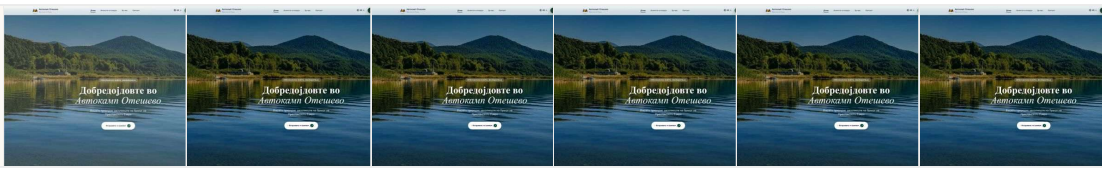

Show audits relevant to: All FCP LCP TBT CLS

INSIGHTS

- Improve image delivery — Est savings of 12,282 KiB
- Use efficient cache lifetimes — Est savings of 12,024 KiB

A long cache lifetime can speed up repeat visits to your page. Learn more about caching. LCP FCP Unscored

Request	Cache TTL	Transfer Size
otesevo.com 1st Party		17,683 KiB
/Content/bannerVideo.webm (otesevo.com)	4h	3,726 KiB
/Content/tents.png (otesevo.com)	4h	3,408 KiB

/Content/campervan2.jpg (otesevo.com)	4h	2,585 KiB
/Content/logo.png (otesevo.com)	4h	1,514 KiB
/Content/camphome.jpg (otesevo.com)	4h	1,271 KiB
/Content/picnic.jpg (otesevo.com)	4h	583 KiB
/Content/appartments2.jpg (otesevo.com)	4h	546 KiB
/Content/banner3.jpg (otesevo.com)	4h	280 KiB
...DataTables/jquery.dataTables.js (otesevo.com)	4h	184 KiB
/Scripts/tailwind_3-4-17.min.js (otesevo.com)	4h	175 KiB
/Scripts/jquery-3.4.1.js (otesevo.com)	4h	127 KiB
/Content/bootstrap.css (otesevo.com)	4h	39 KiB
/Scripts/bootstrap.js (otesevo.com)	4h	30 KiB
/Scripts/alpinejs.min.js (otesevo.com)	4h	27 KiB
/Scripts/modernizr-2.8.3.js (otesevo.com)	4h	23 KiB
...DataTables/dataTables.bootstrap.js (otesevo.com)	4h	3 KiB
...js/global.js (otesevo.com)	4h	3 KiB
...css/dataTables.bootstrap.css (otesevo.com)	4h	2 KiB
/Content/globe.svg (otesevo.com)	4h	2 KiB
...css/style.css (otesevo.com)	4h	1 KiB
/Content/site.css (otesevo.com)	4h	1 KiB
...cloudflare-static/email-decode.min.js (otesevo.com)	1d 23h 59m 54s	1 KiB


▲ Render-blocking requests — Est savings of 600 ms

Requests are blocking the page's initial render, which may delay LCP. Deferring or inlining can move these network requests out of the critical path. LCP FCP Unscored

URL	Transfer Size	Duration
otesevo.com 1st Party	**240.6 KiB**	**1,480 ms**
/Content/bootstrap.css (otesevo.com)	38.8 KiB	240 ms
/Scripts/tailwind_3-4-17.min.js (otesevo.com)	174.6 KiB	460 ms
/Content/site.css (otesevo.com)	1.1 KiB	180 ms
/Scripts/modernizr-2.8.3.js (otesevo.com)	22.6 KiB	240 ms
...css/dataTables.bootstrap.css (otesevo.com)	2.1 KiB	180 ms
...css/style.css (otesevo.com)	1.3 KiB	180 ms

▲ LCP request discovery

- LCP resources should not use loading=lazy
- fetchpriority=high should be applied
- Request is discoverable in initial document



main.flex-grow > section#home > div.absolute > video.w-full

```
<video autoplay="" loop="" muted="" playsinline="" poster="/Content/banner3.jpg"
class="w-full h-full object-cover">
```

Network dependency tree

Avoid chaining critical requests by reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. LCP Unscored

Maximum critical path latency: **783 ms**

Initial Navigation

- /mk/ (otesevo.com) - **213 ms,** 10.45 KiB
  - ...cloudflare-static/email-decode.min.js (otesevo.com) - **719 ms,** 1.20 KiB
  - /Scripts/jquery-3.4.1.js (otesevo.com) - **761 ms,** 126.84 KiB
  - /Scripts/bootstrap.js (otesevo.com) - **760 ms,** 30.39 KiB
  - ...DataTables/jquery.dataTables.js (otesevo.com) - **783 ms,** 183.50 KiB
  - ...DataTables/dataTables.bootstrap.js (otesevo.com) - **721 ms,** 2.95 KiB
  - ...js/global.js (otesevo.com) - **761 ms,** 2.58 KiB
  - /Content/bootstrap.css (otesevo.com) - **461 ms,** 38.85 KiB
  - /Content/site.css (otesevo.com) - **428 ms,** 1.14 KiB
  - ...css/dataTables.bootstrap.css (otesevo.com) - **393 ms,** 2.10 KiB
  - /Scripts/modernizr-2.8.3.js (otesevo.com) - **399 ms,** 22.63 KiB
  - /Scripts/tailwind_3-4-17.min.js (otesevo.com) - **441 ms,** 174.58 KiB
  - ...css/style.css (otesevo.com) - **393 ms,** 1.32 KiB

Preconnected origins

preconnect hints help the browser establish a connection earlier in the page load, saving time when the first request for that origin is made. The following are the origins that the page preconnected to.

no origins were preconnected

Preconnect candidates

Add preconnect hints to your most important origins, but try to use no more than 4.

LCP breakdown

3rd parties

These insights are also available in the Chrome DevTools Performance Panel - record a trace to view more detailed information.

DIAGNOSTICS

Minify JavaScript — Est savings of 213 KiB

Minifying JavaScript files can reduce payload sizes and script parse time. Learn how to minify JavaScript. LCP FCP Unscored

URL	Transfer Size	Est Savings
otesevo.com 1st Party	**360.2 KiB**	**213.0 KiB**
...DataTables/jquery.dataTables.js (otesevo.com)	182.7 KiB	127.6 KiB
/Scripts/jquery-3.4.1.js (otesevo.com)	126.1 KiB	61.1 KiB
/Scripts/modernizr-2.8.3.js (otesevo.com)	21.8 KiB	14.5 KiB
/Scripts/bootstrap.js (otesevo.com)	29.6 KiB	9.8 KiB

Reduce unused JavaScript — Est savings of 319 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. Learn how to reduce unused JavaScript. LCP FCP Unscored

Show 3rd-party resources (1)


URL	Transfer Size	Est Savings
otesevo.com 1st Party	**512.2 KiB**	**246.2 KiB**
...DataTables/jquery.dataTables.js (otesevo.com)	182.7 KiB	89.3 KiB
/Scripts/jquery-3.4.1.js (otesevo.com)	126.1 KiB	81.8 KiB
/Scripts/tailwind_3-4-17.min.js (otesevo.com)	173.8 KiB	53.1 KiB
/Scripts/bootstrap.js (otesevo.com)	29.6 KiB	21.9 KiB
Google Tag Manager Tag-Manager	**196.6 KiB**	**72.5 KiB**
/gtag/js?id=G-FY6047P9JE (www.googletagmanager.com)	196.6 KiB	72.5 KiB

Reduce unused CSS — Est savings of 38 KiB

URL	Transfer Size	Est Savings
otesevo.com 1st Party	**38.0 KiB**	**37.5 KiB**
/Content/bootstrap.css (otesevo.com)	38.0 KiB	37.5 KiB

Image elements do not have explicit `width` and `height`

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. Learn how to set image dimensions CLS Unscored

URL	
otesevo.com 1st Party	
	div.relative > button.px-3 > span.flex > img `<img src="/Content/globe.svg">` /Content/globe.svg (otesevo.com)

Minify CSS — Est savings of 6 KiB

Minifying CSS files can reduce network payload sizes. Learn how to minify CSS. LCP FCP Unscored

URL	Transfer Size	Est Savings
otesevo.com 1st Party	**38.8 KiB**	**6.1 KiB**
/Content/bootstrap.css (otesevo.com)	38.8 KiB	6.1 KiB

Avoid enormous network payloads — Total size was 17,891 KiB

Large network payloads cost users real money and are highly correlated with long load times. Learn how to reduce payload sizes. Unscored

Show 3rd-party resources (1)

URL	Transfer Size
otesevo.com 1st Party	**17,065.8 KiB**
/Content/bannerVideo.webm (otesevo.com)	3,725.7 KiB
/Content/tents.png (otesevo.com)	3,407.6 KiB
/Content/appartments.png (otesevo.com)	3,153.1 KiB
/Content/campervan2.jpg (otesevo.com)	2,584.9 KiB

/Content/camphome.jpg (otesevo.com)	1,271.4 KiB
/Content/picnic.jpg (otesevo.com)	582.8 KiB
/Content/appartments2.jpg (otesevo.com)	546.4 KiB
/Content/banner3.jpg (otesevo.com)	280.1 KiB
Google Tag Manager Tag-Manager	**197.3 KiB**
/gtag/js?id=G-FY6047P9JE (www.googletagmanager.com)	197.3 KiB

Avoid long main-thread tasks — 4 long tasks found

More information about the performance of your application. These numbers don't directly affect the Performance score.

PASSED AUDITS (13) Show

78

Accessibility


These checks highlight opportunities to improve the accessibility of your web app. Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so manual testing is also encouraged.

NAMES AND LABELS

▲ Image elements do not have `[alt]` attributes


Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the `alt` attribute.

Failing Elements



div.relative > button.px-3 > span.flex > img


```
<img src="/Content/globe.svg">
```



▲ Select elements do not have associated label elements.

Form elements without effective labels can create frustrating experiences for screen reader users. Learn more about the `select` element.

Failing Elements



1 гостин 2 гости 3 гости 4 гости 5 гости 6 гости 7 гости 8 гости

```
<select id="bookingGuests" class="w-full max-w-full text-slate-800 text-sm font-medium outline-none bg-trans…">
```


These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

CONTRAST

▲ Background and foreground colors do not have a sufficient contrast ratio.


Low-contrast text is difficult or impossible for many users to read. Learn how to provide sufficient color contrast.

Failing Elements




ПРИСТИГНУВАЊЕ

```
<span class="text-[11px] text-slate-400 font-semibold uppercase tracking-wider flex ite…">
```




ПРИСТИГНУВАЊЕ

```
<label for="bookingCheckIn" class="flex flex-col gap-1 px-4 py-3 border border-slate-200 rounded-xl bg-white …">
```




ЗАМИНУВАЊЕ

```
<span class="text-[11px] text-slate-400 font-semibold uppercase tracking-wider flex ite…">
```




ЗАМИНУВАЊЕ

```
<label for="bookingCheckOut" class="flex flex-col gap-1 px-4 py-3 border border-slate-200 rounded-xl bg-white …">
```



ГОСТИ

```
<span class="text-[11px] text-slate-400 font-semibold uppercase tracking-wider flex ite…">
```



ГОСТИ 1 гостин 2 гости 3 гости 4 гости 5 гости 6 гости 7 гости 8 гости

```
<div class="flex flex-col gap-1 px-4 py-3 border border-slate-200 rounded-xl bg-white …">
```

© 2026 Автокамп Отешево. Сите права задржани.

```
<span>
```

Автокамп Отешево Преспанското Езеро Природен рај на брегот на Преспанското Езе...

```
<footer id="contact" class="py-20 px-6 text-white" style="background-color: #0d1f17;">
```

Преспанско Езеро, Р. Северна Македонија

```
<span>
```

Автокамп Отешево Преспанското Езеро Природен рај на брегот на Преспанското Езе...

```
<footer id="contact" class="py-20 px-6 text-white" style="background-color: #0d1f17;">
```


These are opportunities to improve the legibility of your content.

BEST PRACTICES

▲ Touch targets do not have sufficient size or spacing.

Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. Learn more about touch targets.

Failing Elements




Слајд 1

```
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 1">
```




Слајд 2

```
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 2">
```




Слајд 2

```
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 2">
```



Слајд 1

```
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 1">
```




Слајд 3

```
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 3">
```




Слајд 3



pointer h-2 w…" aria-label="Слајд 3">



Слајд 2
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 2">


Слајд 4
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 4">



Слајд 4
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 4">



Слајд 3
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 3">



Слајд 5
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 5">


Слајд 5
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 5">


Слајд 4
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 4">


Слајд 6
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 6">


Слајд 6
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 6">


Слајд 5
<button class="carousel-dot transition-all duration-300 rounded-full cursor-pointer h-2 w…" aria-label="Слајд 5">

These items highlight common accessibility best practices.

AUDIO AND VIDEO

- `<video>` elements contain a `<track>` element with `[kind="captions"]`

ADDITIONAL ITEMS TO MANUALLY CHECK (10) Show

These items address areas which an automated testing tool cannot cover. Learn more in our guide on conducting an accessibility review.

PASSED AUDITS (15) Show

NOT APPLICABLE (43) Show



Best Practices

TRUST AND SAFETY

- Ensure CSP is effective against XSS attacks
- Use a strong HSTS policy
- Ensure proper origin isolation with COOP
- Mitigate clickjacking with XFO or CSP
- Mitigate DOM-based XSS with Trusted Types

BROWSER COMPATIBILITY

- Baseline Features

GENERAL

PASSED AUDITS (13) Show

NOT APPLICABLE (1) Show

92

SEO


These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on Core Web Vitals. Learn more about Google Search Essentials.

CONTENT BEST PRACTICES

▲ Image elements do not have `[alt]` attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the `alt` attribute.

Failing Elements



div.relative > button.px-3 > span.flex > img

```
<img src="/Content/globe.svg">
```

Format your HTML in a way that enables crawlers to better understand your app's content.

ADDITIONAL ITEMS TO MANUALLY CHECK (1) Show

Run these additional validators on your site to check additional SEO best practices.

▲ 1/4

Agentic Browsing


These checks ensure high-quality, browsable websites for AI agents and validate the correctness of WebMCP integrations. This category is still under development and subject to change.

AGENT ACCESSIBILITY

▲ Accessibility tree is not well-formed

A well-formed accessibility tree helps AI agents to navigate and interact with the page.

Failed Audits

Description	Failing Element	
Select element must have an accessible name		1 гостин 2 гости 3 гости 4 гости 5 гости 6 гости 7 гости 8 гости `<select id="bookingGuests" class="w-full max-w-full text-slate-800 text-sm font-medium outline-none bg-trans…">`

These audits highlight best practices for improving the accessibility of the website for AI agents.

AGENT DISCOVERABILITY

▲ llms.txt does not follow recommendations

If your llms.txt file does not follow recommendations, large language models may not be able to understand how you want your website to be crawled or used for training. The llms.txt file should be a Markdown file containing at least one H1 header. Learn more about the llms.txt audit.

Error
File is missing a required H1 header (e.g., "# Title").

▲ `ai-catalog.json` schema is invalid

Valid `ai-catalog.json` manifests are required for autonomous AI agents and registries to discover and verify your resources. Learn more about the ARD specification.

Element	Issue	Severity
Root	Malformed JSON in manifest: SyntaxError: Unexpected token '<', " <!DOCTYPE "... is not valid JSON	Error

These audits validate that websites expose discoverable resources, documentation, and catalogs for AI agents.

PASSED AUDITS (1) Show

NOT APPLICABLE (3) Show