RIVERSIDE PARK · FREE ENTRY

Autumn Lights Festival

Music, lanterns and street food by the water

DATE Sat 21 Nov

DOORS 16:00

LIVE MUSIC 18:30 – 22:00

Bring a lantern or make one at our workshop tent. Children under twelve must be accompanied by an adult. Shuttle buses run from Central Station every ten minutes.

autumnlights.example · @autumnlights



these methods require additional training using images with localized objects as ground truth. Finally, building on top of diffusion, some recent works show controllable image generation from various conditioning signals [1, 48, 16].

Diffusion-Based Image Editing. Most aforementioned methods lack the ability to control or edit an already generated image, or even the ability to edit real images. For example, simply changing a word in the original prompt typically leads to a drastically different generation. This can be circumvented by providing or generating masks for the objects of interest [24, 2]. Prompt-to-prompt [12] addresses this issue with simple text-based edits by exploiting the fact that the cross-attention layers present in most state-of-the-art architectures connect word tokens to the spatial layout of the generated images. Text-based image editing can also be achieved through single-image model fine-tuning [19, 39]. However, these approaches, while successful at semantically editing entities can only apply such edits *in-place* and do not allow editing of the spatial layout itself.

3. Method

We consider the problem of layout-guided text-to-image generation. Text-based image generators allow to sample images $\boldsymbol{x} \in \mathbb{R}^{3\times H\times W}$ from a conditional distribution $p(\boldsymbol{x} \mid y)$ where $y \in \Sigma^*$ is a language description, Σ is a vocabulary (a list of words), and Σ^* is the set of all possible sequences of words. Given one such generator off-the-shelf, we wish to steer the output to match a desired layout for the generated composition, *without further training*. In other words, our objective is to investigate whether pre-trained text-to-image generators can adhere to a layout specified by the user during inference, without having been trained with explicit layout conditioning. In the simplest case, given the textual description y, the index i of a word y_i in the text prompt, and a bounding box B, we would like to generate an image $\boldsymbol{x}$ that contains y_i *inside* B, essentially modifying the generator to sample from a new distribution $p(\boldsymbol{x} \mid y, B, i)$ with additional controls.

The rest of the section is structured as follows. In Section 3.1 we briefly review several technical details of Stable Diffusion [31], as a publicly accessible, state-of-the-art text-to-image generator. In Section 3.2, we introduce a method that achieves layout guidance during the generation process by intervening in the way the underlying image generator associates visual and textual information. This is achieved via manipulation of the attention response in certain cross-attention layers in the architecture, as well as via an analysis of how textual information is encoded and how the latter affects the output. Finally, in Section 3.3 we discuss how to make this approach applicable to editing real images.

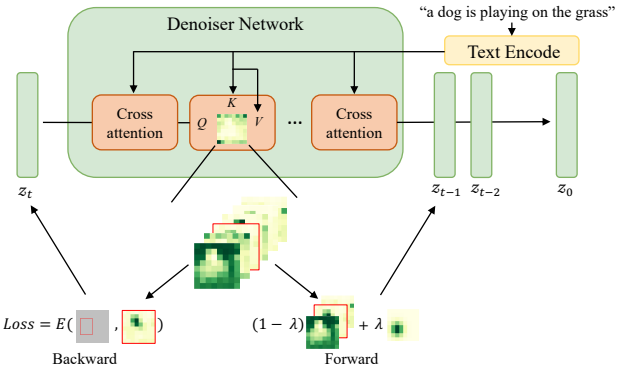


Figure 2: An overview of the two layout guidance strategies: The cross-attention map for a chosen word token is marked with a red border. In forward guidance, we bias (spatially) the word token, start token, and padding tokens. In backward guidance, we perform backpropagation during the inference process to optimize the latent.

3.1. Preliminaries: Stable Diffusion

We consider Stable Diffusion (SD) as a representative conditional image generator of an important class of recent image generators based on diffusion [29, 34, 31]. The SD model comprises a *textual encoder* $Y = \phi(y)$ that maps the input prompt into a tensor of fixed dimension $Y \in \mathbb{R}^{M\times N}$. This works by prepending a start (`[SoT]`) symbol to y and appending $N-|y|-1$ padding (`[EoT]`) symbols at the end, to obtain N symbols in total. Then, the function ϕ, implemented as a large language model (LLM), takes the padded sequence of words as input and produces a corresponding sequence of token vectors $Y_i \in \mathbb{R}^M$ with $i \in \{1, \dots, N\}$ as output.

While not crucial for our discussion, the SD model also contains an encoding network h that maps images $\boldsymbol{x}$ to corresponding latent codes $\boldsymbol{z} = h(\boldsymbol{x}) \in \mathbb{R}^{4\times \frac{H}{s}\times \frac{W}{s}}$, where s divides H and W. The function h is an autoencoder and has a left inverse h^*, such that $\boldsymbol{x} = h^* \circ h(\boldsymbol{x})$. The main purpose of this component is to replace the problem of modeling $p(\boldsymbol{x} \mid y)$ with the problem of modeling $p(\boldsymbol{z} \mid y)$, reducing the spatial resolution s-fold.

The other key component of SD is an iterative conditional denoising network D. This network is trained to output a conditional sample $\boldsymbol{z} \sim p(\boldsymbol{z} \mid y)$ of the latent code $\boldsymbol{z}$. It is designed to take a noised sample $\boldsymbol{z}_t = \alpha_t \boldsymbol{z} + \sqrt{1-\alpha_t}\boldsymbol{\epsilon}_t$, where $\boldsymbol{\epsilon}_t$ is normally distributed noise and α_t is a decreasing sequence, from $\alpha_0 \approx 1$ to $\alpha_T \approx 0$, representing the noise schedule. Then, the network D returns an estimate of the noised sample $\boldsymbol{z}_t$: $D(\boldsymbol{z}_t, y, t) \approx \boldsymbol{\epsilon}_t$. To sample an image, one first samples $\boldsymbol{z}_T$, which is normally distributed, and applies D iteratively, to obtain the intermediate codes $\boldsymbol{z}_{T-1}, \dots, \boldsymbol{z}_1, \boldsymbol{z}_0 \approx \boldsymbol{z}$. Finally, $\boldsymbol{z}$ is converted back to an image via the image decoder $\boldsymbol{x} = h^*(\boldsymbol{z})$.

Rechnung

Atelier Lindenhof · Gartenstraße 12 · 79098 Freiburg
Rechnungsnummer RE-2026-0311 · Datum 14.10.2026

Leistung	Menge	Einzelpreis	Betrag
Entwurf Ladenschild	1	420,00	420,00
Druck auf Alu-Verbund	2	185,50	371,00
Montage vor Ort	3	58,00	174,00
Anfahrt	1	35,00	35,00

Zahlungsart	Fällig am
Überweisung	28.10.2026

Gesamtbetrag **1.000,00 EUR**

Certificate of Achievement

This certificate is proudly presented to

Amara Nwosu-Fischer

for outstanding completion of the Advanced Data Stewardship Programme
with distinction, awarded on the fourth of November, two thousand twenty-six.

Certificate No. ADS-2026-00417 · 120 contact hours · Grade 94 / 100

Dr. Helena Brandt
Programme Director

Prof. Tomas Ortega
Dean of Studies

OFFICIAL
SEAL 2026

Invoice

Elena Martin | ID: DOC-101-1 | 2026-10-15

From: Northfield Studio

Bill to: Elena Martin

Description	Qty	Unit price	Amount
Office paper	1	12.35	12.35
Delivery service	2	15.55	31.10
Maintenance kit	3	18.75	56.25
Consultation	4	21.95	87.80
Storage boxes	5	25.15	125.75
Printer ink	6	28.35	170.10

Total due

739.55

IBAN: FR76 3000 6000 0112 3456 7890 189

billing@example.test

Invoice

Elena Martin | ID: DOC-101-1 | 2026-10-15

From: Northfield Studio

Bill to: Elena Martin

Description	Qty	Unit price	Amount
Office paper	1	12.35	12.35
Delivery service	2	15.55	31.10
Maintenance kit	3	18.75	56.25
Consultation	4	21.95	87.80
Storage boxes	5	25.15	125.75
Printer ink	6	28.35	170.10

Total due


739.55

IBAN: FR76 3000 6000 0112 3456 7890 189

billing@example.test

Quarterly visitors

The museum counted its visitors at the entrance gates in every quarter of the year. The chart shows the totals in thousands; school groups are included in every quarter.

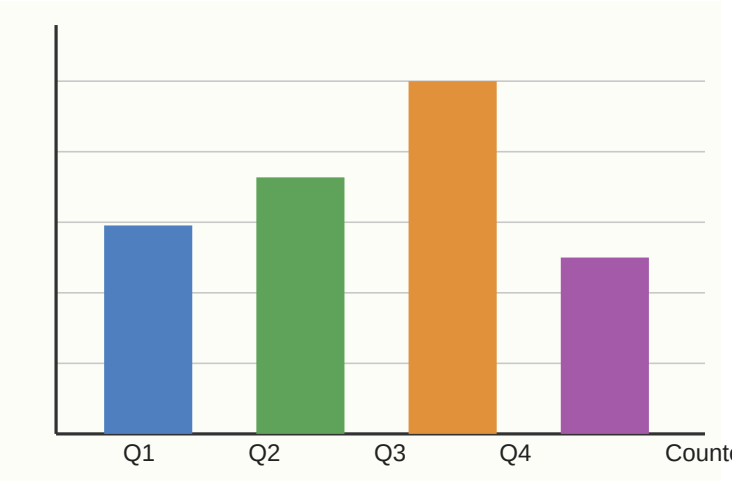

Counted at the entrance gates, all four quarters

Visits peaked in the third quarter, when the summer exhibition opened. The winter months were quieter than in the previous year because the east wing was closed for repairs. School groups made up about a fifth of all visits in every quarter.



I. DEVENGOS

1.	Percepciones salariales	Importe
	Salario base	1.250,00
	Complementos salariales	180,00
2.	Percepciones no salariales	Importe
	Indemnizaciones o suplidos	45,00
	Prestaciones de la Seguridad Social	0,00

Récapitulatif annuel des frais

DES FRAIS DÉTAILLÉS POUR CHAQUE SERVICE

Vous avez accès au détail de chaque frais prélevé sur votre compte au cours de l'année.
Les montants sont indiqués toutes taxes comprises.

UNE COLONNE « CRÉDIT » POUR LES REMBOURSEMENTS

Les sommes remboursées par la banque apparaissent dans la colonne crédit.

Total des frais de l'année	**42,50**

Document d'information, sans valeur contractuelle.