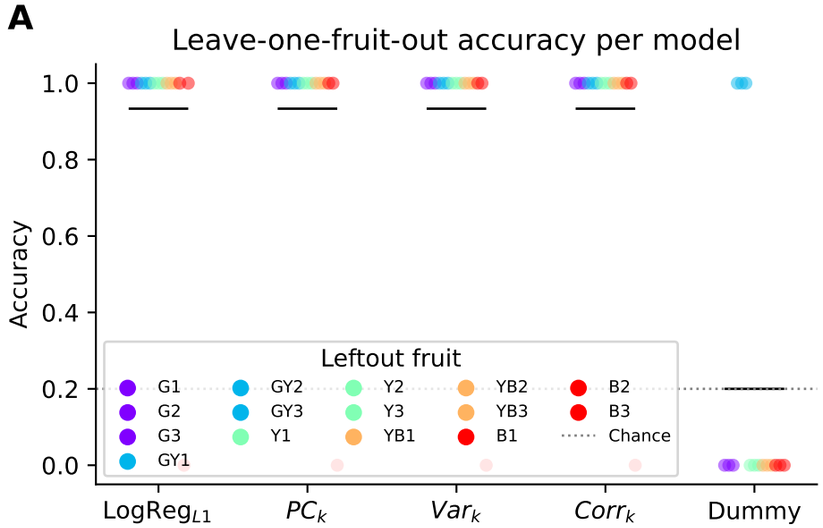
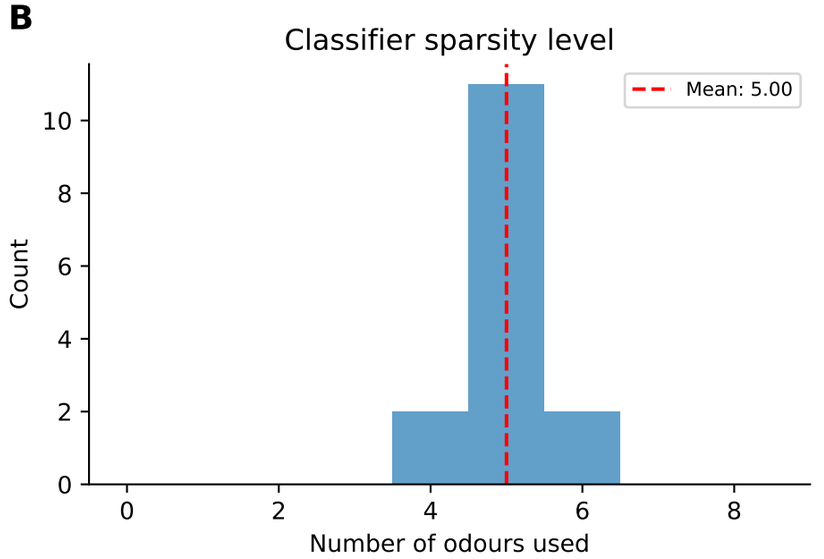
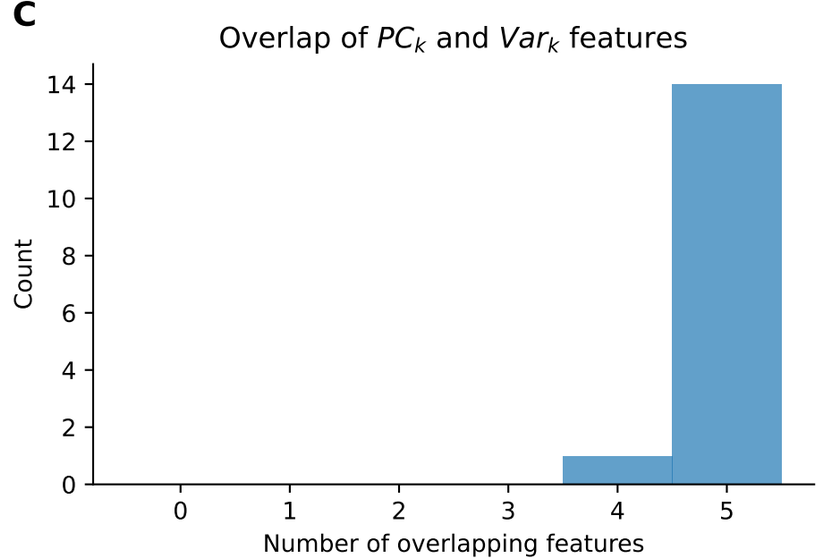
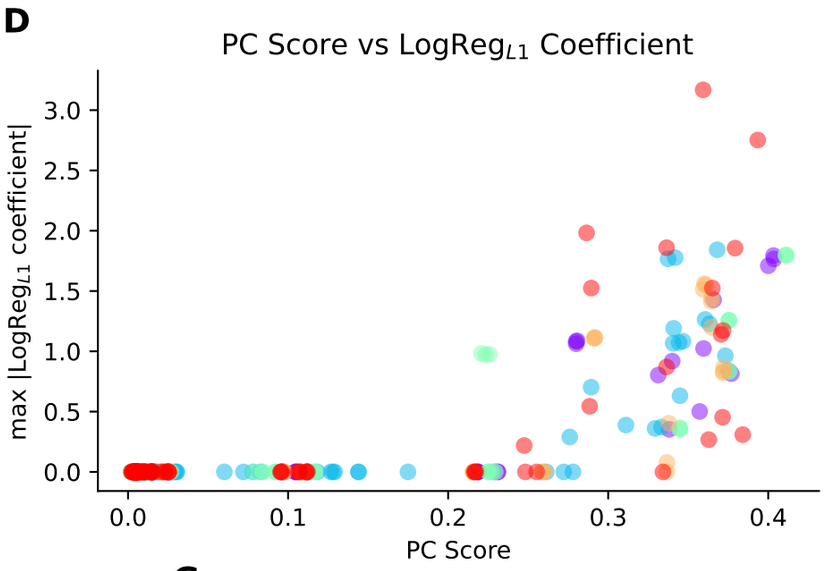
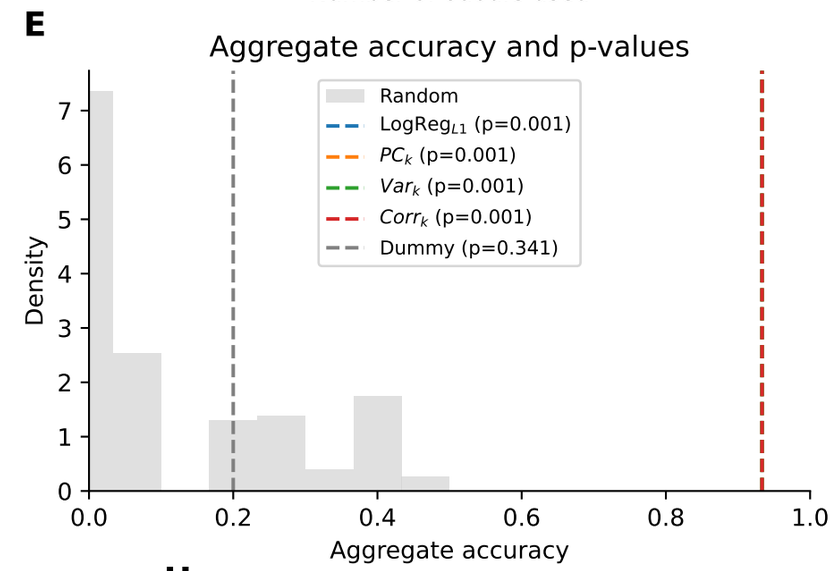
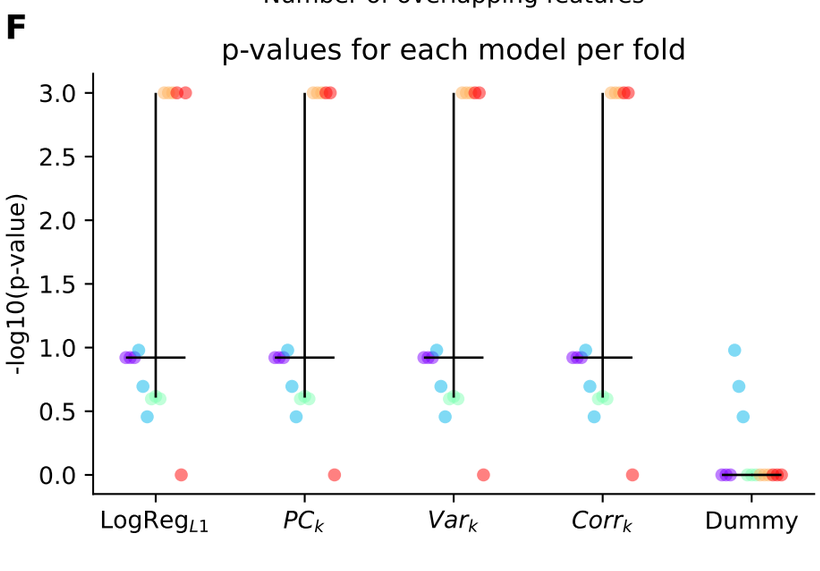

A
Leave-one-fruit-out accuracy per model
Accuracy
Leftout fruit
G1
G2
G3
GY1
GY2
GY3
Y1
Y2
Y3
YB1
YB2
YB3
B1
B2
B3
Chance
LogReg$_{L1}$
PC_k
Var_k
$Corr_k$
Dummy

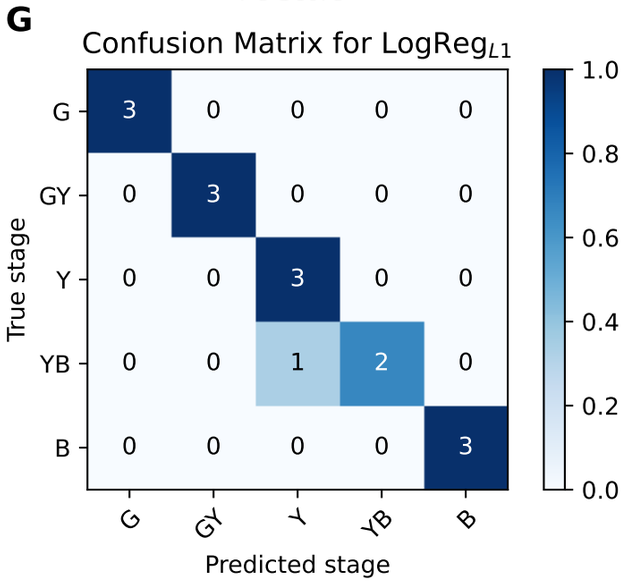

B
Classifier sparsity level
Mean: 5.00
Count
Number of odours used

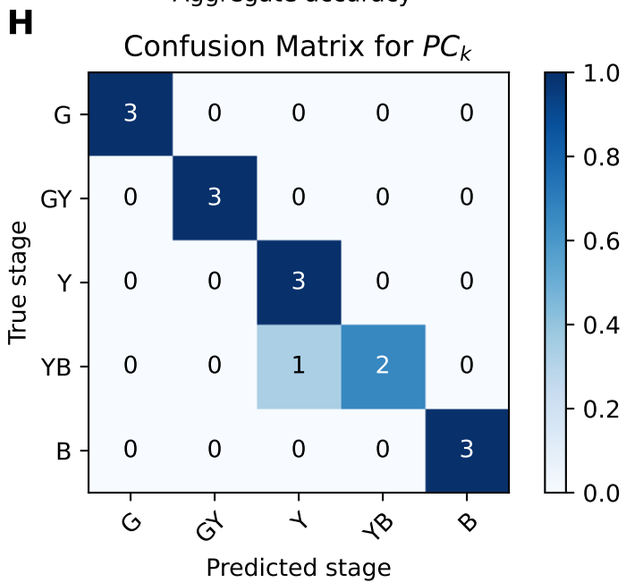

C
Overlap of PC_k and Var_k features
Count
Number of overlapping features

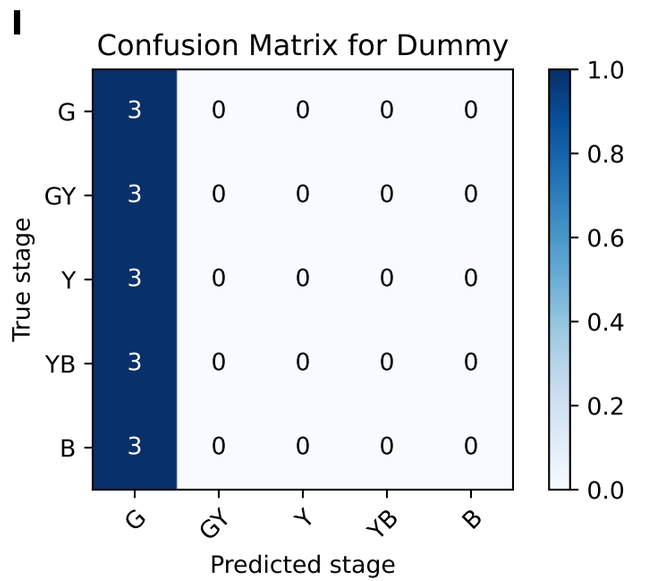

D
PC Score vs LogReg$_{L1}$ Coefficient
max |LogReg$_{L1}$ coefficient|
PC Score


E
Aggregate accuracy and p-values
Random
LogReg$_{L1}$ (p=0.001)
PC_k (p=0.001)
Var_k (p=0.001)
$Corr_k$ (p=0.001)
Dummy (p=0.341)
Density
Aggregate accuracy


F
p-values for each model per fold
-log10(p-value)
LogReg$_{L1}$
PC_k
Var_k
$Corr_k$
Dummy


G
Confusion Matrix for LogReg$_{L1}$
True stage
Predicted stage
G
GY
Y
YB
B


H
Confusion Matrix for PC_k
True stage
Predicted stage
G
GY
Y
YB
B


I
Confusion Matrix for Dummy
True stage
Predicted stage
G
GY
Y
YB
B