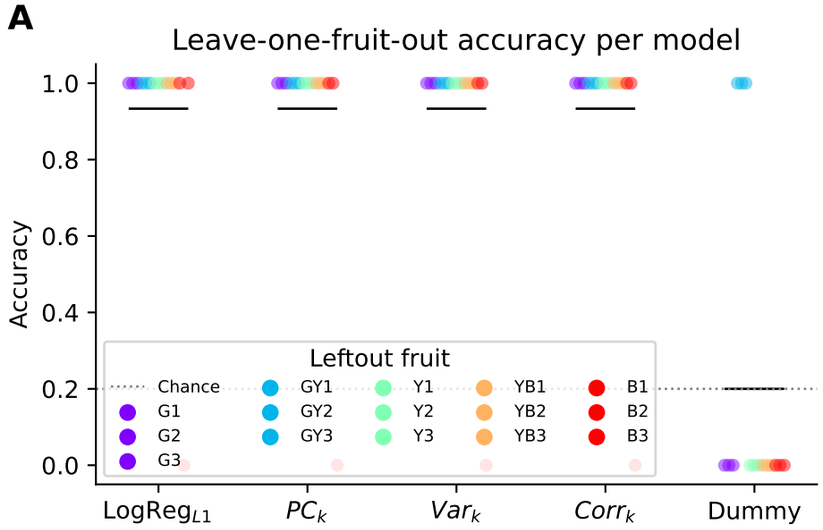
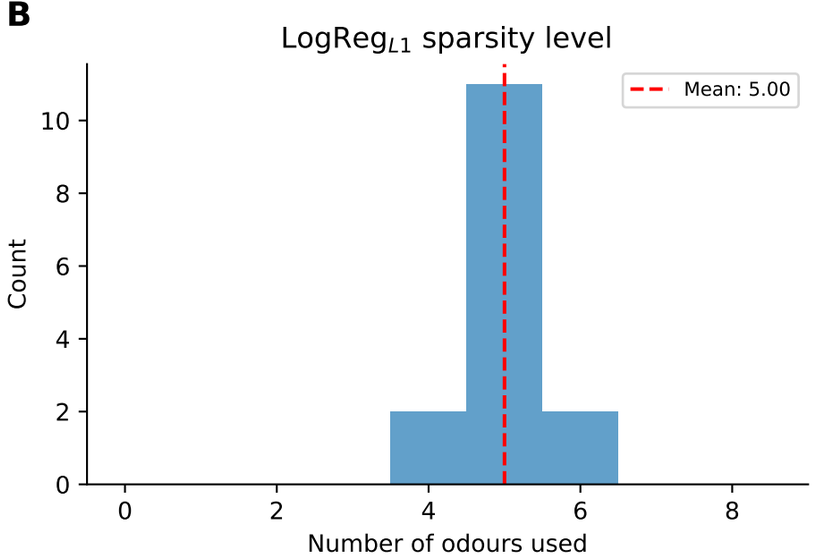
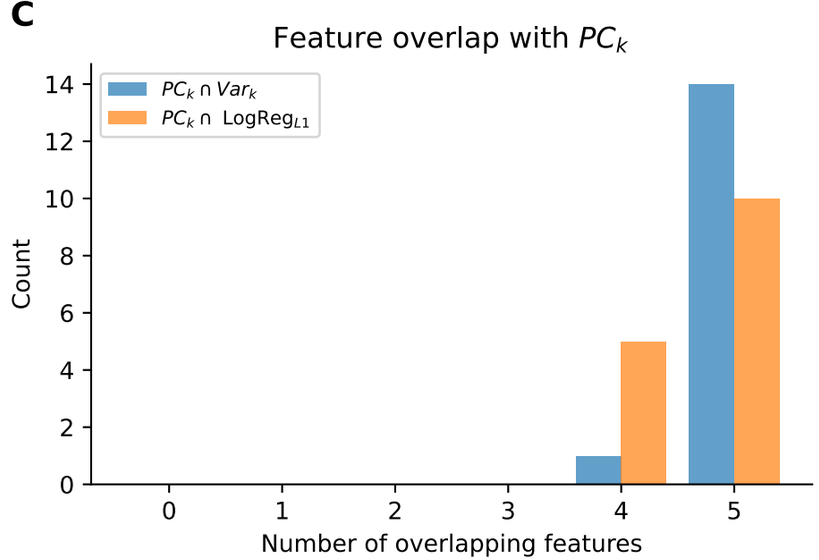
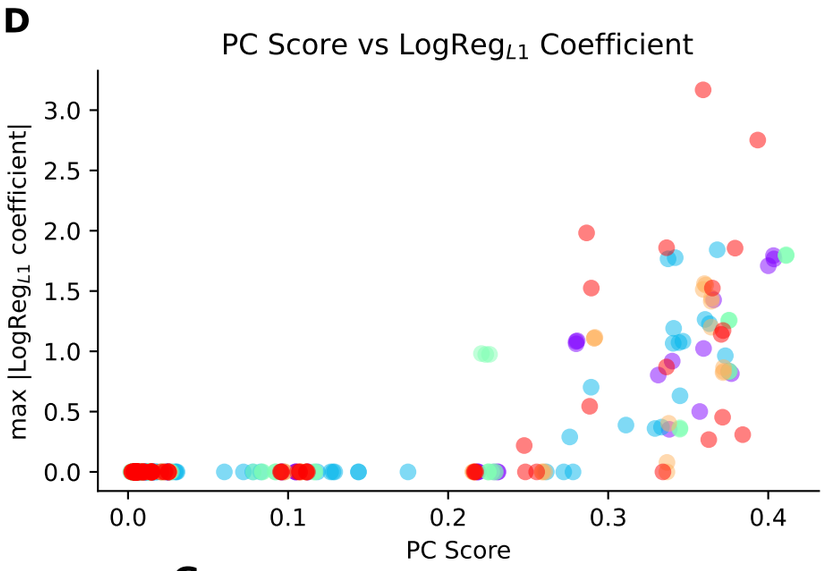
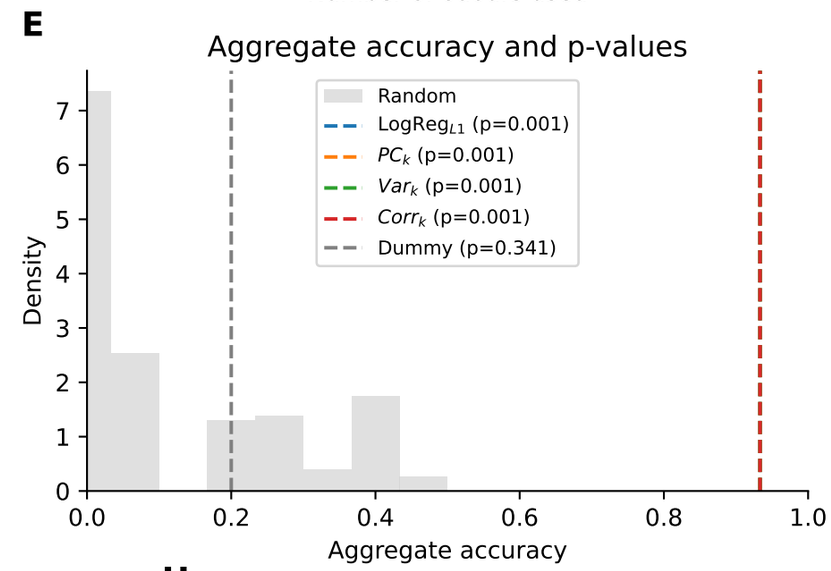
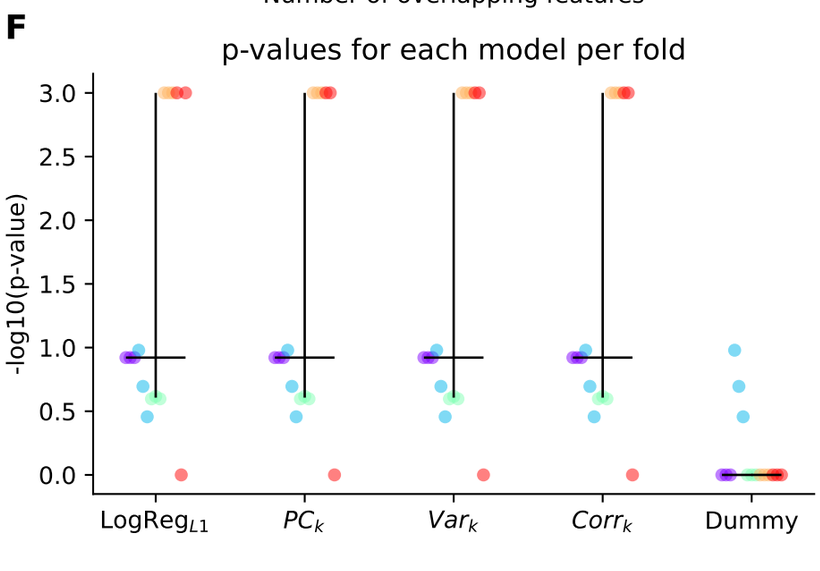

A
Leave-one-fruit-out accuracy per model
Accuracy
Leftout fruit
Chance
G1
G2
G3
GY1
GY2
GY3
Y1
Y2
Y3
YB1
YB2
YB3
B1
B2
B3
LogReg$_{L1}$
PC_k
Var_k
$Corr_k$
Dummy


B
LogReg$_{L1}$ sparsity level
Mean: 5.00
Count
Number of odours used


C
Feature overlap with PC_k
$PC_k \cap Var_k$
$PC_k \cap$ LogReg$_{L1}$
Count
Number of overlapping features


D
PC Score vs LogReg$_{L1}$ Coefficient
max |LogReg$_{L1}$ coefficient|
PC Score


E
Aggregate accuracy and p-values
Random
LogReg$_{L1}$ (p=0.001)
PC_k (p=0.001)
Var_k (p=0.001)
$Corr_k$ (p=0.001)
Dummy (p=0.341)
Density
Aggregate accuracy


F
p-values for each model per fold
-log10(p-value)
LogReg$_{L1}$
PC_k
Var_k
$Corr_k$
Dummy

G
Confusion Matrix for LogReg$_{L1}$
True stage
Predicted stage

H
Confusion Matrix for PC_k
True stage
Predicted stage

I
Confusion Matrix for Dummy
True stage
Predicted stage