

Improving Data Placement Decisions for Heterogeneous Clustered File Systems

Cyril Allen

A Thesis in the Field of Information Technology
for the Degree of Master of Liberal Arts in Extension Studies

Harvard University

March 2018

Abstract

With the advent of cloud computing, datacenters are making use of distributed applications more than ever. MapReduce is used to generate over 20 petabytes of data per day using very large numbers of commodity servers [8]. Many companies use large scale clusters to perform various computational tasks via the the open-source MapReduce implementation, Hadoop [11], or they can possess a virtualized datacenter allowing them to migrate virtual machines between various machines for high-availability reasons. As economics change for hardware, it is likely that a scalable cloud will have the requirement to mix node types, which will lead to higher performance and higher capacity nodes to be mixed with lower performance, lower capacity nodes. This thesis presents an adaptive data placement method in the Nutanix distributed file system which will remedy some common problems found in many heterogeneous clustered file systems.

Acknowledgements

First off, I would like to thank my thesis director, Prof. Jamie Frankel. It has been a truly amazing learning experience working with him.

I doubt I would be writing this document if it were not for my father, Dr. Cyril Allen. Not only did he spark my initial interest in computing as a child, he convinced me to pursue a graduate degree! Thanks, Dada.

Thanks are also due to my amazing mother, Dr. Hengameh Allen-Schaal, for her unconditional love and support. She has always been there for me when I needed her, even when we began living in different states. I could not have done any of this without her.

Monique Fahmy

Contents

1	Introduction	1
1.1	Nutanix and the Acropolis Base System	1
1.1.1	Architecture	1
1.1.2	Stargate	3
1.1.3	Cassandra	3
1.1.4	The Extent Store	4
1.1.5	Storage Tiering and Data Replication	4
1.1.6	Replica Selection	5
1.2	Motivation	7
1.2.1	Interfering Workloads	7
1.2.2	Nodes with Tier Size Disparities	8
2	Prior Work	9
2.1	Clustered Storage Systems	9
2.2	Data Placement Schemes in Clustered Storage Systems	11
2.3	Non-clustered Data Replication via RAID	13
2.4	EIGRP and the Inspiration for Fitness Values	13
3	Implementation	15
3.1	Fitness Values and Functions	15
3.2	Stargate Disk Stats Collection	16
3.3	Weighted Random Selection Algorithms	16
3.3.1	Scalability Simulation Methodology	16
3.3.2	Herding Behavior Evaluation Methodology	17
3.3.3	Stochastic Universal Sampling (SUS) Simulations	18

3.3.4	Tructation Selection Simulations	20
3.3.5	Two-choice Sampling Simulations	20
3.3.6	Uniform Random Selection Simulations	22
3.3.7	Weighted Random Algorithm Scalability Analysis	23
3.4	WeightedVector Class	24
3.4.1	Weighted Vector Internals	27
3.4.2	Weighted Vector Unit Testing	28
3.5	Replica Selection Changes	30
4	Evaluation and Results	31
4.1	Experimental Setup	31
4.2	Fio and Write Patterns	31
4.3	Tier Utilization Experiments	32
4.3.1	Low Outstanding Operation Results	32
4.3.2	High Outstanding Operation Results	36
4.4	Disk Queue Length Experiments	36
5	User Guide	38
5.1	Scraping Data From the Nutanix Cluster	38
5.2	Re-creating Experiments	38
6	Summary and Conclusions	41
6.1	Limitations	41
6.2	Future Work	42
6.2.1	Real-time Fitness Feedback	42
6.2.2	Read Replica Selection	42
6.2.3	More Fitness Function Variables	43

6.2.4	Additional Testing	43
A	Appendix	49
A.1	Herding Behavior Due to Implementation Bug	49

List of Figures

1	Testing size.	1
2	Nutanix node architecture diagram from the Nutanix Bible[22]. . . .	2
3	A cluster with identical nodes running a heterogeneous workload. . .	7
4	A cluster with nodes of varying resource capacity.	9
5	Histograms generated by simulation of Stochastic Universal Sampling to illustrate selection distributions.	19
6	Histograms generated by simulation of Stochastic Universal Sampling to illustrate herding behavior.	19
7	Histograms generated by simulation of truncation selection to illustrate selection distributions.	20
8	Histograms generated by simulation of truncation selection to illustrate herding behavior.	21
9	Histograms generated by simulation of two-choice selection to illustrate selection distributions.	21
10	Histograms generated by simulation of two-choice selection to illustrate herding behavior.	22
11	Histograms generated by simulation of uniform random selection to illustrate selection distributions.	22
12	Histograms generated by simulation of uniform random selection to illustrate herding behavior.	23
13	Running times of various weight random selection algorithms.	24
14	$d_{hot\ tier}$ values over time for low outstanding I/O operations.	33
15	b_r values with static queue lengths at the fitness function ceiling values.	35
16	b_r values with static queue lengths at 1.	35

17	$d_{hot\ tier}$ values over time for low outstanding I/O operations.	36
18	Queue lengths for all SSDs on the specified nodes sampled every 1 second.	37
19	Queue lengths for all SSDs on the specified nodes sampled every 1 second.	37
20	$d_{hot\ tier}$ values over time for low outstanding I/O operations. This set of experiments contains the stats update bug.	49

List of Tables

1	Argument descriptions for DetermineNewReplicas.	6
2	Common RAID levels and their descriptions.	13
3	WeightedVector public interface.	26
4	Inner vector example part 1.	27
5	Inner vector example part 2.	27
6	Inner vector example part 3.	28
7	Inner vector example part 3.	28
8	Disk usage and performance lookup callback functions.	50

1 Introduction

The work in this thesis was performed in the context of a distributed file system designed by Nutanix for enterprise clusters. Given that a write operation that results in the creation of new data in this file system is not complete until all replicas of the data are written to disk, a write's performance is at the mercy of the slowest disk in the set chosen to host replicas and all entities those disks are dependent on. These entities could include variables such as the server's average CPU utilization and the number of operations already in flight on a chosen disk. To mitigate the negative impact these variables could have on a write, the file system should take into account how these variables will affect a disk's performance before choosing to target it for a write operation. This results in biasing toward disks that will give better performance overall.

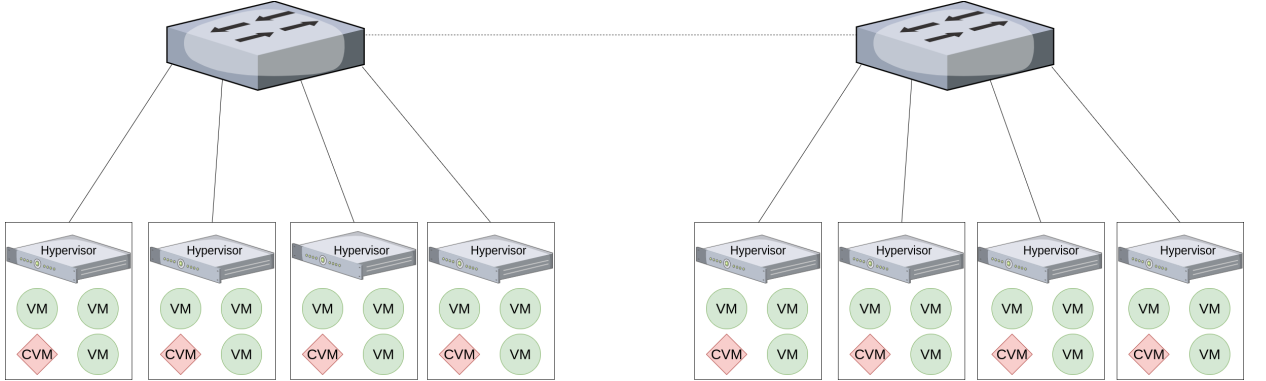


Figure 1: Testing size.

1.1 Nutanix and the Acropolis Base System

1.1.1 Architecture

A Nutanix cluster is facilitated by a clustering of controller virtual machines (CVMs) which reside, one per node, on each server in the cluster as shown in Figure 2. CVMs

work together to form a distributed system that provides an NFS (for VMWare’s ESXi [5]), SMB (for Microsoft’s Hyper-V [27]), or iSCSI (for Nutanix’s AHV [22]) interface to each hypervisor that they reside on. For example, the interface provided by the CVMs to VMware’s ESXi hypervisor will be interfaced as a storage target, or in ESXi terminology, a datastore. The virtual machines’ virtual disk files will reside on the Nutanix datastore and be accessed via NFS through the CVM sharing a host with the other hosted VMs.

Users of a Nutanix cluster will typically have virtual machines (VMs) hosted by one of the hypervisors previously mentioned. These VMs will have their storage requests forwarded to the local CVM hosted on the same node, or another CVM in the cluster in the event that the local CVM is down. This fault tolerance is one of the advantages to using a clustered file system such as Nutanix as opposed to a monolithic storage array.

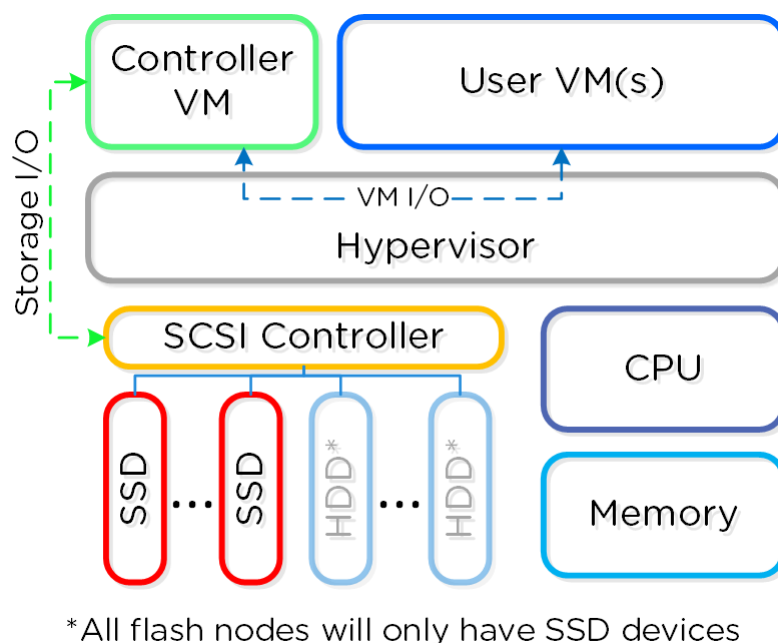


Figure 2: Nutanix node architecture diagram from the Nutanix Bible[22].

The CVMs expose some number of block devices, known as vDisks, that are used

by the VMs hosted by the hypervisor. Within each CVM exists an ecosystem of processes responsible for the services provided by the Nutanix cluster. The work in this thesis is scoped specifically to the process that is directly responsible for disk I/O in the CVM ecosystem, Stargate.

1.1.2 Stargate

The Stargate process is responsible for all data management and I/O operations. The messages sent via NFS/SMB/iSCSI from the hypervisor to the CVM are consumed and acted upon by Stargate. All file allocations and data replica placement decisions are made by this process.

As the Stargate process facilitates read/write I/O to physical disks, it gathers statistics for each disk such as the number of operations currently in flight on the disk (queue length), how much data in bytes currently resides on the disk, and the average time to complete an operation on the disk. These statistics are only gathered on the local disks; however, they are then stored in a distributed database via another service, Arithmos. Along with the statistics gathered by every other Stargate in the cluster, these disk statistics stored in the database and are pulled periodically and are then used to make decisions on whether a disk has enough space available to make it a write target. The work in this thesis uses other available statistics to make better placement decisions when performing writes.

1.1.3 Cassandra

Cassandra stores and manages all cluster metadata in a distributed manner. It is also the distributed database used by Arithmos to store cluster statistics. The version of Cassandra running in NDFS is a heavily modified Apache Cassandra [14]. One of the main differences between Nutanix Cassandra and Apache Cassandra is that Nutanix

has implemented strict consistency via Lamport’s Paxos [15] protocol.

1.1.4 The Extent Store

The Extent Store is a sub-component of Stargate that serves as the persistent bulk storage. Data stored within the Extent Store are referred to as extent groups (also abbreviated as egroups), or 4MB pieces of physically contiguous data. An extent group is replicated a number of times dependent on the cluster replication factor and each replica is placed on a different CVM except for a single replica that resides on the local node. The current replica selection algorithm will be explained in further detail in section 1.1.6.

1.1.5 Storage Tiering and Data Replication

Data in the system is physically stored on disks of varying type. Within a given cluster, one can find NVMe, PCIe SSD, SATA SSD, and HDD drive types. These disks are separated into groups of drives with similar performance characteristics, referred to as storage tiers. For example, PCIe SSDs and SATA SSDs might belong together in the same storage tier, but hard drives would not be included due to their relatively poor random access performance. Extent groups and their replicas are created on a particular storage tier, but may be migrated between tiers depending on data access patterns.

Data replicas for each extent group are written on separate fault domains on the same tier to ensure that in the event a failure occurs and a replica becomes unavailable, that piece of data can still be accessed. An example of a fault domain can be a node (single CVM) or a block (a rackable unit of hardware containing multiple nodes).

1.1.6 Replica Selection

Stargate is inherently limited in its choices of disk to service reads since it must select a disk that contains the desired data. If the data is on a local disk, this disk is always selected to avoid the unnecessary overhead of data traversal over the network when selecting a remote disk. However, when selecting disks to service writes, Stargate must decide whether to perform an in-place overwrite for writes over existing ranges of data or whether to generate new data. In-place overwrites are similar to reads in that the choice of target disk is limited by where the relevant data resides. When enabling a common data reduction feature such as data deduplication, in-place overwrites are not performed since the metadata for multiple logical ranges of data point to the same physical data. In the case of overwrites of deduplicated data and all scenarios where data is being created for the first time, Stargate has the freedom to choose any disk in the cluster.

When a Stargate write operation wants to select disks for data placement upon entrance into the Extent Store, it is done on a per-tier basis. The interface for a replica selection function call, `DetermineNewReplicas`, takes the following arguments:

Upon calling `DetermineNewReplicas`, Stargate first attempts to select replicas from the preferred nodes. This involves finding the set of disks that belong to each node on the specified tier, shuffling the disks, and sequentially evaluating each disk until a suitable one is found (the evaluation step). If a suitable disk is not found on a preferred node, all other disks belonging to the specified tier are shuffled and considered sequentially until enough disks are found to satisfy the requirement set by `replica_vec`.

A suitable disk is one that:

Table 1: Argument descriptions for DetermineNewReplicas.

Argument Name	Description
<code>replica_vec</code>	A <code>std::vector</code> that is populated with the selected disk IDs. The number of selections made is the size of this vector.
<code>storage_tier</code>	The name of the storage tier (set of disks) to select for data placement.
<code>storage_pool_vec</code>	The collection of all disks in the cluster.
<code>preferred_node_vec</code>	Nodes Stargate prefers to choose disks from. This means it will consider disks from these nodes first and only consider other disks if the ones belonging to these nodes are not suitable.
<code>predicate_func</code>	A function that accepts a disk ID and returns a boolean. If this function returns false for any disk ID, it is not considered for selection.
<code>exclude_replica_vec</code>	Disk IDs that will be excluded from selection.
<code>exclude_node_vec</code>	Node IDs whose disks will be excluded from selection.
<code>exclude_rackable_unit_vec</code>	Rack IDs whose disks will be excluded from selection.

1. Contains enough space to accept new data. This is less than 95% by default for Nutanix clusters.
2. Returns "true" when evaluated by the `predicate_func`.
3. Is not included in the `exclude_replic_vec`, `exclude_node_vec`, and `exclude_rackable_unit_vec`.

If a disk does not meet the criteria above, Stargate simply continues searching the shuffled set of disks belonging to the specified tier. If a disk is found to be suitable, Stargate must add the disk to the `replic_vec` and add the node that the disk belongs to in the `exclude_nod_vec`. This prevents it from considering other disks on that node to maintain a node fault tolerance guaranteed by the cluster's replication factor.

1.2 Motivation

The current replica disk selection logic in Stargate uses does not take into account a number of variables such as disparities in tier size, CPU power, workloads, and disk health among other things. There are several scenarios, both pathological and daily occurrences, where a more robust replica placement heuristic is required. The work in this thesis will focus on two orthogonal cases described in the next section.

1.2.1 Interfering Workloads

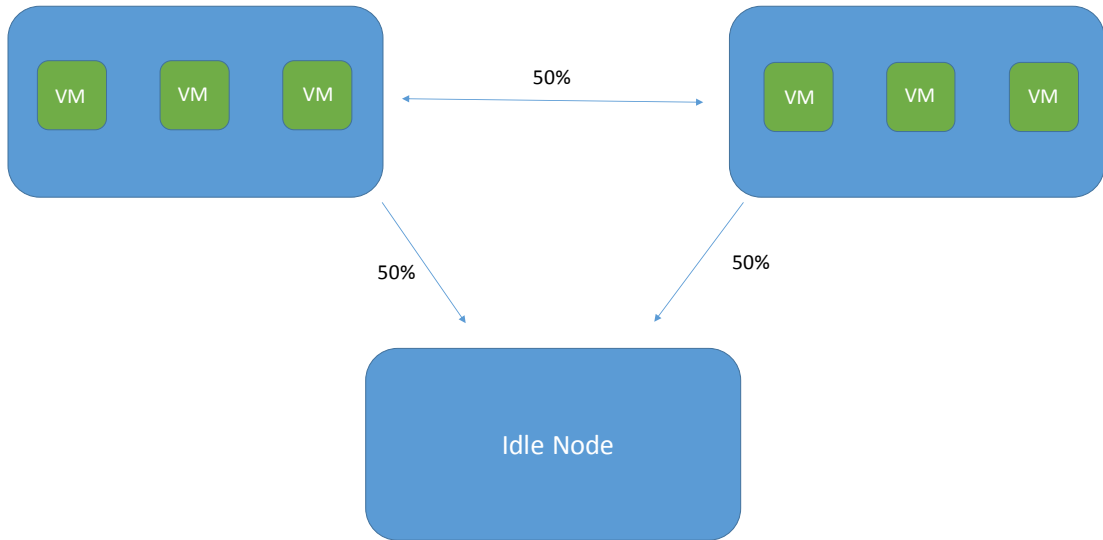


Figure 3: A cluster with identical nodes running a heterogeneous workload.

As shown in Figure 3, interfering workloads can take the form of a homogeneous cluster of 3 servers in a full mesh network (also referred to as a 3 node cluster) with only 2 nodes hosting active workloads. In the current random selection scheme used by Nutanix clusters, writes in this example are equally likely to place their replica on the remote node with an active workload as they would be to place it on the remote node that is idle. This can impact performance on both the local and remote

workloads as secondary writes will be slower on nodes whose resources are being utilized by their primary workloads. A data replica placement scheme is needed that adapts its behavior based on how less busy the target nodes are. This would result in a bias towards nodes that are more idle.

1.2.2 Nodes with Tier Size Disparities

A cluster containing nodes with a tier size disparity are susceptible to a large skew in space utilization on the node, even if the workload on each node is identical. This can be illustrated via Figure 4 which shows a 3-node heterogeneous cluster with 2 high-capacity nodes and a single low-capacity node. Suppose these high-capacity nodes have 500GB of SSD tier, 6TB of HDD tier and the single weak node has only 128GB of SSD tier and 1TB of HDD tier. If 3 simultaneous workloads were to generate data such that the working sets of these workloads are 50% of the local SSD tier, the weaker node is at a significant disadvantage. Given the replica selection algorithm in Nutanix cluster versions prior to 5.0, one can expect 500GB of replica traffic to flood the weak node and fill up its SSD tier well before the workload is able to write its data to the local disks. Since this results in an inability for the workload on the smaller node to place its primary replicas locally and forces the workload to rely on remote CVMs, latency is increased due to the network traversal to reach the remote nodes. An adaptive replica placement heuristic would mitigate this issue by taking disk usages into consideration during the placement of secondary replicas and bias placement of secondary replicas toward the nodes with more free capacity.

To create a context for the work in this thesis, it's necessary to delve deeper into what a Nutanix cluster is and give a brief overview of the I/O path. Section 1.1 will be devoted to this overview.

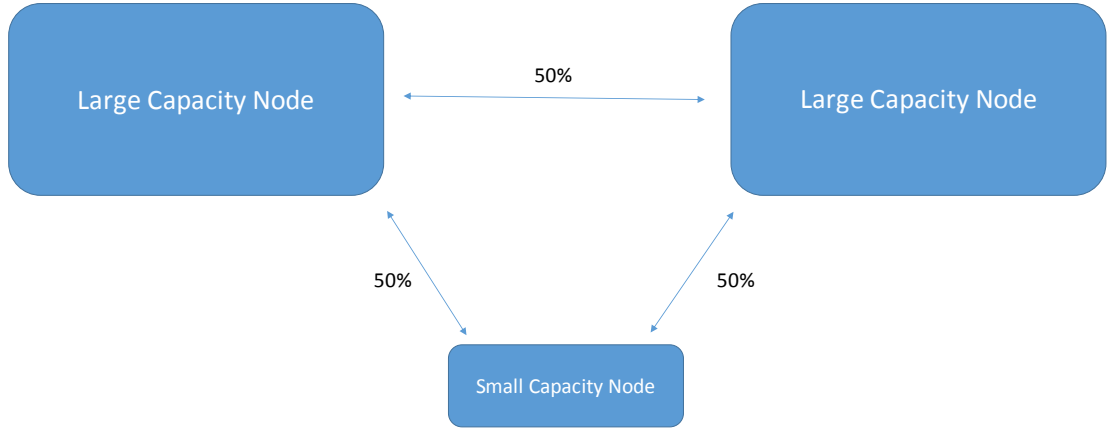


Figure 4: A cluster with nodes of varying resource capacity.

2 Prior Work

2.1 Clustered Storage Systems

Among the contemporary distributed storage systems, Apache’s Hadoop Distributed File System (HDFS) [11] is one of the most well known. HDFS is an open source distributed file system written as a userspace library in Java that is used by Hadoop clusters for storing large volumes of data. An HDFS cluster is comprised of a single NameNode and multiple DataNodes which respectively manage cluster metadata and store the data. HDFS stores files as a sequence of same-size 128MB blocks that are replicated across DataNodes to provide fault tolerance in the event of node failures. Decisions regarding the replication and placement of blocks of data are made by the NameNode. Since large HDFS clusters will span multiple racks, replica placement within HDFS is made in a rack-aware manner to improve data reliability and network utilization.

While HDFS is an open source distributed file system that is part of the greater Apache Hadoop ecosystem, the Google File System (GFS) [10] is a proprietary distributed file system developed by Google that inspired HDFS. Google’s goal was to build a very large storage network from inexpensive commodity hardware [17], so scalability, fault tolerance, and error detection were top-of-mind when designing the GFS.

A GFS cluster is comprised of a single Master node and multiple Chunkservers that store 64MB ”chunks,” or blocks, of data. Each file in the GFS is divided into the 64MB chunks and each chunk is replicated by the Chunkservers multiple times throughout the GFS cluster. Master nodes store the metadata associated with the chunks such as chunk location or which processes are operating on a chunk. While the initial decision by the Google GFS team to have a single master node introduces a single point of failure, this did not pose a problem at the time of initial implementation. The GFS was initially meant to handle data on the order of a few hundred Terabytes from the early web crawler.

As Google’s data grew to the order of tens of Petabytes, the single master node became a bottleneck. The master node task for scanning metadata during chunk recovery scaled linearly with the amount of data and each GFS client spoke to the master when performing a file open operation. Ultimately, Google took a ”multi-cell” approach with GFS which allowed for multiple GFS masters for a pool of chunk servers. Each GFS client application was then able to shard data across multiple cells, creating their own master node fault domains.

Both the HDFS and GFS architectures prioritize high sustained bandwidth over low I/O latency. One source of latencies in these architectures comes from the network partition between file system clients and the servers hosting the file system services. The Nutanix storage system differs from the HDFS and GFS in that the clients are

hosted on the same servers as the file system services and data since the client VMs and CVM always share physical hardware. For client read requests, this means that there is no network traversal necessary to access data.

2.2 Data Placement Schemes in Clustered Storage Systems

Xie et. al. [29] showed that data placement schemes based on the computing capacities of nodes in the HDFS significantly improved workload performance. These computing capacities are determined for each node in the cluster by profiling a target application leveraging the HDFS. Their MapReduced `wordcount` and `grep` results showed up to a 33.1% reduction in response time. Similarly, Perez et. al. [20] used adaptive data placement featurers that make use of data regarding the available free space in their Expand parallel file system design. Though effective in their given contexts, the main drawback to this approach is that it assumes the specific application is working without interference and does not account for other workloads on the system.

One adaptive data placement approach that can account for other workloads on the system was introduced by Jin et. al. [13] in their work on ADAPT . The study predicts how failure-prone a node in a MapReduce cluster is and advises their availability-aware data placement algorithm to avoid those nodes. This proves useful for performance by avoiding faulty nodes that could fail mid-task and cause data transfers and re-calculation of data.

Work by Suresh et. al. [25] approaches adaptive replica selection in much the same way as this thesis, though their work was mainly focused on decreasing tail latencies for Apache Cassandra [14] reads. Their load balancing algorithm, C3, incorporates the concept of a value calculated from request feedback from their servers. The value then guides decisions made regarding which servers to select for future requests. In

addition to the ranking function in C3, they implemented a distributed rate control mechanism to prevent scenarios where many individual clients can bombard a single highly desirable server with requests. Many of the same problems that the work in this thesis seeks to remedy are addressed by the C3 algorithm, such as the reduction of I/O latency. However, the C3 algorithm is not a feasible solution when it comes to reducing each Nutanix node's disk utilization skew relative to the other nodes in the cluster.

The C3 algorithm takes into account the request queue length of certain servers similar to the way I will use disk queue lengths. In addition Suresh et. al. factor in the service latencies of each server so that they may consider a different ideal queue length for each server. With this approach, longer service times will warrant a lower queue length and vice versa. This is beneficial for scenarios where there are multiple underlying storage technologies such as NVMe drives, SSDs, and HDDs under consideration, but the Nutanix file system's architecture does not allow for multiple replicas to span storage tiers. This forces the ideal queue lengths for each selection pool to be the same. Therefore, this thesis does not incorporate service latencies in the fitness value calculations discussed in section 3.1.

Herding of requests to a single highly suitable server is a problem that arises in any replica ranking algorithm. C3 mitigates this issue by rate limiting client requests to each server via a decentralized calculation using a configured time interval and local sending rate information. I've opted to use a simpler probabilistic spreading of client requests via selecting remote nodes using weighted random selection based on the calculated fitness values. This fitness value approach was inspired by Cisco's Enhanced Interior Gateway Routing Protocol (EIGRP) [1] and its composite routing metric calculations discussed further in section 2.4.

2.3 Non-clustered Data Replication via RAID

So far, I have only discussed distributed file systems and data replica placement schemes in a clustered/distributed context. It is worth noting that not all storage replication occurs across a network partition. For example, it is common to see Redundant Arrays of Inexpensive Disks (RAID) [19] [6] used on servers to increase performance or to protect data written to the disks in the event of a drive failure.

Table 2: Common RAID levels and their descriptions.

RAID Level	Description
RAID 0	Disk striping with no replication.
RAID 1	Disk mirroring.
RAID 5	Block-level striping with distributed parity.
RAID 6	Block-level striping with doubly distributed parity.

RAID combines multiple physical disks into a single logical disk that is then presented to the operating system as a single device. The exact data replication scheme that dictates the way data is distributed across the drives is known as the RAID level. Table 2 shows some of the standard RAID levels.

2.4 EIGRP and the Inspiration for Fitness Values

EIGRP [1] is Cisco’s proprietary routing protocol and enhancement to their Interior Gateway Routing Protocol (IGRP). In EIGRP, each router keeps information about its adjacent neighbors containing the address and interface of the connected neighbor. This information is needed because of the Topology Table (also referred to as the Distance Table) which contains the distance, bundled with an associated metric, to all destinations advertised by the adjacent neighbors. The metrics across all paths to the destination are stored in the distance table and are used to calculate the minimum

cost path to a particular destination.

$$Term_1 = K_1 * \frac{K_2 * Bandwidth}{Bandwidth + 256 - Load} + K_3 * Delay \quad (1)$$

$$Metric = 256 * Term_1 * \frac{K_5}{K_4 + Reliability} \quad (2)$$

Equation 2 shows the formula used by Cisco routers to calculate the distance metric. Note that as bandwidth increases, the metric is increased; however, as load increases on the links the metric decreases. There are constant values, also known as K-values, that allow network engineers to modify the behavior of the network based on their preferences. This idea of taking desirable traits and using them to calculate a metric, or desirability value, can be applied to the problem of choosing the best disk for data replica placement. This concept will be explored further in the following sections within the context of the Nutanix distributed file system.

3 Implementation

3.1 Fitness Values and Functions

To calculate a value to represent the desirability of a disk for replica placement, a function, $f_{fitness}$, is defined. $f_{fitness}$ takes as its argument, some number of variables that can affect disk performance and returns a positive number henceforth referred to as a fitness value.

A low fitness value indicates a poor placement candidacy for a disk and a high fitness value will indicate a highly desirable disk for replica placement. In this work, I evaluate two fitness functions that are comprised of terms that utilize a disk's average queue length over some stretch of time, t_q , and a disk's percentage utilization, t_u .

$$t_q = 1 - \frac{q}{q_{ceil}} \quad (3)$$

The variable $q_{ceiling}$ holds the maximum observed queue length. Increasing t_q beyond $q_{ceiling}$ does not contribute to the fitness value. This ensures that as the queue length grows, t_q approaches zero.

$$t_u = \frac{1}{a^u} \quad (4)$$

The variable u represents disk utilization percentage and a is an aggression variable used to control the exponential decay of t_u . The larger a is, the more aggressively t_u will decay as u increases. An aggressive decay results in more preference given to less utilized disks when compared with disks that are slightly more utilized.

These terms are used in two different fitness functions evaluated in this document:

$$f_{add} = t_u + t_q \quad (5)$$

$$f_{mult} = t_u t_q \tag{6}$$

3.2 Stargate Disk Stats Collection

Prior to this work, Stargate’s periodic disk stats collection was limited to caching solely disk usage stats for all disks in the cluster. This has been expanded to now include disk performance stats for use in disk fitness values.

Stargate maintains a mapping, henceforth referred to as the *disk_map*-, from cluster disk ID to a disk state structure. The *disk_map*’s state structure contains disk usage and performance information that has been published to Arithmos by other Stargates in the cluster. Upon gathering fresh stats from Arithmos, the information is used to create a disk fitness value for each disk in the cluster.

3.3 Weighted Random Selection Algorithms

After a weight is calculated for a disk in the cluster that will store a replica, the `WeightedVector` class’ `Sample()` calls will perform a weighted random selection on the set of potential candidate disks. To determine the best method of weighted random selection for Stargate’s `WeightedVector` class, an exploration of various weighted random selection algorithms was necessary. Since the file system only supports replication factors of 2 or 3, the investigation was limited to algorithms that allow for a weighted $\binom{N}{K}$, where K is the data replication factor.

3.3.1 Scalability Simulation Methodology

To test the scalability of the weighted random selection algorithms evaluated in the next section, a single-threaded Python [26] script was written to to evaluate the

change in run time as sample sets increase. Each algorithm's mean running time is calculated for multiple sample sets. Code for the simulations is as follows:

```
def gen_runtimes(selection_func, iteration_count):
    runtimes = []
    std_devs = []
    # For each pool size.
    for pool_size in num_disks_for_tests:
        print("Measuring with pool size " + str(pool_size))
        runtime_list = []
        # Make a list of pool_size random numbers between 1 and 10.
        lst = pool_size * [1]
        # Time selections and get the average runimes.
        for it in range(iteration_count):
            start_time = time.time()
            selection_func(lst)
            elapsed_time = time.time() - start_time
            runtime_list.append(elapsed_time)
        avg_runtime = np.average(runtime_list)
        std_dev = np.std(runtime_list)
        runtimes.append(avg_runtime)
        std_devs.append(std_dev)
    return runtimes, std_devs
```

Object weights are constant throughout the simulation, so selection schemes that require some amount of preprocessing (such as the top T% calculation for truncation selection) perform their preprocessing steps for each weighted random selection. This gives information about the worst-case run time behavior for each algorithm in comparison with the worst case runtime of the others.

3.3.2 Herding Behavior Evaluation Methodology

Herding behaviors can be seen in some weighted random selection algorithms when the weights of a subset of objects in the sampling pool cause a disproportionate amount of selections to target those objects. In the case of replica disk selections in a

Nutanix cluster, this can cause too many operations to target an especially suitable disk, resulting in poor performance. It is possible to simulate an exaggerated scenario in which the susceptibility to herding behavior can be observed by having a single object with a weight that is multiple orders of magnitude heavier than the next highest object in the sampling set. It is also necessary to observe any herding behavior for a sampling set with low weight skew. This section describes the simulation methodology for each.

High-skew sampling sets of 11 objects were generated such that the array index of the first 10 objects was assigned as the object weight, and the last object was given a weight of 1000. This creates an extremely large skew in weights and makes the high-weight object a target for herding behavior. Given this sampling set, weighted random selections were performed and a histogram was kept that tracked the number of selections for each object. 10^3 , 10^4 , and 10^5 iterations were performed to observe any changes in herding behavior at larger time scales. In addition to the high-skew sampling sets, low-skew sets of 100 objects were also simulated. These low-skew sets were identical to the high-skew sets, except there was not a single object with an exaggerated weight of 1000. All element weights were their array indices.

3.3.3 Stochastic Universal Sampling (SUS) Simulations

SUS is another sampling technique first introduced by Baker in 1987 [2]. The algorithm can be understood as follows: On a standard roulette wheel there's a single pointer that indicates the winner. The roulette wheel's "bins" can all be the same size which would indicate a uniform probability of selecting any bin and could also be unevenly sized which would indicate a weighted probability. SUS uses this same concept except allows for N evenly spaced pointers corresponding to the selection of N items. Key things to note are that the set, or "bins" in my roulette analogy, must be

shuffled prior to selection. Also, there is a minimum spacing allowed for the pointers to prevent selection of the same bin.

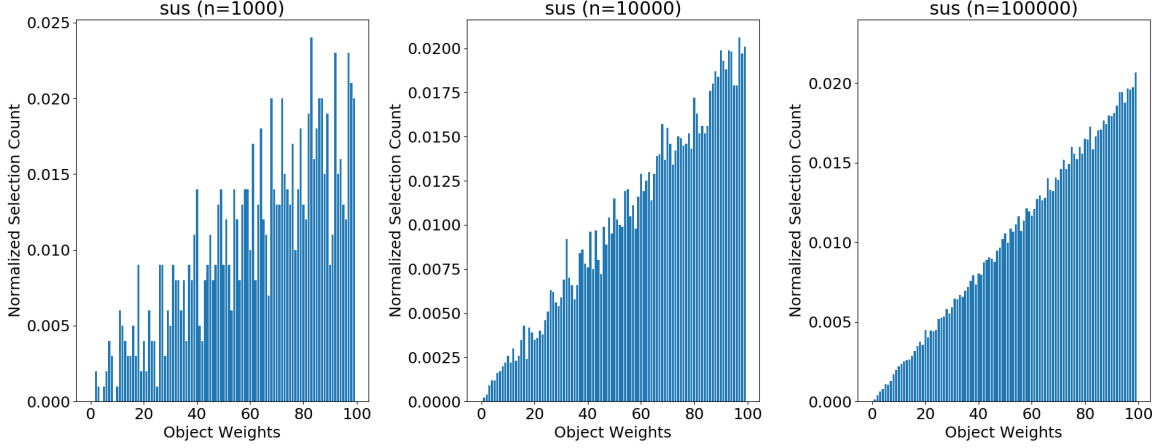


Figure 5: Histograms generated by simulation of Stochastic Universal Sampling to illustrate selection distributions.

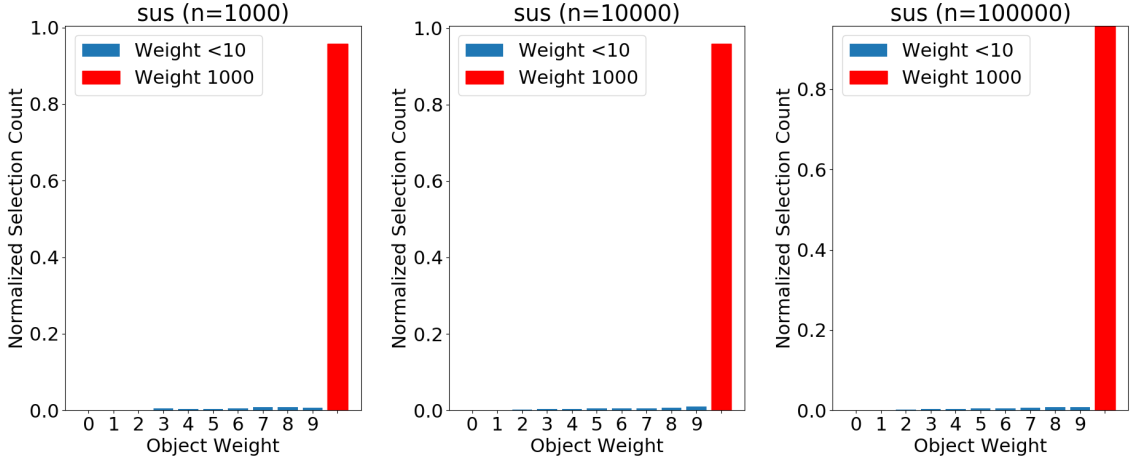


Figure 6: Histograms generated by simulation of Stochastic Universal Sampling to illustrate herding behavior.

Figure 5 shows the evolution of the distribution of selection frequencies for SUS as the number of samples increases. It is evident that the selection frequency is proportional to the object weight. This can prove problematic for outlier objects

with weights that are much larger than the other objects in the set as shown in Figure 6. The high weight object’s selection frequency eclipses all other objects in the selection pool which can lead to extreme herding behaviors.

3.3.4 Tructation Selection Simulations

Truncation selection [7], typically used in evolutionary computing algorithms, does not consider any objects for selection below some threshold, T . In Figure 7, only the top 10% of objects ranked by weight are considered for selection. Within this subset, weight has no meaning so there is a uniform distribution of selections. However, this may not be suitable for use cases where all objects must be candidates for selection. Depending on the threshold chosen, this algorithm can be resistant to herding behavior as shown in Figure 8.

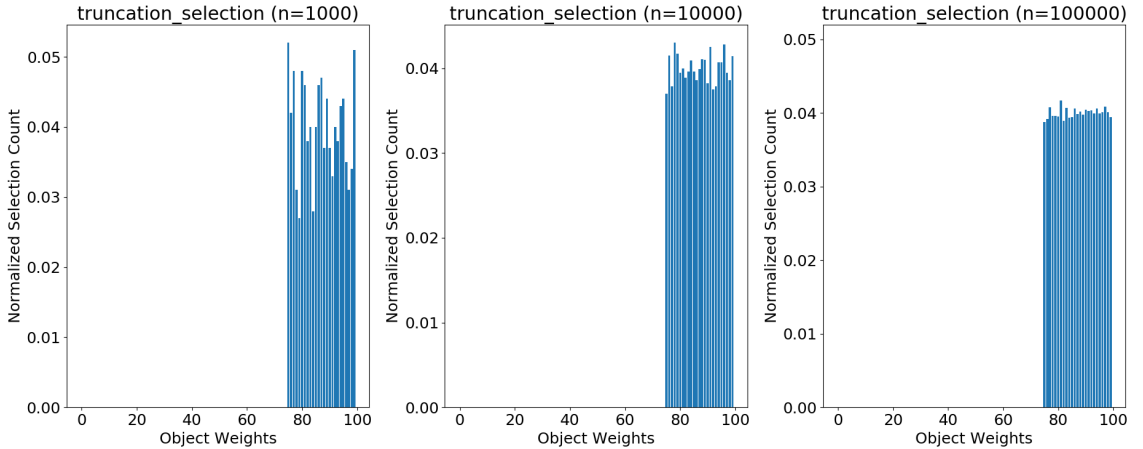


Figure 7: Histograms generated by simulation of truncation selection to illustrate selection distributions.

3.3.5 Two-choice Sampling Simulations

Two-choice sampling [18] performs a uniform random selection twice and returns the object with higher weight. This algorithm has shown to be extremely resilient to

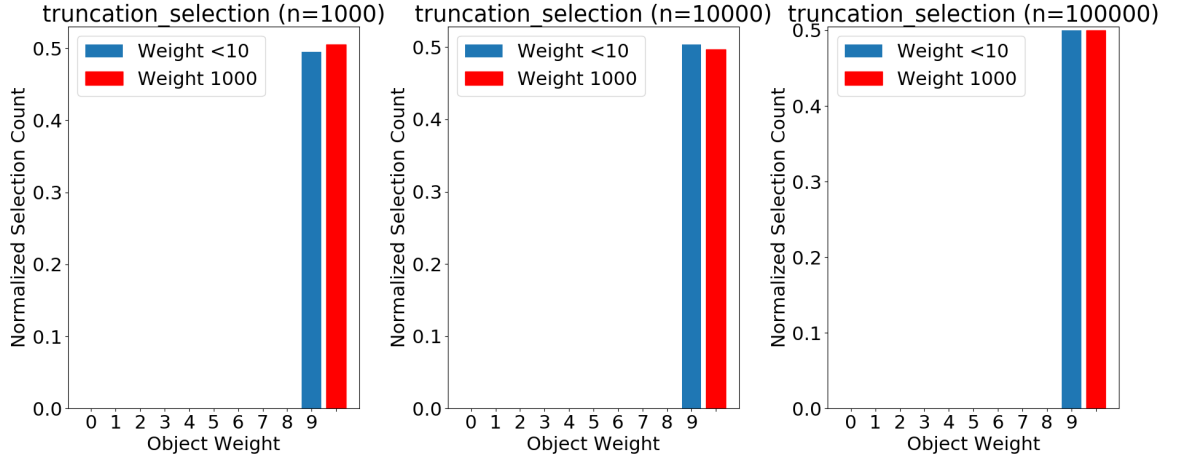


Figure 8: Histograms generated by simulation of truncation selection to illustrate herding behavior.

herding behavior as shown in Figure 10 and selection frequencies for all objects are influenced by object weights in a way similar to SUS. While an object with a higher weight is more likely to be selected, it is not selected with a probability proportional to its fitness value. This makes the algorithm resistant to any herding behaviors, but will not be a good candidate if it's desired for the `WeightedVector` to select objects with probability proportional to its weight.

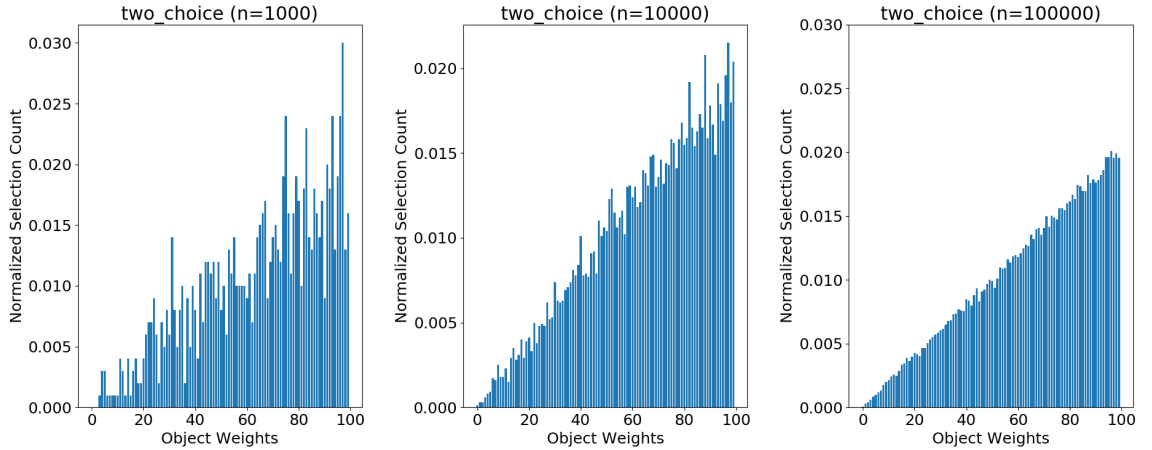


Figure 9: Histograms generated by simulation of two-choice selection to illustrate selection distributions.

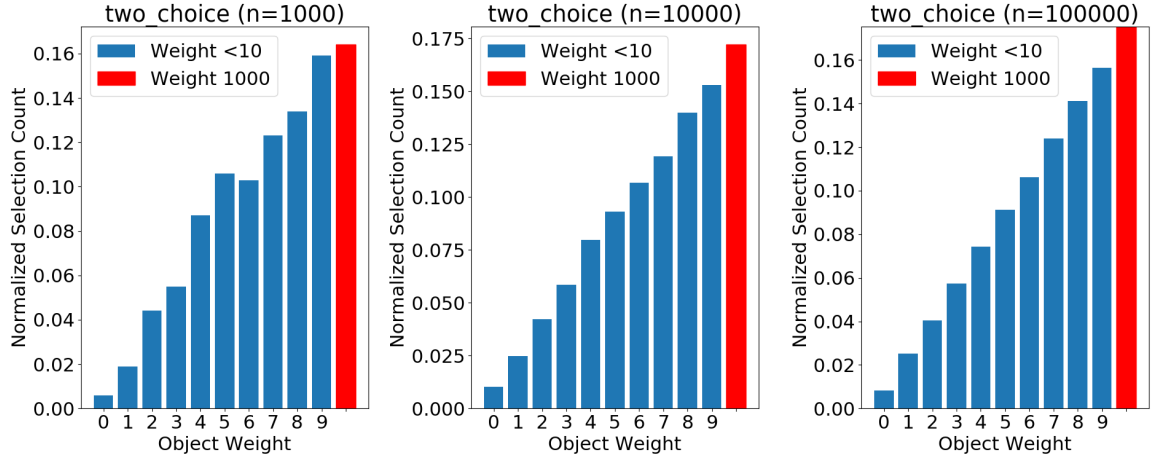


Figure 10: Histograms generated by simulation of two-choice selection to illustrate herding behavior.

3.3.6 Uniform Random Selection Simulations

Uniform random selection is completely indifferent to object weights. Therefore, it exhibits no herding behavior and no usefulness for the `WeightedVector`'s sampling, but it is important to include its analysis for comparison with other selection algorithms.

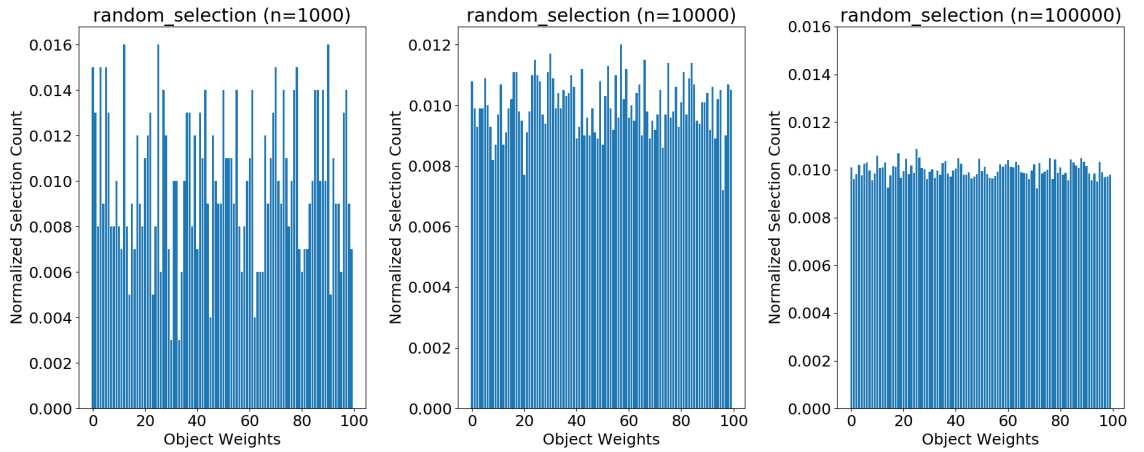


Figure 11: Histograms generated by simulation of uniform random selection to illustrate selection distributions.

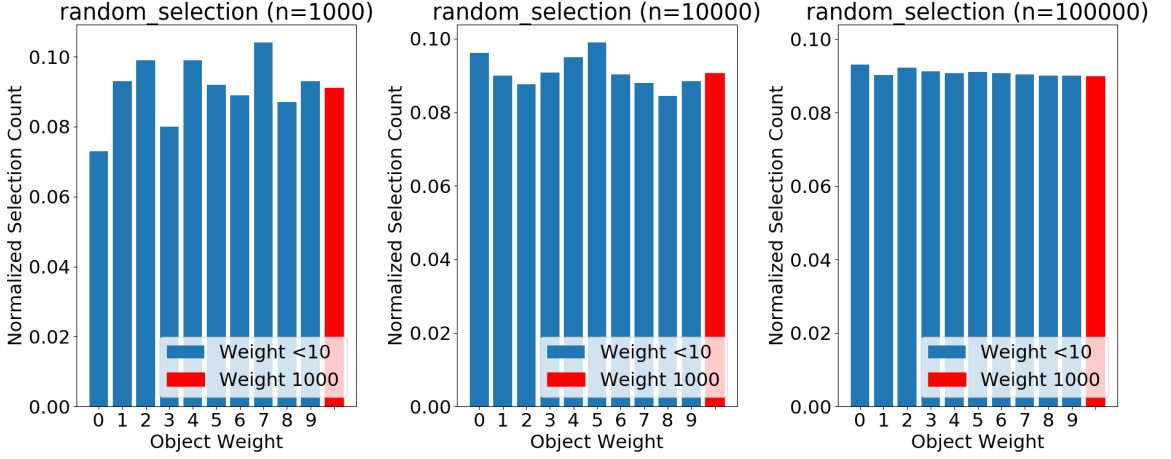


Figure 12: Histograms generated by simulation of uniform random selection to illustrate herding behavior.

Figure 8 shows that uniform selection probabilities can be expected and Figure 12 confirms there is no herding behavior with a uniform random selection scheme.

3.3.7 Weighted Random Algorithm Scalability Analysis

Even though both SUS and truncation selection have $O(N * D)$ time complexity, where D is the number of objects in the set and N is the number of selections required in one iteration, truncation selection is slower than SUS by an order of magnitude. This is mainly due to the need for the truncation selection algorithm to calculate the top $T\%$ of the set for every selection performed in the simulations, an $O(D \log(D))$ operation. As expected, two-choice and random selections are observed to be constant-time algorithms due to its simplicity of two uniform random selections. Two-choice is slightly slower than random selection due to the second uniform random selection and comparison operation that must occur before returning an object.

Figure 13 shows the running times for each of the weighted random selection algorithms discussed. It becomes clear that weighted random selections for large sets of objects is most efficient using a two-choice sampling technique.

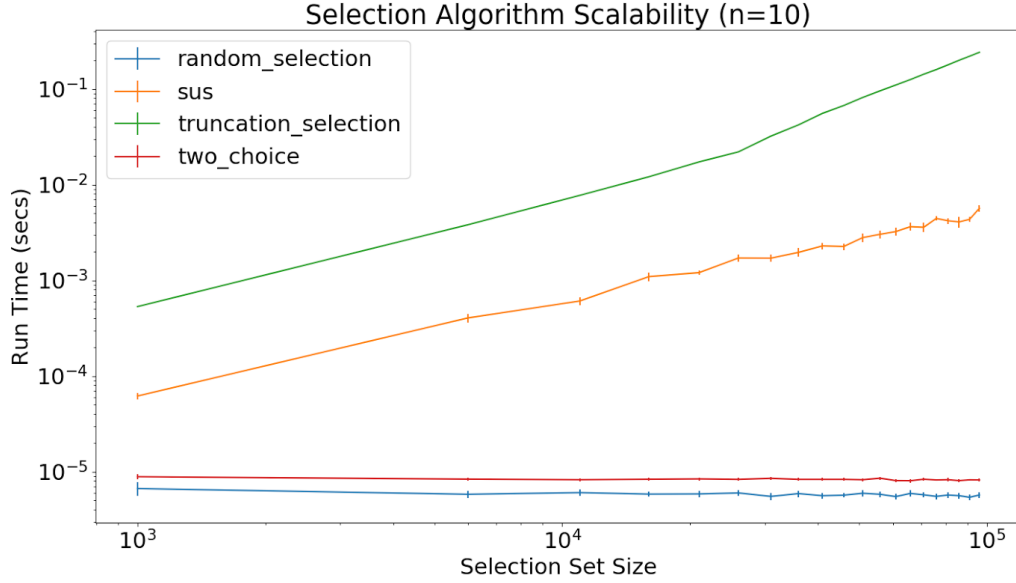


Figure 13: Running times of various weight random selection algorithms.

3.4 WeightedVector Class

It is cleaner to implement repeated weighted sampling of disk IDs in such a way that we call a single function to return a set of unique disk IDs from a sampling set using a weighted random sampling algorithm that uses the disks' fitness values. An object container class is needed similar to the data structures in the C++ Standard Template Library [21]. A requirement for this object is that must be able to access elements of arbitrary types via arbitrary weighted random sampling methods. The **WeightedVector** class was implemented to fulfill this requirement.

Upon instantiation of the **WeightedVector** class, a fitness function is provided to store the fitness values of all objects internally. The **WeightedVector** class has implemented insertion, removal, and weighted random sampling of objects of some arbitrary type, T , based on the object's fitness value as a weight.

The set of objects and their fitness values are stored in `std::vector` objects, one for the object references stored in the **WeightedVector** and one for their corresponding

fitness values. The objects and their corresponding fitness values share an index into their respective internal vectors.

Table 3 shows the `WeightedVector` public interface.

Table 3: WeightedVector public interface.

WeightedVector(const std::function<double(const T)>)
The WeightedVector class is instantiated by providing a fitness function that accepts a reference to an object of type <i>T</i> and returns a fitness value that is of type <i>double</i> . The provided fitness function is used to create a mapping between inserted objects and their corresponding fitness values for sampling. The WeightedVector class asserts that the fitness function returns positive values.
void EmplaceBack(const T& element)
The EmplaceBack function constructs and inserts an object of type <i>T</i> at the end of the vector. This increases the WeightedVector 's size by 1.
bool Empty()
Returns true if the WeightedVector is of size 0.
void Clear()
Resets all state in the WeightedVector object, sets the size to 0, and clears all internal vectors.
T& Sample()
Returns a reference to an object stored inside of the WeightedVector . Objects are sampled via weighted random selection and subsequent calls to Sample are guaranteed not to return the same object unless Reset is called before sampling again. The WeightedVector class asserts that Sample is not called more times than the size of the WeightedVector .
void Reset()
Resets the sampling state of the WeightedVector , allowing sampled objects to be eligible for selection in subsequent Sample calls.
size_t size()
Returns the size of the WeightedVector .

3.4.1 Weighted Vector Internals

Internally, the `WeightedVector` class keeps 3 different `std::vector` objects to keep track of sampling state and the object-to-fitness value mapping. There is the `inner_vector_` variable which stores the objects inserted via `EmplaceBack()`, the `weights_` variable which stores the fitness values of all objects in the `inner_vector_`, and the `sampling_weights_` variable which is identical to `weights_` except that objects weights are set to 0 when sampled. This allows us to exclude objects from being sampled multiple times between calls to `Reset()` with time complexity $O(1)$, since a weight of 0 gives a probability of 0 for sampling using Stochastic Universal Sampling as shown in the example below.

Before sampling, there are identical `weights_` and `sampling_weights_` vectors accompanying an `inner_vector_` of objects as shown in Table 4.

Table 4: Inner vector example part 1.

<code>inner_vector_</code>	<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>
<code>weights_</code>	1	3	3	7
<code>sampling_weights_</code>	1	3	3	7

Suppose that a call to `Sample()` on the `WeightedVector` returns *D*. The probability of this event is 0.5, so to maintain sampling state within the `WeightedVector`, the weight associated with object *D* is set to zero in Table 5.

Table 5: Inner vector example part 2.

<code>inner_vector_</code>	<i>A</i>	<i>B</i>	<i>C</i>	<i>D</i>
<code>weights_</code>	1	3	3	7
<code>sampling_weights_</code>	1	3	3	0

If `Sample()` is called again, it is not possible to return *D* since its sampling weight

is now zero. The probabilities of returning A , B , or C in subsequent calls to `Sample()` are $\frac{1}{7}$, $\frac{3}{7}$, and $\frac{3}{7}$ respectively. Suppose two more calls to `Sample()` lead to the state in Table 6.

Table 6: Inner vector example part 3.

inner_vector_	A	B	C	D
weights_	1	3	3	7
sampling_weights_	0	3	0	0

There can only be one more call to `Sample()` without triggering an assertion failure and the `WeightedVector` is obligated to return B . The only way to restore sampling state is to call `Reset()`. A `Reset()` call will simply copy the values from `weights_` into `sampling_weights_`, restoring all original weights and making all objects eligible for sampling again as shown in Table 7.

Table 7: Inner vector example part 3.

inner_vector_	A	B	C	D
weights_	1	3	3	7
sampling_weights_	1	3	3	7

Note that the usage of `Sample()` and `Reset()` allows the user to perform a weighted $\binom{N}{K}$ by simply making K calls to `Sample()` before resetting. This is required for the Stargate use case of selecting multiple unique disks from a storage tier to host data replicas.

3.4.2 Weighted Vector Unit Testing

The `WeightedVector` class' unit test has four phases:

1. Test `Average()` functionality
2. Test there are no duplicate samples
3. Test sampling with uniform probabilities
4. Test sampling with non-uniform probabilities

The testing of the `Average()` function's behavior includes simply adding all zeros, all ones, and monotonically increasing integers in the range $[0, N]$. For each phase, it can be verified that the reported average is 0, 1, and $\frac{N(N-1)}{2N}$ respectively.

Verification that there are no duplicate samples involves adding monotonically increasing integers in the range $[0, N]$, inserting all sampled elements into a hash set, and verifying that the size of the hash set is equal to the size of the `WeightedVector`.

To test sampling of objects with uniform and non-uniform weights, I add monotonically increasing integers in the range $[0, N]$ to the `WeightedVector`. The fitness function provided for the uniform test simply returns a weight of 1 for all objects inserted into the `WeightedVector`. Elements are then sampled and `Reset()` is called for a number of times several orders of magnitude larger than the number of elements. Each sampled element's number of times being selected is tracked in a test-local hash map. The actual selection probability is calculated for each element in the `WeightedVector` with the expected value and the difference is verified to be within an acceptable tolerance. For the uniform test, all integers are expected to be sampled roughly the same amount and for the non-uniform test, larger integers are expected to be sampled an amount of times proportional to their value.

3.5 Replica Selection Changes

Stargate was modified to store disk IDs in a `WeightedVector` rather than a `std::vector`. When considering a disk for candidacy, rather than shuffling the `std::vector` and sequentially evaluating each disk until enough replica targets are found, calls to `WeightedVector::Sample()` must occur to get the next disk ID so that it may be evaluated. Calls to `WeightedVector::Sample()` will stop when either enough target disks have been selected or when all candidate disks in the set have been evaluated and found unsuitable. All of Stargate's replica placement logic is unmodified and only the order in which candidate disks are considered has been changed. This results in Stargate tending to evaluate the higher fitness disks first and selecting those disks for data placement if they are eligible.

4 Evaluation and Results

The experiments below seek to measure the effects of different ways of combining the tier utilization and queue length variables in the fitness functions. The two functions differ in their approach by either adding the terms together (Equation 5) or multiplying the terms together (Equation 6).

4.1 Experimental Setup

The replica selection schemes were evaluated using a 3-node NX-1350 cluster. Each node contains a single 300GB SSD and 4 HDDs 1TB in size. When evaluating the new replica disk selection framework, two heterogeneous workload scenarios are tested:

1. Two worker VMs on separate nodes running a workload with low outstanding ops.
2. Two worker VMs on separate nodes with running a workload with high outstanding ops.

The worker VMs are manually deployed to their respective host hypervisors and used to perform the experiments described in sections 4.3 and 4.4.

4.2 Fio and Write Patterns

When generating I/O in these experiments, Fio is used on the worker VMs. Fio, short for Flexible IO, is an I/O workload generator that can take configuration files to specify the parameters of a test. On each worker VM, Fio is used to generate a sequential write workload that completely fills the cluster’s hot-tier. Sequential writes were chosen for all tests because they are the default write pattern for Fio tests and the purpose of these experiments is to generate new data replicas in a consistent

manner. For the purposes of replica placement, the Nutanix file system does not distinguish targets based on the write pattern that generated an extent group.

4.3 Tier Utilization Experiments

The tier utilization experiments define the hot-tier deviation, $d_{hot\ tier}$. $d_{hot\ tier}$ is represented as the average SSD utilization percentage of the nodes running a workload, u_w , subtracted by the SSD utilization percentage of the node without a workload, u_o :

$$d_{hot\ tier} = \frac{u_{w1} + u_{w2}}{u_o} \quad (7)$$

Ideally, the idle node would absorb the majority of secondary replicas from the running workloads. However, uniform random selection causes only 50% of secondary replicas to go to the idle node even though it can potentially handle more work due to the fact that it does not have to service a local workload. In a uniform random replica selection scheme, it is expected that the nodes running a workload have to bear 100% of their own primary replicas and 50% of secondary replicas from the other worker node. This causes the SSD utilization for each node to be skewed. More specifically, the nodes with a local workload will have higher SSD utilizations and these utilizations will be expected to grow as the tests run. As the cluster SSD utilization skew increases, higher $d_{hot\ tier}$ values will be observed. A more sophisticated replica selection scheme is expected to minimize $d_{hot\ tier}$ by biasing secondary replicas towards the idle node and limiting the skew.

4.3.1 Low Outstanding Operation Results

Figure 14 shows the results of a workload with only a single outstanding operation. This causes the queue length reported by Stargate to be at most 1, resulting in the

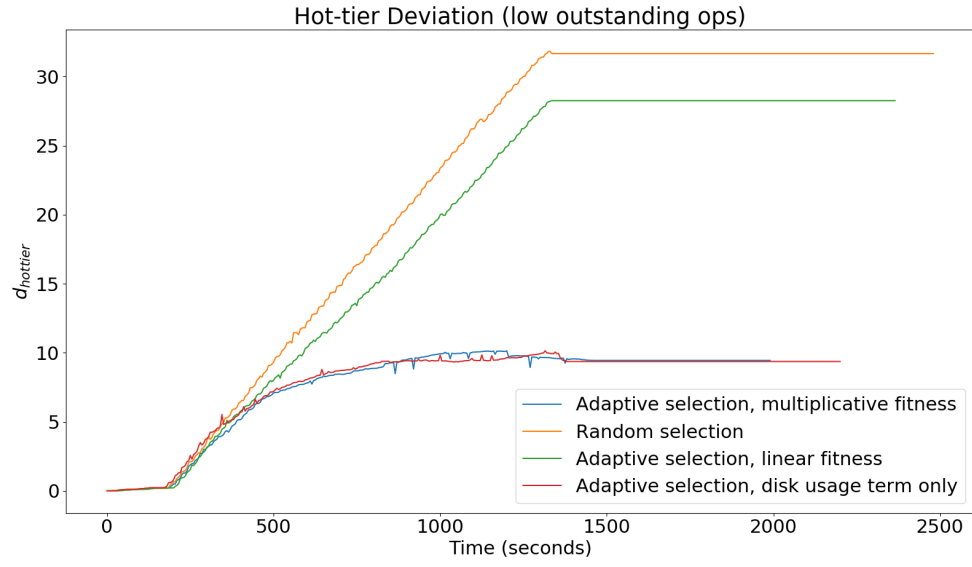


Figure 14: $d_{hot\ tier}$ values over time for low outstanding I/O operations.

fitness function's queue length term to be roughly constant and approximately 1.

It is evident that the additive fitness function does not minimize the hot-tier deviation as well as the multiplicative since the additive fitness function's behavior varies depending on the weight chosen for the queue length term. By default, the linear fitness function gives equal weight to both the disk fullness and queue length terms; however, for one run of this experiment the queue length term was given no weight. Linear fitness that gives equal weight to both terms does not reduce skew by very much, while giving no weight to the queue length term keeps all nodes' SSD usages within 10% of each other. A linear fitness function does a poor job of reducing $d_{hot\ tier}$ values because the queue length term is contributing the maximum amount possible to the fitness value due to the consistently low queue length values. This can be illustrated by defining a disk selection bias, b_r , as the probability some disk, d , will be selected when compared with another disk, d' whose utilization is 10% higher and queue length value is identical. Given a fitness function, f , b_r can be calculated as follows:

$$b_r = \frac{f(d)}{f(d) + f(d')} \quad (8)$$

Figures 15 and 16 show the disk selection biases for very large and very small queue lengths respectively.

For an additive fitness function, the bias towards a less utilized disk decreases as the disk fullness percentages for d and d' increase, even though they still only differ by 10% in Figures 15 and 16. The entire linear fitness function does not scale with each term, so the multiplicative fitness function is superior.

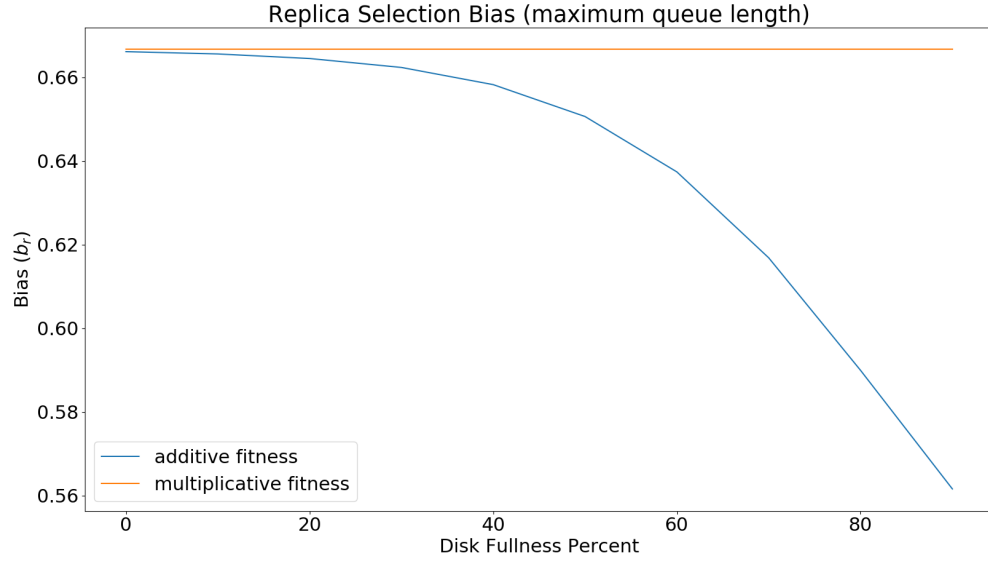


Figure 15: b_r values with static queue lengths at the fitness function ceiling values.

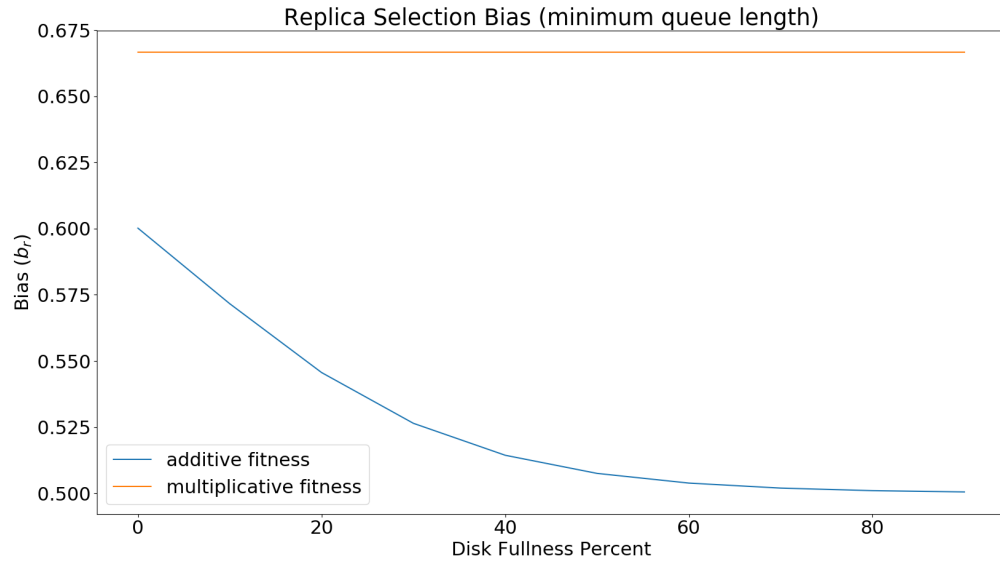


Figure 16: b_r values with static queue lengths at 1.

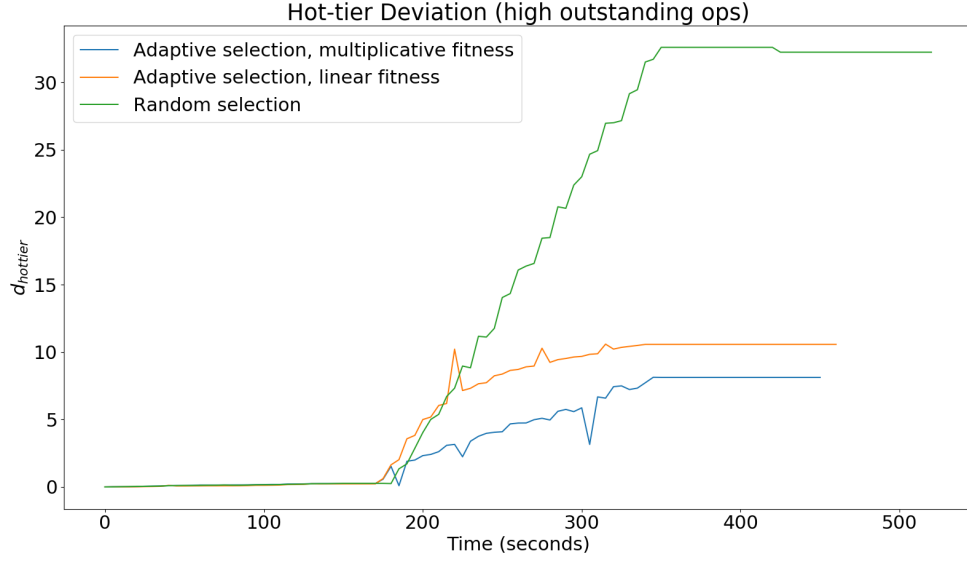


Figure 17: $d_{hot\ tier}$ values over time for low outstanding I/O operations.

4.3.2 High Outstanding Operation Results

Figure 17 shows that both additive and multiplicative fitness functions reduce the disk fullness skew from 30% to less than 10%. Multiplicative fitness performs slightly better at minimizing $d_{hot\ tier}$ than additive fitness, possibly due to scaling the fitness value by the value of both the fullness and queue length terms, rather than weights.

4.4 Disk Queue Length Experiments

Due to the nature of low outstanding I/O workloads, disk queue length values would remain very low for the duration of an experiment. This does not give useful information for measuring the effects of fitness-based replica selection on disk queue lengths. The experiments for high outstanding I/O experiments in section 4.3.2 was re-run for all fitness function types and for fitness function queue length term ceilings of 200 and 100. Figures 18 and 19 show a reduction in queue length quartiles when fitness-based selection is used for disks on nodes that host local workloads. Lower queue length

ceilings are observed to provide better results in reducing the queue lengths for the worker nodes.

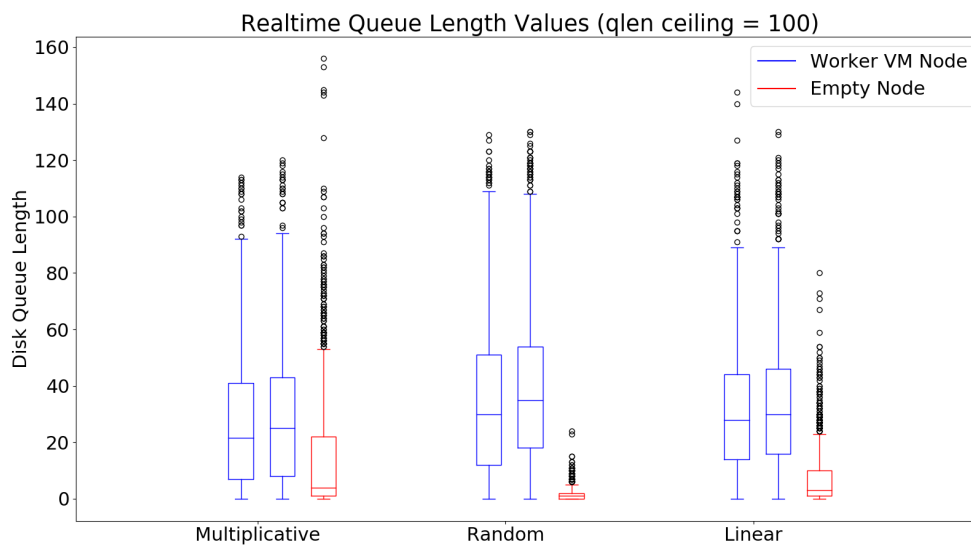


Figure 18: Queue lengths for all SSDs on the specified nodes sampled every 1 second.

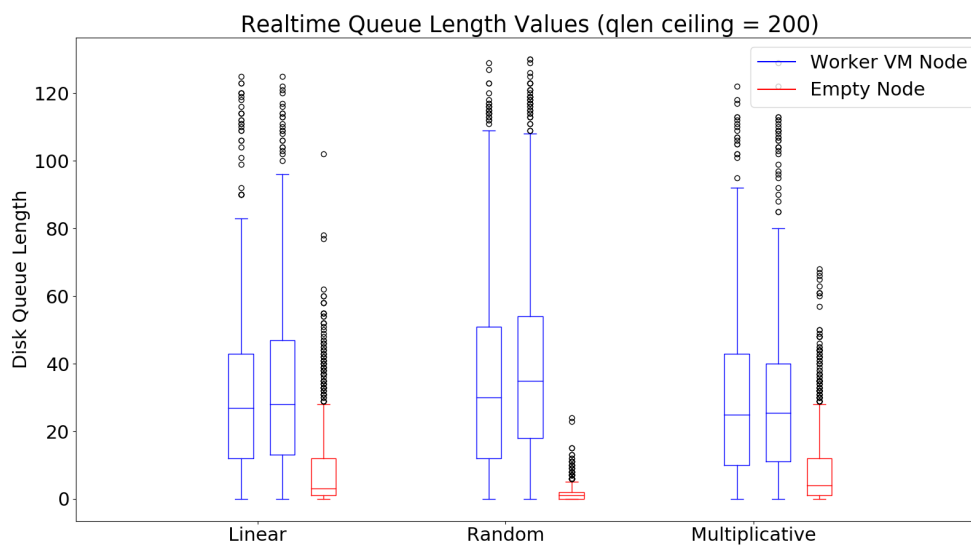


Figure 19: Queue lengths for all SSDs on the specified nodes sampled every 1 second.

5 User Guide

5.1 Scraping Data From the Nutanix Cluster

Stargate exposes a web server on the CVM, listening on port 2009, that exposes various real-time stats such as the number of operations in flight, disk throughput, disk queue length, and many other pieces of information. I wrote a Python script to parse and derive the following information for each node:

1. SSD tier usage
2. SSD tier availability
3. SSD tier max capacity
4. Read/Write counts for each disk
5. Queue lengths for each disk

The script will filter out all disks in the HDD tier and only pull the statistics for the SSD tier. Upon each invocation of the script, information is appended to a file for each node that is created if it is non-existent. The data is layed out in a CSV format for easy plotting via the Matplotlib library [12]. For each experiment, the script was called every 5 seconds via the command `watch -n 5`.

5.2 Re-creating Experiments

An NX-1350 with VMware ESXi 5.5u2 hypervisor and a single 300GB SSD on each node was used for all experiments. This means that for an RF2 cluster, there is less than 150GB of useable hot tier available since a small amount of space is reserved on each disk for other services on the CVM.

A single CentOS 6.5 worker VM was manually created on a single node with 4GB RAM, single 150GB disk, and installation of Fio. The VM was packaged as a file in Open Virtualization Format (OVF) for ease of deployment to the host hypervisor. This removed the need for a tool to use the VMware vSphere API to deploy the worker VMs as mentioned in the proposal for this thesis.

The Worker VM's 150GB disk size ensures that the entire hot tier of each node will be fully utilized when the disk is filled via workload generation on each node. Each of the other nodes then clone the worker VM so that all nodes in the cluster have an identical worker VM, worker VM disk state, and Nutanix node tier utilization.

The Fio script used to generate a sequential write workload on each node is as follows:

```
[global]
direct=1
ioengine=libaio
bs=32k
iodepth=128
randrepeat=0
group_reporting
filesize=150G

[job1]
rw=write
filename=/dev/sdb
name=sequential-write
```

The `iodepth` variable is modified depending on the number of outstanding I/Os needed.

When resetting the cluster for a new test, the commands `cluster stop ; cluster destroy` were run on the CVM and the old Stargate binary was swapped with the one required for the next tests in the `/home/nutanix/bin/` directory. When ready, it's

necessary to recreate the Nutanix cluster via `cluster -s <cvm IPs> create` and deploy new worker VMs. The process is then repeated for each different test.

6 Summary and Conclusions

Prior to this work, the problem of selecting a location for the placement of data replicas in a Nutanix cluster was solved by choosing disks in a uniform random fashion. This method of data placement does not perform well in the presence of heterogeneous workloads or tier size disparities. This work has shown that candidate disks for data placement can be evaluated using a function of observed queue length and fullness percentage values. The result of this function, the fitness value, can be used to bias disk selections towards disks that are less busy and less full. Biasing disk selections results in an overall even utilization of individual disk space and shows potential for a reduction of disk queue lengths for disks residing on busy nodes.

6.1 Limitations

The current weighted random selection approach, Stochastic Universal Sampling, is optimized for clusters that do not contain extremely large numbers of disks. While SUS allows disk selection probabilities to scale proportional to the fitness values of the disks, it is not as scalable as the two-choice method for weighted random selection.

In addition, each Stargate’s frequency of stats updates will impact its view of the world and can lead to herding behaviors if updates are not frequent enough. In the absence of a Stargate’s ability to update its view of the world, it will be unable to adapt to changes in workload characteristics or disk fullness, which defeats the purpose of using fitness-based disk selections in the first place.

6.2 Future Work

6.2.1 Real-time Fitness Feedback

The replica placement scheme shown in this work relies on periodic stats updates, therefore the system is always working with older stats for data placement decisions. One change that can be made to this system is to track the time to completion of the last N operations that place data on a disk. This data can be used similar to the C3 algorithm discussed in section 2.2 to bias the replica placements towards the faster disks. This would remove the dependence on a centralized stats repository such as Arithmos and allow each Stargate to make data placement decisions independent of reports from other nodes in the cluster. Stargate would be required to keep a history latency data for each operation on remote nodes.

6.2.2 Read Replica Selection

When choosing which replicas to read from, Stargate always selects local disks. However, if there were ever a scenario where a read from a remote disk containing the desired data is faster than servicing the read from a local disk, Stargate is not currently equipped to detect or act on this scenario. Currently, disk fitness values are not factored into the selection of disks that will service a read operation. A fitness function for read replica selection would still consider disk queue length, but disk fullness is not a helpful metric to determine the suitability of a read replica target. More experiments will be required to discover variables that would distinguish the read performance of disks holding data replicas before adding support for fitness-based read replica selection.

6.2.3 More Fitness Function Variables

The disk fitness values do not need to be limited to derivation from disk queue length and fullness percentage. The cluster tracks many other variables such as average node CPU utilization, number of Stargate failures in a specified time window, number of active hosted VMs, and data access patterns among other pieces of information. More experiments should occur to see how this data can affect placement decisions and whether the result is beneficial to overall system performance.

6.2.4 Additional Testing

The experiments and testing in this work was performed on a 3-node, homogeneous hardware, Nutanix cluster, which is unsuitable for testing at large scale. Additional performance testing work on larger scale (64 node) clusters would be desirable to measure the impact of this work in larger datacenters. In addition to scale testing, heterogeneous hardware configurations in the form of hybrid (mixed SSD/HDD nodes) and all-flash nodes in the same cluster would provide interesting results for analysis. This work focused mainly on heterogeneous workloads on homogeneous hardware to simulate the effects of realistic workloads on heterogeneous clusters.

Glossary

CVM

Nutanix Controller Virtual Machine.

Data Deduplication

A data compression technique for removing multiple copies of the same data. **Fitness Value**

A value representing the desirability of a disk for data placement.

HDD

Hard Disk Drive.

Hypervisor

Software that runs virtual machines.

iSCSI

An IP based storage networking standard.

NFS

A distributed file system protocol.

OVF

A standard for packaging software to run in virtual machines.

Secondary Replica

Refers to any replica of data written after the first copy.

SSD

Solid State Drive.

vDisk

A file abstraction in the Nutanix distributed file system.

References

- [1] Albrightson, R., Garcia-Luna-Aceves, J. J., and Boyle, J. (1994). EIGRP—A fast routing protocol based on distance vectors. Interop 94.
- [2] Baker, J. E. (1987, July). Reducing bias and inefficiency in the selection algorithm. In Proceedings of the second international conference on genetic algorithms (pp. 14-21).
- [3] Borthakur, D. (2008). HDFS architecture guide. HADOOP APACHE PROJECT <http://hadoop.apache.org/common/docs/current/hdfs design.pdf>, 39.
- [4] Chao, M. T. (1982). A general purpose unequal probability sampling plan. Biometrika, 69(3), 653-656.
- [5] Chaubal, C. (2008). The architecture of vmware esxi. VMware White Paper, 1(7).
- [6] Chen, P. M., Lee, E. K., Gibson, G. A., Katz, R. H., and Patterson, D. A. (1994). RAID: High-performance, reliable secondary storage. ACM Computing Surveys (CSUR), 26(2), 145-185.
- [7] Crow, J. F., and Kimura, M. (1979). Efficiency of truncation selection. Proceedings of the National Academy of Sciences of the United States of America, 76(1), 396399.
- [8] Dean, J., and Ghemawat, S. (2008). MapReduce: simplified data processing on large clusters. Communications of the ACM, 51(1), 107-113.
- [9] Efraimidis, P. S., and Spirakis, P. G. (2006). Weighted random sampling with a reservoir. Information Processing Letters, 97(5), 181-185.

- [10] Ghemawat, S., Gobioff, H., and Leung, S. T. (2003, October). The Google file system. In ACM SIGOPS operating systems review (Vol. 37, No. 5, pp. 29-43). ACM.
- [11] Hadoop, A. (2009). Hadoop. 2009-03-06]. <http://hadoop.apache.org>.
- [12] Hunter, J. D. (2007). Matplotlib: A 2D graphics environment. Computing In Science and Engineering, 9(3), 90-95.
- [13] Jin, H., Yang, X., Sun, X. H., and Raicu, I. (2012, June). Adapt: Availability-aware mapreduce data placement for non-dedicated distributed computing. In Distributed Computing Systems (ICDCS), 2012 IEEE 32nd International Conference on (pp. 516-525). IEEE.
- [14] Lakshman, A., and Malik, P. (2008, August 25). Cassandra A structured storage system on a P2P Network. Retrieved February 15, 2016, from <https://www.facebook.com/notes/facebook-engineering/cassandra-a-structured-storage-system-on-a-p2p-network/24413138919/>
- [15] Lamport, L. (2005). Generalized consensus and Paxos. Technical Report MSR-TR-2005-33, Microsoft Research.s
- [16] McQuillan, J. M., Richer, I., Rosen, E. C., and Bertsekas, D. P. (1978). Arpanet routing algorithm improvements (No. BBN-3940). BOLT BERANEK AND NEWMAN INC CAMBRIDGE MA.
- [17] McKusick, K., and Quinlan, S. (2010). GFS: evolution on fast-forward. Communications of the ACM, 53(3), 42-49.

- [18] Mitzenmacher, M. (2001). The power of two choices in randomized load balancing. *IEEE Transactions on Parallel and Distributed Systems*, 12(10), 1094-1104.
- [19] Patterson, D. A., Gibson, G., and Katz, R. H. (1988). A case for redundant arrays of inexpensive disks (RAID) (Vol. 17, No. 3, pp. 109-116). ACM.
- [20] Perez, J. M., Garcia, F., Carretero, J., Calderon, A., and Sanchez, L. M. (2003, May). Data allocation and load balancing for heterogeneous cluster storage systems. In *Cluster Computing and the Grid, 2003. Proceedings. CCGrid 2003. 3rd IEEE/ACM International Symposium on* (pp. 718-723). IEEE.
- [21] Plauger, P. J., Lee, M., Musser, D., and Stepanov, A. A. (2000). *C++ Standard Template Library*. Prentice Hall PTR.
- [22] Poitras, S. (n.d.) The Nutanix Bible. Retrieved August 09, 2017, from <http://www.nutanixbible.com/>
- [23] Rutgers, C. L. H. (1991). An introduction to igrp. The State University of New Jersey, Center for Computers and Information Services, Laboratory for Computer Science Research.
- [24] Schlierkamp-Voosen, D., and Mhlenbein, H. (1993). Predictive models for the breeder genetic algorithm. *Evolutionary Computation*, 1(1), 25-49.
- [25] Suresh, L., Canini, M., Schmid, S., and Feldmann, A. (2015). C3: Cutting tail latency in cloud data stores via adaptive replica selection. In *12th USENIX Symposium on Networked Systems Design and Implementation (NSDI 15)* (pp. 513-527).
- [26] Van Rossum, G., and Drake, F. L. (2003). *Python language reference manual* (p. 144). Network Theory.

- [27] Velte, A., and Velte, T. (2009). Microsoft virtualization with Hyper-V. McGraw-Hill, Inc..
- [28] Vitter, J. S. (1985). Random sampling with a reservoir. *ACM Transactions on Mathematical Software (TOMS)*, 11(1), 37-57.
- [29] Xie, J., Yin, S., Ruan, X., Ding, Z., Tian, Y., Majors, J., ... and Qin, X. (2010, April). Improving mapreduce performance through data placement in heterogeneous hadoop clusters. In *Parallel and Distributed Processing, Workshops and Phd Forum (IPDPSW)*, 2010 IEEE International Symposium on (pp. 1-9). IEEE.
- [30] Y. Azar, A. Broder, A. Karlin, and E. Upfal. Balanced allocations. In *Proceedings of the 26th ACM Symposium on the Theory of Computing*, pages 593{602, 1994.
- [31] Zaharia, M., Konwinski, A., Joseph, A. D., Katz, R. H., and Stoica, I. (2008, December). Improving MapReduce Performance in Heterogeneous Environments. In *OSDI (Vol. 8, No. 4, p. 7)*.

A Appendix

A.1 Herding Behavior Due to Implementation Bug

During the 128 outstanding op experiments, herding behavior was observed unexpectedly after implementing fitness based replica placement as shown in Figure 20. By default, disk usage and performance stats are supposed to be refreshed every 10 seconds. This is frequent enough to avoid herding behavior, but the 128 outstanding op experiments exhibited herding.

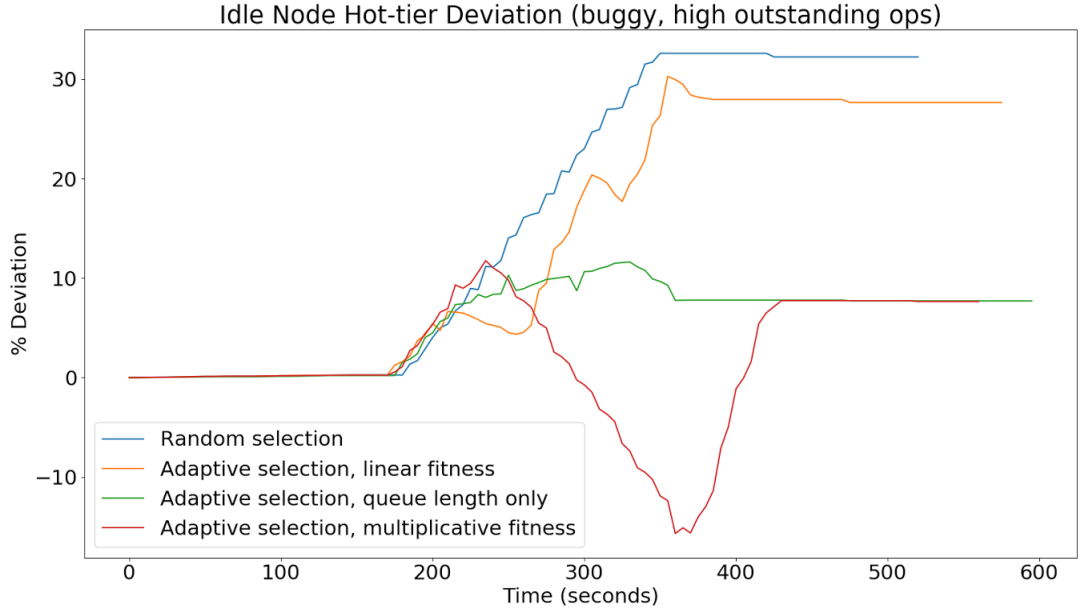


Figure 20: $d_{hot\ tier}$ values over time for low outstanding I/O operations. This set of experiments contains the stats update bug.

The experiment with additive fitness seemed to only exhibit mild herding behavior, whereas the test with multiplicative fitness showcased much more dramatic shifts in SSD usage skews. In conjunction with the complete absence of this behavior in the single outstanding op experiments, it was thought to be highly likely that this herding behavior was caused by a bug in the queue length term of the fitness functions. An

additive fitness function is less affected by this bug due to the attenuated effect of each term in the fitness function.

Within Stargate, a mapping is kept from disk ID to a `DiskState` object (called `disk_map_`) containing information and cached statistics related to the disk. The disk performance and disk usage stats are two separate elements within the `DiskState` structure.

Every 10 seconds, an alarm handler will execute and iterate through each active disk in the cluster and asynchronously query disk stats and bind a callback to each query to be executed when a response is received. Disk usage and performance lookups each have their own callback functions:

Table 8: Disk usage and performance lookup callback functions.

Function Name	Description
<code>UsageStatLookupCallback</code>	Decrement the outstanding stats lookup counter, acquire lock and populate performance stats in <code>disk_map_</code> , and leave performance stats untouched.
<code>PerformanceStatLookupCallback</code>	Decrement outstanding stats lookup counter, lock and populate performance stats in <code>disk_map_</code> , and leave usage stats untouched.

The two callbacks introduce a race condition regarding `disk_map_` even though the structure is locked. Any time `PerformanceStatLookupCallback` returns before the callback for usage stats, all performance stats will be cleared and cause the fitness function to assume worst-case values for the queue length term.

This problem was fixed by simply serializing our usage and performance stats lookups.