

# StormMind

## AI based Web-Service for Storm Damage Prediction

### Bachelor Thesis

ZHAW School of Engineering  
Institute of Computer Science



Submitted on:

06.06.2025

Authors:

Gämperli Nils

Ueltschi Damian

Supervisor:

Andreas Meier

Study Program:

Computer Science





# Declaration of Authorship

We, Damian UELTSCHI, Nils GÄMPERLI, declare that this thesis titled, “StormMind - AI based Web-Service for Storm Damage Prediction” and the work presented in it are our own. We confirm that:

- All external help, aids and the adoption of texts, illustrations and programs from other sources are properly referenced in the work.
- This is also a binding declaration that the present work does not contain any plagiarism, i.e. no parts that have been taken over in part or in full from another’s text or work under pretence of one’s own authorship or without reference to the source.
- In the event of misconduct of any kind, Sections 39 and 40 (Dishonesty and Procedure in the Event of Dishonesty) of the ZHAW Examination Regulations and the provisions of the Disciplinary Measures of the University Regulations shall come into force.



I have no limitations.  
— Thomas Shelby

To our parents...

# Abstract

Extreme weather events cause considerable damage to infrastructure, the economy and the environment worldwide. Predicting such damage can help to optimize preventive measures and reduce costs. In this project, a neural network is being developed that analyzes historical weather data and damage reports to predict potential storm damage in Switzerland based on new weather forecasts. Using modern machine learning techniques, relevant patterns are recognized in order to train a predictive model. The model is tested for accuracy and optimized to enable reliable predictions.

Key words: Machine Learning, Neural Network, Storm Damages



## Acknowledgements

We would like to thank Andreas Meier for his valuable support and guidance throughout this project. Additionally, we would like to thank to Dr. Katharina Liechti which has provided us with valuable insights about the sciences of weather and storm damages. For providing and collecting data to make this project possible, we also like to thank to the Swiss Federal Institute for Forest, Snow and Landscape Research WSL.

# Preface

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magnam aliquam quaerat voluptatem. Ut enim aequale doleamus animo, cum corpore dolemus, fieri tamen permagna accessio potest, si aliquod aeternum et infinitum impendere malum nobis opinemur. Quod idem licet transferre in voluptatem, ut postea variari voluptas distinguere possit, augeri amplificarique non possit. At etiam Athenis, ut e patre audiebam facete et urbane Stoicos irridente, statua est in quo a nobis philosophia defensa et collaudata est, cum id, quod maxime placeat, facere possimus, omnis voluptas assumenda est, omnis dolor repellendus. Temporibus autem quibusdam et.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magnam aliquam quaerat voluptatem. Ut enim aequale doleamus animo, cum corpore dolemus, fieri tamen permagna accessio potest, si aliquod aeternum et infinitum impendere malum nobis opinemur. Quod idem licet transferre in voluptatem, ut.

Key words:



# Contents

<b>Declaration of Authorship</b> . . . . .	<b>ii</b>
<b>Abstract</b> . . . . .	<b>i</b>
<b>Acknowledgements</b> . . . . .	<b>ii</b>
<b>Preface</b> . . . . .	<b>iii</b>
<b>Contents</b> . . . . .	<b>i</b>
<b>List of Abbreviations</b> . . . . .	<b>iii</b>
<b>1 Introduction</b> . . . . .	<b>1</b>
1.1 Motivation . . . . .	1
1.2 Work Outline . . . . .	1
<b>2 Theoretical Background</b> . . . . .	<b>2</b>
2.1 Weather Research . . . . .	2
2.1.1 Reason for Flooding . . . . .	3
2.1.2 Reason for Landslide . . . . .	3
2.2 Machine Learning . . . . .	4
2.2.1 Feedforward Neural Networks . . . . .	4
2.2.2 The Backpropagation Training Algorithm . . . . .	5
2.2.3 Recurrent Neural Networks . . . . .	6
2.2.4 Long Short Term Memory Neural Networks . . . . .	8
2.3 Software Engineering . . . . .	9
<b>3 Methodology</b> . . . . .	<b>10</b>
3.1 AI Engineering . . . . .	10
3.1.1 Data . . . . .	10
3.1.2 Data Cleaning . . . . .	11
3.1.3 Availability of Sources and Data Collection . . . . .	11
3.1.4 Deep Learning Experiments . . . . .	12

3.1.4.1	Feedforward Neural Network . . . . .	13
3.1.4.2	Long Short Term Neural Network . . . . .	14
3.2	Software Engineering . . . . .	15
3.2.1	Backend . . . . .	15
3.2.1.1	Technologies . . . . .	15
3.2.1.2	Architecture . . . . .	15
3.2.2	Frontend . . . . .	15
3.2.2.1	Technologies . . . . .	15
3.2.3	Test Concept . . . . .	15
<b>4</b>	<b>Results . . . . .</b>	<b>16</b>
4.1	Results of AI Engineering . . . . .	16
4.1.1	Feedforward Neural Network: Results . . . . .	16
4.1.2	LSTM Neural Network . . . . .	17
4.2	Software Results . . . . .	17
<b>5</b>	<b>Discussion and Outlook . . . . .</b>	<b>18</b>
	<b>Bibliography . . . . .</b>	<b>19</b>
	<b>List of Figures . . . . .</b>	<b>22</b>
	<b>List of Tables . . . . .</b>	<b>23</b>
<b>A</b>	<b>Appendix . . . . .</b>	<b>24</b>
AA	Disclaimer . . . . .	24
AB	Original Data Features . . . . .	25

## List of Abbreviations

<b>FNN</b>	Feedforward Neural Network	<b>RNN</b>	Recurrent Neural Network
<b>LSTM</b>	Long Short Term Memory Neural Network	<b>VGP</b>	Vanishing Gradient Problem
<b>NN</b>	Neural Network	<b>WSL</b>	Swiss Federal Institute for Forest Snow and Landscape Research WSL

# **1 Introduction**

## **1.1 Motivation**

Why do we do this?

## **1.2 Work Outline**

What do we want to predict etc.

## 2 Theoretical Background

### 2.1 Weather Research

The causes mentioned in this section are neither exhaustive nor account for all damages listed in [1]. In a conversation with K. Liechti ([2]), several contributing factors were discussed, of which only a subset were considered in the model. The discussed influencing factors were:

**Topological gradients:** The question addressed was whether known threshold values of slope (in percent or degrees) exist to differentiate between low, intermediate, and high landslide risk. Unfortunately, the answer was negative. Due to time constraints during the thesis project, further research — e.g., literature reviews — could not provide any conclusive information.

**Forest/Deforestation:** According to Wikipedia ([3]), deforestation contributes to landslides by eliminating trees, thereby destroying the stabilizing effect of their roots. K. Liechti confirmed this statement but also pointed out that forests themselves possess considerable weight, which may also contribute to slope instability. Applying this insight would require additional data and investigation, and was therefore deprioritized due to time limitations.

**Soil condition:** This factor is discussed in detail within each relevant subsection.

**Ground frost:** Frozen soil exhibits increased cohesive strength, which helps prevent landslides.

**Rainfall:** Closely linked to soil conditions; specifically addressed in each subsection.

**Snowfall:** Snowfall itself does not directly cause the damages under investigation but serves as a source for later snowmelt.

**Snowmelt:** Significantly contributes to the total volume of water input and has effects comparable to rainfall.

**Small animals and soil organisms:** This topic lies outside the scope of K. Liechti's expertise and was excluded from further consideration due to limited time.

### 2.1.1 Reason for Flooding

Flooding is primarily mitigated by the soil's capacity to absorb water. The composition of the topsoil is the most relevant factor: a non-permeable surface—such as rock or compacted clay—prevents infiltration, resulting in all incoming water contributing to surface runoff. In contrast, permeable materials such as sand or loose soil can absorb substantial amounts of water, depending on the depth of the soil layer (further details in Section 2.1.2). Even permeable ground can temporarily become impermeable during early spring when frozen. At the opposite extreme, drought has a similar effect: extended periods of high temperature and absent precipitation dry out the surface layer of the soil, thereby reducing or even eliminating its ability to absorb water. The behavior of completely dry soil is comparable to that of any other non-permeable material. All of these mechanisms are governed by the total water input, which originates either from rainfall, melting snow, or temperature conditions [2].

Prolonged precipitation continuously supplies water to the soil. If the ground is permeable and allows both infiltration and subsurface drainage, the overall impact remains limited. However, when the absorbed water cannot drain away, saturation occurs. Once the soil reaches full capacity, it effectively becomes impermeable—regardless of its natural permeability—and behaves like rock or clay, leading to increased surface runoff. In addition, sudden and sustained temperature increases—often indicative of significant snowmelt—can further augment the water load on the soil surface alongside rainfall. [2]

### 2.1.2 Reason for Landslide

Of the potential causes for landslides, three were considered. The first—loose gravel or rock—is not directly influenced by current weather conditions and was therefore excluded. The second and relevant factor is the water absorption capacity of loose soil (e.g., dirt). As water is absorbed, the soil mass increases in weight—from dry ( $0.83\text{kg}/\text{dm}^3$  [4]) to wet ( $1.6 - 1.76\text{kg}/\text{dm}^3$  [5]). This gain in mass reduces the soil's ability to remain stable. Additionally, subsurface clay layers limit water infiltration on the one hand, but on the other hand, they promote landslides by forming smooth and slippery interfaces between different soil types and by preventing subsurface drainage. In contrast, a jagged and solid rock surface also impedes subsurface drainage but may reduce landslide risk by mechanically anchoring the overlying soil layer. [2]

## 2.2 Machine Learning

Machine Learning has gained increasing popularity in recent years, particularly through advancements in Neural Networks (NNs). These developments have significantly expanded the capabilities of automated data-driven modeling across various domains. In this chapter, we focus primarily on NNs architectures, as they form the core modeling approach used in this project.

### 2.2.1 Feedforward Neural Networks

Feedforward Neural Networks (FNNs) are a class of machine learning models inspired by the structure and function of the human brain. In biological systems, neurons are interconnected through synapses, and their strengths change in response to external stimuli—a process that underlies learning. FNNs mimic this behavior by using computational units, also called neurons, connected by weighted links. These weights are adjusted during training to improve the model's predictions, analogous to synaptic strength adjustments in the brain.

Each artificial neuron receives inputs, scales them using learned weights, applies a non-linear activation function, and forwards the result to subsequent neurons. Through this architecture, an FNN models complex functions by propagating signals from input to output layers. Learning in FNNs occurs via exposure to training data consisting of input–output pairs. The network adjusts its weights to reduce the difference between its predictions and the target outputs, thereby minimizing the prediction error.

While the biological analogy is imperfect, it has historically guided the development of neural architectures. More formally, FNNs can also be viewed as compositions of simple mathematical units—such as logistic or linear regressors—structured into a computational graph. Their expressive power arises from stacking these units into deeper networks, enabling them to approximate highly non-linear relationships in data. This capacity to learn from examples and generalize to unseen inputs makes FNNs a powerful tool in modern machine learning.

#### Architecture

An FNN trained with backpropagation, which is discussed in Section 2.2.2, can be illustrated as a directed acyclic Graph with inter-connections. It contains a set of neurons distributed in different layers.

- Each neuron has a activation function.
- The first layer, shown on the left side in Figure 2.1, is called the input layer and has no predacessors in the inter-connection graph. Additionally, is their input value the same as their output value.
- The last layer, shown on the right side in Figure 2.1, is called the output layer and have no successors in the inter-connection graph. Their value represents the output of the Network

- All other neurons are grouped in the so called hidden layers. In Figure 2.1 this is represented by the layer in the middle. A neural network can have an arbitrary amount of hidden layers.
- The edges in the inter-connection graph, are so called weights, which represent an arbitrary number in  $\mathbb{R}$ . These weights are updated during the training process.

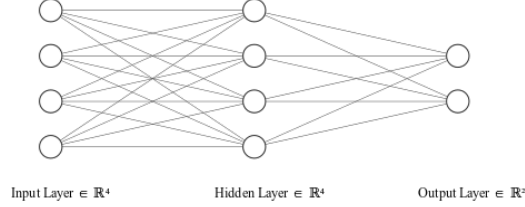


Figure 2.1 – Illustration of a Neural Network with 3 layers. Illustrated with [6]

### Computation of the Output

The calculation of the output of the FNN is also called a forward pass. To do so, the value of each neuron needs to be calculated. This is done by summing all the inputs and then put this value into a given activation function. Mathematically, this process can be represented as:  $y = f\left(\sum_i^n \xi_i\right)$  where  $f$  represents the activation function of the neuron and  $\xi_i$  the input or also called the potential of a neuron. To compute a full forward pass, this is done for each neuron from the input layer towards the output layer. When a value is passed through a weight to a successor neuron, the value is multiplied by the value of the weight. This process can then be summarized to:

$$\begin{aligned}
 y_1 &= f\left(\sum_i^n w_{ij}x_i\right) \text{ [input to hidden layer]} \\
 y_{j+1} &= f\left(\sum_i^n w_{ij}y_j\right) \forall j \in \{1 \dots k-1\} \text{ [hidden to hidden layer]} \\
 o &= f(w_{ij+1}y_j) \text{ [hidden to output layer]}
 \end{aligned} \tag{2.1}$$

[7] where  $j$  denotes the layer, ascending from input layer to output layer,  $f$  activation function,  $w_{ij}$  weight at index  $i$  and layer  $j$ ,  $x$  as input at index  $i$ . The state of the neuron in the output layer  $o$  can then be denoted as the output vector.

#### 2.2.2 The Backpropagation Training Algorithm

**Objective:** To identify a set of weights that guarantees that for every input vector, the output vector generated by the network is identical to (or sufficiently close to) the desired output vector.



Note: The actual or desired output values of the hidden neurons are not explicitly specified by the task.

**For a fixed and finite training set:** The objective function represents the total error between the desired and actual outputs of all the output neurons for all the training patterns.

### Error Function

$$E = \frac{1}{2} \sum_p^P \sum_i^N (y_{ip} - d_{ip})^2 \quad (2.2)$$

[8]

where  $P$  is the number of training patterns,  $N$  the number of output neurons,  $d_{ip}$  is the desired output for pattern  $p$ ,  $y_{ip}$  the actual output of the neuron  $i$  and output neuron  $i$ .

### Procedure

1. Compute the actual output for the presented pattern
2. Compare the actual output with the desired output
3. Adjustment of weights and thresholds against the gradient of the error function (Equation (2.2)) for each layer from the output layer towards the input layer

Figure 2.2 – Training Procedure of the backpropagation algorithm

### Adjustment Rules

$$w_{ij}(t+1) = w_{ij} + \Delta_E w_{ij}(t)$$

$$\Delta_E w_{ij} = -\frac{\partial E}{\partial w_{ij}} = -\frac{\partial E}{\partial y_j} \frac{\partial y_j}{\partial \xi_j} \frac{\partial \xi_j}{\partial w_{ij}} \quad (2.3)$$

[8]

where  $\Delta_E w_{ij}$  denotes the change of the Error Function with respect to  $w_{ij}$ ,  $E$  the Error Function,  $y_j$  the output of the output neuron  $j$ ,  $\xi_j$  the potential of the neuron  $j$  and  $w_{ij}$  the weight with index  $i$  at layer  $j$ .

### 2.2.3 Recurrent Neural Networks

The feedforward FNNs discussed in Section 2.2.1 are inherently limited to fixed-size, unordered input representations. This makes them unsuitable for sequential data, where both the order and length of the input can vary. To address this limitation, we introduce a class of models specifically designed to process variable-length sequences: Recurrent Neural Networks (RNNs)

**Architecture** A RNN consists of the following components:

- **Input signal:** The external data which is fed into the network at a timestep  $n$  and represent the current information which the network is processing.
- **State signal:** Also known as the hidden state, represents the memory of the RNN for a given neuron. It contains information about the past inputs in the sequence and is updated at each time step based on the current input and the previous state. The hidden state is updated with the following formula:  $h_t = f(h_{t-1}, x_t)$ . After the update, the hidden state of neuron  $i$  serves as input into the neuron  $i + 1$
- **Weights:** The weights of the RNN neurons are shared among all different states.
- **Output:** Each neuron has an output, which is denoted as  $y_1 - y_4$  in Figure 2.4. This output can serve as the output for the current state or as input into the next neuron.

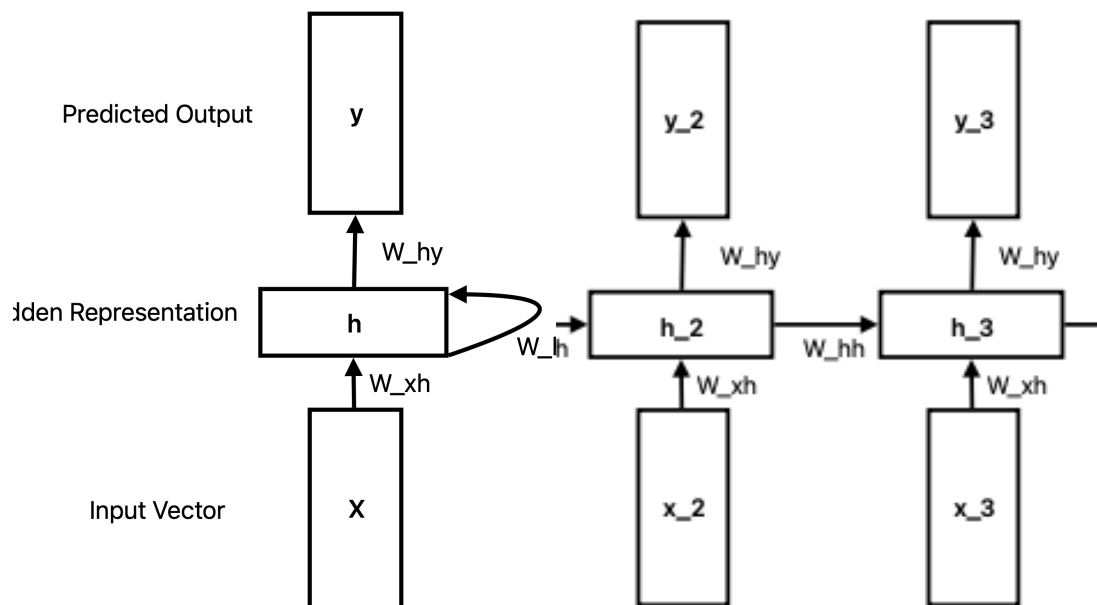


Figure 2.3 – RNN

Figure 2.4 – 4 times unrolled RNN

### Vanishing Gradient Problem

The Vanishing Gradient Problem (VGP) is a challenge encountered during the training of RNNs, particularly dealing with deep RNNs and long input sequences. It arises from the way how gradients are updated during the backpropagation algorithm (discussed in Section 2.2.2), which updates the network's parameters / weights by propagating gradients backward through each time step. In backpropagation, gradients are computed via the chain rule, resulting in repeated multiplication of weight matrices and derivatives of activation functions across time steps. When these values are consistently smaller than one, the gradients exponentially decrease as they traverse earlier layers or time steps. Consequently, the

gradients become vanishingly small, leading to negligible updates for earlier parameters and impairing the network's ability to learn long-range dependencies. The same principle applies, when the gradients become too large. In this case, the problem is called the exploding gradient problem.

### 2.2.4 Long Short Term Memory Neural Networks

Long Short Term Memory Neural Networks (LSTMs) are a special form of RNNs designed to address the problem of Vanishing Gradients while having a more fine-grained control over the previous input data. LSTMs are an enhancement of RNNs, because the recurrence conditions of how the hidden state  $h_t$  is processed. To achieve this aim, we introduce a new hidden state of the same dimension as  $h_t$ , which is called the cell state and is denoted as  $c_t$ . The key innovation of the LSTM lies in its ability to control the flow of information using a set of gating mechanisms. These gates regulate how information is added to, removed from, or exposed from the cell state. Each gate is implemented as a sigmoid-activated neural layer and serves a distinct role in the update process.

#### Architecture

At each time step  $t$  with a given input vector  $x_t$ , previous hidden state  $h_{t-1}$  and previous cell state  $c_{t-1}$ , the LSTM performs the following computations:

- Input Gate: Decides which new information will be added to the cell state and is calculated as:
  - $i_t = \sigma(w_i[h_{t-1}, x_t] + b_i)$
- Forget Gate: This gate decides which parts of the previous cell state should be forgotten. The value of the forget gate is calculated as:
  - $f_t = \sigma(w_f[h_{t-1}, x_t] + b_f)$
- Candidate Cell State: Computes possible candidates  $\tilde{c}_t$  which can be added to the cell state, computed as:
  - $\tilde{c}_t = \tanh(w_c[h_{t-1}, x_t] + b_c)$
- Cell state update: Given the candidates, the cell state can be updated as:
  - $c_t = f_t \cdot c_{t-1} + i_t \cdot \tilde{c}_t$
- Output Gate: Determines which part of the cell state influences the hidden state and therefore the output. It is computed with:
  - $o_t = \sigma(w_o[h_{t-1}, x_t] + b_o)$
- Hidden state update: The final hidden state is computed by applying the output gate to the activated cell state. It is computed with:
  - $h_t = o_t \cdot \tanh(c_t)$

Note:  $w_x$  represents a complete weight matrix for each gate,  $b_x$  denotes the bias for the corresponding gates, and  $\sigma$  denotes the sigmoid function.

[7], [9], [10], [11]

## 2.3 Software Engineering

## 3 Methodology

### 3.1 AI Engineering

#### 3.1.1 Data

The basis of the data was provided by the Swiss Federal Institute for Forest Snow and Landscape Research WSL (WSL). The correspondence partner was K. Liechti, who provided valuable insights into the data as well as into the relevant geographical and meteorological processes. To comply with the legal restrictions cited in Appendix AA, the use of WSLs data in this thesis was limited. These limitations ultimately proved beneficial to the modeling process, as demonstrated by the experiments.

The sources for the recorded incidents were Swiss newspapers. As a result, the accuracy of the incident locations cannot be guaranteed, and the (financial) extent of the damages is only an approximation. In some cases, the location could not be precisely determined; thus, only the region or canton was recorded. Due to these uncertainties, the financial extent had to be rounded, and the damages grouped by canton or region prior to publication.

As outlined in Appendix AB, the scope of the dataset was extensive. The features selected for this thesis were limited to the following: “Gemeindenamen”, “Datum”, “Hauptprozess”, and “Schadensausmass”, which were identified as the most relevant variables related to damage.

Based on the inputs of K. Liechti, the relevant meteorological variables were identified as sunshine duration, ground temperature, snowfall, and rainfall.

The rationale for this selection is briefly summarized below; detailed explanations can be found in Section 2.1:

Sunshine hours influence ground temperature, which in turn can cause snowmelt or thaw ground frost.

Ground temperature was not available via open-meteo[12]; therefore, the temperature at 2 meters above ground was used as a proxy.

Snowfall can contribute to snowmelt processes later in the seasonal cycle.

Rainfall directly contributes to the potential for flooding and can also indirectly increase ground temperature.

Continuous experimentation with the collected data has yielded several useful insights. The proportion of damage-related entries (28,515) compared to the total number of entries (approximately 52 million — the Cartesian product of all days between 01.01.1970 and 31.12.2023 with all municipalities) is highly imbalanced.

Techniques such as downsampling and upsampling were evaluated, but due to the time-series nature of the data, these methods did not produce any meaningful improvements. An alternative approach — which also helps anonymize the data — was to apply k-means clustering based on geographic coordinates and to aggregate the recorded damages per cluster per week.

In a subsequent experiment, snowfall was found to have no significant impact and was therefore completely removed from the dataset.

### 3.1.2 Data Cleaning

The damage data referenced in Section 3.1.1 required several processing steps before it could be used in the modeling phase. As noted in Appendix AA, the municipality names correspond to the administrative boundaries of 1996 and are thus not up to date. To identify outdated names, GPS coordinates were retrieved using the Geocoding API [13]. For approximately 300 out of 2759 municipalities, no coordinates could be retrieved. Manual analysis of these cases revealed recurring issues.

For some incidents, as described in Section 3.1.1, WSL could not determine the exact location and had to assign them to a canton (30 of 28,515 cases), region (3), or district (10). Due to their low frequency, these entries were excluded from the dataset.

Common abbreviations used in the WSLs dataset—such as “a.A.” for “am Albis” or “St.” for “Sankt”—were standardized. Additionally, some municipalities had been merged into others since 1996. These cases were manually updated with their current names.

The weather data required less preprocessing. In eight municipalities, occasional values were set to ‘null’ (no data available); these were replaced by 0.

### 3.1.3 Availability of Sources and Data Collection

The data currently in use was collected with relatively little difficulty. The damage data was kindly provided by K. Liechti from the WSL following a formal request via email [14].

For the collection of weather data, the initial approach was to use official government data provided by MeteoSwiss [15]. However, due to the structure of the website and the raw nature of the station-based measurement data, this approach was ultimately abandoned. During further research, the open-meteo API [12] was discovered. To avoid excessive costs, a free academic access key was requested and kindly provided [16].

To obtain information on soil conditions, the first resource consulted was the Swiss federal geoportal map.geo.admin [17]. However, the format of the data was mostly incompatible with the tools available for this thesis. An alternative considered was the GIS Browser [18], which is the cantonal equivalent of map.geo.admin [17]. Unfortunately, it posed the same limitations as the federal source.

Given that new buildings are constantly being constructed in Switzerland and that the Swiss Confederation is actively researching locations for a nuclear waste repository [19], it was assumed that public institutions must maintain relevant geotechnical data.

First, the building construction office of Affoltern am Albis was contacted [20]. They referred the inquiry to the cantonal building construction office, which also denied possession of such data and redirected the request to the Office for Spatial Development [21].

The contact person from the Office for Spatial Development [22] was likewise unable to provide relevant data or further contacts. Their suggestion was to consult the GIS Browser [18] or map.geo.admin [17].

After these repeated unsuccessful attempts, the GIS Helpdesk was contacted [23]. The proposed solution [24] was again to use the GIS Browser or map.geo.admin, which had already proven inadequate. Due to time constraints, this approach was ultimately abandoned.

### 3.1.4 Deep Learning Experiments

The goal of the experiments was to identify the most suitable deep learning architecture for predicting storm damage events based on weather-related input features. We evaluated different types of neural networks, beginning with a baseline Feedforward Neural Network (FNN), and compared their performance on a held-out test set.

#### Datasets

As shown in Table 3.1 dataset was temporally split into training, validation, and test sets to simulate realistic forecasting scenarios and prevent information leakage. The training set spans the years 1971–2002, the validation set covers 2003–2013, and the test set includes data from 2013–2023.

Table 3.1 – Datasets splits

Set	Nr of patterns	Years
Train	10014	1971 - 2002
Validation	3132	2003 - 2013
Test	3132	2013 - 2023

### 3.1.4.1 Feedforward Neural Network

Our first experiment employed a baseline Feedforward Neural Network (FNN), whose architecture is illustrated in Figure 3.5. The network consists of 10 fully connected layers with ReLU activation functions. The model was trained using the Adam optimizer and crossentropyloss.

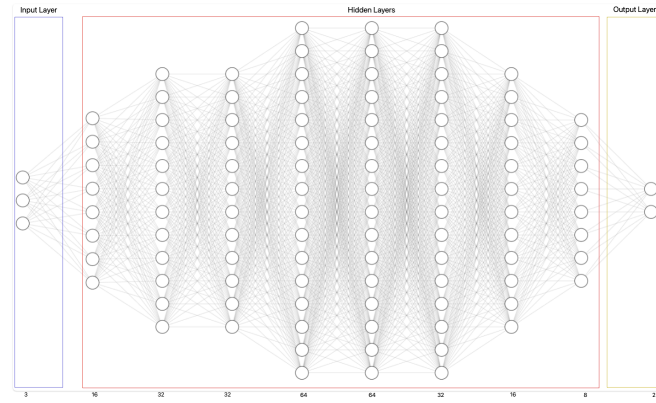


Figure 3.5 – Illustration of the used FNN

#### Input features

The input to the FNN consisted of three weather-related variables: mean temperature at 2 meters, total rainfall, and snow accumulation. All features were normalized to zero mean and unit variance, as described in Section 3.1.1, and were provided on a weekly basis for each coordinate in the dataset.

#### Training

The Feedforward Neural Network was trained to minimize the weighted cross-entropy loss, using class weights computed via sklearn's [25] `compute_class_weight` function. This approach addresses class imbalance in the training data by assigning higher loss penalties to underrepresented classes. The computed class weights were passed to the PyTorch [26] `CrossEntropyLoss` function, allowing the model to pay more attention to minority class predictions.

We used the Adam [27] optimizer with a learning rate of  $1e^{-4}$ , as it provides adaptive learning rate updates and has been shown to work well in practice for deep learning tasks involving



sparse gradients. To further improve training stability and avoid overfitting, we employed a learning rate scheduler (ReduceLROnPlateau), which reduces the learning rate by a factor of 0.5 if the validation loss does not improve for 5 consecutive epochs.

Training was performed over 100 epochs using mini-batches of 64 patterns per batch. After each epoch, the model was evaluated on the validation set to track performance metrics including accuracy, F1 score, precision, and recall. These metrics allowed us to monitor not only the raw predictive performance, but also the model's balance between false positives and false negatives, which is particularly important in the context of storm damage prediction.

This training setup was chosen to ensure stable convergence, account for class imbalance, and enable dynamic adjustment of the learning rate during training.

#### **3.1.4.2 Long Short Term Neural Network**

TBD

## 3.2 Software Engineering

### 3.2.1 Backend

#### 3.2.1.1 Technologies

#### 3.2.1.2 Architecture

### 3.2.2 Frontend

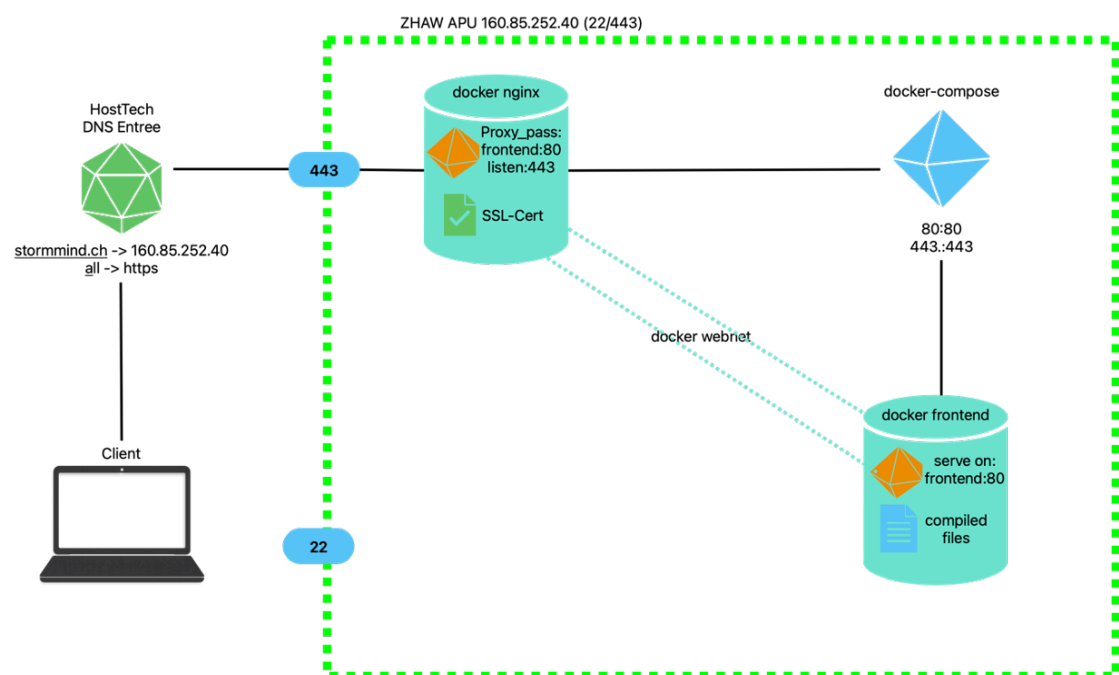


Figure 3.6 – web routing: created with apple freeform, laptop from chatgpt (prompt: erstelle mir ein png eines minimalistischen laptops ohne hintergrund)

#### 3.2.2.1 Technologies

The Frontend consists of a react/vite repository. The DNS Entree was made on Hosttech and references an instance on the Openstack cluster of ZHAW [28]

### 3.2.3 Test Concept

## 4 Results

### 4.1 Results of AI Engineering

To evaluate model performance, we conducted x experiments based on the configurations detailed in Section 3.1.4. The first experiment, using a standard feedforward network, serves as the baseline. The setup was described in Section 3.1.4.1

----

INSERT COMPARISON OF ALL MODELS TABLE

----

#### 4.1.1 Feedforward Neural Network: Results

The feedforward network achieved stable training behavior across 100 epochs, as shown in . Both training and validation loss converged early and remained relatively flat, suggesting a well-calibrated optimization setup. While the training loss steadily decreased, the validation loss plateaued, indicating that the model did not overfit and generalized reasonably well to unseen data.

Performance metrics such as accuracy, F1 score, precision, and recall also stabilized early during training, as shown in Figure 4.7. The final validation accuracy reached approximately 66%, with an F1 score around 0.59. This balance between precision and recall suggests that the model was able to capture patterns in both classes despite class imbalance.

The confusion matrix () further illustrates the model's performance. Class 0 (no storm damage) was predicted with high accuracy (1730 true positives vs. 492 false positives), while Class 1 (storm damage) showed moderate performance (534 true positives vs. 376 false negatives). Although the model exhibits a slight bias toward the majority class, it still correctly identifies a significant proportion of storm damage events, which is critical for real-world risk prediction.

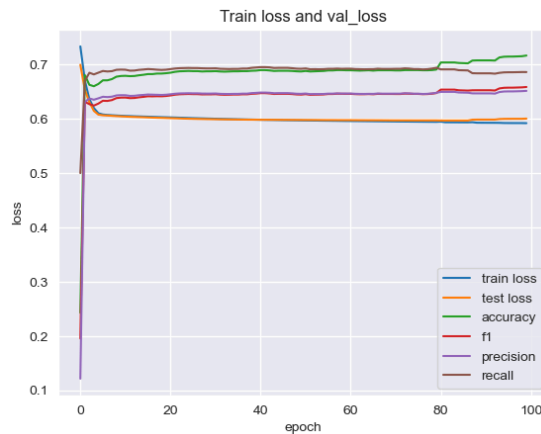


Figure 4.7 – Training of the FNN

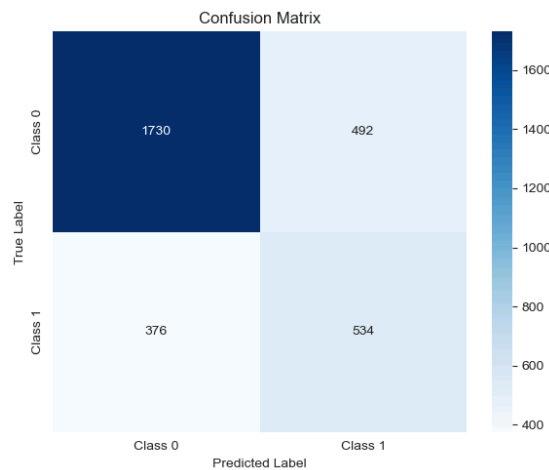


Figure 4.8 – Confusion Matrix of the FNN

Overall, the feedforward network serves as a solid baseline, offering balanced generalization and a reliable starting point for evaluating more complex architectures.

#### 4.1.2 LSTM Neural Network

### 4.2 Software Results

## **5 Discussion and Outlook**

100

- [1] S. F. R. I. WSL, *USDB\_1972\_2023\_ohneSchadenszahlen\_ohneBeschriebe*. (2023).
- [2] “Austausch zu Unwetterschäden und Daten.” [Online]. Available: [https://teams.microsoft.com/l/meetup-join/19%3ameeting\\_ZDk5ODM1MWQtN2E2Yi00NDZjLWFiNTEtOWE0ZWU4ODQ3YzA1%40thread.v2/0?context=%7b%22Tid%22%3a%225d1a9f9d-201f-4a10-b983-451cf65cbc1e%22%2c%22Oid%22%3a%225f85a69b-df7a-4a9a-acab-f5ad7d25b1a9%22%7d](https://teams.microsoft.com/l/meetup-join/19%3ameeting_ZDk5ODM1MWQtN2E2Yi00NDZjLWFiNTEtOWE0ZWU4ODQ3YzA1%40thread.v2/0?context=%7b%22Tid%22%3a%225d1a9f9d-201f-4a10-b983-451cf65cbc1e%22%2c%22Oid%22%3a%225f85a69b-df7a-4a9a-acab-f5ad7d25b1a9%22%7d)°
- [3] “Erdrutsch.” Jan. 13, 2025. Accessed: May 04, 2025. [Online]. Available: <https://de.wikipedia.org/w/index.php?title=Erdrutsch&oldid=252204629>°
- [4] Maria, “Gewicht nasser Erde: Formel zum Umrechnen.” Accessed: May 06, 2025. [Online]. Available: <https://hortica.de/gewicht-nasse-erde/>°
- [5] Designerpart, “Schüttgut-Gewicht - Big Bag Puhm | Alles über Gewicht und Volumen.” Accessed: May 06, 2025. [Online]. Available: <https://bigbag-puhm.at/handhabung/schuettgut-gewicht/>°
- [6] “NN SVG.” Accessed: May 03, 2025. [Online]. Available: <http://alexlenail.me/NN-SVG/>°
- [7] C. C. Aggarwal, *Neural Networks and Deep Learning: A Textbook*. Cham: Springer International Publishing, 2023. doi: 10.1007/978-3-031-29642-0°.
- [8] I. Mrázová, “Multi-Layered Neural Networks.”
- [9] A. Sherstinsky, “Fundamentals of Recurrent Neural Network (RNN) and Long Short-Term Memory (LSTM) Network,” *Physica D: Nonlinear Phenomena*, vol. 404, p. 132306, Mar. 2020, doi: 10.1016/j.physd.2019.132306°.
- [10] F.-P. Schilling and Z. Cai, “Lecture 05: Sequential Models,” Mar. 19, 2025.
- [11] D. Thakur, “LSTM and Its Equations.” Accessed: May 05, 2025. [Online]. Available: <https://medium.com/@divyanshu132/lstm-and-its-equations-5ee9246d04af>°

- [12] P. Zippenfenig, "Open-Meteo.Com Weather API." [Online]. Available: <https://open-meteo.com/><sup>o</sup>
- [13] "Geocoding API - API Ninjas." Accessed: Mar. 08, 2025. [Online]. Available: <https://www.api-ninjas.com/api/geocoding><sup>o</sup>
- [14] K. Liechti, "RE: Anfrage Zur Nutzung Der Unwetterschadens-Datenbank Für Bachelorarbeit." Nov. 29, 2024.
- [15] "MeteoSwiss IDAWEB: Login at IDAWEB." Accessed: May 06, 2025. [Online]. Available: <https://gate.meteoswiss.ch/idaweb/login.do><sup>o</sup>
- [16] P. Zippenfenig, "Professional API Key for Research Purposes."
- [17] "Maps of Switzerland - Swiss Confederation - Map.Geo.Admin.Ch." Accessed: May 06, 2025. [Online]. Available: [https://map.geo.admin.ch/#/?map?lang=en&center=2660000,1190000&z=1&topic=ech&layers=ch.swisstopo.zeitreihen@year=1864,f;ch.bfs.gebaeude\\_wohnungs\\_register,f;ch.bav.haltestellen-oev,f;ch.swisstopo.swisstlm3d-wanderwege,f;ch.vbs.schiessanzeigen,f;ch.astra.wanderland-sperrungen\\_umleitungen,f&bgLayer=ch.swisstopo.pixelkarte-farbe](https://map.geo.admin.ch/#/?map?lang=en&center=2660000,1190000&z=1&topic=ech&layers=ch.swisstopo.zeitreihen@year=1864,f;ch.bfs.gebaeude_wohnungs_register,f;ch.bav.haltestellen-oev,f;ch.swisstopo.swisstlm3d-wanderwege,f;ch.vbs.schiessanzeigen,f;ch.astra.wanderland-sperrungen_umleitungen,f&bgLayer=ch.swisstopo.pixelkarte-farbe)<sup>o</sup>
- [18] "GIS-Browser Geoportal Kanton Zürich." Accessed: May 06, 2025. [Online]. Available: <https://geo.zh.ch/maps?x=2693065&y=1253028&scale=279770&basemap=arelkbackgroundzh><sup>o</sup>
- [19] "Vergraben und vergessen." Accessed: May 06, 2025. [Online]. Available: <https://www.derbund.ch/vergraben-und-vergessen-413137488243><sup>o</sup>
- [20] "Phone call Hochbau und Umwelt Affoltern am Albis." Aug. 04, 2025.
- [21] "phone call Hochbau Amt Zürich." Aug. 04, 2025.
- [22] "phone call Amt für Raum Entwicklung und Vermessung." Aug. 04, 2025.
- [23] D. Ueltschi, "Bodenbeschaffenheitskarte."
- [24] F. GIS, "[ARE-JIRA] GIS-2262 [EXTERN] Bodenbeschaffenheitskarte."
- [25] "Scikit-Learn: Machine Learning in Python — Scikit-Learn 1.6.1 Documentation." Accessed: May 06, 2025. [Online]. Available: <https://scikit-learn.org/stable/#><sup>o</sup>
- [26] "PyTorch Foundation." Accessed: May 06, 2025. [Online]. Available: <https://pytorch.org/><sup>o</sup>
- [27] D. P. Kingma and J. Ba, "Adam: A Method for Stochastic Optimization." Accessed: May 06, 2025. [Online]. Available: <http://arxiv.org/abs/1412.6980><sup>o</sup>
- [28] "Login - OpenStack Dashboard." Accessed: May 06, 2025. [Online]. Available: [https://apu.cloudlab.zhaw.ch/auth/login/?next=](https://apu.cloudlab.zhaw.ch/auth/login/?next=/)<sup>o</sup>

[29] S. F. R. I. WSL, “Infos\_Daten\_Unwetterschadensdatenbank\_WSL\_english.” 2023.





# List of Figures

Figure 2.1 Illustration of a Neural Network with 3 layers. Illustrated with [6] . . . . . 5

Figure 2.2 Training Procedure of the backpropagation algorithm . . . . . 6

Figure 2.3 **RNN** . . . . . 7

Figure 2.4 4 times unrolled **RNN** . . . . . 7

Figure 3.5 Illustration of the used **FNN** . . . . . 13

Figure 3.6 web routing: created with apple freeform, laptop from chatgpt (prompt: erstelle mir ein png eines minimalistischen laptops ohne hintergrund)  
. . . . . 15

Figure 4.7 Training of the **FNN** . . . . . 17

Figure 4.8 Confusion Matrix of the **FNN** . . . . . 17



## List of Tables

Table 3.1 Datasets splits . . . . .	12
-------------------------------------	----

# A Appendix

## AA Disclaimer

### **“Information on the Data of the Swiss flood and landslide damage database managed by WSL**

Please note the following when using the data:

- Names of municipalities refer to the state of 1996. I.e. some municipalities have merged.
- Media reports are the main source of information. There are local and regional differences in reporting. In addition, the focus of the media has changed over time.
- In some cases, it is difficult to assign the damage to a location and / or municipality (in a few cases of doubt, the damage is assigned to the respective canton capital or even the Swiss capital)
- The coordinates have been set based on information from media reports, images, etc. They can therefore deviate greatly from the real main point of damage.

The following must be observed when publishing:

- If the data values are cited or published, they must be provided with at least a reference to the source (“WSL Swiss Flood and Landslide Damage Database”).
- It must be clearly mentioned that the damage data are only estimates.
- Damage values must always be rounded in publications.
- No monetary damage may be published at community level, but only in aggregated form (regions, cantons).
- Monetary damage may only be published in a form that does not allow any conclusions to be drawn about individuals and individual objects.“[29]

## AB Original Data Features

Gemeinde, Gemeindenummer, Weitere Gemeinde, Kanton, Prozessraum, MAXO Datum, Datum, MAXO Zeit, Zeit, Gewässer, Weitere Gewässer, Hauptprozess, Hauptprozess Rutschung Unterteilung, Hauptprozess Wasser/Murgang Unterteilung, Weitere Prozesse, Schadensausmass: gering [0.01-0.4]; mittel [0.4-2]; gross/katastrophal[>2] oder Todesfall [Mio. CHF], x-Koordinate, y-Koordinate, Schadenszentrum; Gemeindegebiet falls nicht bekannt, Grossereignisnummer; mehrere Ereignisse; welche aufgrund meteorologischer oder räumlicher Gegebenheiten zusammengefasst werden, Gewitterdauer MAXO, Gewitterdauer [Std.], Gewitter Niederschlagsmenge MAXO, Gewitter Niederschlagsmenge [mm], Dauerregen Dauer MAXO, Dauerregen Dauer [Std.], Dauerregen Niederschlagsmenge MAXO, Dauerregen Niederschlagsmenge [mm], Schneeschmelze MAXO, Schneeschmelze, Ursache nicht bestimmbar MAXO, Ursache nicht bestimmbar, ID

