
Communications Protocol

Vijay Bajracharya
Nick Hayes
Rohun Kaddu
Mateo Lopez
Carson Storm
Adian Taylor

Abstract

This document defines the communication protocol used by the clients and servers in the collaborative spreadsheet. The protocol is designed to enable multiple users (clients) to edit a spreadsheet simultaneously in such a way that all changes are reflected in real-time for all clients. This protocol defines the behavior of the server and clients and the messages that are exchanged.

Contents

1	Introduction	2
2	Common Client-Server interactions	2
2.1	Connecting to the Server	2
2.2	Managing Spreadsheets	2
2.3	Accessing a spreadsheet	3
2.4	Editing a spreadsheet	3
3	Commands	4
3.1	Common Data Types	4
3.2	Create	5
3.3	Delete	6
3.4	Rename	7
3.5	Get Name	8
3.6	List Spreadsheets	9
3.7	Open	10
3.8	Close	11
3.9	Get History	12
3.10	Get Spreadsheet	13
3.11	Undo	14
3.12	Push	15

1 Introduction

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

2 Common Client-Server interactions

2.1 Connecting to the Server

The client will open a [TCP](#) connection to the server on port 2112 after the connection has been opened, the server will start accepting messages formatted as [JSON strings](#). This connection may be closed and reopened at the clients' discretion, but any open spreadsheet will need to be reopened.

2.2 Managing Spreadsheets

The protocol defines four basic commands that manipulate spreadsheets as a unit: [create](#), [delete](#), [rename](#), [get_name](#) and [list_spreadsheet](#). Every spreadsheet is identified by an *id* and associated with a *name* that need not be unique. The *name* is primarily for display purposes, while the spreadsheet *id* is used to identify it in all operations pertaining to a specific spreadsheet.

2.2.1 Creating a new spreadsheet

To create a new spreadsheet the client will use the [create](#) command, which accepts the name of the spreadsheet to create, and responds with the *id* of the newly created spreadsheet. The newly created spreadsheet will persist on the server until it is deleted.

2.2.2 Deleting a spreadsheet

To delete a spreadsheet the client will use the [delete](#) command, which accepts the *id* of the spreadsheet that is to be deleted. This will delete the spreadsheet from the spreadsheet list and all of its history; it will also trigger an update for all clients who currently have the spreadsheet [open](#), notifying them that the spreadsheet has been deleted.

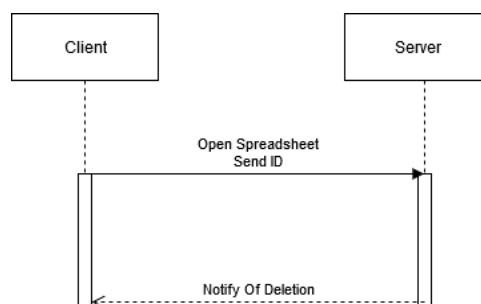


Figure 1: Deleting a spreadsheet sequence diagram

2.2.3 Renaming a spreadsheet

To rename a spreadsheet the client will use the [rename](#) command, which accepts the *id* of the spreadsheet to rename and the *name* to rename the spreadsheet to. This command will trigger an update for all clients who currently have the spreadsheet [open](#), notifying them that the name of the spreadsheet has changed. See [rename](#) for a description of the command.

2.2.4 Getting the name of a spreadsheet

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

2.2.5 Listing all spreadsheets

To list all of the spreadsheets stored on the server the client will use the `list_spreadsheets` command, to which the server will respond with a list of all of the spreadsheets stored on the server.

2.3 Accessing a spreadsheet

One of the clients' primary responsibilities is to display the contents of open spreadsheets in real-time; this protocol defines four commands used to access the contents of the spreadsheet: `open`, `close`, `get_history`, and `get_spreadsheet`. These commands do not alter the spreadsheets in any way, they only access the information stored in the spreadsheets.

2.3.1 Opening a spreadsheet

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

2.3.2 Closing a spreadsheet

In the event that a client no longer wishes to receive updates for a spreadsheet, for example, if the user closes the client or the spreadsheet, the client can unsubscribe from spreadsheet updates by using the `close` command, which accepts the `id` of the spreadsheet the client wishes to close. This will prevent the client from receiving further updates about the spreadsheet, and the client will need to reopen the spreadsheet to begin receiving updates again.

2.3.3 Getting the edit history of a spreadsheet

There are a few reasons the client would want to get a complete history of a spreadsheet, for example, if the client wanted to be able to revert the spreadsheet to the state it was an hour ago. The client can access the complete history of a spreadsheet using the `get_history` command, which accepts the `id` of the spreadsheet whose history to get. The server will respond with a list of all the edits that have been made to the spreadsheet. The response will include edits that have been undone and will indicate which edit is the most recent.

2.3.4 Getting the current state of the spreadsheet

In the event that the client wishes to retrieve the current state of the spreadsheet regardless of whether or not they've opened the spreadsheet, they can use the `get_spreadsheet` command, which accepts the `id` of the spreadsheet to get. The server will then respond with the contents of the spreadsheet.

2.4 Editing a spreadsheet

The client's other main responsibility is to update the spreadsheet stored on the server. This protocol defines two commands to be used for editing a spreadsheet: `push` and `undo`. All

other required edits can be composed using these two commands. These commands do alter the contents of the spreadsheet.

2.4.1 Applying an edit to the spreadsheet

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

2.4.2 Undoing an edit

Undo operations are not considered edits, but simply a rollback of the history of the spreadsheet. This protocol provides an **undo** command which will put the spreadsheet in the state it was before the most recent edit was applied. *undo* accepts the *id* of the spreadsheet to perform the undo on. This command will trigger an update for all clients that currently have the spreadsheet open.

2.4.3 Reverting an edit

The client may want to revert the spreadsheet to a previous state, that is, reapplying an earlier edit to the spreadsheet. This can be accomplished through the **get_history** and **push** commands. The client must simply get the history of the desired spreadsheet, select the edit to revert to, and then push that edit to the server as if it were a new edit. Since, **get_history** returns edits that have been undone, it is possible to revert an undo.

2.4.4 Synchronizing with the server after being offline

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3 Commands

Command	Description
create	Creates a new spreadsheet
delete	Deletes a spreadsheet
rename	Renames a spreadsheet
get_name	Gets the name of a spreadsheet
list_spreadsheets	Lists all spreadsheets
open	Subscribes the client to updates
close	Unsubscribes the client to updates
get_history	Gets the edit history of a spreadsheet
get_spreadsheet	Gets the contents of a spreadsheet
push	Pushes edits to be applied to the spreadsheet
undo	Undoes the most recent edit of a spreadsheet

3.1 Common Data Types

3.1.1 Command

All *Commands* contain the *command* field which is used to identify the command being executed. All *Commands* will contain the following fields:

Field	Type	Description
command	string	The command to execute
...	any	Command parameters

3.1.2 Result

There server will respond to each *Command* with a *Result*. *Results* have two variants: *ok* and *error*. All *Results* will contain the following fields:

Field	Type	Description
result	string	Identifies the command this result is for
ok	boolean	Whether or not the command was successful

If the *Result* is ok (*ok = true*) then the *Result* may contain addition fields that contain the results of the command. Otherwise the *Result* will contain the following fields:

Field	Type	Description
error	string	A description of the error that occurred.

3.1.3 Edits and Spreadsheet

Various commands will accept as parameters or return as a result the contents of a spreadsheet, both *Edits* and *Spreadsheets* will contain spreadsheet contents. They differ in that a *Spreadsheet* object must contain the contents of a whole spreadsheet while a *Edit* object may contain a subset of the contents of a spreadsheet. Both *Edits* and *Spreadsheets* will contain the following fields:

Field	Type	Description
\$CellName	string	The contents of \$CellName.

These data types are simply a mapping between cell names and their contents, valid cell names are a capital letter from "A" to "Z" followed by a number from 1 to 99.

3.2 Create

The create command is used to create a new spreadsheet. Create expects a *name* field to be provided to serve as the name of the new spreadsheet. Any errors resulting from this command will be purely due to an error occurring on the server, for example, if the server does not have the capacity for a new spreadsheet.

3.2.1 Create Command

In addition to the *command* field which will have a value of "create", this command expects the following fields:

Field	Type	Description
name	string	The name of the newly created spreadsheet.

The following is an example of a *create* command:

```
{
  "command": "create",
```

```

    "name": "sheet 1"
  }

```

Listing 1: create command message

3.2.2 Create Results

The result of this command will contain the **standard result** fields, in addition to the following fields to be included for ok results:

Field	Type	Description
id	number	The id of the newly created spreadsheet.

The following are examples of results of the *create* command:

```

{
  "result": "create",
  "ok": true,
  "id": 1
}

```

Listing 2: create result (ok) message

```

{
  "result": "create",
  "ok": false,
  "error": "failed to create a new spreadsheet"
}

```

Listing 3: create result (error) message

3.3 Delete

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3.3.1 Delete Command

In addition to the *command* field which will have a value of "delete", this command expects the following fields:

Field	Type	Description
id	number	The <i>id</i> of the spreadsheet to delete.

The following is an example of a *delete* command:

```

{
  "command": "delete",
  "id": 1
}

```

Listing 4: delete command message

3.3.2 Delete Results

The result of this command will contain the **standard result** fields. The following are examples of results of the *delete* command:

```
{
  "result": "delete",
  "ok": true,
}
```

Listing 5: delete result (ok) message

```
{
  "result": "delete",
  "ok": false,
  "error": "failed to delete the spreadsheet"
}
```

Listing 6: delete result (error) message

3.4 Rename

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3.4.1 Rename Command

In addition to the *command* field which will have a value of "rename", this command expects the following fields:

Field	Type	Description
id	number	The <i>id</i> of the spreadsheet to rename.
name	string	The new <i>name</i> of the spreadsheet.

The following is an example of a *rename* command:

```
{
  "command": "rename",
  "id": 1,
  "name": "sheet1-old"
}
```

Listing 7: rename command message

3.4.2 Rename Results

The result of this command will contain the **standard result** fields. The following are examples of results of the *rename* command:

```
{
  "result": "rename",
  "ok": true
}
```

Listing 8: rename result (ok) message

```
{
  "result": "rename",
  "ok": false,
  "error": "failed to rename the spreadsheet"
}
```

Listing 9: rename result (error) message

3.5 Get Name

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3.5.1 Get Name Command

In addition to the *command* field which will have a value of "get_name", this command expects the following fields:

Field	Type	Description
id	number	The <i>id</i> of the spreadsheet to whose name to get.

The following is an example of a *get_name* command:

```
{
  "command": "get_name",
  "id": 1
}
```

Listing 10: get_name command message

3.5.2 Get Name Results

The result of this command will contain the **standard result** fields, in addition to the following fields to be included for ok results:

Field	Type	Description
name	string	The <i>name</i> of requested spreadsheet.

The following are examples of results of the *get_name* command:

```
{
  "result": "get_name",
  "ok": "true",
  "name": "sheet1"
}
```

Listing 11: get_name result (ok) message

```
{
  "result": "get_name",
  "ok": false,

```



```
{
  "error": "Spreadsheet does not exist"
}
```

Listing 12: get_name result (error) message

3.6 List Spreadsheets

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3.6.1 List Spreadsheets Command

The *command* field which will have a value of "list_spreadsheets", and will the *Command* will not need to contain any other fields.

The following is an example of a *list_spreadsheets* command:

```
{
  "command": "list_spreadsheets"
}
```

Listing 13: list command message

3.6.2 List Spreadsheets Results

The result of this command will contain the **standard result** fields, in addition to the following fields to be included for ok results:

Field	Type	Description
spreadsheets	number[]	The <i>ids</i> of all the spreadsheets.

The following are examples of results of the *list_spreadsheets* command:

```
{
  "result": "list_spreadsheets",
  "ok": true,
  "spreadsheets": [
    1, 2, 3, 4
  ]
}
```

Listing 14: list result (ok) message

```
{
  "result": "list_spreadsheets",
  "ok": false,
  "error": "failed to read spreadsheets"
}
```

Listing 15: list result (error) message

3.7 Open

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3.7.1 Open Command

In addition to the *command* field which will have a value of "open", this command expects the following fields:

Field	Type	Description
id	number	The <i>id</i> of spreadsheet to open.

The following is an example of a *open* command:

```
{
  "command": "open",
  "id": 1
}
```

Listing 16: open command message

3.7.2 Open Results

The result of this command will contain the **standard result** fields, in addition to the following fields to be included for ok results:

Field	Type	Description
spreadsheet	Spreadsheet	The contents of the opened spreadsheet.

The following are examples of results of the *open* command:

```
{
  "result": "open",
  "ok": true,
  "spreadsheet": {
    "A1": "foo",
    "A2": "bar"
  }
}
```

Listing 17: open result (ok) message

```
{
  "result": "open",
  "ok": false,
  "error": "Spreadsheet does not exist"
}
```

Listing 18: open result (error) message

3.7.3 Updates

There are three variants of the updates that clients will receive for the spreadsheets they have open: *delete*, *rename* and *edits*. Each update message will contain an *update* field which will identify the type of update and an *id* field which will identify the spreadsheet the update is for. The *delete* update will contain only the *update* and *id* fields which indicate that the spreadsheet has been deleted. The *rename* update will contain the standard fields, as well as a *name* field which will contain the new name of the spreadsheet. The *edits* update will contain a *edits* field which will contain an array of **Edit** objects in order from oldest to newest edits. The following are examples of the three variants of the update messages:

```
{
  "update": "delete",
  "id": 1
}
```

Listing 19: delete update message

```
{
  "update": "rename",
  "name": "sheet1-old"
}
```

Listing 20: rename update message

```
{
  "update": "edits",
  "id": 1,
  "edits": [
    {
      "A1": "foo"
    }
  ]
}
```

Listing 21: edits update message

3.8 Close

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3.8.1 Close Command

In addition to the *command* field which will have a value of "close", this command expects the following fields:

Field	Type	Description
id	number	The <i>id</i> of spreadsheet to close.

The following is an example of a *close* command:

```
{
  "command": "close",
  "id": 1
}
```

Listing 22: close command message

3.8.2 Close Results

The result of this command will contain the **standard result** fields. The following are examples of results of the *close* command:

```
{
  "result": "close",
  "ok": true
}
```

Listing 23: close result (ok) message

```
{
  "result": "close",
  "ok": false,
  "error": "Spreadsheet is not open"
}
```

Listing 24: close result (error) message

3.9 Get History

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3.9.1 Get History Command

In addition to the *command* field which will have a value of "get_history", this command expects the following fields:

Field	Type	Description
id	number	The <i>id</i> of the spreadsheet whose history to get

The following is an example of a *get_history* command:

```
{
  "command": "get_history",
  "id": 1
}
```

Listing 25: get_history command message

3.9.2 Get History Results

The result of this command will contain the **standard result** fields, in addition to the following fields to be included for ok results:

Field	Type	Description
edits	Edit []	The edit history in order from oldest to newest.
current	number	The zeroth based index of the current state of the spreadsheet.

The following are examples of results of the *get_history* command:

```
{
  "command": "get_history",
  "ok": true,
  "edits": [
    {
      "A1": 1,
      "B1": "=A1"
    },
    {
      "A2": "bar"
    }
  ],
  "current": 1
}
```

Listing 26: *get_history* result (ok) message

```
{
  "result": "get_history",
  "ok": false,
  "error": "Spreadsheet does not exist"
}
```

Listing 27: *get_history* result (error) message

3.10 Get Spreadsheet

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3.10.1 Get Spreadsheet Command

In addition to the *command* field which will have a value of "get_spreadsheet", this command expects the following fields:

Field	Type	Description
id	number	The <i>id</i> of the spreadsheet whose contents to get.

The following is an example of a *get_spreadsheet* command:

```
{
  "command": "get_spreadsheet",
  "id": 1
}
```

Listing 28: get_spreadsheet command message

3.10.2 Get Spreadsheet Results

The result of this command will contain the **standard result** fields, in addition to the following fields to be included for ok results:

Field	Type	Description
spreadsheet	Spreadsheet	The contents of the requested spreadsheet.

The following are examples of results of the *get_spreadsheet* command:

```
{
  "result": "get_spreadsheet",
  "ok": true,
  "spreadsheet": {
    "A1": "foo",
    "A2": "bar"
  }
}
```

Listing 29: get_spreadsheet result (ok) message

```
{
  "result": "get_spreadsheet",
  "ok": false,
  "error": "Spreadsheet does not exist"
}
```

Listing 30: get_spreadsheet result (error) message

3.11 Undo

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3.11.1 Undo Command

In addition to the *command* field which will have a value of "undo", this command expects the following fields:

Field	Type	Description
id	number	The <i>id</i> of the spreadsheet to perform the undo on.

The following is an example of a *undo* command:

```
{
  "command": "undo",
  "id": 1
}
```

Listing 31: undo command message

3.11.2 Undo Results

The result of this command will contain the **standard result** fields. The following are examples of results of the *undo* command:

```
{
  "result": "undo",
  "ok": true
}
```

Listing 32: undo result (ok) message

```
{
  "result": "undo",
  "ok": false,
  "error": "Spreadsheet does not exist"
}
```

Listing 33: undo result (error) message

3.12 Push

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

3.12.1 Push Command

In addition to the *command* field which will have a value of "push", this command expects the following fields:

Field	Type	Description
id	number	The <i>id</i> of the spreadsheet to perform the push on.
edits	Edit []	The edits to apply to the spreadsheet.

The following is an example of a *push* command:

```
{
  "command": "push",
  "id": 1,
  "edits": [
    {
      "A1": "=A2",
      "A2": 1
    }
  ]
}
```

```
      "A2": "=A1",  
      "A1": 1  
    }  
  ]  
}
```

Listing 34: push command message

3.12.2 Push Results

The result of this command will contain the **standard result** fields. The following are examples of results of the *push* command:

```
{  
  "result": "push",  
  "ok": true  
}
```

Listing 35: push result (ok) message

```
{  
  "result": "push",  
  "ok": false,  
  "error": "Edits cause a circular dependency"  
}
```

Listing 36: push result (error) message