

# 1 Notation & Definitions

In this section we introduce a mathematical description of the visualization pipeline where artist  $\mathcal{A}$  functions transform data space  $\mathcal{E}$  to an intermediate representation in a prerendered graphic space  $\mathcal{H}$ .

$$\mathcal{A} : \mathcal{E} \rightarrow \mathcal{H} \quad (1)$$

We use fiber bundles[7, 18] to model data and graphics because they allow us to separate the variables in a dataset from how the values are connected to each other [3, 4]. The fiber bundles mentioned in this work are assumed to be locally trivial[11, 20].

We first describe the fiber bundle spaces of data(1.1), graphics(1.2), and intermediate visual characteristics (1.3). We then discuss the equivariant maps between data and visual characteristics (1.3.2) and visual characteristics and graphics (1.3.3) that make up the artist.

## 1.1 Data Space

Lets say we are working with the Global Historical Climatology Network[12], which is a dataset of global daily meteorological observations. Each record includes the timestamp, location, and measurements such as temperature, precipitation, and snowfall. Using a fiber bundle allows us to express the properties of the variables(1.1.1), the connectivity of the records (1.1.3), and tables of records (1.1.4).

### 1.1.1 Variables: Fiber Space $F$

The fiber is a topological space containing the set of all records that could possibly be in the dataset, even values that do not actually exist in the dataset. For example, a fiber  $F$  that is the temperature variable from GHCN is the range of physically possible temperature values  $\{tp_0, \dots, tp_n\} \subset \mathbb{R}$ . Lets rename this  $F$  to a component

$$F_0 = \{tp_0, \dots, tp_n\} \quad (2)$$

so that more variables can be added to the fiber. Then lets add the time from GHCN  $F_1 = \{t_0, \dots, t_n\}$

$$F = \{tp_0, \dots, tp_n\} \times \{t_0, \dots, t_n\} \quad (3)$$

The elements in a given fiber set do not need to be scalars; for example the location can be encoded as the set of tuples  $(lat, lon)$ . We add the location to the fiber

$$F = \{tp_0, \dots, tp_n\} \times \{t_0, \dots, t_n\} \times \{(la_0, ln_0), \dots, (la_j, ln_k), \dots (la_n, ln_n)\} \quad (4)$$

such that one record  $r$  in the fiber would have the form  $(tp, t, (la, ln))$ . We also add the variable name and measurement scale  $M$  monoid actions to the fiber  $F_i$  such that

$$F_0 = (\text{temperature}, \{tp_0, \dots, tp_n\}, M_0) \quad (5)$$

$$F_1 = (\text{time}, \{t_0, \dots, t_n\}, M_1) \quad (6)$$

$$F_2 = (\text{location}, \{(la_0, ln_0), \dots, (la_j, ln_k), \dots (la_n, ln_n)\}, M_2) \quad (7)$$

or more generally (name, set, monoid)

$$F_i = (\text{name}, \{x_i, \dots, x_n\}, M_i) \quad (8)$$

as described in Spivak's categorical formulation of databases [21]. We describe  $M$  in more detail in section 1.1.2. We can keep growing the fiber

$$F = F_0 \times \dots \times F_i \times \dots \times F_n \quad (9)$$

and identify the elements in the record by the variable name. We will often be working with the decoupled fiber  $F_i$  rather than the total fiber  $F$ .

### 1.1.2 Measurement Scales: Monoid Actions

A common task is modifying the values in  $F_i$  in some consistent way, such as converting data from °F to °C or changing category labels or rotating a shape; this model formally encodes the set of allowable operations in the fiber because a transformation on the data side needs to be reflected in the visual representation, discussed in more detail in section 1.3.2. One method of classifying the types of operations that can be performed on data are Steven's measurement scales [10, 23]: nominal data is permutable, ordinal data is monotonic, interval data is translatable, and ratio data is scalable [24].

We generalize the set of allowable transformations to the monoid actions  $M_i$  on  $F_i$ . A monoid [13]  $M$  is a set with an associative binary operator  $* : M \times M \rightarrow M$ . A monoid has an identity element  $e \in M$  such that  $e * a = a * e = a$  for all  $a \in M$ . A left monoid action [1, 19] of  $M$  is a set  $F$  with an action  $\bullet : M \times F \rightarrow F$  with the properties:

- associativity** for all  $m, t \in M$  and  $x \in F$ ,  $m \bullet (t \bullet x) = (m \bullet t) \bullet x$
- identity** for all  $x \in F$ ,  $e \in M$ ,  $e \bullet x = x$

For example, the temperature  $F_0$  defined in unit °C is on an interval scale; this means that the monoid actions  $M_0$  on  $F_0$  are the set of all transformations  $tp_i + c$  such that

$$F_0 = (\text{temperature}, \{tp_0, \dots, tp_n\}, \{tp_0 + c_0, \dots, tp_0 + c_n, \dots, tp_n + c_0, \dots, tp_n + c_n\}) \quad (10)$$

As with the fiber  $F$ , the total monoid space  $M$  is the cartesian product

$$M = M_0 \times \dots \times M_i \times \dots \times M_n \quad (11)$$

of the monoids  $M_i$  on each  $F_i \in F$ . Because each  $F_i, M_i$  can be independent of the other fibers, we can formally express the constraints on heterogenous multivariate datasets in the same manner as univariate datasets.

### 1.1.3 Connectivity: Base Space $K$

The fiber bundle is the gluing map  $\pi$  between the fiber space included in the total space  $E$  and the base space  $K$

$$F \hookrightarrow E \xrightarrow{\pi} K \quad (12)$$

The base space  $K$  provides a way to encode how the records are connected to each other; for example the GHCN data can be expressed as discrete observations, many timeseries, maps, a network of stations, etc.

$K$  has no knowledge of the records. As illustrated in figure ??,  $K$  is more of an indexing space into  $E$  that describes the structure of  $E$  and itself can be any number of dimensions.

Formally,  $K$  is the quotient space [16] of  $E$ , meaning it is the finest space such that every  $k \in K$  has a corresponding fiber  $F_k$  in  $E$ . In figure ??,  $E$  is a rectangle divided by vertical

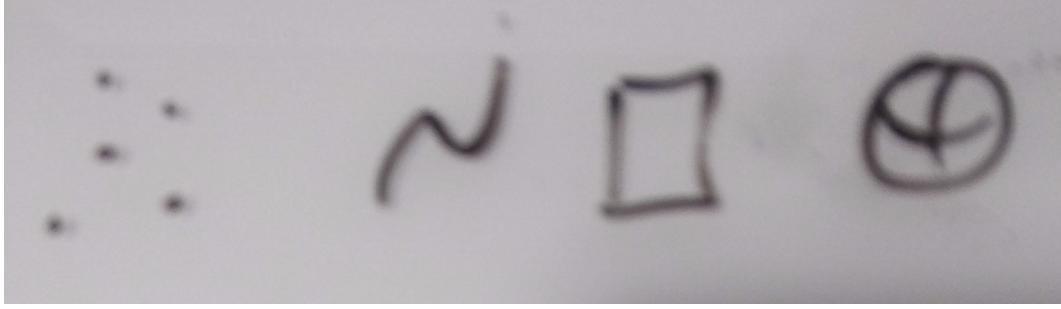


Figure 1: The topological base space  $K$  encodes the connectivity of the data space, for example if the data is independent points or a map or on a sphere

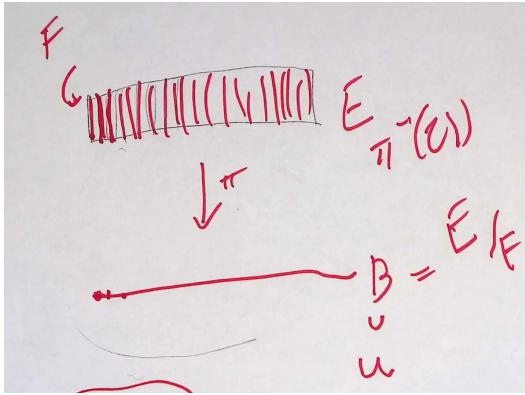


Figure 2: The base space  $E$  is divided into fiber segments  $F$ . The base space  $K$  acts as an index into the fibers.

fibers  $F$ , so the minimal  $K$  for which there is always a mapping  $\pi : F \rightarrow K$  is the straight line.

We encode indexing from  $K$  to  $E$  as sections  $\tau$  of the fiber bundle that return corresponding records. For example when  $K$  has

**vertices**  $\tau(k)$  = vertex id  
**edges**  $\tau(k, \alpha)$ ,  $k$  = edge id,  $\alpha$  = distance along edge  
**faces**  $\tau(k, \alpha_1, \alpha_2)$ ,  $k$  = face id,  $\alpha_1 = x$

such that we can check for continuity of sections  $\tau$  by verifying that the edges align such that  $\tau(k_i, 1) = \tau(k_j, 0)$ .

As with fibers and monoids, we can decompose the total space into components

$$\pi : E_1 \rightarrow K, \dots, \pi : E_i \rightarrow K, \dots, \pi : E_n \rightarrow K \quad (13)$$

which is a decomposition of  $F$ . The  $K$  remains the same because the connectivity of records does not change just because there are fewer variables in each record.

#### 1.1.4 Values: Sections $\tau$

The sections of the fiber bundles are the instances of the data. They are the functions that map from a point  $k \in K$  to a set of values in  $F$ . For example, if we have a database, the section is the table that yields a row given an index. The section  $\tau$  is the mapping from base space to total space  $\tau : K \rightarrow E$

$$\begin{array}{ccc} F & \xhookrightarrow{\quad} & E \\ & \pi \downarrow \tau & \\ & K & \end{array} \quad (14)$$

such that in a trivial fiber bundle,  $E = K \times F$  [7, 18]:

$$\tau(k) = (k, (x_{F_0}, \dots, x_{F_n})) \quad (15)$$

which we can also decompose such that

$$\tau_0(k) = (k, (x_{F_0})) \quad (16)$$

$$\vdots \quad (17)$$

$$\tau_n(k) = (k, (x_{F_n})) \quad (18)$$

which allows us to have field wise access to the data so long as there is a shared  $K$ .

#### 1.1.5 Sheaf and Stalk

Often a graphic may need to be updated with live data or support zooming in on a segment of the dataset; to support working with a subset of data, we can use the sheaf  $\mathcal{O}(E)$

$$\begin{array}{ccc} \iota^* E & \xleftarrow{\iota^*} & E \\ \pi \downarrow \iota^* \tau & & \pi \downarrow \tau \\ U & \xleftarrow{\iota} & K \end{array} \quad (19)$$

which is the localized section of fibers  $\iota^* \tau : U \rightarrow \iota^* E$  pulled back via the inclusion map  $\iota : U \rightarrow K$ . The localized section is the germ  $\xi^* \tau$ . The neighborhood of points  $k_i$  surrounding the point  $k$  the sheaf lies over is the stalk  $\mathcal{F}_b$  [20, 22].

The jet bundle  $\mathcal{J}$  [9, 15] is a for writing differential equations on sections of fiber bundles; this information is required for some visual characteristics, such as line thickness.

#### 1.1.6 Case Study: GHCN

Moved & walked through b/c was getting clunky to not have terms yet

The fiber bundle model is flexible enough to express some of the many different forms that temperature data can come in.

The datasets in figure ?? have identical fibers that encode a set of temperature values. In figure ?? the temperatures lie on a line such that a section could return a timeseries or a distribution. In figure ??, the temperatures lie on a 2D continuous plane; a section could return a map or contour. Because the fiber is 1D, it does not encode metadata

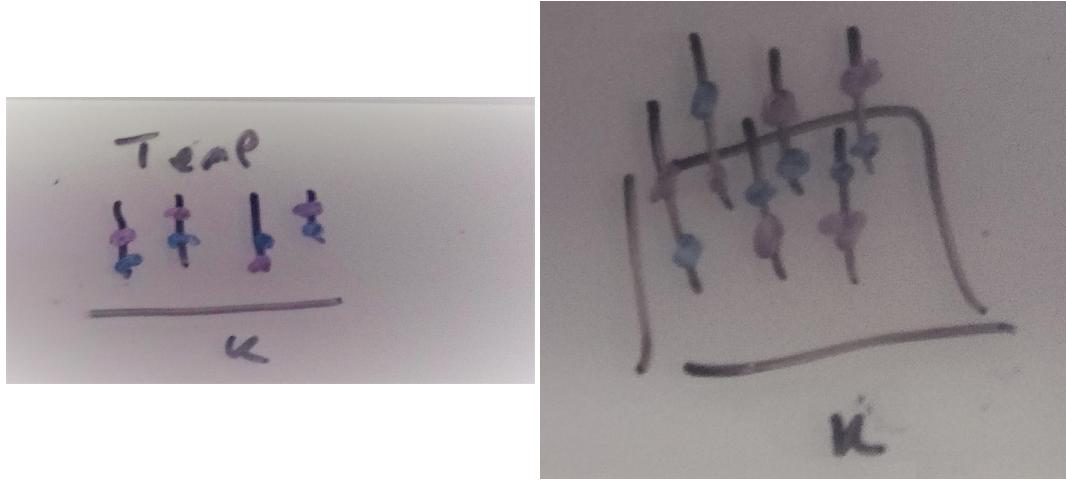


Figure 3: These two datasets have the same fiber of temperature but different base spaces. In figure ?? the temperature values are 1D continuous, while in figure ?? the temperature values are 2D continuous.

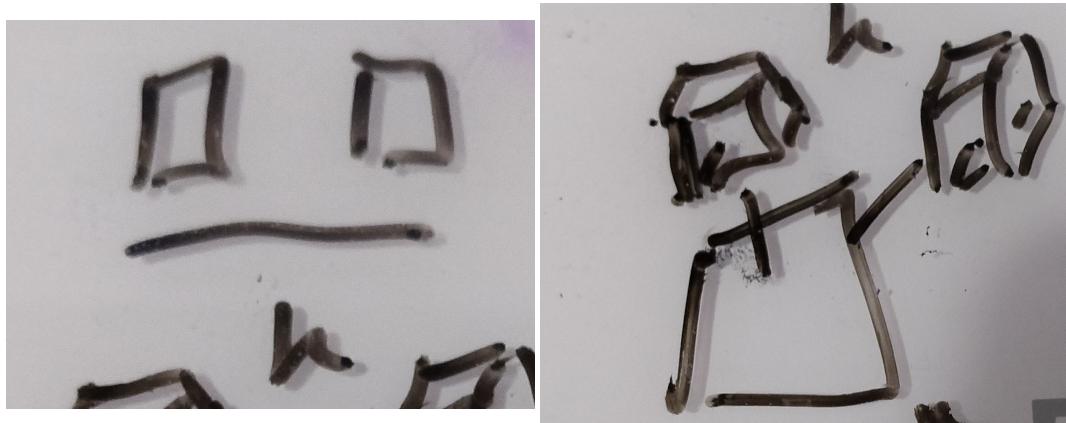


Figure 4: The fiber is expanded to include metadata fields that describe the semantics of  $K$ . In figure ?? the fiber is temperature  $\times$  time and in figure ?? the fiber is temperature  $\times$  latitude  $\times$  longitude

To encode the metadata, the fiber is expanded as illustrated in figure ???. The fiber in figure ?? is the cartesian product of the space of possible temperature values in degrees celsius and space of possible time values

$$F = [temp_{min}, temp_{max}] \times [time_{min}, time_{max}] \quad (20)$$

while the fiber in figure ?? is the cartesian product of temperature, latitude, and longitude

$$F = [temp_{min}, temp_{max}] \times [-90, 90] \times [-180, 180] \quad (21)$$

such that  $E$  is the space of all possible points in  $F$ .

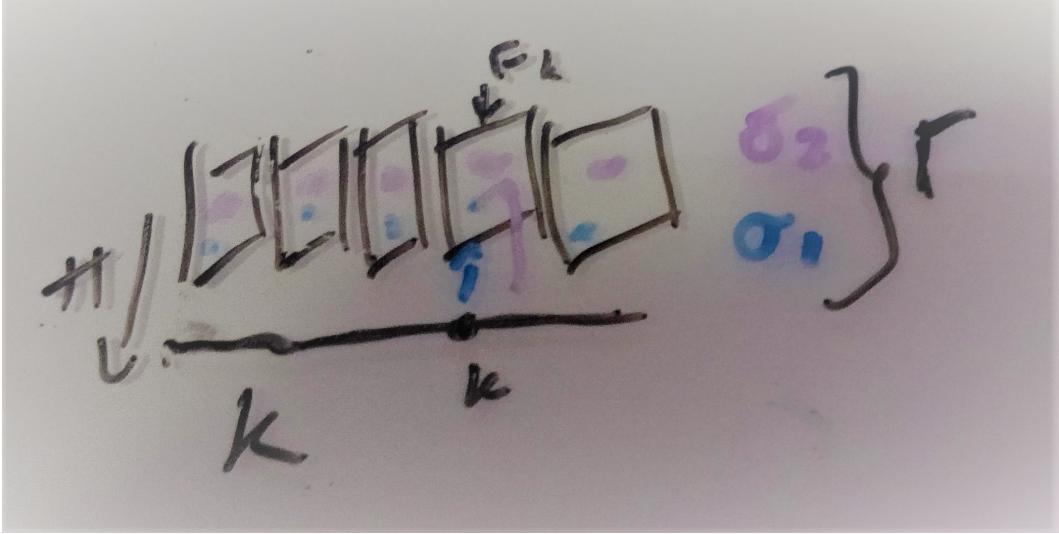


Figure 5: The section  $\tau_1$  returns the blue points, while  $\tau_2$  returns the purple points.  $\Gamma(E)$  is the set of all sections, including  $\tau_1$  and  $\tau_2$

Given the fiber described in equation 20, the sections  $\tau_1$  and  $\tau_2$  in figure ?? return tuples of the form

$$\tau(k) = (k, (temperature, time)) \quad (22)$$

such that sections with the constraint that time is monotonic return a timeseries.

## 1.2 Prerender Space $H$

We define a graphic space  $H$  such that we do not have to assume the physical output space of the renderer. This means that the graphic in  $H$  can be output to a screen or 3D printed space or a dome. We model the prerender space as a fiber bundle  $(H, S, \pi, D)$ .  $H$  is the predisplay space, with a fiber  $D$  dependent on the target display and a base space of  $S$ .

### 1.2.1 Base space

The underlying topology  $S$  of a graphic often needs more dimensions than the data topology  $K$  because of the specifications of the display space. For example, a line plot on a plane (such as a screen or a piece of paper) by necessity needs to also have a thickness so that it is visible, which maps back to a set of connected points in  $H$ . The topology of these connected

points is therefore the region  $s \subset S$  such that  $\xi : S \rightarrow K$  is a deformation retraction [17]

$$\begin{array}{ccc} E & & H \\ \pi \downarrow & & \pi \downarrow \\ K & \xleftarrow{\xi} & S \end{array} \quad (23)$$

that goes from a region  $s \in S_k$  to its associated point  $k$ , such that when  $\xi(s) = k$ ,  $\xi^*\tau(s) = \tau(k)$ .

### 1.2.2 Fiber and Section

A section  $\rho : S \rightarrow H$  is a mapping from a region  $s$  on a mathematical encoding of the image to a region  $xy$  on the screen that the renderer then maps to visual space as defined in D.

**Example** For a physical screen display, we can consider a predisplay space that is a trivial fiber bundle  $H = \mathbb{R}^5 \times S$  such that  $\rho$  is

$$\rho(s) = [x(s), y(s), r(s), g(s), b(s)] \quad (24)$$

To draw an image, a region,  $H$  is inverse mapped into a region  $s \in S$  where

$$s = \rho_{XY}^{-1}(xy) \quad (25)$$

such that the rest of the fields in  $\mathbb{R}^7$  are then integrated over  $s$  to yield the remaining fields:

$$r = \iint_s \rho_R(s) ds^2 \quad (26)$$

$$g = \iint_s \rho_G(s) ds^2 \quad (27)$$

$$b = \iint_s \rho_B(s) ds^2 \quad (28)$$

Here we assume a single opaque 2D image such that the  $z$  and *alpha* fields can be omitted. To support overplotting and transparency, we can consider  $D = \mathbb{R}^7$

### 1.2.3 Example

As illustrated in figure 6, words.

## 1.3 Artist

In this section we will define the artist as a mapping from a sheaf  $\mathcal{O}(E)$  to  $\mathcal{O}(H)$ .

$$A : \mathcal{O}(E) \rightarrow \mathcal{O}(H) \quad (29)$$

The artist decomposes to mapping data to visual  $\nu : E \rightarrow V$ , then compositing  $V$  pulled back along  $\xi$  to  $\xi^*V$  to a visual mark in prerender space  $Q : \xi^*V \rightarrow H$ .

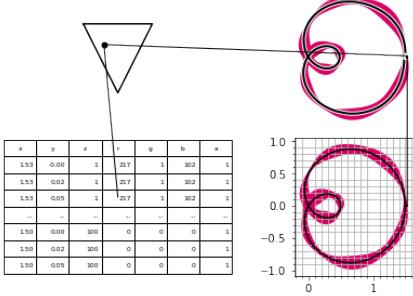


Figure 6

$$\begin{array}{ccccc}
 E & \xrightarrow{\nu} & V & \xleftarrow{\xi^*} & \xi^*V \xrightarrow{Q} H \\
 & \searrow \pi & \downarrow \pi & \xi^* \pi \downarrow & \swarrow \pi \\
 & & K & \xleftarrow{\xi} & S
 \end{array} \tag{30}$$

The pullback map  $\xi^*$  copies each value in  $V$  over  $k$  to  $s$  in corresponding  $S_k$  such that  $\xi^*V$  can have multiple values that map to one value in  $V$ .

The visual fiber bundle  $(V, K, \pi, P)$  has section  $\mu : V \rightarrow K$  that resolves to a visual variable [2, 14] in fiber  $P$ . The visual transformer  $\nu$  is a set of functions each targeting a different  $\mu$

$$\{\nu_0, \dots, \nu_n\} : \{\tau_0, \dots, \tau_n\} \mapsto \{\mu_0, \dots, \mu_n\} \tag{31}$$

where  $\mu_i$  are the visual parameters in the assembly function  $Q(\mu_0, \dots, \mu_n)(s) = \rho(s)$ .

### 1.3.1 Example: Matplotlib Visual Fiber

For example, for Matplotlib [8], some of the possible types in  $P$  are:

$\nu_i$	$\mu_i$	$\text{codomain}(\nu_i)$
position	x, y, z, theta, r	$\mathbb{R}$
size	linewidth, markersize	$\mathbb{R}^+$
shape	markerstyle	$\{f_0, \dots, f_n\}$
color	color, facecolor, markerfacecolor, edgecolor	$\mathbb{R}^4$
texture	hatch	$\mathbb{N}^{10}$
	linestyle	$\{f_0, \dots, f_n\} \times (\mathbb{R}, \mathbb{R}^{+n, n \% 2 = 0})$

Table ?? is an example of the visual fiber defined in terms of common parameters to plots in Matplotlib. The range of  $\mu_i$  determine the monoid actions on  $\mu_i$ . A section of  $V$   $\mu$

is a tuple of visual values that specifies the visual characteristics of a glyph. For example, given a fiber of  $\{xpos, ypos, color\}$  one section is  $\{.5, .5, (255, 20, 147)\}$ .  $Q$  determines how this section is applied to a graphic.

### 1.3.2 Visual Channels

$\nu : E \rightarrow V$  is an equivariant map such that there is a homomorphism from left monoid actions on  $E_i$  to left monoid actions on  $V_i$  where  $i$  identifies a field in the fiber.  $E_i$  and  $V_i$  each contain a set of values as defined in  $F$  and  $P$  respectively. A validly constructed  $\nu$  is one where the diagram

$$\begin{array}{ccc} E_i & \xrightarrow{\nu_i} & V_i \\ m_e \downarrow & & \downarrow m_v \\ E_i & \xrightarrow{\nu_i} & V_i \end{array} \quad (32)$$

commutes such that  $\nu_i(m_e(E_i)) = m_v(\nu_i(E_i))$ .

**Example: Ordering** To preserve ordering of elements in  $E_i$ ,  $\nu$  must be a monotonic function such that given  $e_1, e_2 \in E_i$

$$\text{if } e_1 \leq e_2 \text{ then } \nu(e_1) \leq \nu(e_2) \quad (33)$$

**Example: Translation** According to Stevens, interval data is a set with general linear group actions [10, 23]. Position is a visual variable that can support translation

$$\nu(x + c) = \nu(x) + \nu(c) \quad (34)$$

**Example: Invalid  $\nu$**  Given a transform  $t(x) = x + 2$ , we construct a  $\nu$  that always takes data to  $.5$ :

$$\begin{array}{ccc} E_1 & \xrightarrow{\lambda: e \mapsto .5} & V_i \\ 2e \downarrow & & \downarrow 2v \\ E_1 & \xrightarrow{\lambda} & V_i \end{array} \quad (35)$$

This  $\nu$  is invalid because the graph does not commute for  $t$ :

$$\nu(t(e)) \stackrel{?}{=} t(\nu(e)) \quad (36)$$

$$.5 \stackrel{?}{=} t(.5) \quad (37)$$

$$.5 \neq 2 * .5 \quad (38)$$

To construct a valid  $\nu$ , the diagram must commute for all monoid actions on the sets in  $E_i, V_i$ .

### 1.3.3 Assembling Marks

As shown in figure ??,  $Q$  takes the individual fields in  $V$  as input and outputs a single piece of a graphic on  $H$ . As with  $\nu$ , the constraint on  $Q$  is that for every monoid actions on the input in  $V$  there is a corresponding monoid action on the output in  $H$

$$Q : \Gamma(V) \rightarrow \Gamma(H) \quad (39)$$


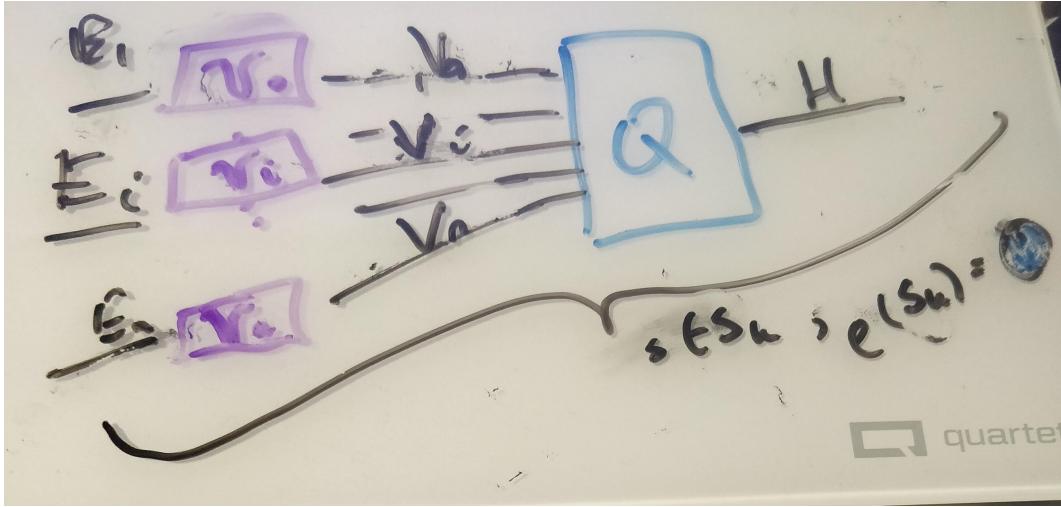


Figure 7: The  $\nu$  functions convert data  $E$  to visual  $V$ .  $Q$  assembles the different types of visual parameters  $V_i$  into a graphic in  $H$ .  $Q \circ \mu(\xi^{-1}J)$  forms a visual mark by applying  $Q$  to a region mapped to connected components  $J \subset K$ .

When  $Q : \mu \mapsto \rho$  yields a  $\rho$  that maps to the same values in  $D$  over all  $S_k$ , then  $M$  can be defined over  $\Gamma(H)$  such that a constraint on  $Q$  is that it must be equivariant. For example, when  $\mu_i$  is the color of the glyph, it maps directly to  $(R,G,B)$  in  $D$ .

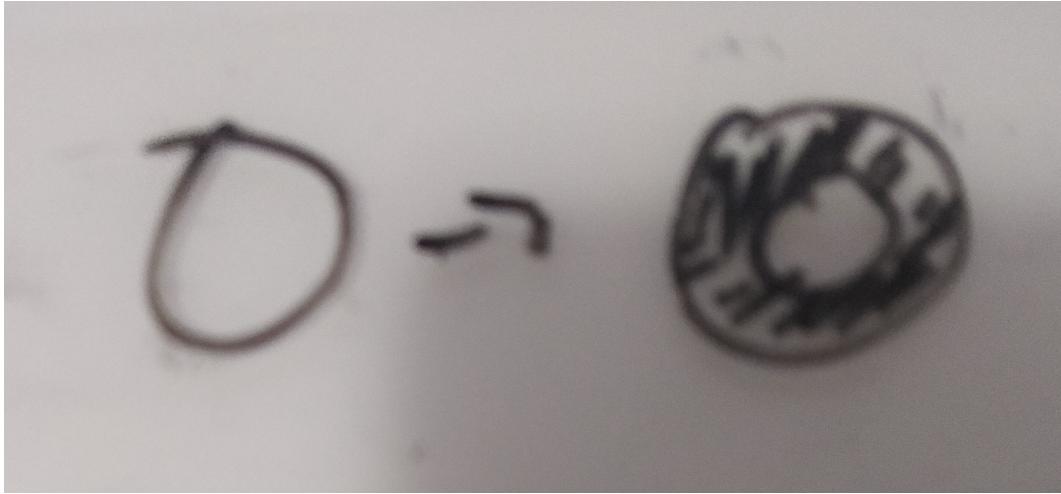

Many  $\mu_i$  are graphical parameters that do not apply to the whole glyph, such as edge thickness in figure ??.

In these situations, not all  $\rho$  in  $\Gamma(H)$  will support these parameters; instead we define an action on the output graphic  $Q(\Gamma(V)) \in \Gamma(H)$  since by definition every section  $\mu$  will have a corresponding  $\rho$ .

We then define the constraint on  $Q$  such that if  $Q$  applied to two sections  $\mu, \mu'$  generate the same graphic  $\rho$ , then the output of both sections acted on by the same monoid  $m$  must also be the same.

Lets call the visual encodings  $\Gamma(V) = X$  and the graphic  $Q(\Gamma(V)) = Y$ . If  $\forall m \in M$  and  $\forall \mu, \mu' \in X$ ,

$$Q(\mu) = Q(\mu') \implies Q(m \circ \mu) = Q(m \circ \mu') \quad (40)$$

then a group action on  $Y$  can be defined as  $m \circ \rho = \rho'$  where  $\rho' = Q(g \circ \mu)$  with  $\mu \in Q^{-1}(\rho)$ .

Given

- $P = \{xpos, ypos, color, thickness\}$
- $\mu = 0, 0, 0, 1$
- $Q(\mu) = \rho$  generates a piece of the thin circle in figure ??

the constraint on  $Q$  means that the translation  $m = \{e, e, e, x + 2\}$  applied to  $\mu$  such that  $\mu' = \{0, 0, 0, 3\}$  has an equivalent action on  $\rho$  that causes  $Q(\mu')$  to be equivalent to the thicker circle in figure ??.

#### **Example: Invalid Q** Insert some degenerate Q that generates an inconsistent glyph

Check a well defined map  $M \times Y \rightarrow Y$ .

constraint: inputs go to same output means changes to inputs mean same changes to output

**Graphical Marks** To output a mark [2, 5],  $Q$  is called with all the regions  $s$  that map back to a set of connected components  $J \subset K$ :

$$J = \{j \in K \text{ s. t. } \exists \gamma \text{ s.t. } \gamma(0) = k \text{ and } \gamma(1) = j\} \quad (41)$$

where the path[6]  $\gamma$  from  $k$  to  $j$  is a continous function from the interval  $[0,1]$ .


We define the mark as the graphic generated by  $Q(S_j)$

$$H \xrightleftharpoons[\rho(S_j)]{} S_j \xrightleftharpoons[\xi^{-1}(J)]{} J_k \quad (42)$$

in terms of  $K$  because mark is a semantic term denoting the graphic representation of the data.

#### 1.3.4 Sample Qs

In this section we formulate the minimal Q that will generate distinguishable graphical marks: non-overlapping scatter points, a non-infinitely thin line, and a simple heatmap.

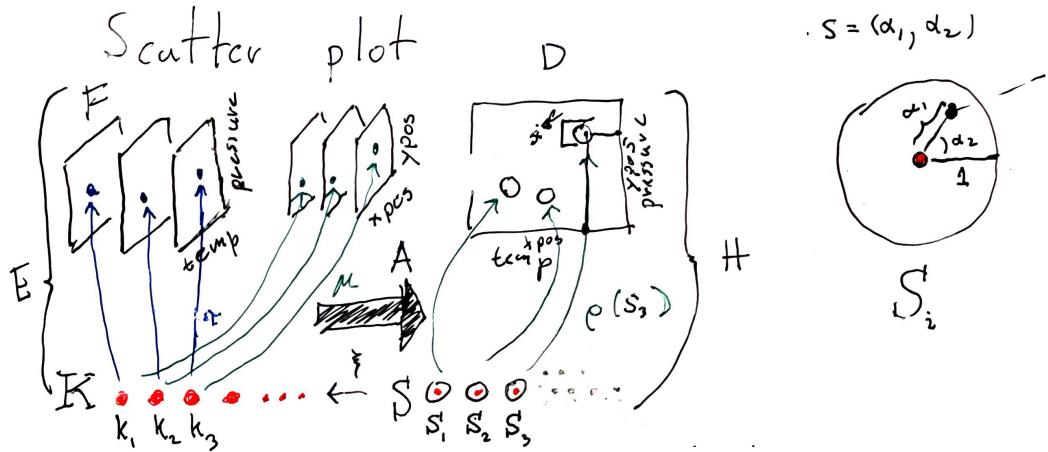

Q: scatter plot

$$Q(xpos, ypos)(\alpha_1, \alpha_2) \quad (43)$$


Given a default color of black,  $\rho_{RGB} = (0, 0, 0)$ . The position of this swatch of color can be computed relative to the location on the disc  $S_i$  as shown in figure ??:

$$x = size \bullet \alpha_1 \bullet \cos(\alpha_2) + xpos \quad (44)$$

$$y = size \bullet \alpha_1 \bullet \sin(\alpha_2) + ypos \quad (45)$$

such that  $\rho(s) = (x, y, 0, 0, 0)$  where  $s$  is the region in  $H$ .

Q: line plot

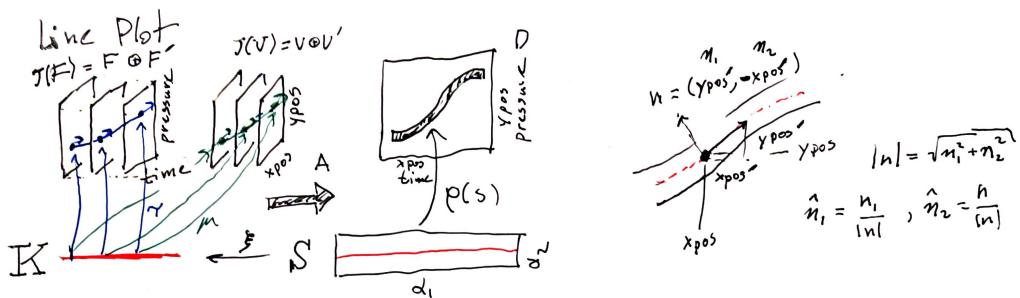

The line plot shown in fig ?? exemplifies the need for the jet discussed in section ?? (needs the normal to push up/down against the normal)

$$Q(xpos, \hat{n}_1, ypos, \hat{n}_2)(\alpha_1, \alpha_2) \quad (46)$$

where the magnitude of the thickness is

$$|n| = \sqrt{n_1^2 + n_2^2} \quad (47)$$

such that the components are

$$\hat{n}_1 = \frac{n_1}{|n|}, \quad \hat{n}_2 = \frac{n_2}{|n|} \quad (48)$$


which yields components of  $\rho(s)$ :

$$x = xpos(\xi(\alpha_1)) + \alpha_2 \hat{n}_1(\xi(\alpha_1)) \quad (49)$$

$$y = ypos(\xi(\alpha_1)) + \alpha_2 \hat{n}_2(\xi(\alpha_1)) \quad (50)$$

### Q: heatmap

The heatmap in figure ??

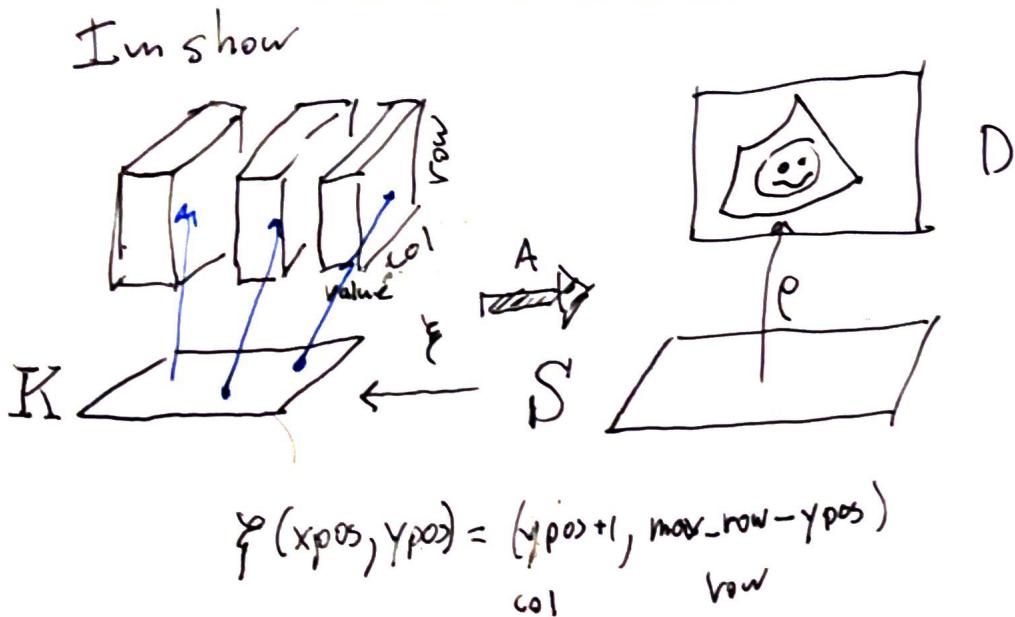

$$Q(xpos, ypos, color) \quad (51)$$

has in the simple case a direct lookup into  $K$  to obtain the  $\mu = (x, y, c)$  values that are mapped into (arrays are upside down, x is y, is x) -  $\xi$  is about translating indices from data to visual alignment

$$D_{RGB} = color(\xi(\alpha_1, \alpha_2)) D_x = xpos(\xi(\alpha_1, \alpha_2)) D_y = ypos(\xi(\alpha_1, \alpha_2)) \quad (52)$$

through  $\rho$ .

## 1.4 Making the fiber bundle computable


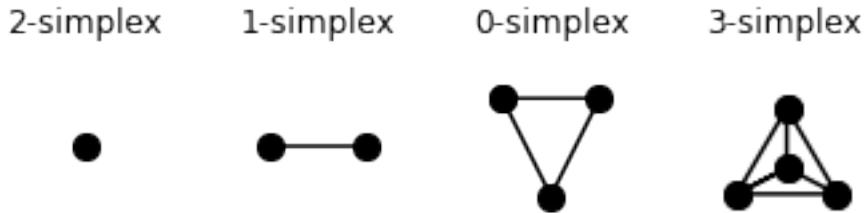


Figure 8: Simplices can encode the connectivity of the data, from fully disconnected (0 simplex) records to all records are connected to at least 3 others

One way to build flexible  $\xi$  is to choose a consistent way of representing  $K$ . In our draft implementation of the data as fiber bundle model, we triangularize  $K$  using complexes of the simplicies shown in figure 8 such that  $\xi$  consistently yields some combination of vertexes, edges, and faces. This gives a common data indexing structure on which to build components that could potentially be reused across  $Q$ .

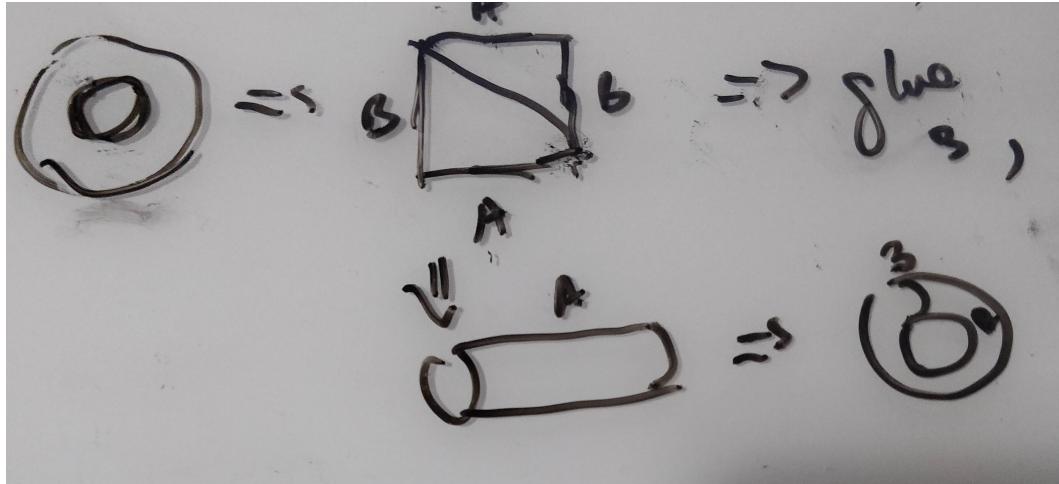

**Example** Given data that lies on the toroidal space shown in figure ??, the torus  $K$  can be implemented as a simplicial complex of two 2-simplices. We unfold the torus into the two triangles that compose the square in figure ?? and encode that as  $K$ . We also constrain the functions on  $A$ ,  $A'$ ,  $B$  and  $B'$  such that  $A$  can be glued to  $A'$  and  $B$  to  $B'$  to reconstruct the torus.

#### 1.4.1 Visual Idioms: Equivalence class of artists

As formulated above, every artist function  $A$  has fixed  $\nu$  and generates a distinct graphic  $\rho$ . It is unfeasible to implement  $A$  for every single graphic; instead we implement the equivalence class of artists  $\{A \in A' : A_1 \equiv A_2\}$  which is  $Q : \Gamma(V) \rightarrow \Gamma(H)$ .