

# Day 10 - Autoregressive models

## Introduction

We continue our discussion of basic stochastic models, introducing the generating autoregressive model of order  $p$ .

```
# packages
library(tidyverse)
library(lubridate)
```

## Review

Read in the Bozeman air quality data set, create a time series object, and filter the time series to only observations between September 15<sup>th</sup> and September 20<sup>th</sup>. Plot the resulting time series.


```
# load air quality data
bz_air <- readRDS("mt_pm25_sept2020.rds")

# create a ts
mt_pm_clean <- bz_air %>%
  mutate(dt = lubridate::ymd_hms(datetime)) %>%
  dplyr::select(dt, rawvalue, everything()) %>%
  arrange(dt)


# create ts
boz_pm_ts <- ts(
  mt_pm_clean$rawvalue,
  start = c(1, 5),
  end = c(30, 5),
  freq = 24
)

boz_ts_short <- window(boz_pm_ts, start = c(15, 1), end = c(20, 1))

# plot 09/15 - 09/20
plot(boz_ts_short)
```

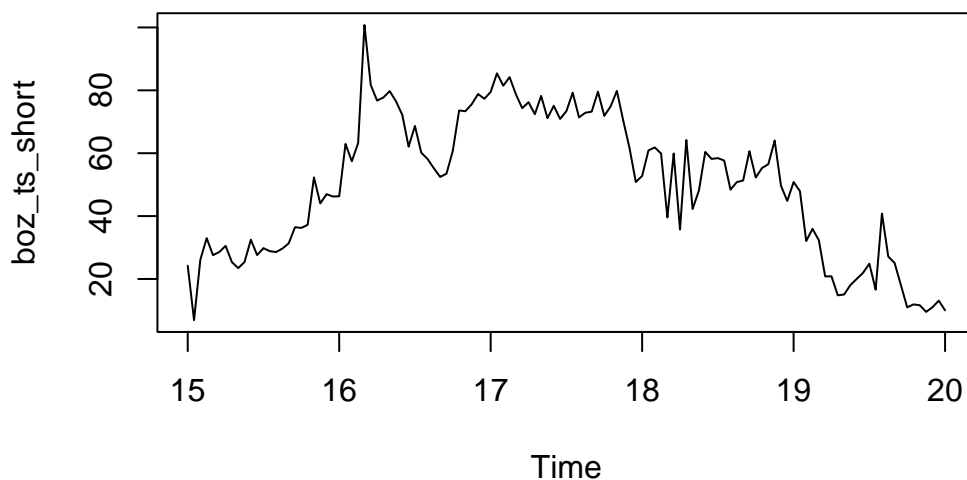


```
# random walk?  
acf(diff(boz_ts_short))
```

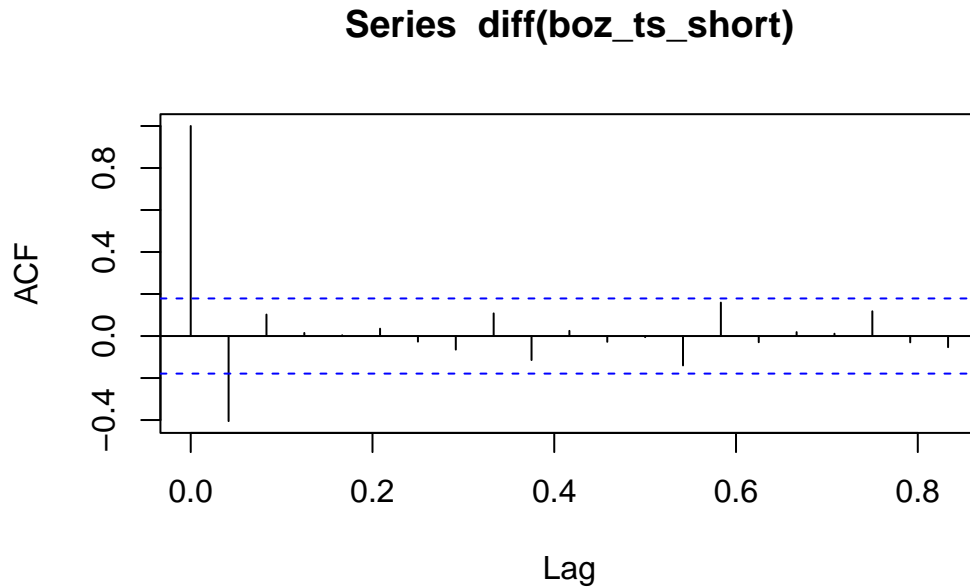


```
# another example  
library(quantmod)  
getSymbols('MSFT', src = 'yahoo')
```

```
[1] "MSFT"
```

```
plot(MSFT$MSFT.Adjusted)
```

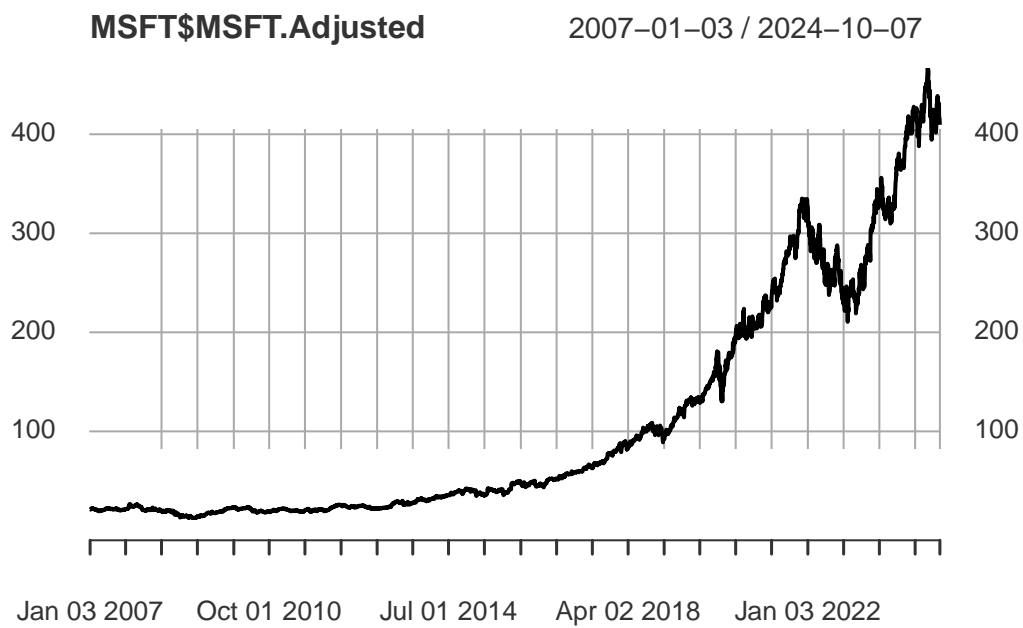

```
acf(diff(Ad(MSFT))), na.action = na.omit)
```

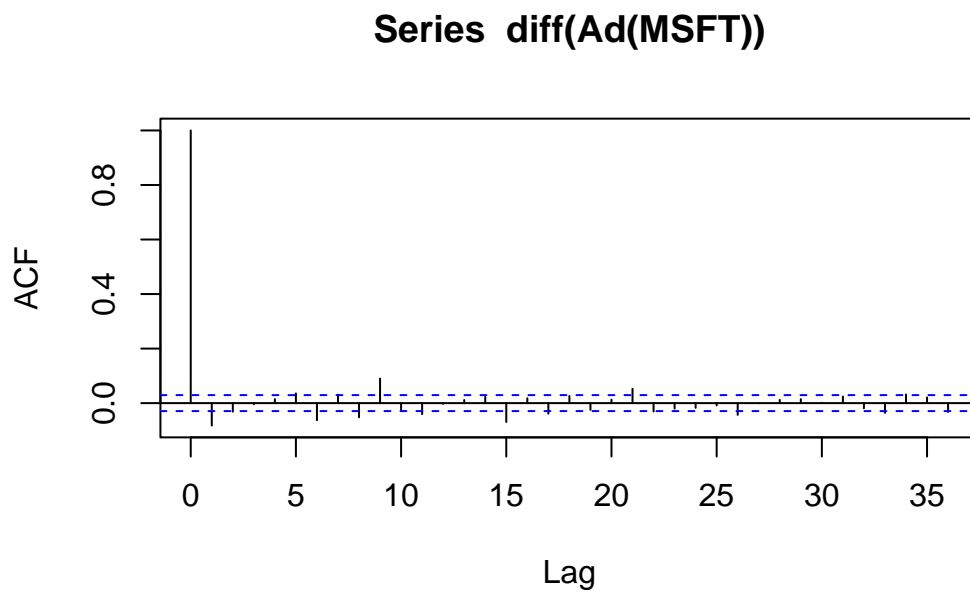

## Autoregressive models

### **i** Note

A time series  $\{x_t\}$  is an \_\_\_\_\_ or AR( $p$ ) if

$$x_t = \alpha_1 x_{t-1} + \alpha_2 x_{t-2} + \cdots + \alpha_p x_{t-p} + w_t$$

where  $\{w_t\}$  is white noise and the  $\alpha_i$  are the model parameters. It can be shown that the AR( $p$ ) model can be expressed as a polynomial of order  $p$  in the backshift operator:

$$\theta_p(B)x_t = (1 - \alpha_1 B - \alpha_2 B^2 - \cdots - \alpha_p B^p)x_t = w_t$$

A few notes on AR( $p$ ) models:

- The \_\_\_\_\_ is a special case of AR(1) with  $\alpha_1 = 1$ .
- The \_\_\_\_\_ model is a special case of an AR process with  $\alpha_i = \alpha(1 - \alpha)^i$  as  $p$  approaches infinity.
- A prediction at time  $t$  is given by
 
$$\hat{x}_t = \hat{\alpha}_1 x_{t-1} + \hat{\alpha}_2 x_{t-2} + \cdots + \hat{\alpha}_p x_{t-p}$$
- Model parameters are estimated by minimizing the \_\_\_\_\_.

Is an AR( $p$ ) process stationary?

**i** Note

The equation  $\theta_p(B) = 0$  is called the \_\_\_\_\_. The roots of the \_\_\_\_\_ may be used to determine whether an  $\text{AR}(p)$  process is stationary.

If all roots of the \_\_\_\_\_ exceed 1 in magnitude, the model is stationary. You may use the `polyroot` function in R to find the roots of polynomials.

*Example:* Determine whether the  $\text{AR}(1)$  model  $x_t = \frac{1}{2}x_{t-1} + w_t$  is stationary.

*Example:* Determine whether the  $\text{AR}(2)$  model  $x_t = x_{t-1} - \frac{1}{4}x_{t-2} + w_t$  is stationary.

*Example:* Determine whether the  $\text{AR}(2)$  model  $x_t = \frac{1}{2}x_{t-1} - \frac{1}{2}x_{t-2} + w_t$  is stationary.

### i AR(1) processes


A time series  $x_t$  is an AR(1) process if

The second-order properties of an AR(1) process are:

$$\begin{aligned}\mu(t) &= 0 \\ \gamma_k &= \frac{\alpha^k \sigma^2}{(1 - \alpha^2)} \\ \rho_k &= \alpha^k\end{aligned}$$

How can we simulate an AR(1) process?



```
set.seed(10062024)
x <- w <- rnorm(100)
for(t in 2:100) x[t] <- 0.7 * x[t-1] + w[t]
par(mfrow = c(1, 2))
plot(x, type = "l", xlab = "Time")
acf(x)
```

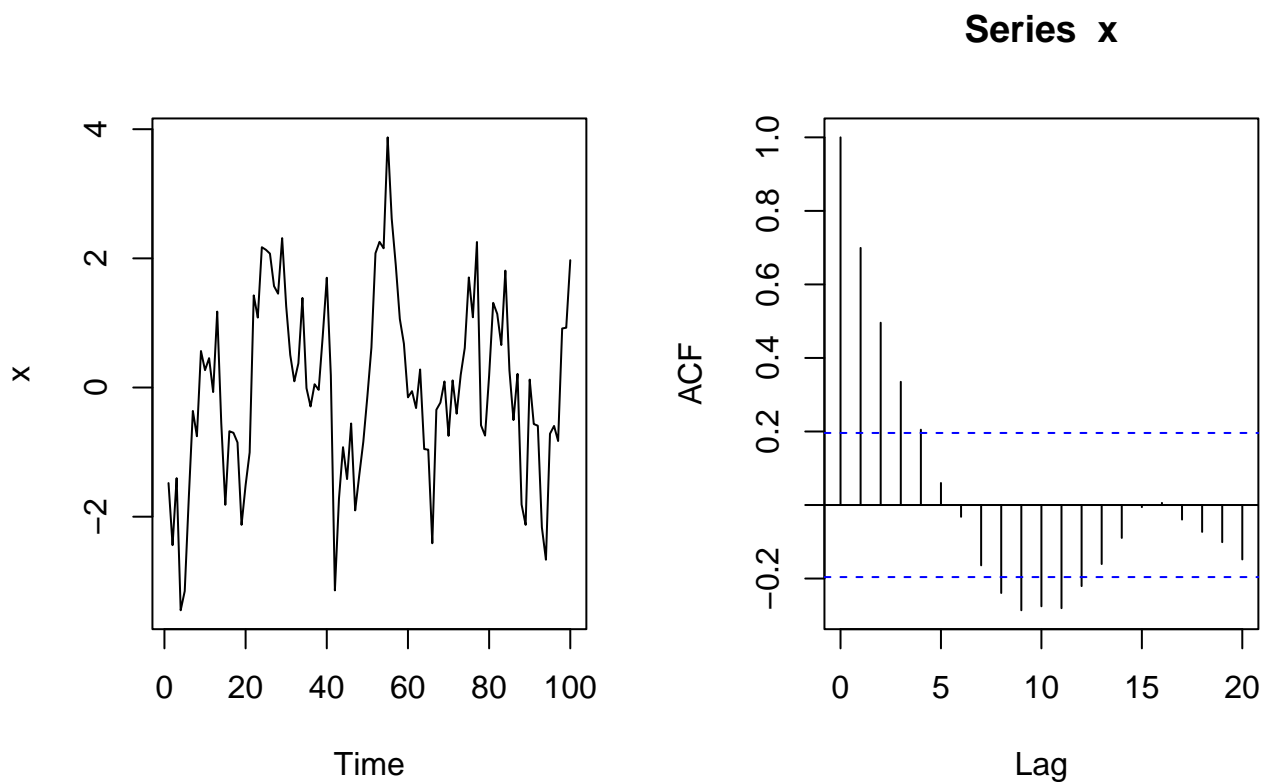

**i** Note

The \_\_\_\_\_ at lag  $k$  is the correlation that results after removing the effect of any correlation due to terms at shorter lags.

```
par(mfrow = c(2, 1))  
plot(x, type = "l", xlab = "Time")  
pacf(x)
```

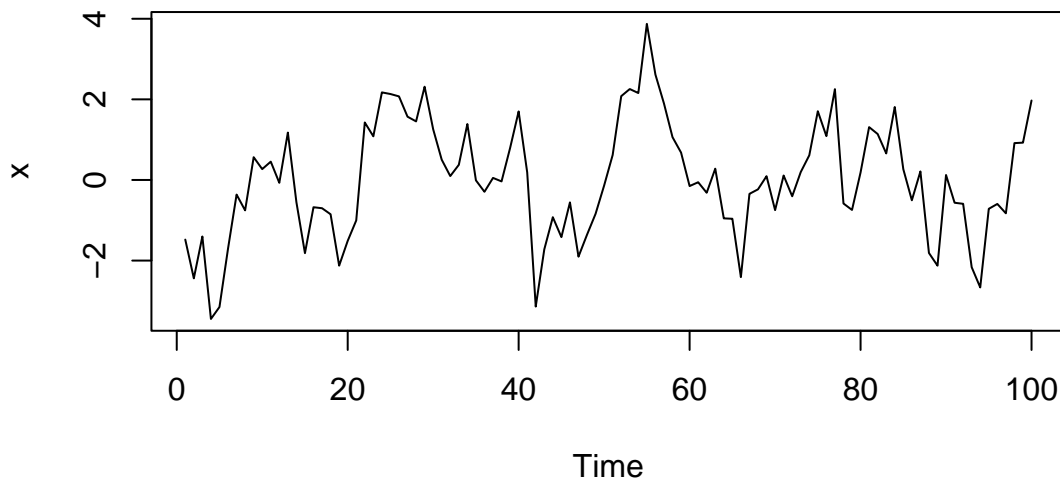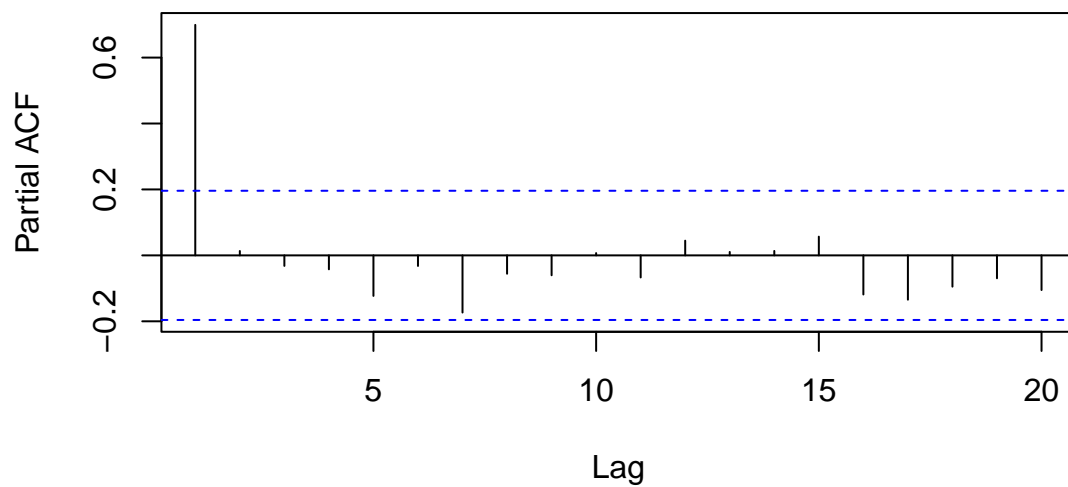**Series x**



### **i** Fitting an AR(p) process

To fit an AR( $p$ ) process, we use the `ar` function in R. To select the order of the AR process, R minimizes the AIC.

$$AIC = 2 \cdot (-\log\text{-likelihood} + \text{number of parameters})$$

```
# a few things
par(mfrow = c(1,1))
ar_fit <- ar(x)
str(ar_fit)
```


List of 15

```
$ order      : int 1
$ ar         : num 0.699
$ var.pred   : num 1.06
$ x.mean     : num -0.00725
$ aic        : Named num [1:21] 65.14 0 1.98 3.88 5.7 ...
..- attr(*, "names")= chr [1:21] "0" "1" "2" "3" ...
$ n.used     : int 100
$ n.obs      : int 100
$ order.max  : num 20
$ partialacf : num [1:20, 1, 1] 0.6993 0.0133 -0.032 -0.0423 -0.123 ...
$ resid      : num [1:100] NA -1.404 0.306 -2.466 -0.738 ...
$ method     : chr "Yule-Walker"
$ series     : chr "x"
$ frequency  : num 1
$ call       : language ar(x = x)
$ asy.var.coef: num [1, 1] 0.00521
- attr(*, "class")= chr "ar"
```


```
ar_fit$aic
```

	0	1	2	3	4	5	6	7
65.141818	0.000000	1.982267	3.879878	5.700571	6.175876	8.072266	7.017330	
8	9	10	11	12	13	14	15	
8.705460	10.340195	12.335376	13.885613	15.686569	17.675725	19.657472	21.333858	
16	17	18	19	20				
21.913735	22.088854	23.184022	24.699330	25.586472				

```
acf(na.omit(ar_fit$resid))
```

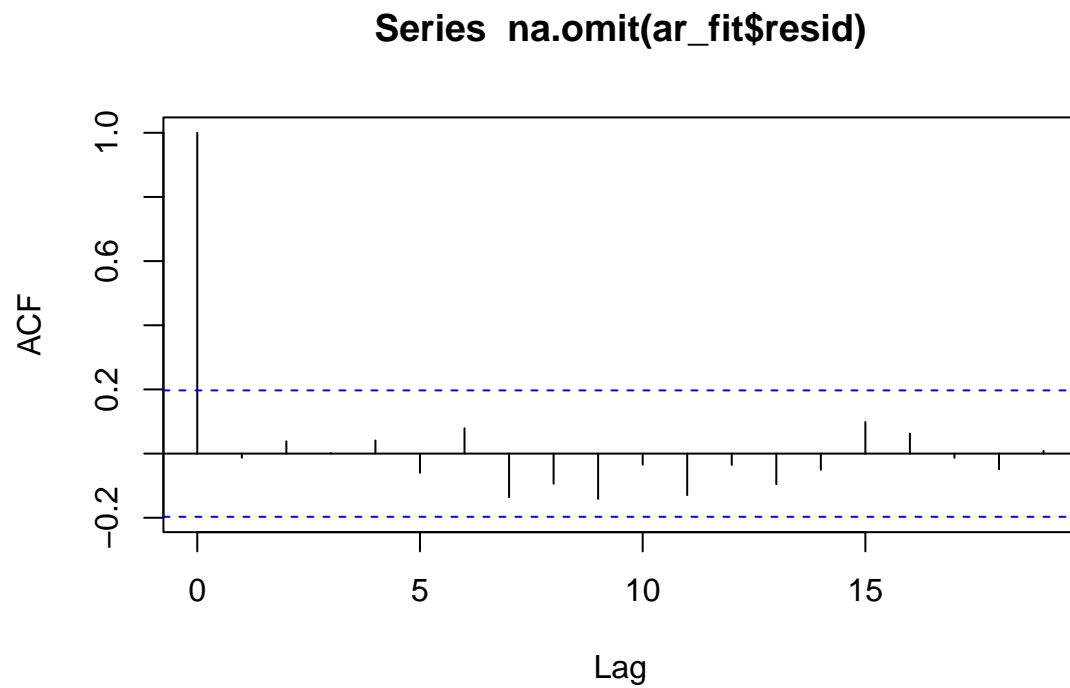


```
# obtain predictions 2:N for AR(1) model
fitted <- ar_fit$x.mean + ar_fit$ar * (x[1:(length(x)-1)] - ar_fit$x.mean)
plot(x, type = "l")
lines(fitted ~ c(2:100), col = "red", lty = 2)
```

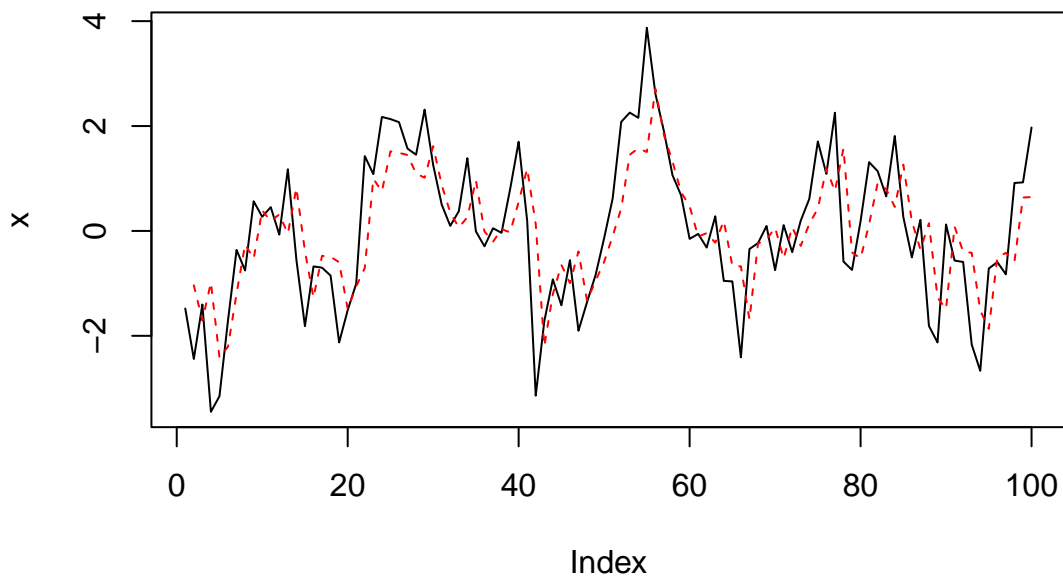

```
# what about forecasts?
## pretend we observe 1:90, prediction 91:100
x_short <- x[1:90]
ar_fit_short <- ar(x_short)
fitted <- ar_fit_short$x.mean +
  ar_fit_short$ar *
  (x_short[1:(length(x_short)-1)] - ar_fit_short$x.mean)

plot(x[1:90], xlim = c(0, 100), type = "l")
abline(v = 90, lty = 2)
lines(fitted ~ c(2:90), col = "red")

x_pred <- predict(ar_fit_short, n.ahead = 10)
lines(x_pred$pred, col = "red", lty = 2)
lines(x_pred$pred - 2*x_pred$se, col = "red", lty = 2)
lines(x_pred$pred + 2*x_pred$se, col = "red", lty = 2)
lines(x[91:100] ~ c(91:100), lty = 2)
```

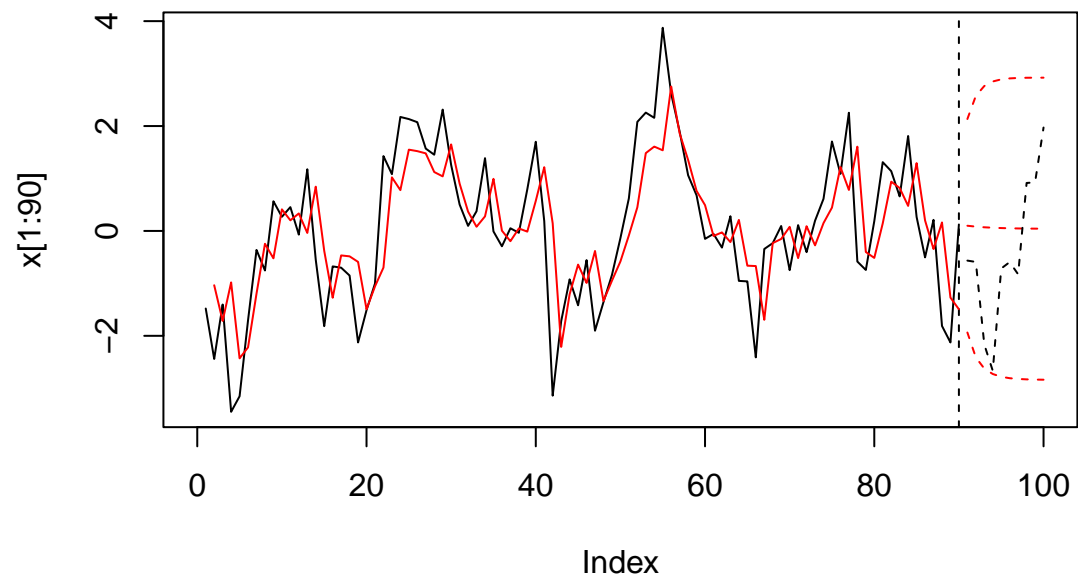

## Closing remarks

- The stochastic models discussed this week (white noise, random walks, and  $AR(p)$  processes) are not very useful for forecasting on their own, and are unlikely to compete with procedures like Holt-Winters.
- In practice, these stochastic models are combined with other techniques (regression, moving average, and integrated moving averages) to construct powerful forecasting techniques.
- The  $AR(p)$  process is one component of the ARIMA model, which we will discuss towards the end of the semester.