
Ingested data

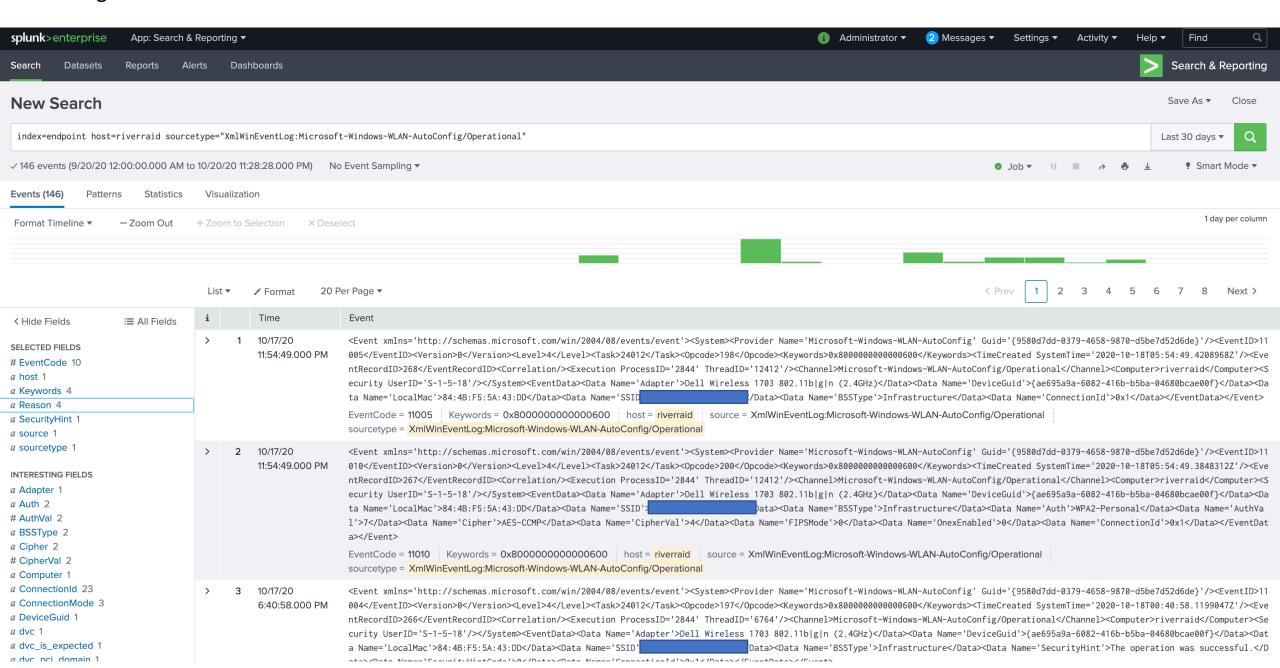


Fields


```
INTERESTING FIELDS
a Adapter 1
a Auth 2
# AuthVal 2
a BSSType 2
a Cipher 2
# CipherVal 2
a Computer 1
a ConnectionId 23
a ConnectionMode 3
a DeviceGuid 1
a \, dvc \, 1
a dvc_is_expected 1
a dvc_pci_domain 1
a dvc_requires_av 1
a dvc_should_timesync 1
a dvc_should_update 1
a EventChannel 1
# EventCode 10
# FIPSMode 1
a Guid 1
a index 1
a InterfaceDescription 1
a InterfaceGuid 1
# Level 2
# linecount 1
a LocalMac 1
a Name 1
# OnexEnabled 1
# Opcode 10
a ProcessID 3
```

```
a ProfileName 5
a punct 1
# RecordID 100+
a SecurityID 1
a splunk_server 1
a src_host 1
a SSID 5
a SystemTime 100+
# Task 3
a ThreadID 46
a TimeCreated 100+
a transport 2
a UserID 1
a vendor_product 1
# Version 1
a xmlns 1
```


Connections without profiles

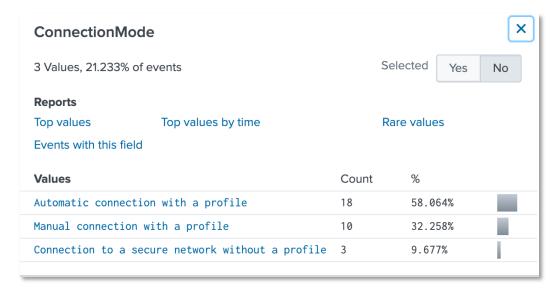

Look for connections to "open" networks

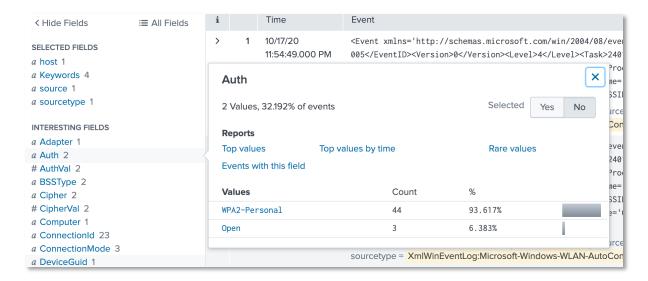

Timechart by connections to SSID

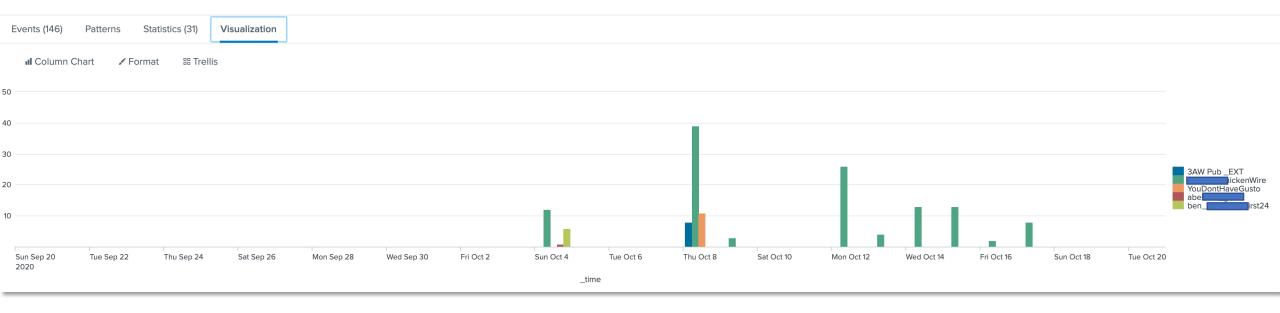

Connection failures and reasons

