



SightingDB

*Once is happenstance. Twice is coincidence.
The third time it's enemy action.*

— Auric Goldfinger, in Ian Fleming's *Goldfinger*, 1959

SightingDB does the counting.

Sebastien Tricaud

SightingDB 0.7

Contents

1	What this is	1
1.1	What a sighting is	1
1.2	Namespaces are paths	2
1.3	Sightings, elsewhere	3
1.3.1	MISP	3
1.3.2	STIX 2.1	3
1.3.3	Where this fits	4
1.4	What it is not	4
1.5	Where it sits	5
2	Quick start	6
2.1	Run it	6
2.2	Write a sighting	6
2.3	Read it back	7
2.4	Write a lot of them at once	7
2.5	Open the interface	7
2.6	Try it from Python	7
2.7	A galaxy, if you want one now	8
2.8	What to read next	8
3	Installing	9
3.1	Build it	9
3.2	Let it install itself	9
3.3	Run it in a container	10
3.4	Kubernetes	10
3.5	Checking it started	11
4	Configuration	12
4.1	Yours, and the program's	12
4.2	The minimum	13
4.3	[daemon]	13
4.4	[storage]	14
4.5	[acl], or acl_file	15
4.6	[galaxy]	15
4.7	[stix], [zmq], [dns]	15
4.8	Changing it while it runs	16
5	The API	17
5.1	Writing	17
5.1.1	One sighting	17
5.1.2	Many at once	18
5.1.3	Checking a batch first	18
5.2	Reading	18
5.2.1	One value	18

5.2.2	With statistics	19
5.2.3	A whole namespace	19
5.2.4	Just the size of one	19
5.2.5	Many values at once	19
5.3	Deleting	19
5.4	What the status codes mean	20
5.5	Namespaces beginning with _	20
5.6	The route list	20
6	Tags	21
6.1	The shape of a tag set	21
6.2	They merge	21
6.3	The vocabulary the export reads	22
6.4	Colours, and what a tag means	22
6.4.1	Families	22
6.4.2	What ships	23
6.4.3	Tags found on values	24
6.4.4	Typing one	24
6.5	Where tags show up	24
7	The Python client	25
7.1	Connecting	25
7.2	Writing	25
7.3	Writing a lot	26
7.4	Reading	26
7.5	The rest	27
7.6	Asynchronously	27
7.7	Talking to several servers	27
7.8	A worked example	28
8	Galaxies	30
8.1	Why more than one	30
8.2	The three roles	30
8.3	What a galaxy looks like	31
8.4	Forwarding	31
8.5	Counting, without inflating	32
8.6	Consensus across a galaxy	33
8.7	Catching up	33
8.8	Cascades	33
8.9	Keys are the boundary	34
8.10	When nothing holds it	35
9	Running a galaxy	36
9.1	Build one in four containers	36
9.2	Adding a node	36
9.2.1	The node does not have to be up	37
9.2.2	Give the new node peers of its own	37
9.3	Changing one	38
9.4	Taking one out of service	38
9.5	Removing one	39
9.6	What you cannot change over the API	39
9.7	Watching it	39

9.8	Keys across a galaxy	39
9.9	A checklist	40
10	The management interface	41
10.1	Browsing	41
10.2	Values	41
10.3	One value	42
10.4	Tags	42
10.5	Galaxy	42
10.6	Keys	42
10.7	Configuration	45
10.8	Exporting	45
10.9	Rejections	45
10.10A	a note on caching	45
11	STIX and MISP	46
11.1	Exporting STIX 2.1	46
11.1.1	Ids are derived, not minted	46
11.1.2	What decides the pattern	47
11.1.3	Headers say what you got	47
11.1.4	A subtree, or several namespaces	47
11.1.5	Configuring who you are	48
11.2	Importing STIX	48
11.3	Importing from MISP	48
11.3.1	What becomes a tag	49
11.4	A feed to try it with	49
12	Operations	51
12.1	Is it alive	51
12.2	Where the data is	51
12.3	What stays in memory	51
12.4	Expiring data	52
12.5	What was refused	52
12.6	Certificates	52
12.7	Logs	53
12.8	Backing up	53
12.9	Upgrading	53
12.10	Things that have surprised people	53
13	Reference	54
13.1	Routes	54
13.2	Query parameters	55
13.3	Status codes	55
13.4	Configuration at a glance	56
13.5	The files	56
13.6	Internal namespaces	57
13.7	The Python client	57
13.8	Where else to look	57

What this is


A sightings database answers one question: **how often have you seen this, and when?**

Not whether it is malicious. Not who owns it. Not what campaign it belongs to. Those are judgements, and there are good tools for keeping judgements. This keeps the observations the judgements are made from — and it keeps them at a volume and a speed that makes the count itself worth reading.

That is the whole idea. An address seen once last March is a different thing from an address seen four thousand times this morning, and from an address seen once a day for eighty days. Nothing about the address changed. What changed is what you know about it, and all you needed to know it was a counter.

1.1 What a sighting is

A sighting is a value, in a namespace, at a moment:

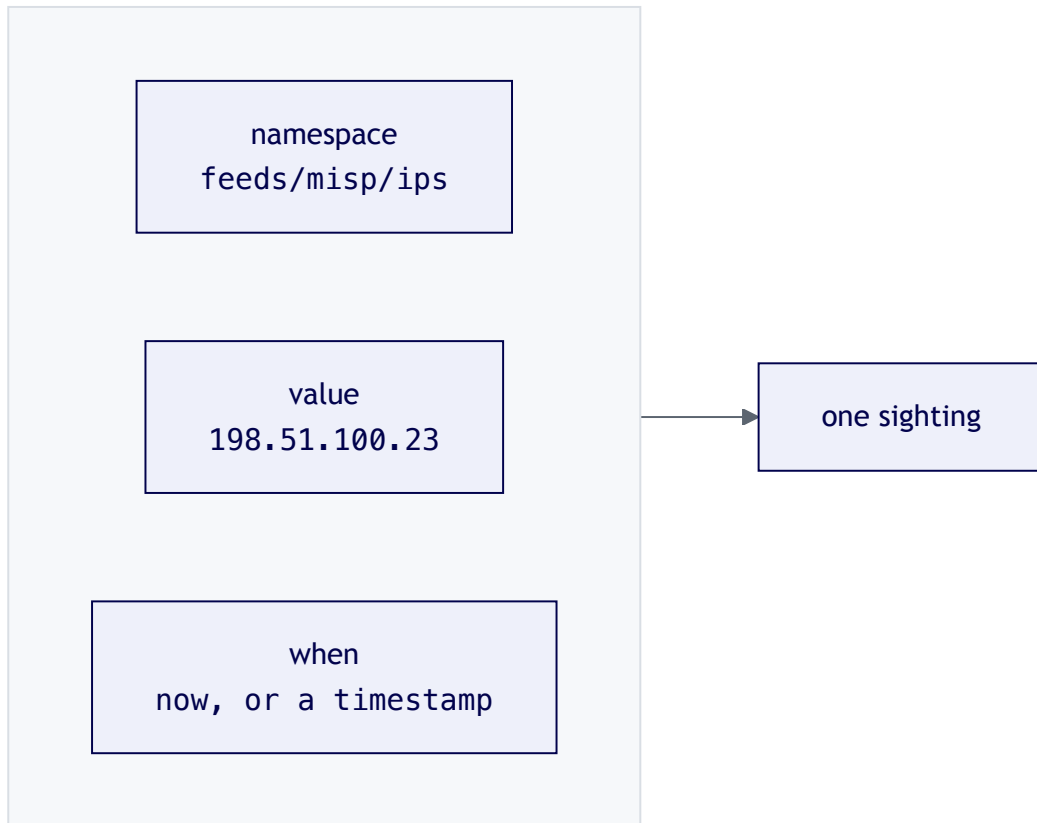

Write the same value again and the count goes up. That is the entire write path, and it is why this is fast: there is no document to re-index and no verdict to recompute.

What comes back when you read it:

Field	Meaning
count	How many times this namespace has seen this value.
first_seen, last_seen	The ends of the window it has been seen in.
tags	What the value <i>is</i> , as a set — see chapter 6.
ttl	When it stops being visible, if ever.
consensus	How many namespaces have seen it at all.
stats	The count broken down by hour, on request.

`consensus` is the one that is not obvious. It counts *namespaces*, not sightings: a value seen a thousand times in one feed has a consensus of one, and a value seen once each in six feeds has a consensus of six. The first is noisy; the second is corroborated. They are different questions and they deserve different numbers.

1.2 Namespaces are paths

A namespace is a path, and it browses like folders:

```
feeds/misp/ips
feeds/misp/domains
myorg/proxy/domains
watchlist/ips
```

There is no schema to declare. Writing to `feeds/misp/ips` creates it. The path is yours to organise: by source, by type, by team, by sensitivity. What it buys you is that access is granted by prefix — a key can be given `rw:feeds` and reach everything under it and nothing else — and that storage is managed by top-level namespace, so `feeds` can live in memory while `archive` lives on disk.

1.3 Sightings, elsewhere

The word is not ours, and it is worth knowing what the two standards that use it mean by it, because SightingDB sits deliberately between them.

1.3.1 MISP

MISP's definition is a person speaking:

Sighting is a way for a user to say that they have seen or notice an attribute and confirm its validity.
— [MISP's documentation](#)

A MISP sighting is therefore partly a **judgement**. There are three kinds — a *true positive*, a *false positive*, and an *expiration date* saying an attribute has stopped being relevant — and they feed MISP's scoring and decaying models. An analyst saying “yes, we saw this, and it was real” is exactly the signal those models need.

1.3.2 STIX 2.1

STIX models a sighting as a relationship between an indicator and whoever saw it. What distinguishes it from every other relationship is the three properties it alone carries:

Sighting contains unique properties like `count`, `first_seen`, and `last_seen` that convey when a SDO was seen within a particular timeframe as well as the number of times this SDO was seen.
— [OASIS, Sighting of an Indicator](#)

In the OASIS example, one organisation publishes an indicator for a malicious URL and another, seeing it on their own network, publishes a sighting of it:

```
{
  "type": "sighting",
  "spec_version": "2.1",
  "id": "sighting--ee20065d-2555-424f-ad9e-0f8428623c75",
  "count": 1,
```


```

"first_seen": "2017-02-27T21:37:11.213Z",
"last_seen": "2017-02-27T21:37:11.213Z",
"sighting_of_ref": "indicator--9299f726-ce06-492e-8472-2b52ccb53191",
"where_sighted_refs": ["identity--..."]
}

```

1.3.3 Where this fits

Look again at what STIX says is special about a sighting — `count`, `first_seen`, `last_seen` — and then at what SightingDB stores. They are the same three fields. That is not a coincidence or a convenience: **this is a database of exactly the thing a STIX sighting is**, which is why the export in chapter 11 is a mapping rather than a translation.

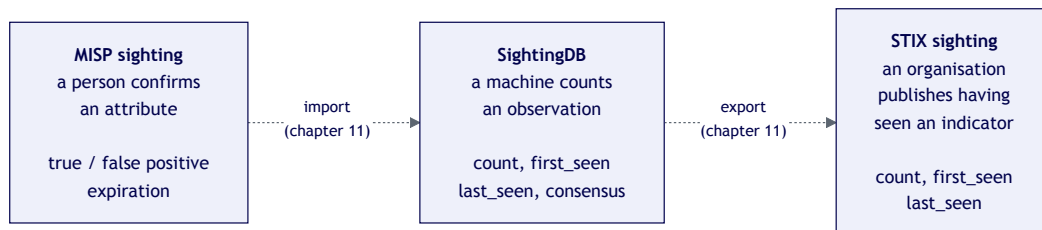

The difference from MISP is the one worth holding on to. A MISP sighting is a **judgement** made a few times by people; a SightingDB sighting is an **observation** recorded continuously by machines, with no view on whether the thing is good or bad. That is why there is no “false positive” here: nothing is being asserted that could be false. The value was seen, four thousand times, and what that means is yours to decide.

The two are complements rather than rivals. A MISP attribute whose decaying model says it has gone stale, and a SightingDB count that says your proxy has seen it eleven times this morning, are both true and interesting at once.

1.4 What it is not

It is not a threat intelligence platform. It holds no verdicts, no relationships, no cases, no workflow. It will happily tell you that you have seen 198.51.100.23 four thousand times and take no view on whether that is good or bad.


It is not a log store. A log line is an event with a shape; a sighting is a counter with a window. If you need to answer “what happened at 14:32”, keep your logs. If you need to answer “is this the first time?”, in the time it takes to answer an API call, this is the thing.

It is not a graph. Values do not point at each other.

Those are not gaps to be filled in later. They are the reason a write is a counter increment and a read is a map lookup, which is what makes the numbers above cheap enough to ask for on every event you process.

1.5 Where it sits

Most deployments put it behind whatever is already producing observations — a proxy log pipeline, a MISP feed, a sensor — and in front of whatever is asking questions.

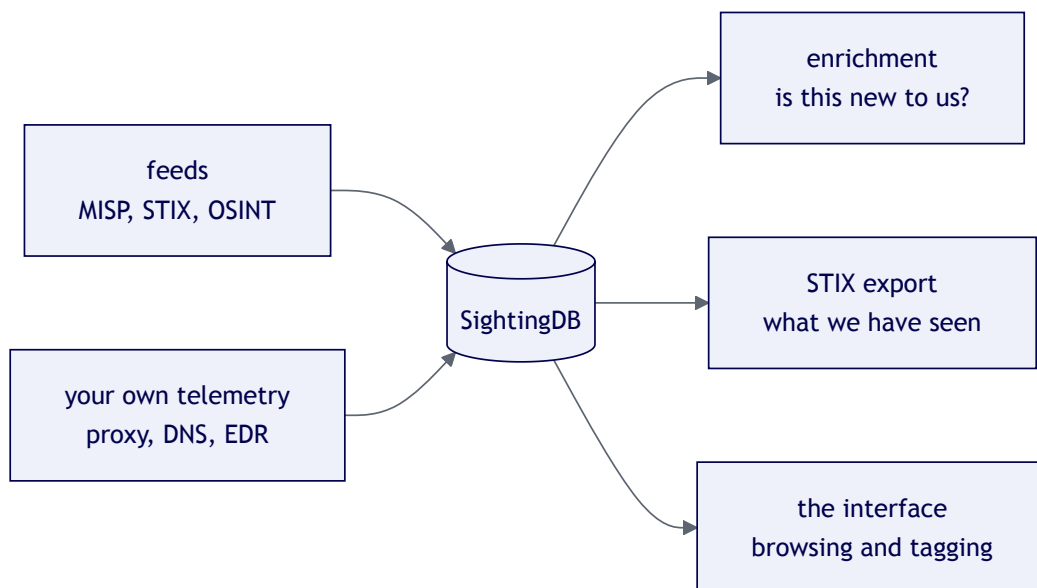

The rest of this book is how to run that, starting with the shortest possible version of it.

Quick start

Five minutes, one container, no configuration.

2.1 Run it

From a clone of the repository:

```
docker compose -f docker/docker-compose.yml up --build
```

That builds the image from the source in your working tree and starts one server on port 9999 with the API key `changeme`.

There is no published image to pull. SightingDB is small and builds in a couple of minutes, and an image you built from the source in front of you is one fewer thing to trust.

If you would rather not use Docker, chapter 3 builds it directly; everything below is the same either way.

2.2 Write a sighting

```
curl -H 'Authorization: changeme' \  
  'http://localhost:9999/w/feeds/ips?val=198.51.100.23'
```

```
{"message": "ok", "count": 1, "new": true}
```

Run it again. And again.

```
{"message": "ok", "count": 3, "new": false}
```

`new` is whether this namespace had ever seen the value before, which is the one thing you cannot work out from the count afterwards.

2.3 Read it back

```
curl -H 'Authorization: changeme' \
  'http://localhost:9999/r/feeds/ips?val=198.51.100.23&noshadow'
```

```
{"value":"198.51.100.23","first_seen":1791668207,"last_seen":1791668230,
 "count":3,"tags":"","ttl":0,"consensus":1}
```

noshadow is there because **a read is itself an observation**. Without it, SightingDB records that somebody asked — in a parallel `_shadow/` namespace — which is how you find out which indicators your analysts keep looking up. When you are reading your own data in a loop, say `noshadow` and it records nothing.

2.4 Write a lot of them at once

One sighting per HTTP request is fine for enrichment, and wrong for ingest:

```
curl -H 'Authorization: changeme' -H 'Content-Type: application/json' \
  -X POST http://localhost:9999/wb -d '{"items":[
    {"namespace":"feeds/ips","value":"198.51.100.23","tags":"tlp:green"},
    {"namespace":"feeds/ips","value":"203.0.113.7"},
    {"namespace":"feeds/domains","value":"login.phish.example"}
  ]}'
```

Every item gets its own result, so one bad value does not discard the batch:

```
{"message":"ok","written":3,"items":[
  {"index":0,"namespace":"feeds/ips","value":"198.51.100.23","status":"ok",
   "count":4,"new":false}, ...]}
```

2.5 Open the interface

http://localhost:9999/_management, with the key `changeme`.


2.6 Try it from Python

```
pip install sightingdb-client
```

```
from sightingdb import SightingDB

db = SightingDB(url="http://localhost:9999", apikey="changeme")

db.write("feeds/ips", "198.51.100.23")
print(db.read("feeds/ips", "198.51.100.23", shadow=False).count)
```

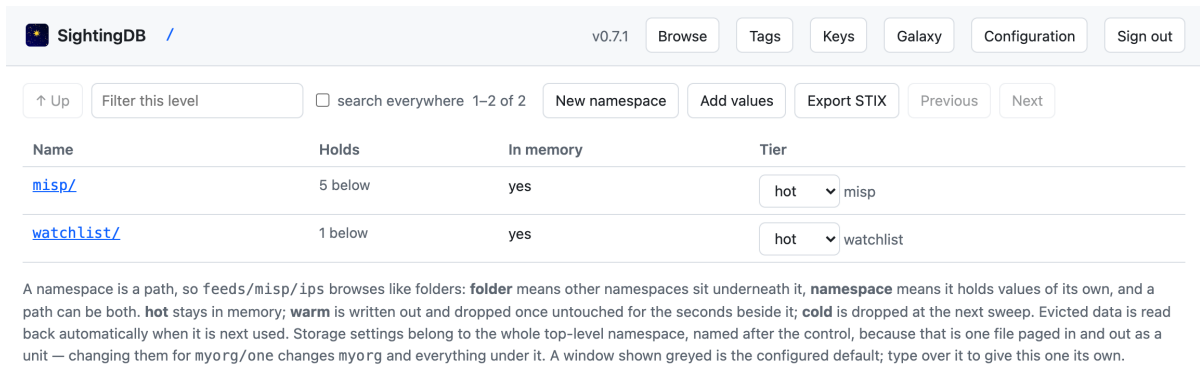

The screenshot shows the SightingDB interface. At the top, there's a navigation bar with 'SightingDB /', version 'v0.7.1', and buttons for 'Browse', 'Tags', 'Keys', 'Galaxy', 'Configuration', and 'Sign out'. Below this is a control bar with '↑ Up', 'Filter this level', a search checkbox, '1-2 of 2', and buttons for 'New namespace', 'Add values', 'Export STIX', 'Previous', and 'Next'. The main table has columns: Name, Holds, In memory, and Tier. It lists two namespaces: 'misp/' (5 below, yes in memory, hot tier) and 'watchlist/' (1 below, yes in memory, hot tier). Below the table is a detailed explanation of namespaces and tiers.

A namespace is a path, so `feeds/misp/ips` browses like folders: **folder** means other namespaces sit underneath it, **namespace** means it holds values of its own, and a path can be both. **hot** stays in memory; **warm** is written out and dropped once untouched for the seconds beside it; **cold** is dropped at the next sweep. Evicted data is read back automatically when it is next used. Storage settings belong to the whole top-level namespace, named after the control, because that is one file paged in and out as a unit — changing them for `myorg/one` changes `myorg` and everything under it. A window shown greyed is the configured default; type over it to give this one its own.

Figure 2.1: The namespace tree. A path is a folder and a namespace at once.

```
print(db.exists("feeds/ips", "203.0.113.99"))
```

Chapter 7 is the rest of it.

2.7 A galaxy, if you want one now

One server is a node. Several servers behind a load balancer is a *galaxy*, and there is a four-container sample of one:

```
docker compose -f doc/docker/docker-compose.yml up --build
```

That starts a load balancer on 9999 and three nodes — two full mirrors and one holding a single namespace — and loads them with real indicators from CIRCL's public OSINT feed. Chapter 8 explains what it is doing; `doc/docker/README.md` lists things to try.

2.8 What to read next

- **Chapter 3** to install it properly, with TLS and a service.
- **Chapter 4** for the configuration files.
- **Chapter 5** for the rest of the API.
- **Chapter 8** if you are here because one server is not enough.

Installing

Three ways, in rising order of permanence: build it and run it, let `--setup` install it, or run it in a container.

3.1 Build it

SightingDB is a single Rust binary with no runtime dependencies beyond OpenSSL.

```
git clone https://github.com/stricaud/sightingdb
cd sightingdb
cargo build --release
./target/release/sightingdb --help
```

To run it without installing anything:

```
./target/release/sightingdb -c etc/sightingdb.toml
```

`etc/sightingdb.toml` in the repository is a working configuration and is mostly comments explaining itself. **Read the `dbdir` line before you run it:** it points at `/var/lib/sighting`, which is where a real installation keeps its data, and is probably not what you want for a first look.

3.2 Let it install itself

```
sudo sightingdb --setup
```

This asks what the server is for and then writes everything: directories, a configuration with comments, an API key, a self-signed certificate, and a service for `systemd` or `launchd`. It asks before changing anything and tells you what it did.

The first question is the one that matters:

- | | |
|---------------|--|
| 1) standalone | stores everything; knows no peers |
| 2) node | stores namespaces; other servers forward to it |
| 3) router | stores nothing of its own; forwards to its peers |
| 4) both | stores some namespaces and forwards the rest |

Chapter 8 is what those mean. If you are installing one server, it is 1.

What it writes, and which of them it will rewrite later:

File	Who owns it
sightingdb.toml	You. Comment-rich, hand-maintained, never rewritten.
acl.toml	The program. Rewritten when a key is saved.
tiers.toml	The program. Rewritten when a storage tier changes.
tags.toml	The program. Rewritten when a tag's colour changes.
peers.toml	The program. Rewritten when a peer is added or changed.

That split is the thing to understand about configuring SightingDB, and chapter 4 is about it.

`--setup` writes a **self-signed** certificate. It is there so that the first thing you run is encrypted rather than plaintext, not because it is good enough for a galaxy that crosses a network you do not control. Replace it, or terminate TLS in front.

3.3 Run it in a container

```
docker compose -f docker/docker-compose.yml up --build
```

The image builds from your working tree, runs as a non-root user at a fixed uid, and keeps its database on a named volume. The configuration baked in is deliberately small — mount your own over `/etc/sightingdb/sightingdb.toml` to change it, which is what the galaxy sample in `doc/docker` does.

Two environment variables matter:

Variable	Effect
SIGHTINGDB_APIKEY	The key, granted full access. Read by the daemon itself, so it is not visible in ps.
SIGHTINGDB_CONFIG	Which configuration to read.

3.4 Kubernetes

```
make deploy      # into the cluster kubectl already points at
make dev         # into a kind cluster this creates for the purpose
```

Both build the image from your tree, install the Helm chart, wait for the pod and write a sighting through it to prove it works. **They refuse to touch a cluster that is not local** — they check the context against a list of local ones and stop otherwise, because a `kubectl config use-context`

away from production should not be one keystroke away from `make deploy`.

`make port-forward` and `make admin-key` then get you into the interface.

3.5 Checking it started

```
curl -fsS http://localhost:9999/health
```

```
{"status":"ok","version":"0.7.1","uptime_seconds":12,  
  "resident_shards":2,"shards":2,"catching_up":false}
```


`/health` needs no key, which is what makes it usable as a container healthcheck and a load balancer probe. Everything else needs one.

If it did not start, it said why and exited; look at `log_err` from the configuration, or the container's logs. A configuration that will not parse names the line.

Configuration

Everything is TOML, and there are five files. Knowing which of them is yours and which belongs to the program is most of what there is to know.

4.1 Yours, and the program's

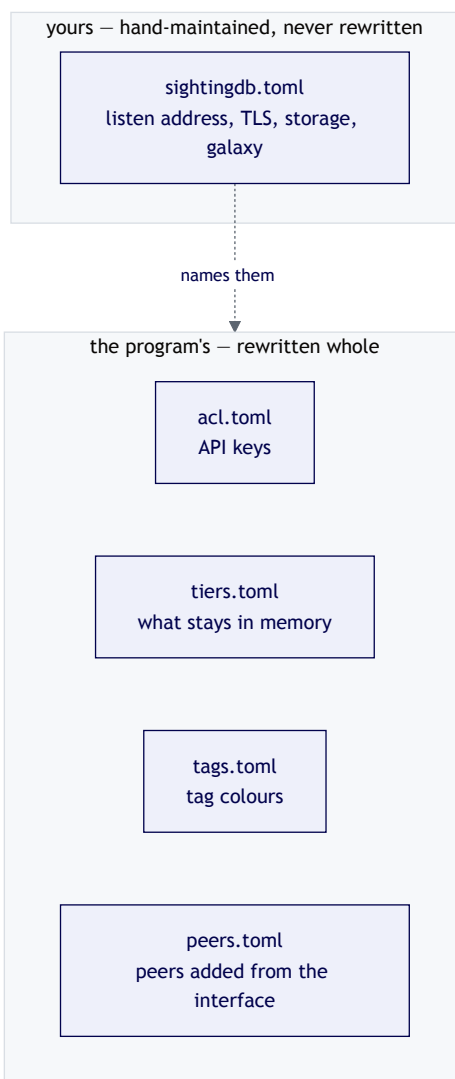

`sightingdb.toml` is comment-rich and the program does not write to it. The other four it rewrites, wholesale, whenever you change the matching thing in the management interface.

That is why they are separate files. A program that rewrote the main configuration would destroy the comments in it, and those comments are the documentation you actually read at three in the morning. The cost is that **anything set directly in `sightingdb.toml` is read-only in the interface** — which it says, rather than appearing to accept a change that will not last.

If you do not name one of the four, the matching thing still works; it is simply not editable. No `tags_file` means the standard colours and a Tags page that says it cannot save. No `peers_file` means the peers in `[galaxy] peers` and a Galaxy page that cannot add one.

4.2 The minimum

```
[daemon]
listen_ip = "127.0.0.1"
listen_port = 9999
authenticate = true
ssl = false
dbdir = "/var/lib/sightingdb"
acl_file = "/var/lib/sightingdb/acl.toml"
```

That is a working server. Everything below has a default.

4.3 [daemon]

Setting	Default	What it does
<code>enabled</code>	<code>true</code>	<code>false</code> runs DNS or ZMQ ingest with no HTTP API.
<code>listen_ip, listen_port</code>	<code>127.0.0.1:9999</code>	Where the API listens.
<code>authenticate</code>	<code>true</code>	<code>false</code> disables API keys entirely. For a laptop.
<code>daemonize</code>	<code>false</code>	Fork into the background. Leave off in a container.
<code>ssl, ssl_cert, ssl_key</code>	<code>off</code>	Terminate TLS here.
<code>dbdir</code>	<code>none</code>	Where snapshots live. Without it nothing survives a restart.
<code>snapshot_interval</code>	<code>300</code>	Seconds between writing the database out.
<code>sweep_interval</code>	<code>60</code>	Seconds between expiring TTLs and evicting cold shards.
<code>stats_retention</code>	<code>720</code>	Hourly buckets kept per value. 720 is 30 days.
<code>shadow_ttl</code>	<code>2592000</code>	How long a record of “somebody searched for this” lasts.

Setting	Default	What it does
<code>post_limit</code>	2.5 GB	The largest bulk request accepted.
<code>rejection_log</code>	1000	How many refused values to keep for the interface.
<code>node_id</code>	"local"	This server's name in its own counters.
<code>acl_file, tags_file</code>	none	The machine-owned files above.
<code>log_out, log_err</code>	stdout	Where the logs go.

`node_id` is the one to get right before a server joins a galaxy. Sightings are counted per node, so two servers sharing a name each take the other's contributions for their own, and the merge that should reconcile them discards one side instead. Give every server its own.

4.4 [storage]

```
[storage]
default_tier = "hot"
warm_idle = 3600
tiers_file = "/var/lib/sightingdb/tiers.toml"
namespaces = ["feeds", "myorg"]
```

`namespaces` is what this server stores. Absent means everything. An empty list makes it a router, which stores nothing of its own and forwards — see chapter 8. Prefixes match whole path segments, so `feeds` holds `feeds/misp/ips` and never `feeds-internal`.

The three tiers decide what sits in memory:

Tier	Behaviour
hot	Stays in memory. The default.
warm	Written out and dropped after <code>warm_idle</code> seconds untouched.
cold	Dropped at the next sweep.

Evicted data is not gone — the shard is read back when it is next used, so `cold` costs one load per burst of activity rather than one per operation. Tiers apply to a whole top-level namespace, because that is one file paged in and out as a unit.

4.5 [acl], or acl_file

```
[acl]
"changeme" = "rw, admin"
"analyst"  = "r"
"feed-misp" = "rw:feeds/misp"
"lb-to-us" = "rw:feeds"
```

A grant is *r*, *w* or *rw*, each optionally followed by *:<prefix>*, plus *admin* for the management interface. Without a prefix the grant is global. Access is allow-only: a key is denied unless one of its grants both covers the namespace and carries the permission.

Set `acl_file` instead if you want the interface to manage keys. The two together is an error worth avoiding: the file wins, and an `acl_file` that does not exist yet starts *empty*, discarding an inline `[acl]` table. Use one or the other.

Out-of-reach namespaces answer 404 rather than 403 throughout, so that browsing cannot be used to enumerate what a key may not see.

4.6 [galaxy]

The whole of chapter 8. In short:

```
[galaxy]
peers_file = "/var/lib/sightingdb/peers.toml"
max_hops = 4
health_interval = 30
sync_interval = 300
reconcile_interval = 3600
gossip_interval = 600
peers = [
  { url = "https://node-a.example:9999", key = "...", },
  { url = "https://node-b.example:9999", key = "...", namespaces = ["feeds"] },
  { url = "https://spare.example:9999", key = "...", enabled = false },
]
```

A peer carries the key **this** server authenticates to it with, which is the bound on what it may do there, and what that peer holds, so a request can be sent where it can be served.

4.7 [stix], [zmq], [dns]

Three optional sections, each with a chapter or a section of its own:

- `[stix]` — who exports are published as, and which observable type a namespace holds by default. Chapter 11.
- `[zmq]` — subscribe to a MISP publisher and write what it sends. Chapter 11.
- `[dns]` — answer sightings over DNS, DNSBL-style, for tools that speak no HTTP. It **bypasses the ACL**, which is why its defaults are locked down.

4.8 Changing it while it runs

Change	Needs a restart?
API keys	No, if <code>acl_file</code> is set.
Storage tiers	No, if <code>tiers_file</code> is set.
Tag colours	No, if <code>tags_file</code> is set.
Galaxy peers	No, if <code>peers_file</code> is set.
Anything else	Yes.

The last row is honest rather than apologetic: the listen address, TLS, the DNS zone and the storage policy all need sockets rebound or the database rebuilt, so “editable at runtime” would mean “applied at the next restart” anyway.

The API

Every route takes the key in an `Authorization` header. There is no scheme prefix — the key is the whole value.

```
curl -H 'Authorization: changeme' ...
```

`doc/routes.md` in the repository is the exhaustive version of this chapter, with every status code. This is the part you will use.

5.1 Writing

5.1.1 One sighting

```
curl -H 'Authorization: changeme' \
  'http://localhost:9999/w/feeds/misp/ips?val=198.51.100.23'
```

```
{"message": "ok", "count": 4, "new": false}
```

The namespace is the path. Everything after `/w/` up to the query string is it, so it can be as deep as you like.

Optional parameters:

Parameter	Effect
<code>timestamp=</code>	Record it as seen then, in Unix seconds, rather than now.
<code>ttl=</code>	Seconds until it stops being visible.
<code>tags=</code>	Tags to merge into whatever it already carries.

```
curl -H 'Authorization: changeme' \
  'http://localhost:9999/w/feeds/misp/ips?val=198.51.100.23&tags=tlp:green,stix-type:ipv4-addr'
```

Writes merge tags rather than replacing them, so two feeds that each know something different about a value both contribute. Taking a tag *off* is the management interface's job — chapter 6.

5.1.2 Many at once

POST /wb is the ingest path, and the one to use for anything over a handful.

```
curl -H 'Authorization: changeme' -H 'Content-Type: application/json' \
-X POST http://localhost:9999/wb -d '{"items": [
  {"namespace": "feeds/misp/ips", "value": "198.51.100.23", "tags": "tlp:green"},
  {"namespace": "feeds/misp/ips", "value": "203.0.113.7", "timestamp": 1791668207},
  {"namespace": "feeds/misp/domains", "value": "login.phish.example", "ttl": 86400}
]}'
```

Every item is answered separately:

```
{"message": "ok", "written": 3, "items": [
  {"index": 0, "namespace": "feeds/misp/ips", "value": "198.51.100.23",
    "status": "ok", "count": 5, "new": false},
  ...]}
```

message is ok, partial or failed. A batch where some items were refused and others written is partial with HTTP 200 — **the ones that worked are stored**, which is the point of per-item results. A batch that wrote nothing because every item was refused by the ACL is 403; one that wrote nothing for mixed reasons is 400.

5.1.3 Checking a batch first

POST /vwb takes the same body and writes nothing:

```
curl -H 'Authorization: changeme' -H 'Content-Type: application/json' \
-X POST http://localhost:9999/vwb -d '{"items": [...]}'
```

It answers with the same per-item shape, saying which items *would* be accepted. It deliberately does not read the database, which is what lets it promise that a passing item would be written rather than that it looks plausible.

5.2 Reading

5.2.1 One value

```
curl -H 'Authorization: changeme' \
'http://localhost:9999/r/feeds/misp/ips?val=198.51.100.23&noshadow'
```

```
{"value": "198.51.100.23", "first_seen": 1791668207, "last_seen": 1791668230,
  "count": 5, "tags": "tlp:green", "ttl": 0, "consensus": 1}
```

noshadow matters. Without it the read is recorded as a search, in a `_shadow/` namespace beside the one you read. That is a feature — it answers “which indicators do my analysts keep looking up?” — and a nuisance when you are reading your own data in a loop.

```
curl -H 'Authorization: changeme' \
  'http://localhost:9999/r/_shadow/feeds/misp/ips?val=198.51.100.23&noshadow'
```

5.2.2 With statistics

/rs is /r plus the hourly breakdown:

```
{"value":"198.51.100.23", ..., "stats":{"1791666000":3,"1791669600":2}}
```

The keys are the Unix timestamp of the hour.

5.2.3 A whole namespace

```
curl -H 'Authorization: changeme' 'http://localhost:9999/r/feeds/misp/ips'
```

5.2.4 Just the size of one

```
curl -H 'Authorization: changeme' 'http://localhost:9999/r/feeds/misp/ips?count'
```

```
{"namespace":"feeds/misp/ips","values":1284}
```

Maintained as values are written and deleted, so it is a lookup rather than a walk — ask it as often as you like.

5.2.5 Many values at once

```
curl -H 'Authorization: changeme' -H 'Content-Type: application/json' \
  -X POST http://localhost:9999/rb -d '{"items":[
    {"namespace":"feeds/misp/ips","value":"198.51.100.23","noshadow":true},
    {"namespace":"feeds/misp/ips","value":"203.0.113.99","noshadow":true}
  ]}'
```

```
{"items":[
  {"value":"198.51.100.23","first_seen":1791668207,"last_seen":1791668230,
    "count":5,"tags":"t1p:green","ttl":0,"consensus":1},
  {"error":"Value not found","namespace":"feeds/misp/ips","value":"203.0.113.99"}]}
```

Results are positional: item n answers item n , and a miss is an error object in place of an attribute rather than a gap. /rbs is the same with statistics.

5.3 Deleting

```
curl -H 'Authorization: changeme' 'http://localhost:9999/d/feeds/misp/ips'
```

Deletes the **whole namespace**. There is no delete-one-value route: a sighting is a count over a window, and removing one observation from it is not a coherent operation. Expire values with a `ttl` instead.

5.4 What the status codes mean

Code	Meaning
200	Done. For a batch, possibly <code>partial</code> — read items.
400	The request is malformed, or a batch failed for mixed reasons.
401	No key.
403	The key may not do this, or you wrote to an internal namespace.
404	No such namespace, or no such value in it.
421	Nowhere in reach stores that namespace. See chapter 8.
500	Something broke; the message says what.
502	A mirror that holds this could not be reached.
508	A forwarded request ran out of hops; your galaxy has a cycle.

421 and 502 only appear in a galaxy, and the distinction between them and 404 is deliberate: “no such namespace”, “nowhere in reach stores it” and “the server that has it is down” are three different answers, and only one of them is worth retrying.

5.5 Namespaces beginning with `_`

Internal. `_all` is the consensus tally, `_shadow/*` is what has been searched for, `_config` is server state.

They are **readable** — `/r/_all?val=x` is how you ask how many namespaces have seen a value — and **not writable from outside**, by anything, at any permission level. A client that could write `_all` could forge consensus: one honest write plus five forged ones, and a value looks corroborated by six independent feeds. `_config` is not readable either.

5.6 The route list

```
curl http://localhost:9999/
```

Needs no key and lists every route with a line each. `GET /i` reports the version, and `GET /_api/openapi.yaml` is the whole API as an OpenAPI 3 document, which a test keeps honest.

Tags

A sighting on its own is *namespace, value, count, first seen, last seen*. That answers “how often, and when” and nothing else — it does not say what the value **is**, who saw it, or how it may be shared. Tags carry that.

6.1 The shape of a tag set

A comma-separated set, each entry either a bare label or key:value:

```
stix-type:ipv4-addr, tlp:amber, confidence:80, identity:Beta Cyber Intelligence
```

Comma is the separator because the interesting values contain spaces — an identity, a description — so a tag may contain **anything except a comma**, colons included. That is what a URL and an RFC 3339 timestamp need. Whitespace around entries is trimmed, and a key may repeat.

6.2 They merge

```
curl -H 'Authorization: changeme' \
  'http://localhost:9999/w/feeds/ips?val=198.51.100.23&tags=stix-type:ipv4-addr'
curl -H 'Authorization: changeme' \
  'http://localhost:9999/w/feeds/ips?val=198.51.100.23&tags=tlp:amber'
```

The value now carries both. Two feeds that each know something different about an address both contribute, and neither erases the other.

Which means **a write can never take a tag off**. That is the management interface’s job:

```
curl -H 'Authorization: changeme' -H 'Content-Type: application/json' \
  -X POST http://localhost:9999/_management/api/tags \
  -d '{"namespace":"feeds/ips","value":"198.51.100.23","tags":"tlp:green"}'
```

That replaces the set outright. It is not a sighting: nothing is counted and no timestamp moves.

In a galaxy the replacement is pushed to every mirror as it is made, and the answer says which took it. A tag change is not a sighting, so nothing else would ever carry it. Chapter 9.

6.3 The vocabulary the export reads

Anything you like is kept, and these are the keys the STIX export understands:

Tag	What it does
<code>stix-type:<type></code>	The observable type, and so the pattern: <code>ipv4-addr</code> , <code>domain-name</code> , <code>url</code> , <code>email-addr</code> , <code>mutex</code> , <code>windows-registry-key</code> , or <code>file</code> . <code><ALGORITHM></code> for a hash.
<code>stix-id:indicator--<uuid></code>	Reuse this indicator id rather than minting one.
<code>indicator-type:<value></code>	Adds to <code>indicator_types</code> . Repeatable.
<code>tlp:<label></code>	Marks the indicator and the sighting with the TLP marking.
<code>confidence:<0-100></code>	STIX confidence on both objects.
<code>identity:<name></code>	Who saw it. Becomes an identity object. Repeatable.
<code>name:, description:</code>	Indicator name and description.
<code>valid-until:</code>	Indicator <code>valid_until</code> , as RFC 3339 or Unix seconds.

The MISP importer also writes `misp-type:`, `misp-category:`, `misp-event:` and MISP's own tags as they were published.

6.4 Colours, and what a tag means

The **Tags** page gives every tag a colour and a description, and that is what makes a marking readable at a glance instead of being grey text among twenty others.

It decides **presentation only**. A value can carry a tag nothing here defines and that is not an error — a feed brings what it brings, and refusing tags to keep a table tidy would lose data.

6.4.1 Families

A name ending in `:` is a family and colours everything beneath it:

```
stix-type:           colours stix-type:ipv4-addr, stix-type:domain-name, ...
misp-galaxy:         colours every MISP galaxy tag
```

Half the vocabulary above is `key:value` with an open set of values, which could not be enumerated even in principle. An exact entry beats its family, and the longest family wins. It is also the shape of a MISP machine tag — `namespace:predicate` — so a whole MISP taxonomy can be coloured by its namespace.

SightingDB / v0.7.1 Browse Tags Keys Galaxy Configuration Sign out

Tags 13 defined, 7 seen on values but not defined Filter Define a tag Refresh

Tag	Shown as	Colour	Used by	Description
confidence: family	confidence:example	 #0891b2	—	Confidence in the sighting, 0 to 100.
description: family, 7 seen not defined	description:example	 #6b7280	17	—
identity: family	identity:example	 #059669	—	Who reported the sighting.
indicator-type: family	indicator-type:example	 #2563eb	1	The STIX indicator type, such as malicious-activity.
misp-category: family	misp-category:example	 #d97706	31	The MISP attribute category imported.
misp-event: family	misp-event:example	 #d97706	31	The MISP event this came from.
misp-galaxy: family, 5 seen not defined	misp-galaxy:example	 #6b7280	155	—
misp-type: family	misp-type:example	 #d97706	31	The MISP attribute type imported.
needs-review not defined	needs-review	 #6b7280	1	—
osint:certainty="50" not defined	osint:certainty="50"	 #6b7280	31	—

Figure 6.1: The tag vocabulary. Families, usage counts, and tags seen but not defined.

6.4.2 What ships

A new installation starts with the five TLP 2.0 labels — `tlp:clear`, `tlp:green`, `tlp:amber`, `tlp:amber+strict`, `tlp:red` — plus `tlp:white`, which 2.0 renamed to `CLEAR`, because sources still send it. CIRCL's public OSINT feed tags its events `tlp:white` *and* `tlp:clear`, so a real import carries both; `WHITE` is given `CLEAR`'s colour, because that is what it means. A colour per family of SightingDB's own vocabulary comes with them.

The colours are MISP's own, from its `tlp` taxonomy, which follows FIRST's, so a tag exported to MISP and back looks the same in both.

Seeded, not insisted upon. Once there is a `tags_file` the table is yours: any of them can be recoloured or removed, and nothing puts them back.

```
curl -H 'Authorization: changeme' -H 'Content-Type: application/json' \
  -X POST http://localhost:9999/_management/api/tags/vocabulary \
  -d '{"name":"needs-review","colour":"#AA33CC","description":"Ours, not from a feed."}'
```

```
curl -H 'Authorization: changeme' -X DELETE \
  'http://localhost:9999/_management/api/tags/vocabulary?tag=needs-review'
```

Removing a colour **does not remove the tag from the values**. This is a presentation setting, and deleting data from a colour picker would be a trap — so the tag stays in the table, listed as undefined, for as long as anything carries it.

Changing the table needs an `admin` key, or one with `read` *and* `write` across all namespaces. A key that can already write any tag onto any value is not meaningfully restrained by being unable to say what colour it is shown in — but a key scoped to a subtree cannot, since the vocabulary

is server-wide and changing it would reach past that scope.

6.4.3 Tags found on values

The page lists tags nothing has defined, so adopting one is a click rather than a discovery. Those are **grouped where a key is being used as a free-text field**: MISP turns an attribute's comment into `description:<text>`, and real comments are paragraphs — a single imported CIRCL event produced seven rows of prose. A key with more than three distinct values is shown once, as its family, saying how many it stands for. Three or fewer keep their own rows, because that is a vocabulary rather than a free-text field, and giving every `tlp:` label one colour would defeat the point of a marking.

6.4.4 Typing one

The tag box completes what you are typing, offering tags already in use. It completes the entry after the last comma rather than the whole field, because the point is to type a tag the same way twice. A family is offered with its colon kept, leaving the cursor ready for the value.

6.5 Where tags show up

In `/r` and `/rs` responses, in the DNS TXT answer, in the STIX export, and everywhere a value appears in the interface.

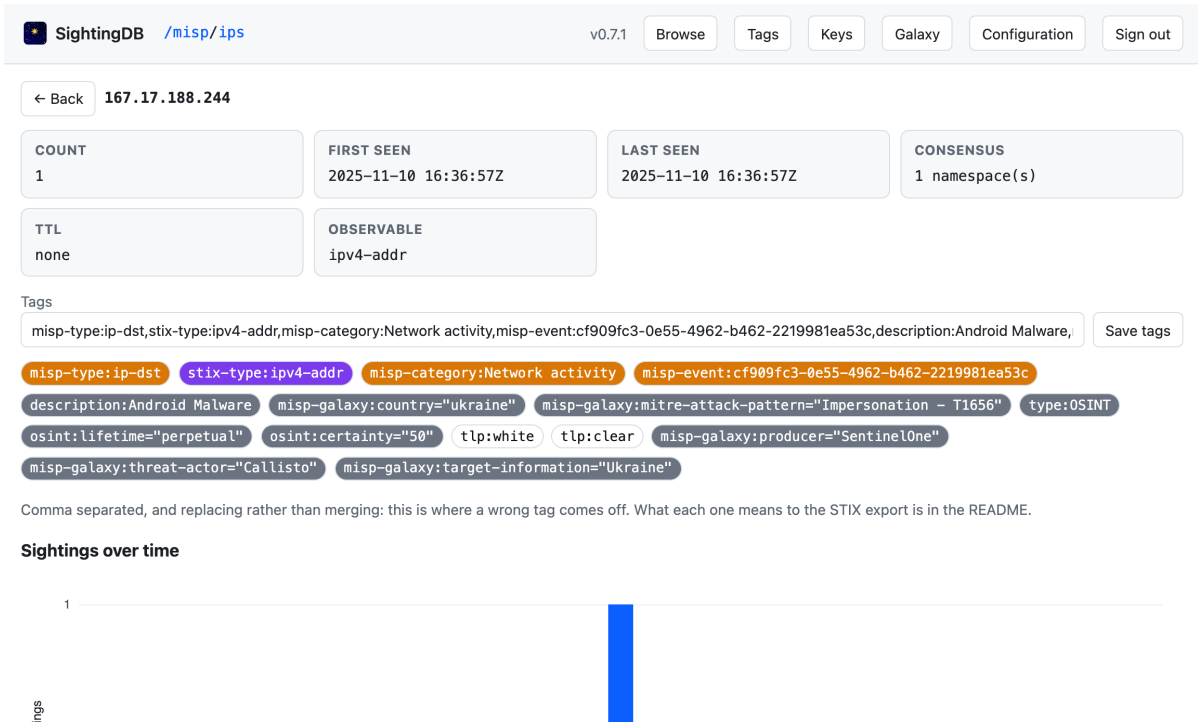


Figure 6.2: A value, its history and its tags.

The Python client

```
pip install sightingdb-client
```

Python 3.10 or newer. The source is at github.com/stricaud/sightingdb-client.

7.1 Connecting

```
from sightingdb import SightingDB

db = SightingDB(url="https://sightingdb.example:9999", apikey="changeme")
```

Or from the environment, which is what you want in anything scheduled:

```
export SIGHTINGDB_URL=https://sightingdb.example:9999
export SIGHTINGDB_APIKEY=changeme
```

```
db = SightingDB()
```

Or from `~/.config/sightingdb/client.toml`. `client.toml.example` in the repository is the template. For a self-signed certificate, `verify=False`.

7.2 Writing

```
db.write("feeds/misp/ips", "198.51.100.23")
```

Returns the new count. Timestamps and TTLs are `datetime` and `timedelta` rather than seconds, because that is what your code already has:

```
from datetime import datetime, timedelta, timezone

db.write("feeds/misp/ips", "203.0.113.7",
        timestamp=datetime(2026, 3, 1, tzinfo=timezone.utc),
        ttl=timedelta(days=30))
```

7.3 Writing a lot

One call per sighting is one HTTP request per sighting. For ingest, batch:

```
from sightingdb import Sighting

result = db.write_many([
    Sighting("feeds/misp/ips", "198.51.100.23", ttl=timedelta(days=7)),
    ("feeds/misp/ips", "203.0.113.7"),
    {"namespace": "feeds/misp/domains", "value": "login.phish.example"},
])

print(result.written, "written")
for failure in result.errors:
    print(failure.namespace, failure.value, failure.error)
```

Three shapes are accepted because three shapes are what callers have: a Sighting, a tuple, or the dict you already decoded from somewhere.

`strict=True` — the default — raises if anything was refused. `strict=False` returns the result and lets you decide, which is usually what a feed importer wants: one bad value out of fifty thousand should not stop the import.

For a stream that never ends, a batch flushes itself:

```
with db.batch(chunk_size=5000) as batch:
    for namespace, value in every_line_of_the_feed():
        batch.add(namespace, value)
```

7.4 Reading

```
seen = db.read("feeds/misp/ips", "198.51.100.23", shadow=False)

print(seen.count)
print(seen.first_seen_at, seen.last_seen_at)  # datetimes
print(seen.tags)
print(seen.consensus)
```

`shadow=False` is `noshadow` from chapter 5: it stops the read being recorded as a search. **Pass it whenever you are reading your own data**, and leave it alone when the read represents an analyst actually asking.

Hourly statistics on request:

```
seen = db.read("feeds/misp/ips", "198.51.100.23", stats=True, shadow=False)
for hour, count in seen.stats_by_hour.items():
    print(hour, count)
```

Many at once, positionally:

```
results = db.read_many([
    Sighting("feeds/misp/ips", "198.51.100.23", noshadow=True),
    Sighting("feeds/misp/ips", "203.0.113.99", noshadow=True),
])

for result in results:
    if result.found:
        print(result.value, result.count)
    else:
        print(result.value, "not seen")
```

And the question you will ask most:

```
if not db.exists("feeds/misp/ips", address, shadow=False):
    alert("first time we have ever seen this")
```

7.5 The rest

```
db.list_values("feeds/misp/ips", shadow=False) # every value, as Attributes
db.delete("feeds/misp/ips", missing_ok=True)   # the whole namespace
db.info()                                     # version, what it stores
db.ping()                                     # is it there
db.close()
```

SightingDB is a context manager, so with `SightingDB()` as `db`: closes the connection for you.

7.6 Asynchronously

AsyncSightingDB has the same API with `await`:

```
from sightingdb import AsyncSightingDB

async with AsyncSightingDB(url=..., apikey=...) as db:
    await db.write("feeds/misp/ips", "198.51.100.23")
    seen = await db.read("feeds/misp/ips", "198.51.100.23", shadow=False)
```

7.7 Talking to several servers

A client can point at a load balancer — chapter 8 — and nothing changes. It can also fan out itself, which is useful when you would rather not run one:

```
db = SightingDB(
    urls=["https://node-a.example:9999", "https://node-b.example:9999"],
```

```
    apikey="changeme",
)
```

Writes then go to **every** node and reads to **one**. Two things make that correct rather than merely parallel, and both are easy to get wrong.

A fanned-out write is attributed to its origin. SightingDB counts sightings per server so that merging two copies adds separate contributions rather than replaying increments. One write sent to two nodes would otherwise be counted by each under its own name, and when those nodes sync, three writes would become six. So the client names itself in a header and every node counts the write under that one name.

A value always reads from the same node. Nodes drift apart transiently while they catch up with each other, so two consecutive reads served by different nodes could show a count going *down*. The client picks the node by hashing the value, which also moves the fewest values when the node list changes.

```
db.fans_out      # True when there is more than one
db.urls          # what it is pointing at
```

With one URL none of this happens: no extra headers, no hashing. Pointing at one server behaves exactly as it did before any of this existed.

7.8 A worked example

Enrich a stream of addresses, recording each as seen and reporting the new ones:

```
from datetime import timedelta
from sightingdb import SightingDB, Sighting

with SightingDB() as db:
    addresses = [line.strip() for line in open("today.txt")]

    # One round trip to find out which are new...
    before = {
        result.value: result.found
        for result in db.read_many(
            [Sighting("myorg/proxy/ips", a, noshadow=True) for a in addresses]
        )
    }

    # ...and one to record them all.
    db.write_many(
        [Sighting("myorg/proxy/ips", a, ttl=timedelta(days=90)) for a in addresses],
        strict=False,
    )

    for address in addresses:
```

```
if not before.get(address):  
    print("first sighting:", address)
```

Two requests for the whole file, rather than two per address.

Galaxies

One server is a *node*. Several servers that know about each other are a *galaxy*. This chapter is what the pieces are; the next is running one.

8.1 Why more than one


Two reasons, and they want different shapes.

More clients than one server can answer. Put a server in front that stores nothing and forwards everything to mirrors behind it. Reads spread across the mirrors; writes go to all of them.

More data than one server should hold. Give each node a slice of the namespace tree. A node that holds only `feeds/misp` needs the disk for `feeds/misp` and nothing else.

Both are the same mechanism.

8.2 The three roles

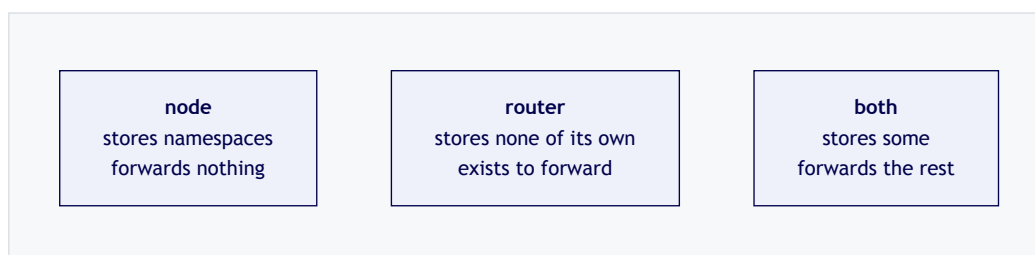


They describe a *configuration*, not a type. Any server can be any of them, and the only thing that decides which is `[storage]` namespaces:

namespaces	Role
absent	A node that stores everything — a full mirror.
<code>["feeds", "myorg"]</code>	A node that stores those subtrees — a partial mirror.
<code>[]</code>	A router. Stores nothing of its own.

Add `[galaxy]` peers and a node becomes “both”: it keeps what it holds and forwards what it

does not.

8.3 What a galaxy looks like

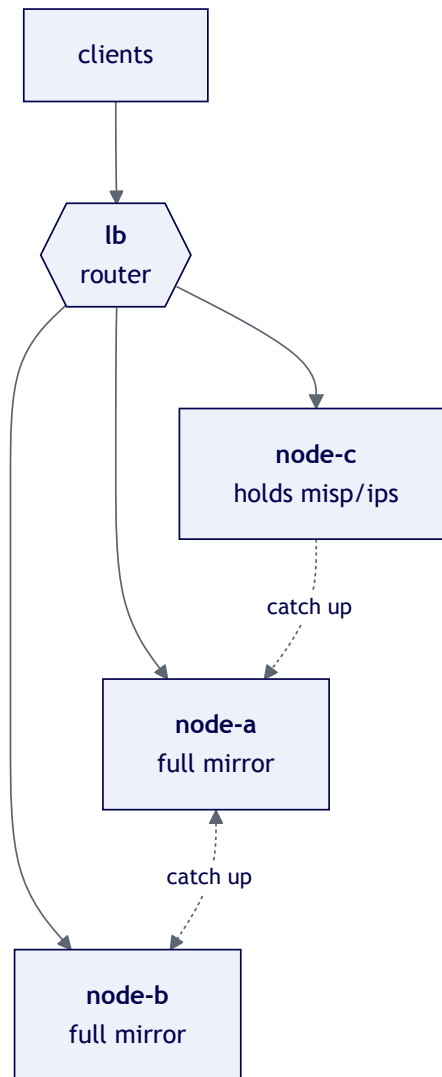


That is the sample in `doc/docker`. The load balancer is the entry point; clients talk only to it. Each node declares what it holds, and the load balancer is configured with the same declaration so it knows where a request can be served.

8.4 Forwarding

The rule is short:

- A write goes to every live mirror of its namespace.
- A read goes to one, chosen by hashing the value.

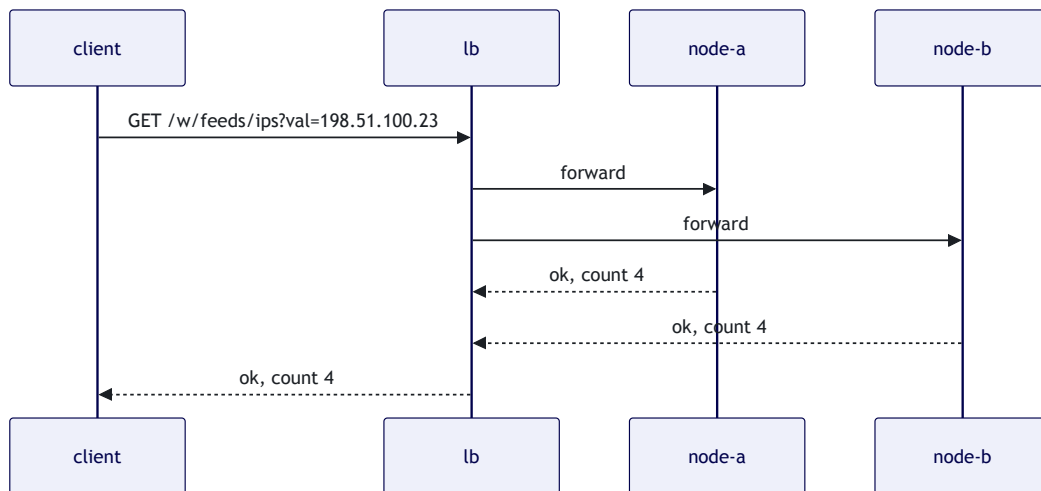

Writes must reach every mirror or the mirrors diverge. Reads must reach exactly one, and always the *same* one for a given value, for a reason worth stating: mirrors drift apart transiently while they catch up with each other, so two consecutive reads served by different mirrors could show a count going **down**.

The choice is made by hashing the value against each mirror's address and taking the highest — *rendezvous hashing*. Compared with picking a mirror by `hash(value) % n`, it moves the fewest values when a mirror is added or removed: `mod-n` reshuffles about 89% of values where 11% is the minimum. That was measured rather than assumed; `doc/sharding-experiment.py` reproduces it.

8.5 Counting, without inflating

Here is the problem that shapes everything else.

A write arrives at the load balancer and is forwarded to two mirrors. Each records a sighting. Later the mirrors sync with each other. If each counted the write as *its own*, the merge would add the two together and three writes would become six — and six again at the next merge.

So a **sighting is counted per server**:

```
{"counts": {"lb": 3}, "first_seen": ..., "last_seen": ...}
```

Both mirrors record `{"lb": 3}`, because the write is attributed to the entry point the client actually reached and not to whichever mirror stored it. Merging two copies takes the greater value for each server, so two mirrors that already agree change nothing. The total you read is the sum.

That single decision is what makes every other piece safe: merges can be retried, they can arrive in any order, and a mirror can be synced twice with no effect.

This is why `node_id` must be unique. Two servers sharing a name each take the other's contributions for their own, and the merge meant to reconcile them discards one side instead.


8.6 Consensus across a galaxy

`consensus` — how many namespaces have seen a value — cannot be answered by any single node, because no node has all the namespaces. The router keeps the tally itself: when a mirror says a sighting was *new there*, the router counts it.

That number only ever rises on its own, because values expire and namespaces are deleted on the nodes and neither reaches the router. So a router surveys its galaxy on a timer and puts the tally right. It is a repair, not a steady cost: the incremental tally answers reads in between.

8.7 Catching up

A node that was down missed whatever was written while it was away. On a timer it asks each peer what it holds, compares, and pulls what it is missing.

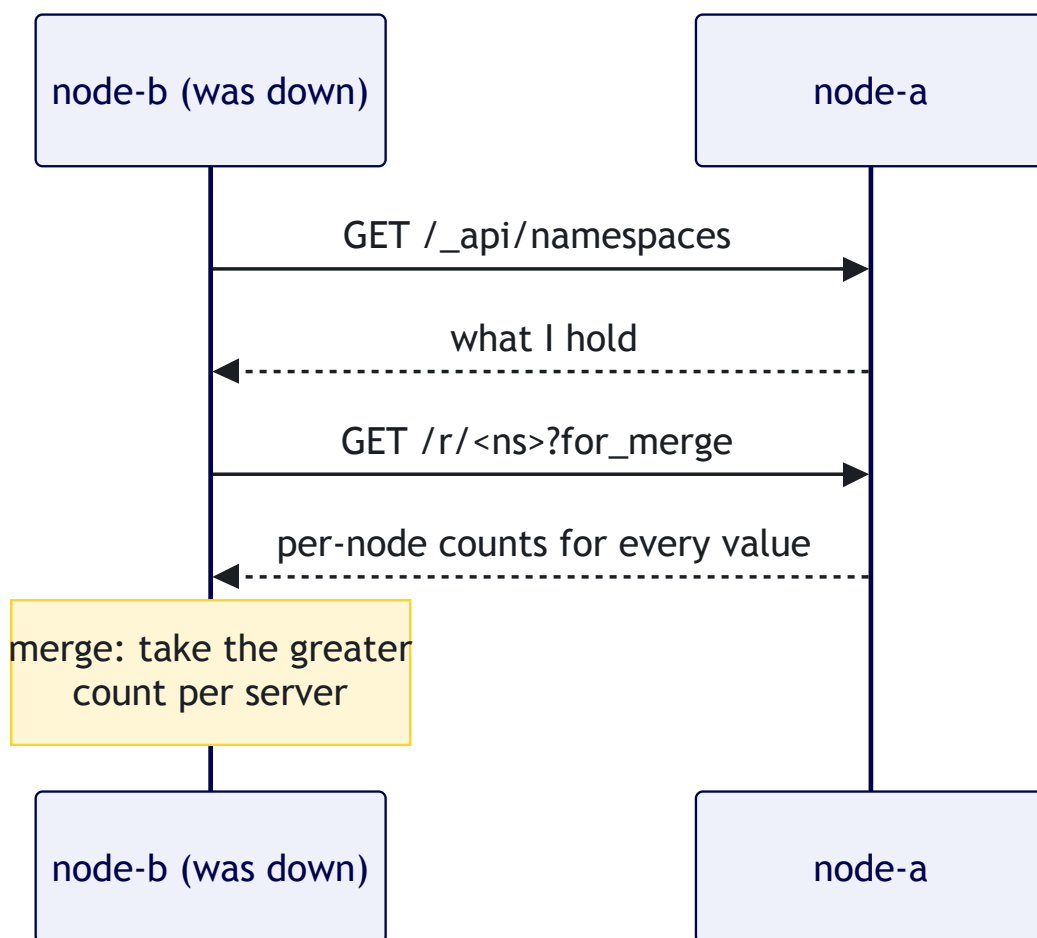


It only ever pulls namespaces it stores itself, so a partial mirror stays partial.

While a node is catching up it says so, and **the router sends reads elsewhere** until it is done — which is what makes a backfill invisible rather than a window of wrong answers. Writes keep going to it throughout: they land directly, and the catch-up fills in the history behind them.

8.8 Cascades

A peer may itself be a router, so a galaxy can be a tree:

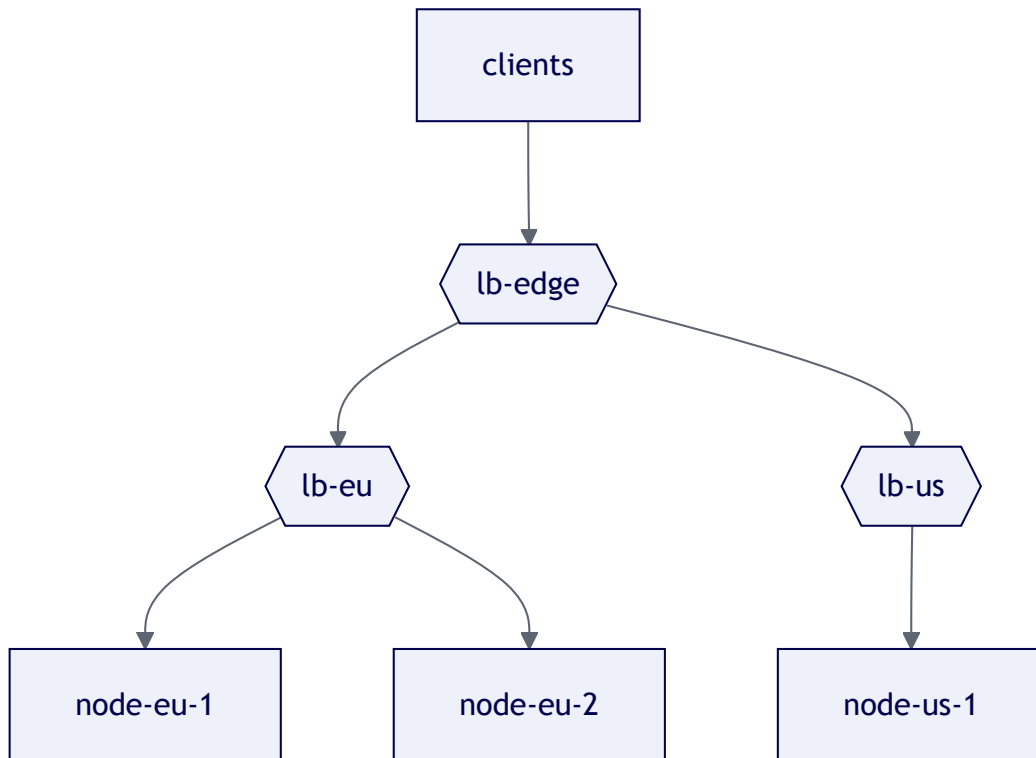

A forwarded request carries a hop count, spent at every hop and refused at zero. That is what stops a miswired cycle — and a cycle matters more here than usual, because a request going round one would inflate every count it carried. A request that runs out of hops answers 508 Loop Detected.

A cascade also **preserves the entry point**: a write forwarded twice is still counted once, for the server the client actually reached.

8.9 Keys are the boundary

Every peer entry carries the key *this* server authenticates to that peer with:

```

peers = [
  { url = "https://node-a:9999", key = "lb-full" },
  { url = "https://node-c:9999", key = "lb-ips", namespaces = ["misp/ips"] },
]

```

Those keys live in the **peers'** ACLs, and it is the peer that enforces them. Give the load balancer `rw:misp/ips` on node-c and it cannot write anywhere else there — however it is configured, and however it is compromised. That is not a policy the load balancer applies to itself; it is a capability it does not hold.

Give a peer key the narrowest grant that does the job, and never `admin`: nothing in forwarding needs it.

One consequence worth knowing: the galaxy *graph* asks each peer about its own peers, and that needs `admin` there. With narrow keys the graph draws this server's peers from

its own configuration instead, labelled “as configured here”. That is the right trade, not a bug.

8.10 When nothing holds it

Answer	Means
404	The namespace exists somewhere in reach, and the value is not in it.
421	No server in reach stores that namespace at all.
502	A mirror that holds it could not be reached.
508	The request ran out of hops.

Three different answers, and only 502 is worth retrying. Collapsing them into 404 — which is what an earlier version did — makes “the server that has it is down” indistinguishable from “there is no such thing”.

Running a galaxy

Chapter 8 was what the pieces are. This is building one, changing it, and taking parts of it out of service.

9.1 Build one in four containers

The fastest way to see all of it:

```
docker compose -f doc/docker/docker-compose.yml up --build
```

A load balancer on 9999 and three nodes on 9991–9993, two full mirrors and one holding a single namespace, loaded with real indicators from CIRCL's public OSINT feed. `doc/docker/README.md` lists things to try. The rest of this chapter is what it is doing.

9.2 Adding a node

A load balancer takes a new node over HTTP, and starts using it at once — no restart, which matters because restarting a router is a gap in service for everything behind it.

First, on the new node, create the key the load balancer will use. It is the node's own ACL that decides what that key opens, so make it the narrowest thing that works:

```
curl -H 'Authorization: <node admin key>' \
  -X POST https://new-node.example:9999/_management/api/keys \
  -H 'Content-Type: application/json' \
  -d '{"key": "lb-to-new-node", "admin": false,
      "read": [""], "write": [""]}'
```

`read` and `write` are lists of namespace prefixes and `""` means all of them, so that is read and write everywhere — what a full mirror needs. For a node that only holds feeds, name it and the key cannot reach past it:

```
-d '{"key": "lb-to-feeds", "admin": false,
    "read": ["feeds"], "write": ["feeds"]}'
```

Then, on the load balancer, add the peer:

```
curl -H 'Authorization: <lb admin key>' \
  -X POST https://lb.example:9999/_management/api/galaxy/peers \
  -H 'Content-Type: application/json' \
  -d '{"url": "https://new-node.example:9999", "key": "lb-to-new-node"}'
```

Leave namespaces out for a full mirror; name them for a partial one. It must agree with the node's own [storage] namespaces.

The answer is the whole peer list, so nothing else has to be fetched. The same thing is a form on the **Galaxy** page.

This needs a `peers_file` in [galaxy]. Without one the galaxy is read-only over the API, and the page says so rather than letting a save fail.

9.2.1 The node does not have to be up

A mirror that is down must still be addable, or a galaxy could not be rebuilt after whatever took it down. It is shown offline until it answers.

9.2.2 Give the new node peers of its own

This is the part that is easy to miss, and it is measured rather than theoretical.

A new node starts **empty**. From the moment it is added, writes fan out to it — but reads are spread by hashing, so a share of reads goes to a node that does not have the history yet. With twenty values on an existing node and an empty node added beside it:

```
reads through the load balancer after adding the empty node: 13/20 now MISS
```

Thirteen values that are in the galaxy, reported absent. And it does not heal: the node has no way to know what it is missing.

The fix is to give the new node a [galaxy] section naming at least one existing node, and a non-zero `sync_interval`:

```
[galaxy]
sync_interval = 300
peers = [
  { url = "https://node-a.example:9999", key = "new-node-to-node-a" },
]
```

It then asks that node what it holds, compares, and pulls what it is missing. While it does, it reports `catching_up` and the load balancer sends reads elsewhere. With that in place, the same test:

```
right after it starts    node-d: holds=['feeds/ips']  misses=0/20
```

The key for *that* direction is read-only — pulling is a read, and a node catching up has no business writing on the node it pulls from:

```
-d '{"key": "new-node-to-node-a", "admin": false,
    "read": [], "write": []}'
```

A node with no [galaxy] at all never reports catching up, because it has nothing to catch up from. That is a valid configuration — a node that only ever holds what arrives from now on — as long as it is the one you meant.

9.3 Changing one

Rotating a key, or changing what a node holds, is PUT:

```
curl -H 'Authorization: <lb admin key>' \
  -X PUT https://lb.example:9999/_management/api/galaxy/peers \
  -H 'Content-Type: application/json' \
  -d '{"url": "https://new-node.example:9999", "key": "a-rotated-key}"'
```

Adding and changing are separate verbs on purpose. An upsert would mean that typing an address that already exists silently replaces its key, and that key is the one thing bounding what the load balancer may do there. POST on an address already present answers 409; PUT on one that is absent answers 404.

The key is required even when only namespaces changes, because it is never read back: a peer key is a credential this server holds, and a topology view is not a reason to hand it out.

9.4 Taking one out of service

```
curl -H 'Authorization: <lb admin key>' \
  -X POST https://lb.example:9999/_management/api/galaxy/peers/enabled \
  -H 'Content-Type: application/json' \
  -d '{"url": "https://node-b.example:9999", "enabled": false}'
```

The peer is **kept** — address, key, what it holds — and this server sends it nothing at all: no forwarded request, no catch-up, no gossip, not even a health probe. For a node going down for maintenance, or one you want to stop sending data to without having to find its key again to put it back. Disable and Enable on the Galaxy page are the same call.

It survives a restart, because it is written to the `peers_file`:

```
[[peers]]
url = "https://node-b.example:9999"
key = "lb-full"
enabled = false
```

A namespace only that peer held is out of reach while it is off, and reads of it answer 421. That is what taking a node out of service means rather than a side effect of it — check the `Holds` column before you disable something.

Rotating a key leaves a peer disabled if it was. Two different decisions.

9.5 Removing one

```
curl -H 'Authorization: <lb admin key>' -X DELETE \
  'https://lb.example:9999/_management/api/galaxy/peers?url=https%3A%2F%2Fnode-b.example%3A9999'
```

Nothing stored on the node is deleted; this server stops using it. Its health is forgotten with it, so re-adding the same address starts unprobed rather than inheriting a stale “offline”.

9.6 What you cannot change over the API

A peer written into [galaxy] peers in the configuration file:

```
{
  "message": "https://node-a.example:9999 is declared in the configuration file,
  so removing it here would not last: it would come back at the next restart.
  Remove it from [galaxy] peers instead."
}
```

That file is yours and the program does not rewrite it, so a change made here would be undone by the next restart. Either edit it, or move the peer out of it so the API owns it. `sightingdb --setup` writes a live `[galaxy]` section with a `peers_file` and no peers in it, which is a valid galaxy and the easier starting point.

9.7 Watching it

```
curl -H 'Authorization: changeme' \
  https://lb.example:9999/_management/api/galaxy/peers
```

```
{
  "peers": [
    {
      "url": "https://node-a:9999",
      "namespaces": null,
      "fixed": false,
      "enabled": true,
      "health": {
        "online": true,
        "probed": true,
        "last_seen": 1791678296,
        "latency_ms": 1,
        "version": "0.7.1",
        "error": null,
        "failures": 0,
        "catching_up": false
      }
    }
  ],
  "editable": true
}
```

probed: false with online: false means “not asked yet”, which is not the same as down. last_seen is when this server last got a health reply from that peer — nothing to do with a value’s own last_seen, which is why the interface calls the column **Last answered**.

The graph colours a full mirror, a partial mirror and a router differently, and red for a server that is not answering. `GET /_management/api/galaxy` walks the peers, so one request describes a whole cascade.

9.8 Keys across a galaxy

Each server has its own ACL, and the **Keys** page shows the ACL of the server you are connected to and nothing else. The keys a *node* accepts live on that node.

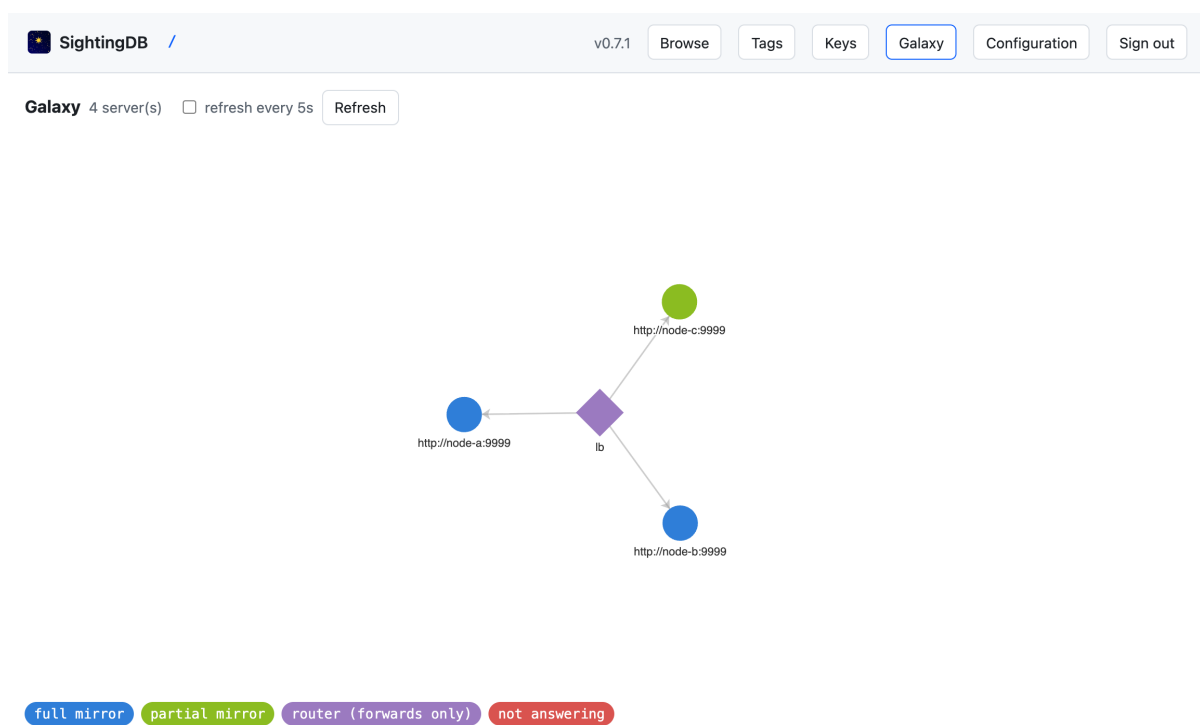


Figure 9.1: The galaxy, and the peers under it.

Two optional mechanisms connect them:

- `gossip_interval` pushes this server's keys to its peers, so a peer that was down for a key change picks it up. The push goes through the peer's own management interface, so the peer's ACL decides — this server can only administer a peer it holds an `admin` key for. The offer is *additive*: a revocation made while a peer was down does not reach it this way.
- `acl_authority` and `acl_replaceable` are the answer to that. Set `acl_authority` on the server that owns the galaxy's keys and `acl_replaceable` on each server that accepts them, and the owner's offer becomes the whole list, to be held exactly — which *does* remove. Both ends must agree, so a server with `acl_replaceable` off keeps its own keys and nothing is lost by not opting in. Setting both on one server is refused at startup: they would take turns overwriting each other.

GET `/_management/api/keys/drift` shows where a server's keys and its peers' disagree. It needs `admin` on the peer key, which a deliberately narrow peer key does not have — in which case it says so, which is a correct answer rather than a failure.

9.9 A checklist

Before a node joins:

- It has its **own** `node_id`. Nothing else in this chapter works if two servers share one.
- Its `[storage]` namespaces matches what the load balancer declares for it.
- It has a key for the load balancer, scoped to what that load balancer should reach.
- It has `[galaxy]` peers and a `sync_interval` of its own, so it backfills.
- The load balancer has a `peers_file`, so the addition survives a restart.

The management interface

`https://your-server:9999/_management`, with a key holding admin. On a fresh install that is changeme, and changing it is the first thing to do.

It is one page — markup and script in a single file compiled into the binary — so there is nothing to deploy and nothing to keep in step with the server.

10.1 Browsing

The screenshot shows the SightingDB management interface. At the top, there's a header with the SightingDB logo, version v0.7.1, and navigation buttons: Browse, Tags, Keys, Galaxy, Configuration, and Sign out. Below the header, there's a sub-header with an 'Up' button, a 'Filter this level' input, a search checkbox labeled 'search everywhere 1-2 of 2', and buttons for 'New namespace', 'Add values', 'Export STIX', 'Previous', and 'Next'. The main content is a table with four columns: Name, Holds, In memory, and Tier. The table lists two namespaces: 'misp/' and 'watchlist/'. The 'misp/' namespace has 5 items below it, is in memory, and has a tier of 'hot' with a dropdown menu showing 'misp'. The 'watchlist/' namespace has 1 item below it, is in memory, and has a tier of 'hot' with a dropdown menu showing 'watchlist'. Below the table, there's a detailed explanation of namespaces and tiers.

Name	Holds	In memory	Tier
misp/	5 below	yes	hot ▼ misp
watchlist/	1 below	yes	hot ▼ watchlist

A namespace is a path, so feeds/misp/ips browses like folders: **folder** means other namespaces sit underneath it, **namespace** means it holds values of its own, and a path can be both. **hot** stays in memory; **warm** is written out and dropped once untouched for the seconds beside it; **cold** is dropped at the next sweep. Evicted data is read back automatically when it is next used. Storage settings belong to the whole top-level namespace, named after the control, because that is one file paged in and out as a unit — changing them for myorg/one changes myorg and everything under it. A window shown greyed is the configured default; type over it to give this one its own.

Figure 10.1: A namespace is a path, so it browses like folders.

folder means other namespaces sit underneath it, **namespace** means it holds values of its own, and a path can be both. The storage column is from chapter 4: **hot** stays in memory, **warm** is written out after the seconds beside it, **cold** goes at the next sweep. Those settings belong to the whole top-level namespace, because that is one file paged in and out as a unit — which the page says out loud when you change one.

10.2 Values

The **Observable** column is what the STIX export will call each value, sitting next to the tags that decide it — on purpose, because the column that tells you a value has no observable type is next to the one you fix it in.

Tags are editable in place, and the box completes what you type from tags already in use.

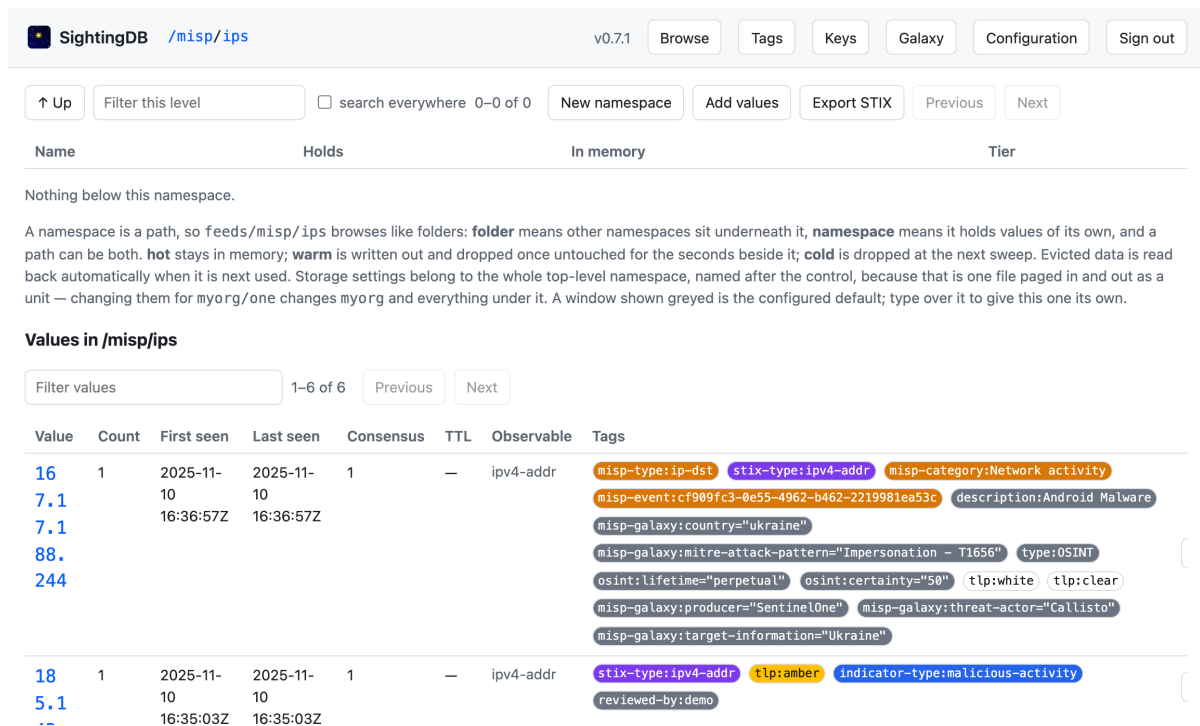


Figure 10.2: The values in a namespace, with what the export will make of them.

10.3 One value

The histogram is the hourly statistics from /rs. **Consensus** is how many namespaces have seen this value at all, and the list below says which — the answer to “is this just my proxy, or is it in three feeds as well?”.

10.4 Tags

Chapter 6 is this page in full.

10.5 Galaxy

The graph is drawn from one request that walks the whole cascade. Below it, the peers table is where a node is added, re-keyed, disabled or removed — chapter 9.

Note what Last answered means: when this server last got a health reply from that peer. It is about the server, not about any value.

10.6 Keys

Create, scope and revoke. The guard rails refuse any change that would leave no admin key at all, by demotion or by deletion — there is no way to lock yourself out from this page.

Keys are per server. This page shows the ACL of the server you are connected to; the keys a node accepts live on that node. See chapter 9 for the two mechanisms that connect them.

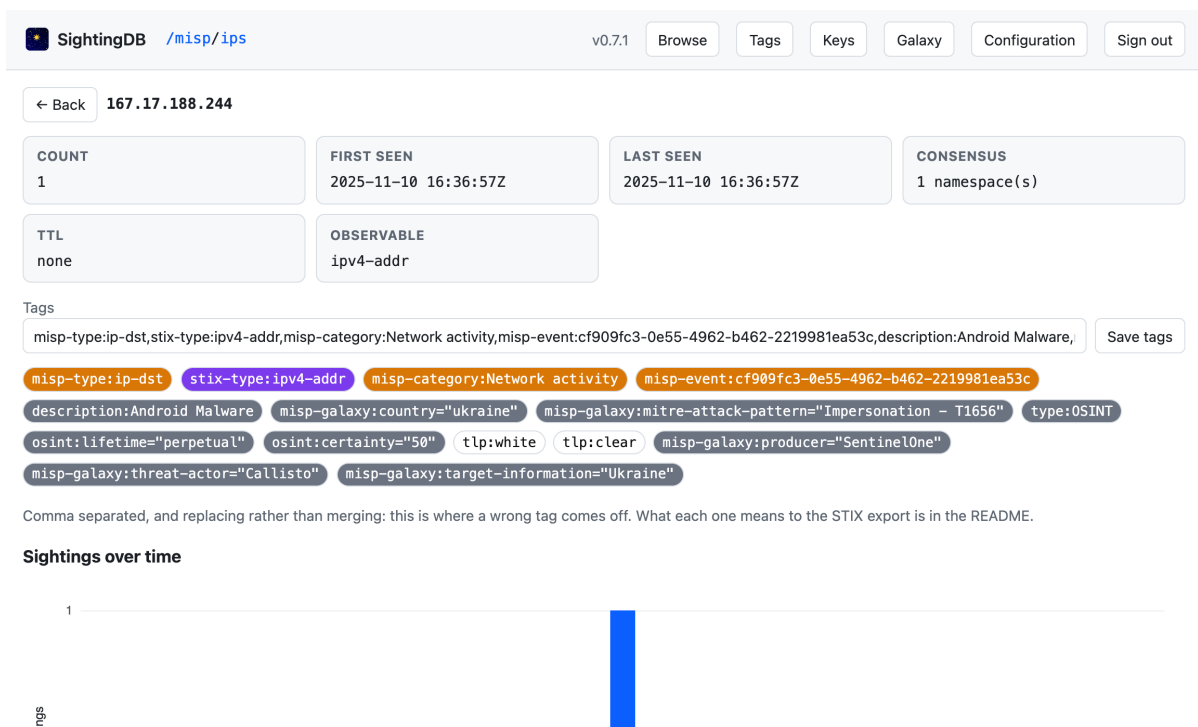


Figure 10.3: One value: its history, its tags, and where else it has been seen.

SightingDB / v0.7.1 Browse Tags Keys Galaxy Configuration Sign out

Tags 13 defined, 7 seen on values but not defined Filter Define a tag Refresh

Tag	Shown as	Colour	Used by	Description
confidence: family	confidence:example	#0891b2	—	Confidence in the sighting, 0 to 100.
description: family, 7 seen not defined	description:example	#6b7280	17	—
identity: family	identity:example	#059669	—	Who reported the sighting.
indicator-type: family	indicator-type:example	#2563eb	1	The STIX indicator type, such as malicious-activity.
misp-category: family	misp-category:example	#d97706	31	The MISP attribute category imported.
misp-event: family	misp-event:example	#d97706	31	The MISP event this came from.
misp-galaxy: family, 5 seen not defined	misp-galaxy:example	#6b7280	155	—
misp-type: family	misp-type:example	#d97706	31	The MISP attribute type imported.
needs-review not defined	needs-review	#6b7280	1	—
osint:certainty="50" not defined	osint:certainty="50"	—	31	—

Figure 10.4: The vocabulary: colours, what each tag means, and what is in use.

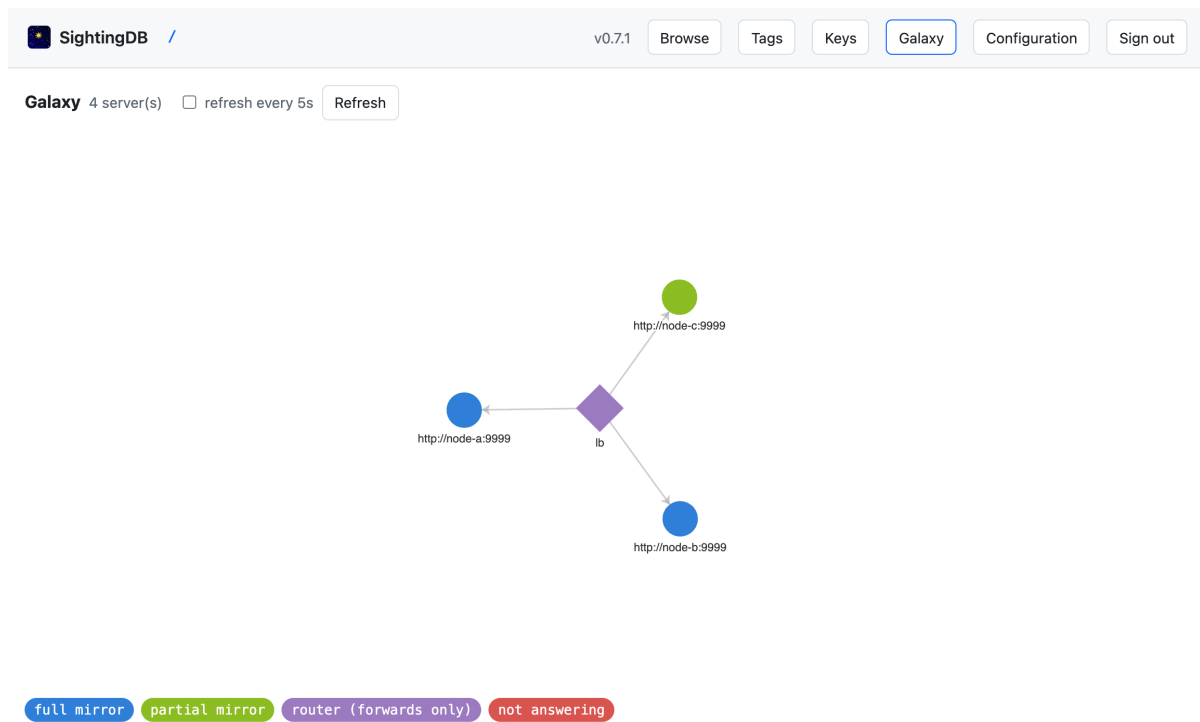


Figure 10.5: The galaxy, and the peers under it.

SightingDB / v0.7.1 Browse Tags **Keys** Galaxy Configuration Sign out

New key 3 key(s), 1 with management access

API key	Admin	Read	Write	
demo	yes	all namespaces	all namespaces	Edit Revoke
lb-full	—	all namespaces	all namespaces	Edit Revoke
peer-full	—	all namespaces	—	Edit Revoke

Figure 10.6: What each key may reach.

10.7 Configuration

Read-only, and says so: it is what the server read at startup. Everything on it comes from `sightingdb.toml`, which this program does not rewrite.

The exceptions are the four machine-owned files from chapter 4 — keys, tiers, tag colours and peers — each edited on its own page.

It also shows the TLS certificate’s expiry, and says **about to expire** when there are fewer than 30 days left. A certificate that quietly lapses takes a galaxy with it, since peers stop being able to authenticate to each other.

10.8 Exporting

Export STIX on a namespace asks two things before it runs: whether to include the sub-namespaces beneath it, and what to do with values whose observable type could not be worked out — leave them out, or export them flagged as untyped. Chapter 11.

10.9 Rejections

Every write path records what it turned away, newest first, including the ZMQ ingest which has no caller of its own to tell. It is the answer to “the feed says it sent fifty thousand and I have forty-nine”.

It is bounded and in memory: a record kept to make something visible, not a fact about the data.

10.10 A note on caching

The page is served with `Cache-Control: no-cache`, so a browser revalidates it every time. It is the whole application in one file, and a cached copy means a browser running the previous version’s JavaScript against this version’s API — which looks like the server being wrong rather than the page being old.

If you ever see an interface that disagrees with the API, reload it once.

STIX and MISP

Chapter 1 made the claim that SightingDB stores exactly what a STIX sighting is. This is the chapter where that pays.

11.1 Exporting STIX 2.1

```
curl -H 'Authorization: changeme' \
  'http://localhost:9999/stix/feeds/misp/ips' > bundle.json
```

A namespace becomes a bundle shaped after the OASIS *Sighting of an Indicator* example: for each value an indicator carrying the pattern, and a sighting that refers to it with the count and the window.

```
{
  "type": "bundle", "id": "bundle--...", "objects": [
    {
      "type": "identity", "id": "identity--...", "name": "SightingDB", ...
    },
    {
      "type": "indicator", "id": "indicator--...",
      "pattern": "[ipv4-addr:value = '198.51.100.23']", "pattern_type": "stix",
      "object_marking_refs": ["marking-definition--..."], ...
    },
    {
      "type": "sighting", "id": "sighting--...",
      "count": 5, "first_seen": "...", "last_seen": "...",
      "sighting_of_ref": "indicator--...",
      "where_sighted_refs": ["identity--..."],
      "x_sightingdb_namespace": "feeds/misp/ips",
      "type": "marking-definition", "name": "TLP:AMBER", ...
    }
  ]
}
```

The namespace travels as `x_sightingdb_namespace`, which is a custom property and so carries the `x_` prefix the specification requires.

11.1.1 Ids are derived, not minted

Every id is a UUIDv5 over a fixed namespace UUID and what the object describes. Two consequences, both useful:

- Exporting the same data twice produces a **byte-identical** bundle, so an export can be diffed, cached, or published on a schedule without looking like it changed.
- One value in two namespaces yields **one indicator with two sightings**, because the indicator's id depends on the value and the sightings' on the namespace.

11.1.2 What decides the pattern

An indicator is a pattern, and there is no pattern without a type. The type is resolved in this order:

1. A `stix-type`: tag on the value.
2. The `[stix.types]` mapping for the namespace, read backwards.
3. The shape of the value itself.

A value that none of those identify is **skipped** and counted in `X-SightingDB-Skipped`, never guessed at. If you would rather have it, ask:

```
curl -H 'Authorization: changeme' \
      'http://localhost:9999/stix/feeds/misp/ips?untyped=include'
```

Those go out as a custom observable type, flagged, so a consumer can tell them from a value whose type is actually known.

11.1.3 Headers say what you got

Header	Meaning
X-SightingDB-Exported	Values in the bundle.
X-SightingDB-Skipped	Values left out for having no observable type.
X-SightingDB-Untyped	Of those exported, how many went out untyped.
X-SightingDB-Namespaces	How many namespaces contributed.
X-SightingDB-Truncated	The namespace holds more than <code>limit</code> allowed.
X-SightingDB-Missing	Namespaces asked for that do not exist.

A bundle that quietly dropped a third of a namespace would be worse than one that refused, so it says.

11.1.4 A subtree, or several namespaces

```
curl -H 'Authorization: changeme' \
      'http://localhost:9999/stix/feeds?recursive'
```

```
curl -H 'Authorization: changeme' -H 'Content-Type: application/json' \
      -X POST http://localhost:9999/_api/stix \
      -d '{"namespaces":["feeds/misp/ips","watchlist/ips"],"q":"198.51","limit":500}'
```

Through a load balancer, each namespace is exported by the mirror that holds it and the bundles are folded into one. The result is byte-identical to what a single server holding all of them would produce — the derived ids make the merge a deduplication rather than a reconciliation.

11.1.5 Configuring who you are

```
[stix]
identity = "Beta Cyber Intelligence Company"
identity_class = "organization"

[stix.types]
"feeds/misp/ips" = "ipv4-addr"
"feeds/misp/domains" = "domain-name"
"feeds/misp/hashes" = "file.SHA-256"
```

identity is who the bundle is published by and who the sightings are attributed to when no identity: tag says otherwise. [stix.types] saves tagging every value in a namespace that only ever holds one kind of thing.

Verify changes against the OASIS library rather than by eye: `pip install stix2`, then `stix2.parse(raw, allow_custom=True, version="2.1")`. `allow_custom` is needed only for `x_sightingdb_namespace`.

11.2 Importing STIX

```
sightingdb --import-stix ./bundles/
```

A file or a directory. It loads, writes, saves and exits — no listeners start, so it is safe to run against a server's data directory while that server is stopped.

A STIX sighting's count is honoured, and its `first_seen/last_seen` become the window: the first write lands at `first_seen` and the rest at `last_seen`, so both ends survive. Tags are written from what the bundle says — the observable type, the markings, who published it — which is what makes an import and then an export round-trip.

11.3 Importing from MISP

MISP publishes over ZMQ, and SightingDB subscribes:

```
[zmq]
url = "tcp://misp.example:50000"
format = "misp"
default_namespace = "misp/other"
require_to_ids = false

[zmq.types]
ip-src = "misp/ips"
ip-dst = "misp/ips"
domain = "misp/domains"
hostname = "misp/domains"
```

```
url = "misp/urls"
md5 = "misp/hashes"
sha256 = "misp/hashes"
```

Attributes are read from single-attribute publications and from whole events, including attributes nested inside objects — which is where most of a modern MISP event’s attributes live. Only mapped types are ingested unless `default_namespace` is set, and `require_to_ids = true` limits ingest to attributes MISP flagged as actionable.

MISP’s timestamps are preserved, so a replayed event does not claim to have been seen today.

11.3.1 What becomes a tag

Tag	From
<code>misp-type:</code>	The attribute type, as published.
<code>stix-type:</code>	Translated from it, where there is a one-to-one mapping.
<code>misp-category:</code>	The attribute’s category.
<code>misp-event:</code>	The event it came from.
<code>description:</code>	The attribute’s comment, if it has one.
<i>everything else</i>	MISP’s own tags, carried across as published.

MISP’s tags are already `namespace:predicate` shaped — `tlp:amber`, `misp-galaxy:threat-actor="Callisto"` — so they come across unchanged, which is what makes `tlp:` work end to end.

Tags on the event are inherited by its attributes. MISP keeps the TLP marking on the event, and reading attribute tags alone would lose it: a sighting from a `tlp:amber` event would arrive unmarked and export unmarked, which is the one kind of loss here that could mislead someone about how a value may be shared.

Where the two contradict each other the attribute wins and the event’s is dropped rather than added beside it — a value tagged both `tlp:amber` and `tlp:white` says nothing useful. That applies only to taxonomies where one value can be true at a time, which today means `tlp:`; most are genuinely multi-valued, so an event and an attribute can each contribute a `misp-galaxy:` tag and both are kept.

11.4 A feed to try it with

CIRCL publish a public MISP OSINT feed at <https://www.circl.lu/doc/misp/feed-osint/>. The galaxy sample in `doc/docker` is loaded from one of its events, converted by `doc/docker/fetch-demo-data.py` into the shape this ingest produces — same namespaces, same tags. It is a useful thing to read if you are writing an importer of your own.

Two cautions if you take data from it yourself. The feed is **not uniformly public**: most events are `tlp:white` or `tlp:clear`, but some are `tlp:green` and a few carry no marking at all, and `tlp:green` means the community rather than the world. And it states **no licence** — TLP is a handling designation, not a copyright grant. The script that converts it refuses anything not

marked for unrestricted sharing for exactly that reason.

Operations

12.1 Is it alive

```
curl -fsS http://localhost:9999/health
```

```
{"status": "ok", "version": "0.7.1", "uptime_seconds": 864,
  "resident_shards": 4, "shards": 7, "catching_up": false}
```

No key, which is what makes it usable as a container healthcheck and a load balancer probe. `resident_shards` against `shards` is how much of the database is in memory; `catching_up` is true while a node is pulling what it missed.

12.2 Where the data is

Everything lives in memory and is written to `dbdir` as compressed JSON, one file per top-level namespace, every `snapshot_interval` seconds and once more on a clean shutdown.

That shape is the reason `dbdir` matters so much: **without it, nothing survives a restart**. The server will start, work perfectly, and lose everything when it stops.

A snapshot that exists but cannot be read is fatal at startup rather than ignored. Starting empty would look like catastrophic data loss, and the next save would make it real.

Snapshots carry a format version and are migrated forward on load, so an upgrade reads what the previous version wrote. The migration happens in memory and lands on disk at the next save.

12.3 What stays in memory

Chapter 4 has the settings; this is what to do with them.

A top-level namespace is the unit. `hot` keeps it in memory, `warm` writes it out and drops it after `warm_idle` seconds untouched, `cold` drops it at the next sweep. Evicted data is **read back when it is next used**, so `cold` costs one load per burst of activity rather than one per operation.

```
curl -H 'Authorization: changeme' -X POST http://localhost:9999/_api/tier \
  -H 'Content-Type: application/json' \
  -d '{"namespace":"archive","tier":"warm","warm_idle":86400}'
```

```
{"shard":"archive","tier":"warm","warm_idle":86400,
  "own_tier":true,"own_warm_idle":true,
  "effect":"'archive' and everything under it is dropped after 86400s untouched"}
```

The reply says the effect out loud, because a change made from a row deep in a tree is a change to everything beside it. Either field takes "default" to stop overriding.

A rough guide: feeds you enrich against are *hot*; feeds you keep for history are *warm* with a long window; anything you query a few times a month is *cold*.

12.4 Expiring data

A `t1` on a write is how long the value stays visible. The sweep removes what has expired, every `sweep_interval` seconds, and gives back the consensus those values were holding.

Shadow sightings — the record of what was searched for — have their own `shadow_ttl`, 30 days by default, because “what did people look up” is interesting for a while and not forever.

12.5 What was refused

```
curl -H 'Authorization: changeme' \
  'http://localhost:9999/_management/api/rejections'
```

Newest first, from every write path including the ZMQ ingest, which has no caller of its own to tell. This is the answer to “the feed says it sent fifty thousand and I have forty-nine thousand”.

Bounded and in memory. A record kept to make something visible, not a fact about the data.

12.6 Certificates

```
[daemon]
ssl = true
ssl_cert = "/etc/sightingdb/tls/cert.pem"
ssl_key = "/etc/sightingdb/tls/key.pem"
```

`sightingdb --install-selfsigned-keys` writes a pair at those paths for getting started. The Configuration page shows the expiry and warns at 30 days.

That warning matters more in a galaxy than it looks: when a certificate lapses, peers stop being able to authenticate to each other, and a galaxy comes apart without any one server failing. For a galaxy of self-signed instances — which is what `--setup` produces — set `verify_tls = false` in `[galaxy]` and understand what you have chosen.

12.7 Logs

`log_out` and `log_err` in `[daemon]`, or `stdout` and `stderr` in a container. Every line is timestamped, including panics, which is worth knowing because a crash with no timestamp is hard to line up against anything else.

For more control, `-1` takes a `log4rs` configuration.

12.8 Backing up

Stop the server, or take the snapshot directory while it runs and accept that you get the last snapshot rather than the current state — up to `snapshot_interval` behind. The files are self-contained; copying `dbdir` copies the database.

The machine-owned files from chapter 4 — `acl.toml`, `tiers.toml`, `tags.toml`, `peers.toml` — are small, change rarely, and are worth having in the same backup. The keys in particular: a galaxy whose load balancer has lost its `peers.toml` has lost the credentials it reaches its nodes with.

12.9 Upgrading

One binary. Stop it, replace it, start it. Snapshots migrate forward on load, and the configuration you have keeps working — new settings have defaults that preserve the previous behaviour.

In a galaxy, upgrade the nodes before the routers. A galaxy running mixed versions is visible on the Galaxy page, which reports each peer's version, because that is worth seeing before it misbehaves rather than after.

Reload the management interface once after an upgrade if it looks wrong; see the end of chapter 10.

12.10 Things that have surprised people

Reads are recorded. A read without `noshadow` writes a shadow sighting. Enrichment loops should pass it; an analyst's lookup should not.

consensus counts namespaces, not sightings. A value seen four thousand times in one feed has a consensus of one.

Deleting removes a namespace, not a value. There is no delete-one-value route; use a `ttl`.

node_id must be unique in a galaxy. Two servers sharing one quietly corrupt the counting, and nothing will tell you.

A new node needs peers of its own, or reads hashed to it will miss. See chapter 9.

Reference

The short version of everything, for finding rather than reading.

13.1 Routes

Route	Method	What it does
/w/<namespace>?val=	GET	Record a sighting.
/wb	POST	Record many.
/vwb	POST	Check a batch without recording it.
/r/<namespace>?val=	GET	Read one value.
/r/<namespace>	GET	List a namespace.
/r/<namespace>?count	GET	How many values it holds.
/rs/<namespace>?val=	GET	Read with hourly statistics.
/rb, /rbs	POST	Read many, without and with statistics.
/d/<namespace>	GET	Delete a whole namespace.
/stix/<namespace>	GET	Export as a STIX 2.1 bundle.
/_api/stix	POST	Export several namespaces into one bundle.
/_api/merge	POST	Fold a peer's copy of values into ours.
/_api/namespaces	GET	What this server actually stores.
/_api/tier	POST	Set a namespace's tier.
/_api/openapi.yaml	GET	The whole API as OpenAPI 3.
/health	GET	Liveness. No key needed.
/i	GET	Version and implementation.
/	GET	The route list. No key needed.

Management, all under `/_management/api/`:

Route	Method	What it does
session	GET	Is this an admin key?
info	GET	What this server was configured to do.
namespaces	GET, POST	List, or create an empty one.
tree	GET	One level of the namespace tree.

Route	Method	What it does
values, value	GET	Values in a namespace; one value.
sightings	GET	Where else a value has been seen.
tags	GET, POST	The vocabulary; replace a value's tags.
tags/vocabulary	POST, DELETE	Define or forget a tag's colour.
galaxy	GET	The whole cascade, for drawing.
galaxy/peers	GET, POST, PUT, DELETE	List, add, change, remove a peer.
galaxy/peers/enabled	POST	Take a peer out of service, or back.
keys	GET, POST, PUT	List, save, or replace the whole list.
keys/generate	GET	A random key.
keys/drift	GET	Where this server's keys and its peers' disagree.
keys/<key>	DELETE	Remove a key.
rejections	GET, DELETE	What was refused; forget it.
tier	POST	Set a tier.

`doc/routes.md` has every one of these with a worked example and its status codes. A test keeps it from drifting.

13.2 Query parameters

Parameter	On	Effect
val=	/w, /r, /rs	The value.
noshadow	reads	Do not record that somebody searched.
timestamp=	/w	Unix seconds; record it as seen then.
ttl=	/w	Seconds until it stops being visible.
tags=	/w	Tags to merge in.
count	/r	Answer with the number of values instead.
for_merge	/r	The per-node shape a peer is offered.
recursive	/stix	Include the namespaces below this one.
untyped=include	/stix	Export values with no observable type.
limit=, q=	listings, /stix	Page size; substring filter.

13.3 Status codes

Code	Meaning
200	Done. A batch may be partial; read items.
400	Malformed, or a batch that failed for mixed reasons.
401	No key.
403	Not permitted, or a write to an internal namespace.
404	No such namespace, or no such value in it.
409	Refused because of how things are configured.
421	Nowhere in reach stores that namespace.
500	Something broke.
502	A mirror that holds it could not be reached.
508	A forwarded request ran out of hops.

13.4 Configuration at a glance

Section	Setting	Default
[daemon]	listen_ip, listen_port	127.0.0.1, 9999
	authenticate	true
	ssl, ssl_cert, ssl_key	off
	dbdir	none — nothing persists without it
	snapshot_interval	300
	sweep_interval	60
	stats_retention	720 hours
	shadow_ttl	2592000 seconds
	post_limit	2.5 GB
	rejection_log	1000
	node_id	"local" — unique per server in a galaxy
	acl_file, tags_file	none
[storage]	namespaces	everything
	default_tier, warm_idle	hot, 3600
	tiers_file	none
[galaxy]	peers, peers_file	none
	max_hops	4
	health_interval	30
	sync_interval	300
	reconcile_interval	3600
	gossip_interval	600
	acl_authority, acl_replaceable	false
	verify_tls	true
[stix]	identity, identity_class	SightingDB, system
[zmq]	url, format, types	none
[dns]	listen, zone, ttl	none

13.5 The files

File	Owner	Rewritten when
sightingdb.toml	you	never
acl_file	the program	a key is saved
tiers_file	the program	a tier changes
tags_file	the program	a tag's colour changes
peers_file	the program	a peer is added, changed or disabled

13.6 Internal namespaces

Namespace	What it is	Readable	Writable
_all	The consensus tally.	yes	no
_shadow/<ns>	What was searched for in <ns>.	yes	no
_config	Server state.	no	no

Nothing beginning with `_` is writable from outside, at any permission level. A client that could write `_all` could forge consensus.

13.7 The Python client

Call	Does
<code>write(ns, value, timestamp=, ttl=)</code>	One sighting. Returns the count.
<code>write_many(sightings, strict=)</code>	A batch.
<code>batch(chunk_size=)</code>	A self-flushing batch, as a context manager.
<code>read(ns, value, stats=, shadow=)</code>	One value.
<code>read_many(sightings, stats=)</code>	Many, positionally.
<code>exists(ns, value, shadow=)</code>	Has this ever been seen?
<code>list_values(ns)</code>	Every value in a namespace.
<code>delete(ns, missing_ok=)</code>	A whole namespace.
<code>info(), ping(), close()</code>	Version; liveness; done.

`AsyncSightingDB` is the same with `await`.

13.8 Where else to look

<code>README.md</code>	The repository's own tour, in more depth on some things.
<code>doc/routes.md</code>	Every route, with examples and status codes.
<code>doc/ADDING-NEW-NODE.md</code>	Joining a node to a galaxy, with troubleshooting.
<code>doc/docker/</code>	A four-container galaxy to try things on.
<code>doc/openapi.yaml</code>	The API as a machine-readable document.
<code>etc/sightingdb.toml</code>	Every setting, with the reasoning beside it.