


Protokoll:

Client verbindet sich

Server schickt Lavinengefahr

Zustandsdiagramm:


Server

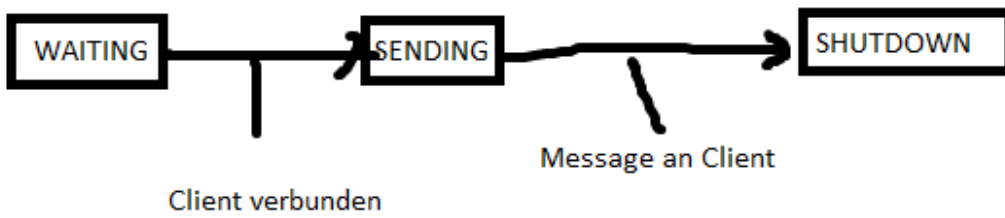

Client



Test:

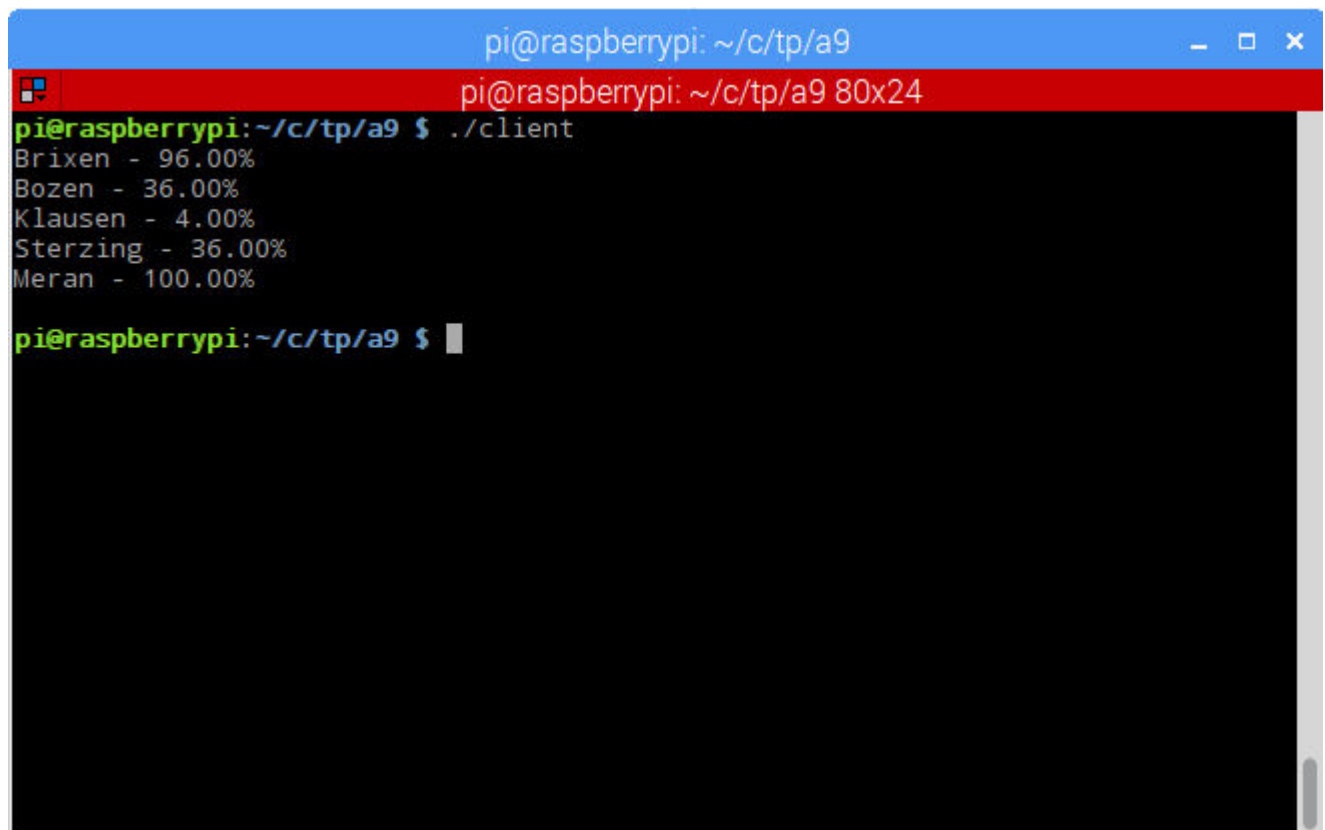

A terminal window titled "pi@raspberrypi: ~/c/tp/a9" with a red title bar. The window shows the execution of a program named "client". The output displays the progress of a process for five locations: Brixen (96.00%), Bozen (36.00%), Klausen (4.00%), Sterzing (36.00%), and Meran (100.00%). The prompt "pi@raspberrypi: ~/c/tp/a9 \$" is visible at the bottom.

```
pi@raspberrypi: ~/c/tp/a9
pi@raspberrypi: ~/c/tp/a9 80x24
pi@raspberrypi:~/c/tp/a9 $ ./client
Brixen - 96.00%
Bozen - 36.00%
Klausen - 4.00%
Sterzing - 36.00%
Meran - 100.00%
pi@raspberrypi:~/c/tp/a9 $
```

Ausführung:

Einfach über CLI `./server` bzw. `./client` starten
Es wird keine weitere Eingabe benötigt

Kompilierung:

Ausführbare Dateien können durch
`make [server | client]`
erstellt werden.