


[Sample SRC BAPI PO CREATE1 v2.2 E] Explanatory Material

1. Overview

Sample Workflow for registering purchase order document using "Sample_SRC_BAPI_PO_CREATE1_v2.2_E" and "Sample_SRC_BAPIv2.2_REGISTER".

2. Function Image Overview

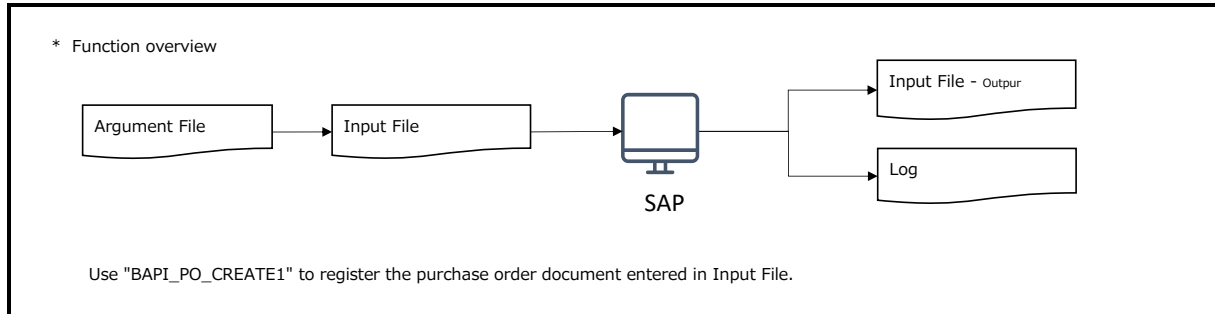

3. How to use

Enter the information of the purchase order documents to be registered in the Input File.

You need to enter the following Argument information in the Argument File.
(Please input all Strings in Argument File.)

Sheet : Settings

Property	Description	Required
BAPIName	Function module name to execute (BAPI name)	Yes
InputFilePath	Input File save destination and file name (Set a relative or full path.)	Yes
CallWorkflowPath	Workflow save destination and file name for each BAPI (Set a relative or full path.)	Yes
DataCountSheet	Worksheet name of header data (worksheet where key items of input data are registered)	Yes
Client	Client information for SAP connection	
Language	SAP connection language (EN: English, JA: Japanese)	
SncLibraryPath	Absolute path of SNC shared library used for SAP connection	
SncMode	Determine if the connection to SAP is protected by SNC. (0 : Do not use SNC, 1 : Use SNC)	
SncPartnerName	ID used for the destination server, if required by the SNC solution.	
SncQOP	Quality of service level used for SNC communication on the destination server. (1 : Authentication only, 2 : Integrity protection, 3 : Privacy protection, 8 : Default, 9 : Maximum security)	
SncSSO	Credentials when using SNC (0 : Login with user / password, 1 : Login with SNC ID)	
AdvancedParameters	A semicolon-separated list of name / value pairs for additional RFC configuration parameters.	
AppServer	SAP Application Server host name.	
LogonGroup	Logon group from which the message server selects the application server	
MessageServer	The host name of the central instance message server in the SAP system.	
SAPRouter	SAP router used to establish connection.	
StatefulConnection	Decide whether to establish a stateful connection, defaults to True. (True, False)	
SystemID	3-character system ID of the SAP system	
SystemNumber	SAP system number	
Commit	Commit execution flag (X: Commit is executed, other than X: Commit is not executed) (Because this function is committed inside BAPI, it will be committed even if this flag is deleted.)	
LogFolderPath	Log data file save destination (Set a relative or full path.)	Yes
LogFileName	Log data file name	
LogType	Output type of log data (TEXT: text, EXCEL: Excel)	Yes
LogOutputLine	Number of output to Excel	Yes

In CheckRequiredfield.xml, check logic for required items is included, but please add logic if necessary.

(In order to support single sign-on, the mandatory check of user ID and password, which was mandatory check in the previous version, has been deleted)


Sheet : Option

Property	Description	Required
BAPIUser	Authorization check (AUTHORITY_CHECK) BAPI user name at execution (Blank: Do not perform authorization check, otherwise: Perform authorization check)	
PasswordSuffix	Suffix given to password when executing password change (BAPI_USER_CHANGE) #DATE# : yyyyMMdd is assigned #RANDOM# : random number is assigned Other character : choose value is assigned	Not used in this sample


Execute Sample_SRC_BAPIv2.2_REGISTER.xaml

Data	2019/10/11 12:48	ファイル フォルダー	
SRC_BAPI_PO_CREATE1_v2.2	2019/10/10 16:54	ファイル フォルダー	
SRC_BAPIv2.2_REGISTER	2019/10/10 16:54	ファイル フォルダー	
SRC_Common	2019/10/10 16:54	ファイル フォルダー	
Sample_SRC_BAPIv2.2_REGISTER.xaml	2019/10/10 2:12	UiPath Studio proj...	24 KB

The pop-up will appear asking from which file the Argument information is to be read.
Select the required file from the files stored in the Data folder.



A pop-up for entering User and Password will be displayed.

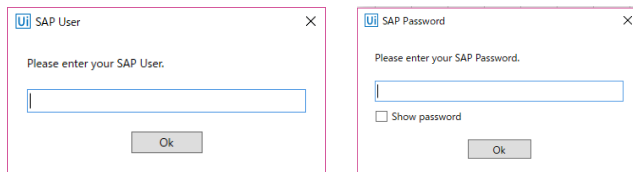

When registration is completed, the SRC_Log sheet will be added to the Input File and enable to check the processing results.

4. Folder structure

/Sample_SRC_BAPI_PO_CREATE1_v2.2_E

Sample_SRC_BAPIv2.2_REGISTER.xaml

/ SRC_BAPI_PO_CREATE1_v2.2_E

SRC_BAPI_PO_CREATE1_v2.2_E.xaml

*1

SRC_BAPI_PO_CREATE1_v2.2_E_EN.xlsx

-> Input File can be executed in either English (EN) or Japanese (JA).

SRC_BAPI_PO_CREATE1_v2.2_E_JA.xlsx

/ SRC_BAPIv2.2_REGISTER

SRC_BAPIv2.2_REGISTER.xaml

-> Contains necessary xaml files that are invoked
from SRC_BAPIv2.2_REGISTER.xaml (xaml for main processing)

Each xaml files

/SRC_Common

/Error

/Log

Complete set of xaml files stored in the SRC Common folder provided by SAP Common Components

/Data

Arg-SRC_BAPI_PO_CREATE1_v2.2_E_EN.xlsx

-> Check the prerequisites and enter the required information
before execution.

Arg-SRC_BAPI_PO_CREATE1_v2.2_E_JA.xlsx


5. Reference

About data registration using other BAPI

The folder structure is the same as the following image or *1.

Save the other BAPI registration folder and save the file with the required Argument information in the Data folder.

By doing so It is possible to register the data using various BAPI.



SRC_BAPiv2.2_REGISTER

SRC_Common

Sample_SRC_BAPiv2.2_REGISTER.xml