

Kotlin

Stuhlmeier

Version 0.0.1

Table of Contents

Introduction	1
What is Kotlin?	1
Why should I use Kotlin?	1
How do I write Kotlin?.....	2
Language idioms	2
Kotlin ABCs	4
Kotlin fundamentals.....	4
Files	4
new	5
?	5
Unit	7
Nothing	8
Any	9
Kotlin's type hierarchy	9
Statements and expressions	11
Access modifiers.....	12
Hello, world!	13
Classes and objects: Data handling.....	13
Primary and secondary constructors	14
objects	15
Kotlin and static	16
companion objects.....	17
data classes	18
Nesting	20
Nested classes	20
Inner classes.....	20
Labels	20
Functions and properties	21
Functions	21
Variadic arguments	22
Named arguments	22
Properties	23

Backing fields.....	24
<code>lateinit</code> properties.....	25
Nesting	25
Local functions and classes	25
Classes, functions, properties, and inheritance.....	26
Inheritance	26
<code>abstract</code> and <code>override</code>	27
Explicit <code>super</code>	28
Function objects.....	28
Anonymous objects.....	29
Additional resources.....	31

Introduction

What is Kotlin?

Kotlin is a programming language developed by JetBrains, the creators of the IntelliJ Java IDE.

Why should I use Kotlin?

Kotlin is many things:

It is cross platform. Kotlin's current compilation targets are:

- JVM bytecode
- JavaScript
- Native binaries via LLVM:
 - iOS (arm32, arm64)
 - macOS (x86_64)
 - watchOS (x86_64, arm32, arm64)
 - tvOS (x86_64, arm64)
 - Android (x86, x86_64, arm32, arm64)
 - Windows (MinGW x86_64, x86)
 - Linux (x86_64, arm32, MIPS, RPi)
 - WebAssembly (wasm32)

It is multi-paradigm. Kotlin supports a mix of functional and object-oriented programming to achieve maximum productivity.

Its expansive standard library provides hundreds of utilities, ranging from basic helpers to entire suites of functions that, in order to work properly in other, less-flexible languages, would have had to be fully-fledged language features; the previous sentence may or may not be a not-so-subtle jab at C# and LINQ.

It is **flexible**. Kotlin is a great fit for domain-specific languages (DSLs) and has great support for being used as an embedded scripting language — in fact, the Gradle buildscript used to create this document was itself written in Kotlin.

How do I write Kotlin?

Language idioms

Kotlin was originally developed as a JVM language, and has thus been considerably influenced by the Java world. While this means that some fragments of may be translated line-by-line into Kotlin, this often does not result in optimal Kotlin code.

Take the following example:

```
final var person = ...;

if (person != null) {
    final var addresses = person.getAddresses();
    if (addresses != null && !addresses.isEmpty()) {
        final var firstAddress = addresses.get(0);
        if (firstAddress != null) {
            final var street = firstAddress.getStreet();
            if (street != null) {
                final var streetName = street.getName();
                if (streetName != null) {
                    ...
                }
            }
        }
    }
}
```

One might argue that this Java antipattern is obsolete, due to the advent of Java 8 and its **Optional** utility class. Let us give this sample a more modern twist:

```

final var person = ...;

Optional.ofNullable(person)
    .flatMap(Person::getAddresses)
    .flatMap(as -> as.stream().findFirst())
    .flatMap(Address::getStreet)
    .flatMap(Street::getName)
    .ifPresent(streetName -> {
        ...
    });

```

While this is much more concise, consider the overhead of wrapping every value that *may or may not* have a value with an extra object that:

- must be allocated on the stack (or heap)
- incurs a runtime performance penalty for each of the chained method calls
- results in code that is non-trivial to read

Not only is this be an unnecessarily complex approach to handling [Tony Hoare's billion-dollar mistake](#), there exist *core language features* in Kotlin designed to avoid this problem entirely:

```

val person = ...

person?.addresses?.firstOrNull()?.street?.name?.let {
    ...
}

```

In short: to write proper, idiomatic Kotlin, you will *need* to ignore your instincts and find new approaches to solving problems. Pretending to write Kotlin when you are doing nothing more than translating the Java you *would've* written will not result in good code.

IntelliJ's [built-in Java-to-Kotlin converter](#) (*Ctrl+Alt+Shift+K*) is often a good start; its conversions are relatively decent due to the IDE's advanced static analysis capabilities. However, one should not rely solely on this tool — it will often produce suboptimal (or even invalid) code.

Kotlin ABCs

Kotlin fundamentals

Kotlin is fundamentally an object-oriented language. This, along with the constraints imposed by the JVM, means that classes and data will be structured in much the same way as in Java, C++, or any other object-oriented language.

Kotlin's primary advantage to developers is that it manages to be extremely expressive while remaining fairly short.

Files

Unlike many other languages, the Kotlin compiler has the additional concept of a "file". Whereas all symbols in Java or C# must either be or be contained in *classes*, Kotlin allows properties and functions to be declared at the *top level*:

```
class Test {}

val foo = "This is a top-level property"
fun thisIsATopLevelFunction() {}
```

Top-level symbols are placed in the current package's scope, unless they are *private* — private top-level symbols are only visible within the same file. They can be imported with `[package-name].[symbol-name]`, similarly to classes:

```
// File A
package a

val foo = "This is a top-level property"

// File B
package b
import a.foo

fun main() = println(foo) // "This is a top-level property"
```

Kotlin files typically have the extension *.kt*.

The Kotlin compiler, *kotlinc*, supports dynamic execution of *Kotlin scripts*. Kotlin

scripts have the extension `.kts` and do not require a `main` function; top-level statements are allowed and executed.

You can download `kotlinc`'s binaries [here](#). If you prefer package managers, you can also install it [with pacman](#) (Arch Linux), [Homebrew](#) (macOS/Linux), [Snappy](#) (primarily Ubuntu), or [Chocolatey](#) (Windows).

`kotlinc` isn't necessary to compile or run Kotlin code, though. JetBrains' [IntelliJ IDEA](#), unsurprisingly, has first-class Kotlin support built in to the IDE. An easy way to play around with Kotlin is to create a `.kts` *scratch file* (`Ctrl+Alt+Shift+Insert`). If you want to create a full Kotlin project, you can easily do so by using JetBrains' [Kotlin Maven archetype](#) or by selecting "Kotlin/JVM" in the Gradle project creation dialog.

While there exists an equivalent plugin for [Eclipse](#), it unfortunately tends to be updated quite infrequently, is prone to bugs, and is usually out of date.

new

Kotlin does not have a `new` operator. Constructors are called using standard function-call syntax:

```
val person = Person("Test", "Testerson")
```

NOTE

This is a nice time-saver, and is consistent with C++ syntax — `new` is used to allocate dynamic memory, call a constructor, and return a pointer; or to otherwise create the object on the stack and return an rvalue. As there is no real functional distinction between heap- and stack-allocated values on the JVM, since one generally does not have to deal with pointers, there is no reason to keep the keyword.

?

`?` is an integral part of Kotlin's type system; `?` designates a type as *nullable*:


```

val foo1: String = "bar" // ok
val foo2: String? = "bar" // ok
val foo1: String = null // ERROR
val foo2: String? = null // ok

```

Non-nullable types cannot have the value `null` assigned to them! This is one of Kotlin's advantages — it is extremely difficult to write proper Kotlin code that throws a `NullPointerException`.

Nullable types come with **their own useful utilities**.

`?.`, the *safe call* operator, can be used to perform operations on nullable values. If the value is `null`, it performs the operation; otherwise, it too returns `null`. This is useful for chaining methods on values that may be null:

```

val input: String? = readLine()
val enteredInt =
    input           // String?
    ?.trim()        // String? -> String?
    ?.toIntOrNull() // String? -> Int?

if (enteredInt == null) println("You did not enter an integer")

```

The Elvis operator (`?:`, try turning it 90° clockwise) is frequently used as the last element in a `?.` chain to return a fallback value. The result of an `?:` expression returns the left operand if it is not `null`; otherwise, it returns the right operand.

This is equivalent to the `??` operator in C#.

```

val envvar: String? = System.getProperty("FOO")
val displayValue: String = envvar ?: "No value found" // Not nullable!

if (enteredInt == null) println("The value of FOO is: $displayValue")

```

If you *really* need to force the compiler to dereference a nullable value, the `!!` operator can be used for this purpose:

```

val maybeFoo: Foo? = retrieveMaybeFoo()
val foo = maybeFoo!!

```

CAUTION

Note that this will throw an exception if the value is indeed `null`. Unless you are dealing with complex scenarios (e.g. reflection) where you can be *absolutely sure* that a value will not be null, **never** use this operator. There is always a better way to solve nullability issues.

TODO nullableutil

Unit

Kotlin, like many functional languages, does not have the concept of "no return type"; every function must return a value. So how do we deal with `void` methods?

Kotlin represents the `unit` type as `Unit`. This is equivalent to `()` in Rust or Haskell, and `Unit` in Swift. `Unit` is a singleton value that holds no information, making it a perfect choice for methods that return nothing. It is automatically returned from blocks of code that do not contain a `return` expression:

```
val value = run {}  
println(value) // kotlin.Unit
```

It also plays extremely well with generics! Previously, to create a `void Callable` in Java, one would have to specify the type parameter as `void`'s peculiar wrapper type, `Void`, and then manually return `null` from the implementation of the `call` method:

```
new Callable<Void>() {  
    Void call() {  
        foo();  
        return null;  
    }  
}
```

This is redundant! Since there exist no valid instances of `Void`, there is no use in returning any sort of value. Furthermore, the client of this API would need to know to discard the returned value.

Fortunately, since `Unit` is implicitly returned, all we need to do in Kotlin is:

```
Callable<Unit> { foo() }
```

This also enables function chains returning `Unit` to compose nicely.

TODO samconv

Nothing

While `Nothing` as a type is fundamentally similar to `Void`, they are extremely different in terms of usage.

A function returning `Nothing` will never return. This is primarily used for functions that will always throw exceptions (i.e. exception helpers), or that will loop forever. All statements following an expression that returns `Nothing` will never execute:

```
fun throwDataException(error: String): Nothing {
    throw DataException("SQL error: $error")
}

try {
    doDatabaseStuff()
} catch (e: SQLException) {
    throwDataException(e.message)
    foo() // Warning: unreachable code
}
```

This is used quite effectively in the standard library by the utility function `TODO`, often used during development to mark sections of code that are not implemented and should throw an error.

```
if (foo()) {
    handleFoo()
} else {
    // Not done with this yet
    TODO("handleNotFoo()")
    //^ NotImplementedError: "An operation is not implemented:
    handleNotFoo()"
}
```

TIP

Since `Nothing` cannot hold a value, and `T?` is a union between `T` and `null`, the type `Nothing?` can be used to hold a value that is always null.

Any


Any is Kotlin's equivalent to **Object** — it is the implicit base class for all types. It is functionally equivalent to **Object**, except that most of its methods have been removed:

- `clone`
 - Implement **Cloneable** instead, if you *really* need `clone`.
- `finalize`
- `wait`, `notify`, `notifyAll`
 - Use of these methods has been discouraged for years — Kotlin has simplified things by removing them outright.
- `getClass`
 - This method has been replaced by the `::class` operator.

If you need to use any of **Object**'s methods, you can force the compiler to make them visible by casting an object to **Object**:

```
val foo = ...  
(foo as java.lang.Object).notify()
```

Kotlin's type hierarchy

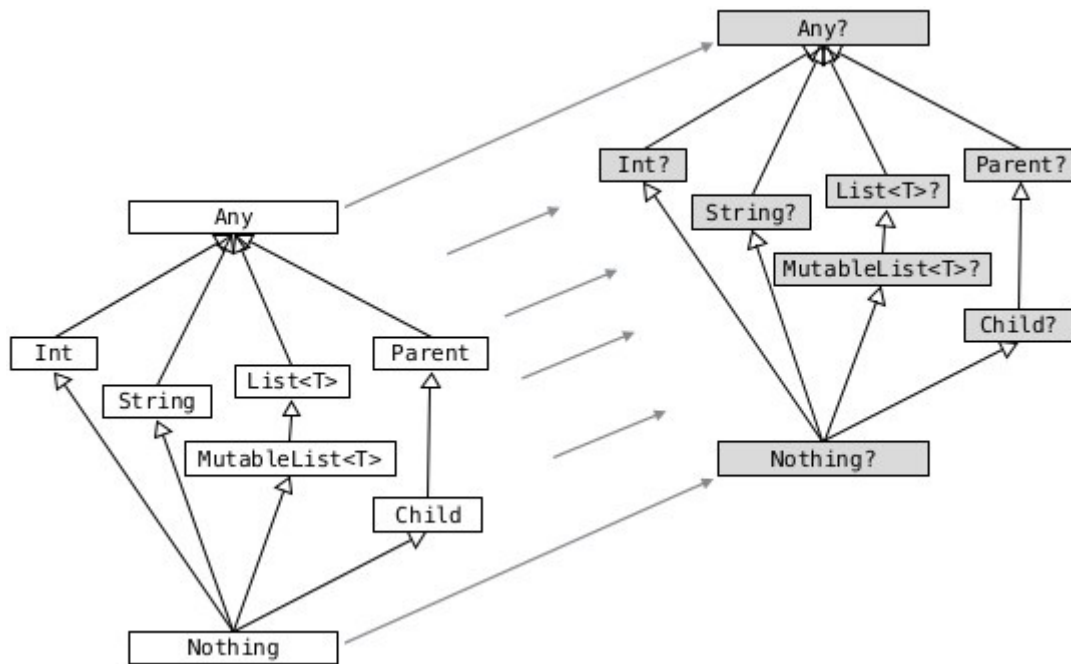

The base type for all other types in Kotlin is **Any**. All nullable types are subtypes of their respective non-nullable types. This is important since it allows nullable types to hold a regular, non-null value.

Nothing, the type discussed earlier, is at the bottom of the type hierarchy; it is considered a subtype of every other type, meaning that a variable of type **Nothing** cannot be implicitly assigned to.

The only expressions in Kotlin that return **Nothing** are:

- **return**
- **throw**
- **continue**
- **break**

Yes, **return** returns a value! This allows us to extremely easily handle precondition failures, and is a very common Kotlin idiom:

```

fun login(user: User): Boolean {
    val username = user.name ?: return false // User has no name, don't
    try to log in
    val token = doLogin(user) ?: throw LoginException("Could not log
    in")
    return true // Success
}

```

In this case, `?:` will either return the preceding value or execute the right-hand expression, forcing the function to return prematurely without too much boilerplate code. This can also be used with `continue` or `return` to prematurely end the loop body.

Of course, this allows us to write meaningless code:

```
return return throw return throw throw return return throw return
```

While the compiler will warn that each of the expressions (except the last) is unreachable, this is valid code. It should be obvious that code like this is nevertheless meaningless and should never be written.

Statements and expressions

Generally, *expressions* are snippets of code that have a *value*. Statements, on the other hand, do not necessarily have any sort of resulting value.

Apart from declarations and assignments, everything in Kotlin is an expression:

```
val password = readLine()
val output = when (password) {
    "hunter2" -> "Authenticated!"
    else -> "Hacker detected!"
}
```

Even an `if` statement returns a value:

```
println(
    if (room.isSmoking) "This is a smoking room"
    else "This is a no-smoking room"
)
```

This is incredibly versatile, since it is possible to place multiple statements within the `if` statement's block — every *block* in Kotlin also returns a value! The result of the last statement in a block implicitly becomes the result of the block itself. If the last statement is not an expression, it returns `Unit` instead:

```
val value = run {  
    val foo = 40  
    foo + 2  
}  
print(value) // 42
```

Unlike in most other C-like languages, assignments are not expressions. This means many classic sources of programmer error can be eliminated:

```
_Bool ok = doSomething(...);  
if (ok = true) { // = instead of ==, this will always get executed!  
    printf("Success\n");  
} else {  
    // This will never get executed!  
    printf("An error occurred\n");  
    abort();  
}
```

Access modifiers

Kotlin has the following access modifiers:

- `public`
- `internal`
- `protected`
- `private`

`public`, `protected` and `private` function identically to how they work in Java and C++.

Unlike Java, Kotlin does not have package-private (default) access. It replaces this with `internal` access, which makes a symbol visible to all other classes *in the same module*. Files outside a project (i.e. in other modules) will not be able to access an `internal` symbol.

IMPORTANT

The **default access modifier** for a symbol, when one is not specified, is `public`! This means specifying `public` explicitly is almost always redundant.

Hello, world!

As with any other programming language, to write an executable program we need an entry point. A Kotlin program's entry point is a top-level function called `main`. As many programs do not make use of command-line arguments, the `args` parameter is optional. This means a "hello world" program could look something like:

```
fun main(args: Array<String>) {  
    println("Hello, world!")  
}
```

or

```
fun main() {  
    println("Hello, world!")  
}
```

Our golfing opportunities don't end here, though. In the interest of enabling terse, functional programming, there exists a shorter syntax for functions that consist of and return a single expression:

```
fun main() = println("Hello, world!")
```

Classes and objects: Data handling

The basic types in Kotlin are identical to those found in Java and C#.

We have:

- (abstract) classes
- interfaces
- enum classes
 - Analogous to `enums` in Java; this construct is rare in other languages.
- annotation classes
 - Analogous to `@interfaces` in Java and `Attributes` in C#.

Unlike Java, where interfaces have only recently gained support for default implementations, Kotlin permits this for any JVM target level using bytecode magic.

Primary and secondary constructors

Before discussing classes in Kotlin, it is important to understand how constructors work. There are two types of constructors in Kotlin: *primary* and *secondary* constructors.

This is the basic structure of a class in Kotlin:

```
class Foo constructor(bar: String) {  
    constructor(baz: Int) { ... }  
    ...  
}
```

A constructor in Kotlin is declared with the keyword `constructor`, followed by the list of parameters.

The constructor immediately following the type name, *if present*, is called the *primary constructor*. Unlike a secondary constructor, a primary constructor **does not** have a body. Any initialization logic must be wrapped in an `init` block. The parameters of this constructor are visible for all property initializers:

```
class Person constructor(birthYear: Int) {  
    val age: Int  
    val birthYearMinusOne = birthYear - 1 // birthYear is in scope  
    here!  
  
    init {  
        // Do some extra work here  
        age = 2019 - birthYear  
    }  
  
    fun foo() {  
        println(birthYear) // ERROR: construction has finished,  
        parameters are no longer available  
    }  
}
```

Additionally, the `constructor` keyword may be omitted *for the primary constructor only*. It is only required if you wish to apply an access modifier or annotation to the

primary constructor:

```
@Component
class MyService @Autowired internal constructor(...)
```

What makes the primary constructor so powerful is that **it can have properties as parameters**. It is no longer necessary to repeat `this.field = field;` for every single constructor parameter!

```
class Person(var name: String, private var ssn: String)
```

This is all the code necessary to create a class with two properties, their respective getters/setters, and the proper constructor!

TIP

Notice that the class or constructor body (`{}`) can be omitted when it is empty; this is another useful quality-of-life feature.

If a primary constructor is present, all secondary constructors are required to *chain* to it, either directly or through another secondary constructor. This is useful if you wish to have a convenience constructor with different parameters that can be easily converted to the desired type:

```
class Timestamp(val instant: Instant) {
    constructor(ldt: LocalDateTime)
        : this(ldt.toInstant(ZoneOffset.UTC))
    constructor() {
        // ERROR: not chained to primary constructor!
        doSomethingElse()
    }
}
```

objects

In addition to these types, Kotlin introduces a new type of class called the **object**. More commonly known as *singletons*, **objects** only can have one global instance for the whole lifetime of a program — this behavior is identical to that of standard singletons and of **static** globals in C/C++. What makes **objects** really stand out, however, is that they require no boilerplate code to implement and are thus free

from programmer error. Since they are normal classes, they can implement interfaces, and their instance can be passed around like a normal value.

This means that something like

```
public interface Bar {
    String baz();
}

// Typical Java singleton
public enum Foo implements Bar {
    INSTANCE {
        @Override String baz() {
            return "Hello, world!";
        }
    }
}

public class Program {
    public static void doSomething(Bar bar) {
        System.out.println(bar.baz());
    }
    public static void main(String[] args) {
        doSomething(Foo.INSTANCE); // Unnecessary qualification :(
    }
}
```

would become

```
interface Bar {
    fun baz(): String
}

object Foo : Bar {
    override fun baz() = "Hello, world!"
}

fun doSomething(bar: Bar) {
    println(bar.baz())
}

fun main() = doSomething(Foo) // The type name itself refers to the
instance!
```

Kotlin and static

This leads us to another important point: *Kotlin does not have the concept of* **static**.

The optimal replacement for static utility classes is either a set of top-level functions or an **object**. This is mostly up to your own taste, but typically depends on whether the utility conceptually belongs *at the package level*, or if they should be further grouped according to a certain criterion.

This means that something like

```
public class LzmaUtils {
    private LzmaUtils() {}
    public static void decompressStream(InputStream input) { ... }
}
```

would become

```
package myapp // These utilities may not belong at the top level

object LzmaUtils {
    fun decompressStream(input: InputStream) { ... }
}
```

or, alternatively, simply:

```
package myapp.lzma // This is an appropriate package for these
utilities

fun decompressStream(input: InputStream) { ... }
```

While it is ultimately up to the user to decide, creating top-level symbols is usually considered more idiomatic.

companion objects

What if one wants to mix static functions and instance methods within a single class? This is often not an indicator of good design choices — if you can, think about making these into (private) top-level functions instead.

This is possible, however, using **companion objects**:

```

class Person {
    var name = "Gagagegg" // Instance property

    companion object {
        fun createPerson(): Person = Person()
    }
}

...

Person.createPerson() // Person(name="Gagagegg")

```

A companion object is essentially an embedded **object** with the same name as a class: it is accessed using the enclosing class's name, can implement interfaces or abstract classes, and is treated as a value. This effectively removes the "non-object-orientedness" of static methods from the language, making it truly object-oriented.

Companion objects can be used to remove the need for boilerplate code. The most common application of this is in logging frameworks:

```

abstract class LoggerCompanion {
    val LOGGER = ...
}

class MyApplication {
    private companion object : LoggerCompanion()

    fun foo() {
        LOGGER.log("Hello, world!")
    }
}

```

All properties and functions of the companion object are pulled into the enclosing class's scope.

data classes

Data classes are one of Kotlin's most loved features. If you need to store complex objects in memory and have all of the boilerplate abstracted away, they are the feature for you.

Data classes:

- must have a primary constructor with one or more parameters
- must have a primary constructor with no non-property parameters
- **should** generally be immutable
- cannot be inherited from

In most ways they behave identically to regular classes, except that `equals`, `toString` and `hashCode` are automatically generated!

```
data class Student(val name: String, val id: String, val graduation:
Year)
```

This single line of code will generate a `Student` class with a proper implementation of all of the following:

- constructors
- `getName`, `getId`, `getGraduation`
- `equals`, `hashCode`, `toString`
- `copy`

`copy` is automatically generated for all data classes and allows the user to construct an exact copy of the specified object, with the specified changes:

```
val john = Student("John", "1234", Year.of(2020))
val jane = john.copy(name = "Jane", id = "5678")
```

Thanks to `copy`, there is often no need to make data classes mutable — new, modified instances can be created easily. Immutability comes with a large amount of benefits, including the elimination of defensive copying; data classes should generally be made immutable.

NOTE

It may be worth mentioning that Java is adopting this syntax in JDK 14, for its proposed `records` feature! While this is a preview feature and may not necessarily make it into the full release, this is impressive progress.

Nesting

Nested classes

This is equivalent to `static` classes in Java; the class is placed in the scope of the enclosing class and can access its private members, but is otherwise unrelated to it.

Inner classes

This is equivalent to normal nested classes in Java. Inner classes hold a reference to an instance of the outer class. In Kotlin, an inner class is denoted by the `inner` keyword:

```
class Outer {  
    inner class Inner  
}
```

Labels

To access the outer class instance, use `this@Outer`. Whereas in Java you would use `Outer.this`, Kotlin uses *labels* to accomplish this.

```

class Outer {
    fun foo() {
        println("Outer")
    }

    inner class Inner {
        fun foo() {
            println("Inner")
        }

        fun bar() {
            this@Outer.foo() // "Outer"
            this.foo() // "Inner"
        }
    }

    class Nested {
        fun bar() {
            this@Outer.foo() // ERROR: this is not an inner class,
                             // so it has no Outer instance!
        }
    }
}

```

Functions and properties

Functions

Kotlin functions are declared using **fun**:

```

fun functionName(params): Type { ... }

```

Parameters, along with all other values in Kotlin, are defined using *Pascal notation*. Parameters can also have *default arguments*, which helps to reduce the need for overloads.

```

fun makePurchase(amount: Int = 1) {
    ...
}

```

If no return type is specified, it is inferred to be **Unit**. Similarly, if a **return** statement is made with no value, it will implicitly return **Unit**:


```
fun foo() { // Equivalent to fun foo(): Unit
    return // return Unit
}
```

If no return statement is present in the body of a function, and the function is specified to return `Unit`, it is implicitly returned.

If a function's body consists of a single expression, you can make use of a special, shorter syntax:

```
override fun toString() = "..."
```

Single-expression functions can have their return types omitted; they will be inferred from the expression.

Variadic arguments

A parameter can accept an arbitrary number of arguments if it is annotated by `varargs`:

```
fun takeLotsOfStrings(vararg strings: String) {
    for (string in strings) println(string)
}
```

Within the function, `varargs` parameters are treated as arrays and can be used as such.

To pass the contents of an array to a `varargs` parameter, you can use the *spread operator* `*`:

```
val strings = arrayOf("Hello", "world")
// The spread operator can even interleave varargs parameters!
takeLotsOfStrings("Something", *strings, "else")
```

CAUTION

No more than one parameter per function can be `varargs`.

Named arguments

When invoking a function, parameters can be referred to by name. This is helpful

when invoking a function with multiple default parameter values:

```
fun joinToString(
    strings: Iterable<String>,
    separator: CharSequence = ", ",
    prefix: CharSequence = "",
    postfix: CharSequence = "",
    limit: Int = -1,
    truncated: CharSequence = "...",
    transform: ((T) -> CharSequence)? = null
): String { ... }

...

joinToString(listOf("Hello", "world"), separator = "; ", truncated = "
(more)")
```

If named arguments had not been used, redundant values for all intermediate parameters would have had to have been specified.

Properties

Kotlin, like Swift, has no concept of *fields*. All instance attributes are automatically encapsulated in properties.

Properties may be backed by fields internally; this is the default. They may also have custom accessors.

The syntax for defining a property is:

```
[var/val] name: Type = [initialValue]
    get
    set
```

This notation, where the type follows the name, is called *Pascal notation*.

var properties are *mutable*; they have getters and setters, whereas **val** properties only have getters. By default, the getter and setter can be omitted, unless you wish to apply an access modifier or annotation to it.

```
var property: Any? = null
@Inject internal set
```

Getters and setters may also have bodies, as in C#:

```
var fullName: String
  get() {
    return "$first $last"
  }
  set(value) {
    val split = value.split(" ")
    first = split[0]
    last = split.skip(1).joinToString(" ")
  }
```

If the body of a getter or setter contains a single expression, the braces may be omitted similarly to functions:

```
val fullName: String
  get() = "$first $last"
```

The type of the property may usually be omitted; it will be automatically inferred from its getter or initial value.

```
// These are equivalent:
val foo: Int = 3
val foo = 3
```

Backing fields

Within the body of a field-backed property's getter or setter, a **magic variable** called `field` is accessible. This is a mutable reference to the property's backing field, and can be used to easily add additional logic to a property setter.

Without `lateinit`, the property would have to be declared as nullable because its initial value is `null`; every operation on it would either have to make use of the `!!` operator or use unnecessary `?.` chaining.

```
var positiveInt: Int = 1
  get
  set(value) {
    if (value > 0) field = value
  }
```

NOTE

If a property is not given an initial value, or if `field` is never used, the property will not have a backing field; it is purely compiled to a getter (and a setter, if the property is a `var`). This is useful for creating e.g. "compound properties" (like the aforementioned `fullName`) that should not be stored in memory and are the result of performing cheap operations.

TIP

Properties with no backing field **can be declared as `inline`**; no getters or setters will be generated, as they will be inlined into the calling code.

lateinit properties

The `lateinit` modifier allows a property or local variable of a non-nullable type to initially have no value. This is especially useful for classes that do not have their fields initialized at construction time; Android activities, test fixtures, or Spring services are common examples.

```
@Test
class FooServiceTest {
    lateinit var fooService: FooService

    @BeforeClass
    fun init() {
        this.fooService = ...
    }
}
```

Nesting

Local functions and classes

Classes and functions can be declared *locally*, that is, within other functions:

```

fun foo() {
    fun bar() {
        ...
    }
    class Quux

    bar()
}

fun baz() {
    bar() // ERROR
    Quux::class // ERROR
}

```

This is an invaluable tool — the scope of symbols should be restricted as much as possible, and if a certain subroutine or data class is only needed within a function, it is a great idea to make them local to that function.

Classes, functions, properties, and inheritance

Kotlin classes, functions and properties are **final** by default. They can be made virtual by adding the **open** modifier:

```

open class Foo // This class can be extended!

```

Abstract classes and functions do not need to be declared as **open**, as this would defeat their purpose.

Inheritance

To extend a class, add it after the type name using the C++-style extension syntax:

```

class Derived : Base

```

The base class must be initialized in the class header:

```

abstract class Base

class Derived : Base() // Primary constructor is called

```

Alternatively, if the base class has no primary constructor, its secondary

constructors can chain to **super**:

```
class Derived : Base {  
    constructor() : super()  
}
```

This ensures that the superclass constructor has finished by the time the subclass's initializers run.

abstract **and** override

Functions and properties can also be **abstract** members of abstract classes and interfaces. Interface functions are implicitly **abstract**. Default implementations for interface functions are easy to specify — just give the function a body:

```
interface Comparer<T1, T2> {  
    fun compare(a: T1, b: T2): Boolean {  
        return true // Default implementation always returns true  
    }  
}
```

To override a function or property, declare it in the subtype using the **override** modifier.

TIP

Unlike in Java, where **Override** is an annotation, **override** is a keyword in Kotlin.

To override a member and prevent further overriding, declare it as **final**, like in C++:

```

interface A {
    // `abstract` is implied, since this is an interface
    fun foo()
    val bar: String
}

open class B : A {
    final override fun foo()
    override val bar get() = "Baz"
}

class C : B {
    override fun foo() // ERROR
    override val bar get() = "Quux" // ok
}

```

TIP

`override` can even be used on primary constructor property parameters!
This is especially useful for use with data classes.

Explicit super

If a class inherits the same member from multiple supertypes, it must provide its own implementation to avoid the diamond problem: ^[1]

```

open class Rectangle {
    open fun draw() { ... }
}

interface Polygon {
    fun draw() { ... } // Default implementation
}

class Square : Rectangle(), Polygon {
    // The compiler requires draw to be overridden:
    override fun draw() {
        super<Rectangle>.draw() // call to Rectangle.draw
        super<Polygon>.draw() // call to Polygon.draw
    }
}

```

Function objects

TODO lambda

Anonymous objects

Objects of an anonymous type can be created using `object` literals.

```
val runnable = object : Runnable {  
    override fun run() {  
        foo()  
    }  
}
```

However, when using SAM (single-abstract-method) interfaces that are defined in Java code, this is unnecessary, because Kotlin will automatically create helper constructors for these interfaces to allow for a nicer syntax:

```
val runnable = Runnable {  
    foo()  
}
```

Additionally, anonymous objects that do not extend any class can be created. This is similar to C#'s `new {}`.

```
val list = listOf(3)  
val mapped = list.map { int ->  
    object {  
        val value = int  
    }  
}  
  
for (item in mapped) {  
    println(item.value)  
}
```

While the type cannot be referred to by name, it is available to the compiler and can thus be used within the same scope. Since anonymous objects have no proper type, they cannot be returned from methods.

TIP

It is often better to use local data classes instead of untyped anonymous objects, as they are named and they more clearly express the intent of the code.


```
fun foo() {  
    data class TempData(...) // Local data class!  
}
```

[1] <https://kotlinlang.org/docs/reference/classes.html#overriding-rules>

Additional resources

In addition to the contents of this paper, a set of official Kotlin [koans](#) can be found online at play.kotlinlang.org. These are a set of small Kotlin examples to get you used to the language and assist the learning process.

Additionally, Kotlin's [extensive reference](#) is an extremely helpful resource, even for veteran Kotlin developers. It goes into great detail about most, if not all, important parts of the language itself.