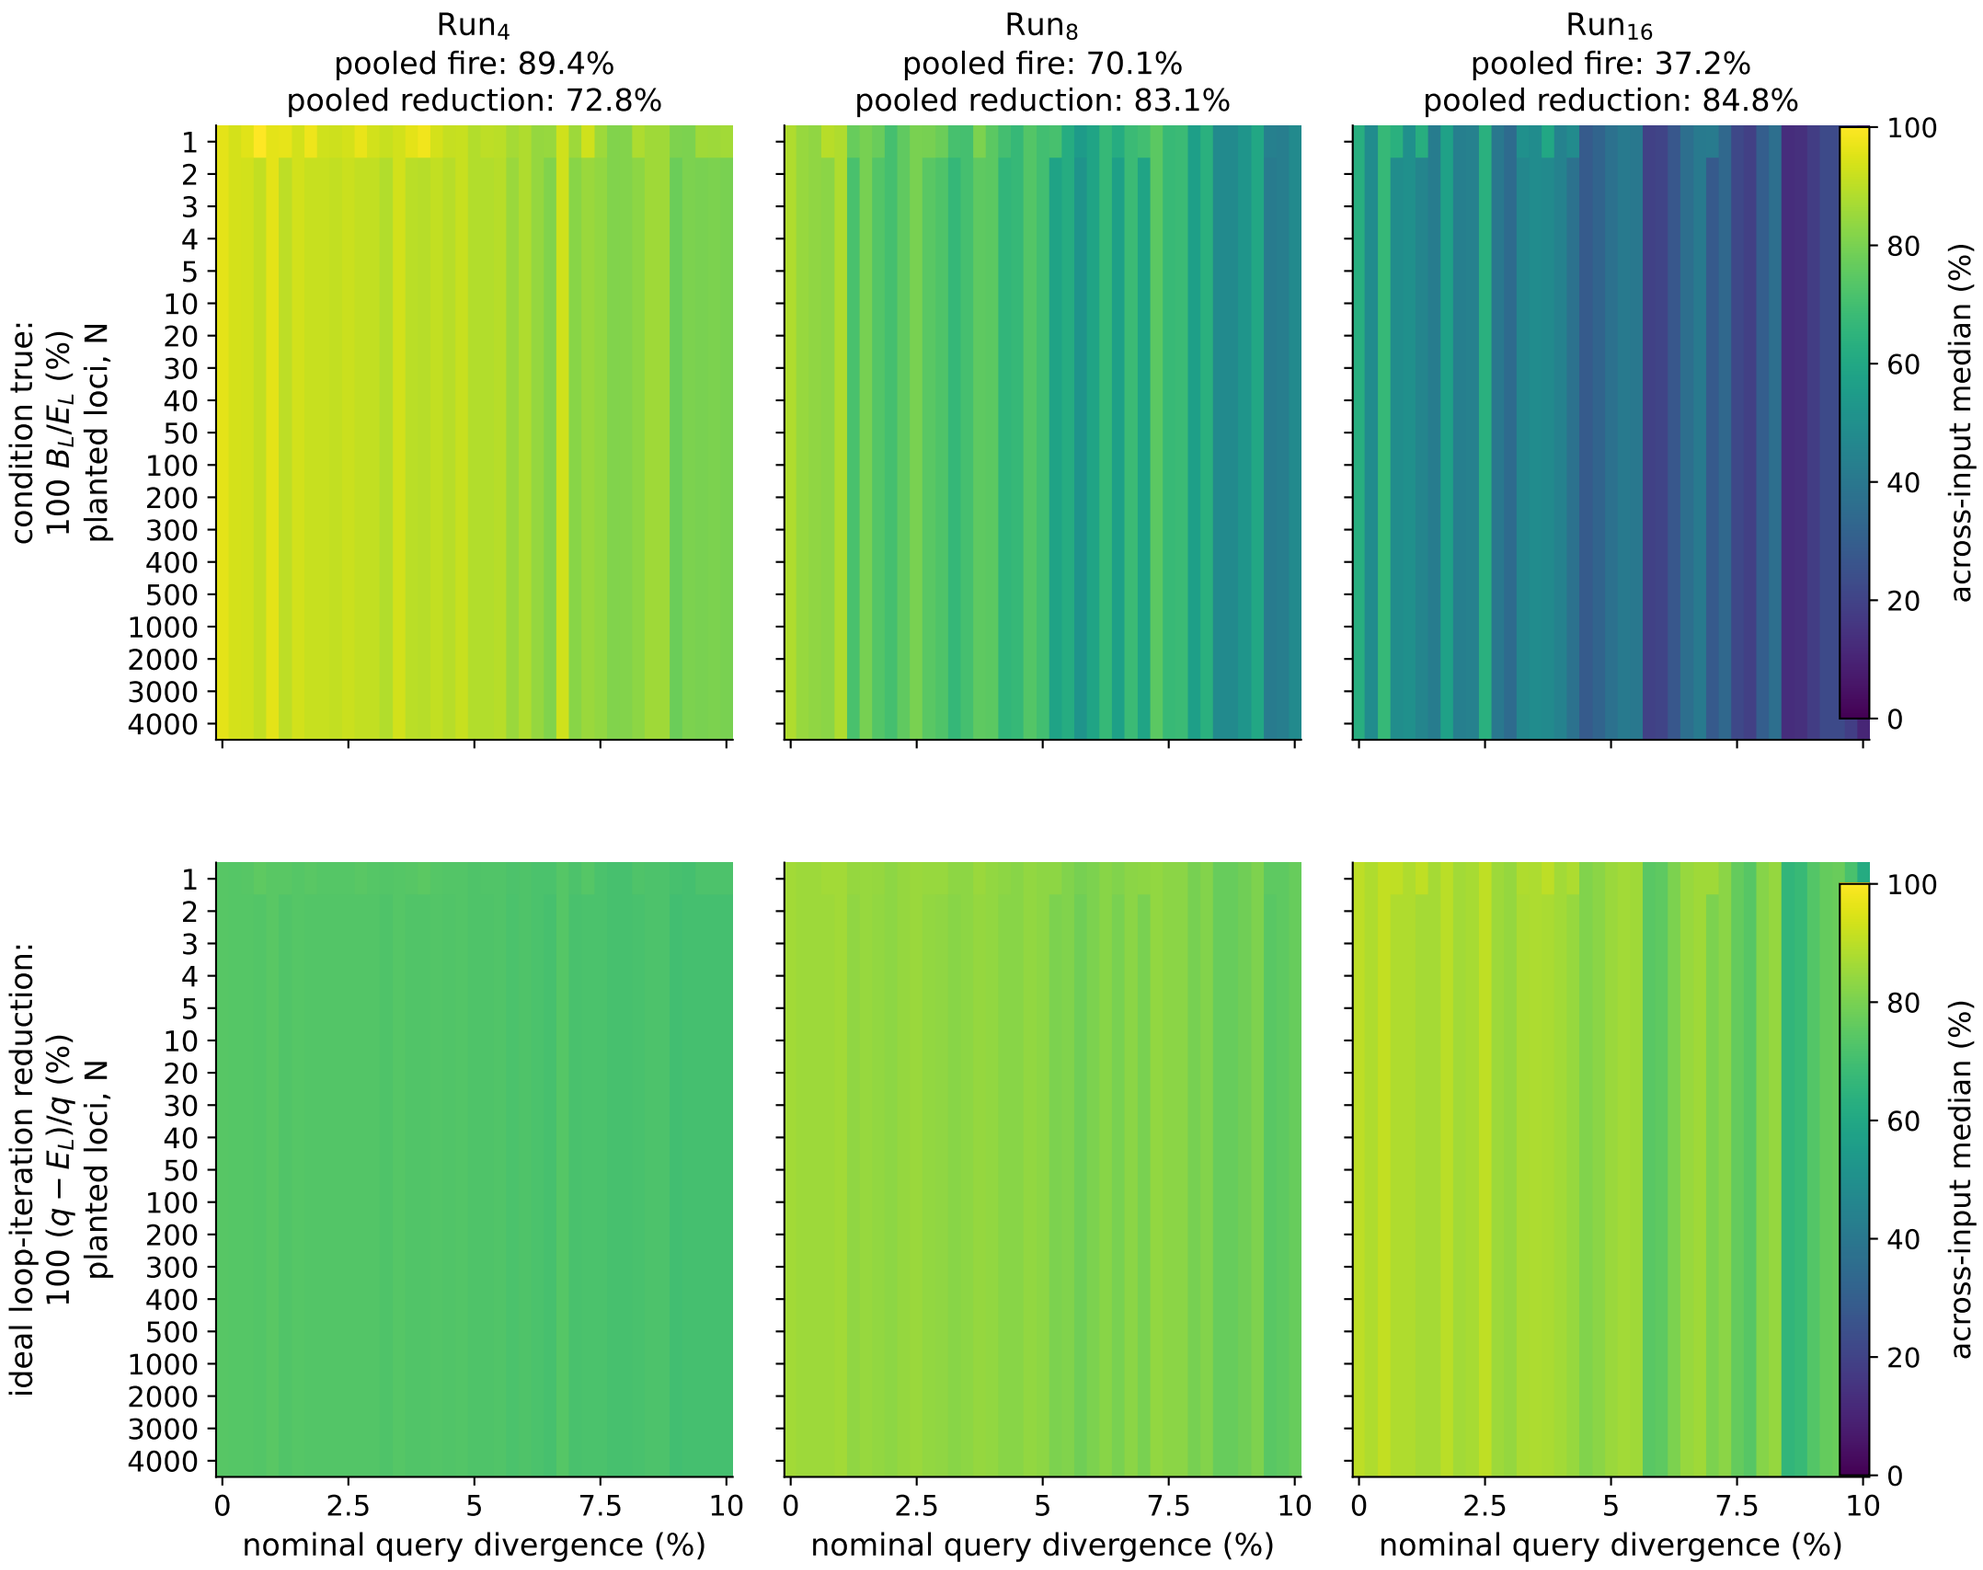

Cells summarize generated-input seeds; gray means undefined. Full descriptive summaries are retained in the generated plot data.
Run_L uses the first score-ranked predecessor path. Ideal reduction is 1 minus mixed-loop evaluations divided by scalar path length.
It excludes SIMD instruction cost and is not timed speedup. N=5000 is separate. Source SHA-256 b1d2660ef90a...