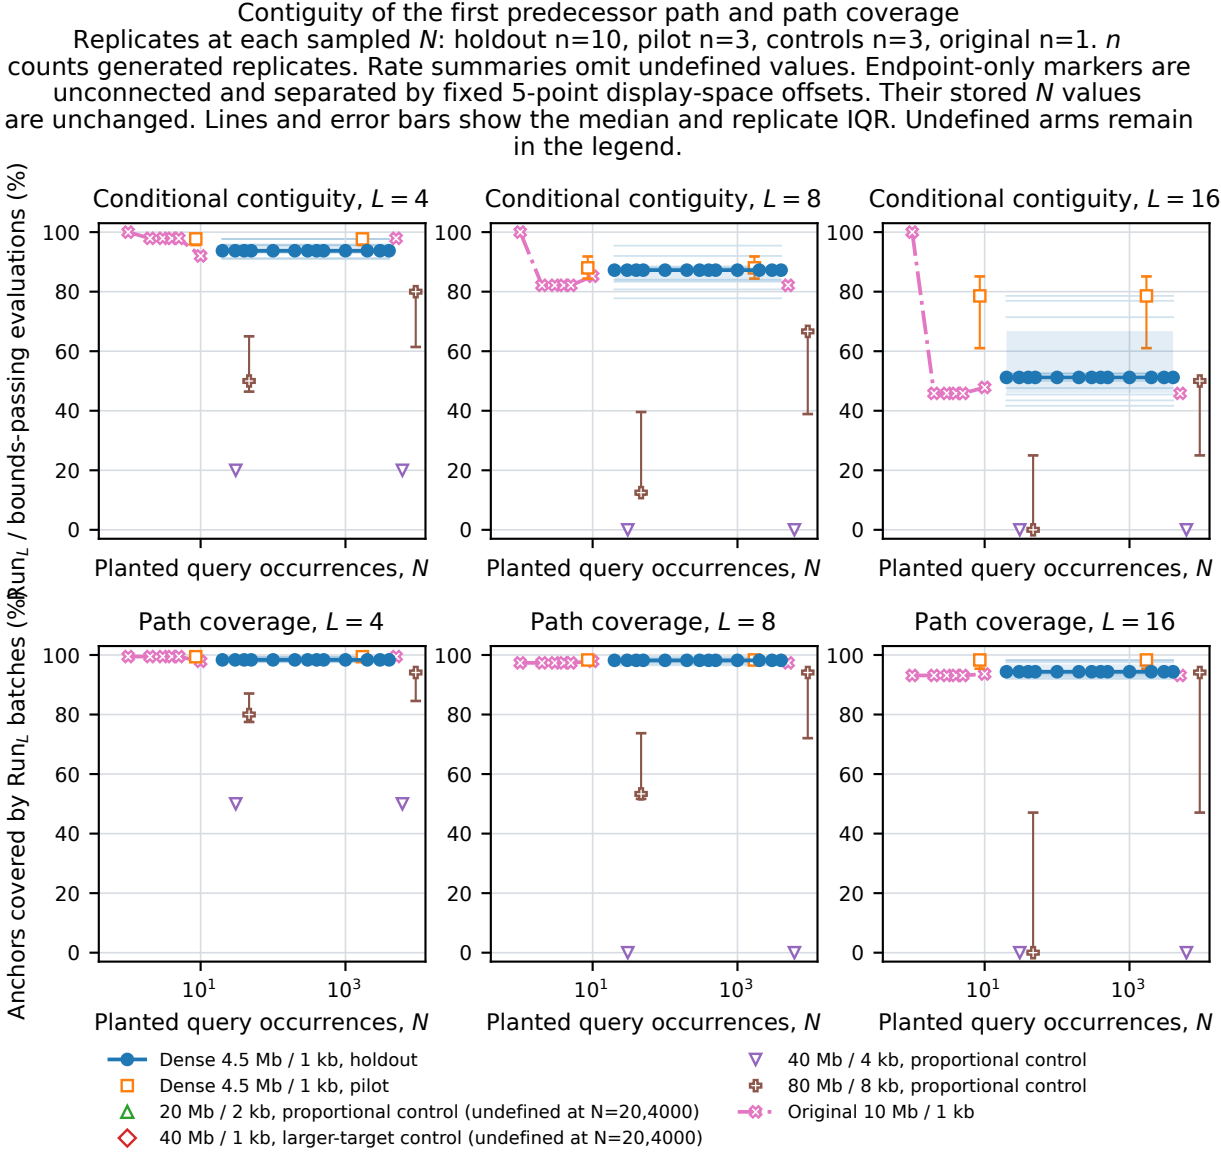
Contiguity of the first predecessor path and path coverage
Replicates at each sampled N: holdout n=10, pilot n=3, controls n=3, original n=1. n counts generated replicates. Rate summaries omit undefined values. Endpoint-only markers are unconnected and separated by fixed 5-point display-space offsets. Their stored N values are unchanged. Lines and error bars show the median and replicate IQR. Undefined arms remain in the legend.
Conditional contiguity, L = 4
Conditional contiguity, L = 8
Conditional contiguity, L = 16
Path coverage, L = 4
Path coverage, L = 8
Path coverage, L = 16
Anchors covered by RunL batches (%)
RunL / bounds-passing evaluations (%)
Planted query occurrences, N
Dense 4.5 Mb / 1 kb, holdout
Dense 4.5 Mb / 1 kb, pilot
20 Mb / 2 kb, proportional control (undefined at N=20,4000)
40 Mb / 1 kb, larger-target control (undefined at N=20,4000)
40 Mb / 4 kb, proportional control
80 Mb / 8 kb, proportional control
Original 10 Mb / 1 kb