Score qualification before evaluating Run_L
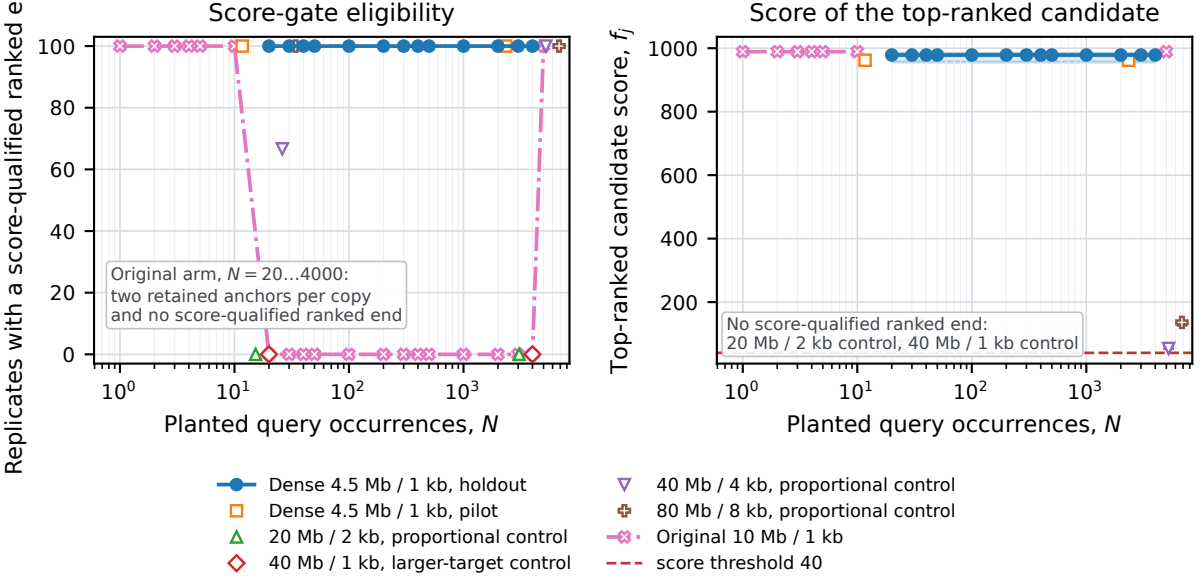
Replicates at each sampled N: holdout n=10, pilot n=3, controls n=3, original n=1. n counts generated replicates. Rate summaries omit undefined values. Endpoint-only markers are unconnected and separated by fixed 5-point display-space offsets. Their stored N values are unchanged.