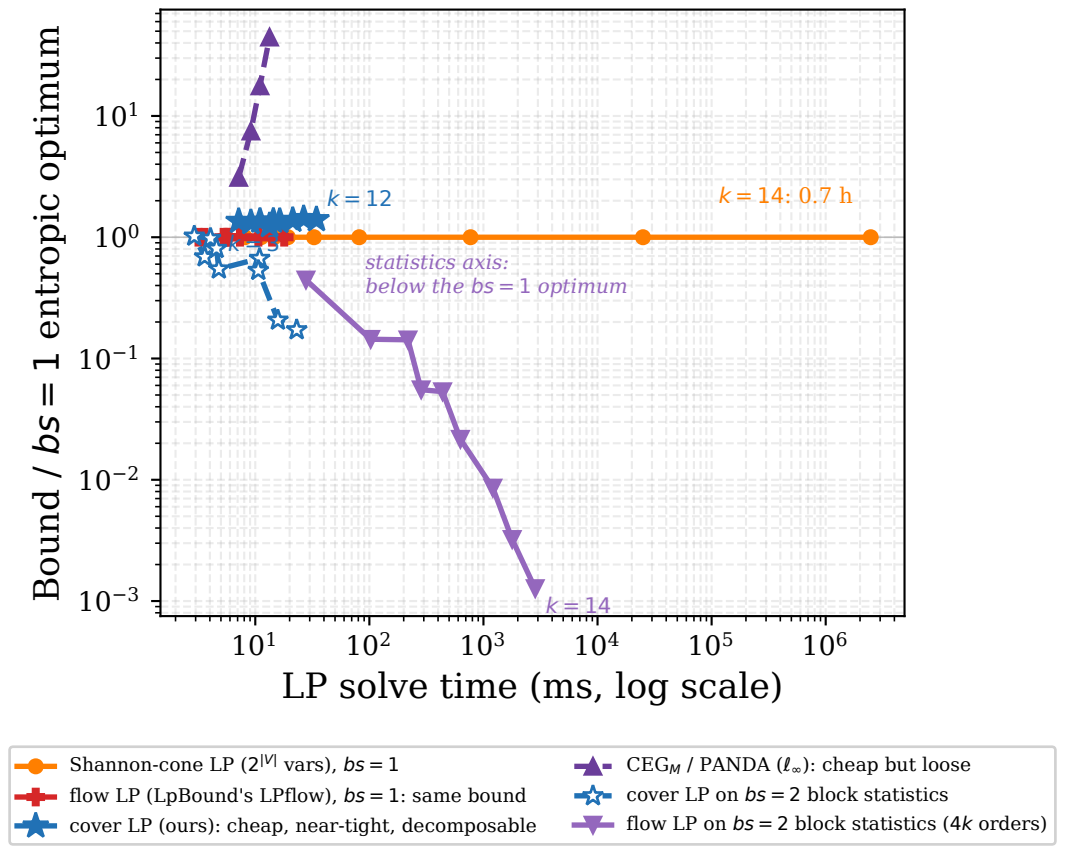
Bound / $bs = 1$ entropic optimum
10^{1}
10^{0}
10^{-1}
10^{-2}
10^{-3}
$k = 12$
$k = 14$: 0.7 h
$k = 3$
statistics axis:
below the $bs = 1$ optimum
$k = 14$
10^{1}
10^{2}
10^{3}
10^{4}
10^{5}
10^{6}
LP solve time (ms, log scale)
Shannon-cone LP ($2^{|V|}$ vars), $bs = 1$
flow LP (LpBound's LPflow), $bs = 1$: same bound
cover LP (ours): cheap, near-tight, decomposable
CEG$_M$ / PANDA (ℓ_∞): cheap but loose
cover LP on $bs = 2$ block statistics
flow LP on $bs = 2$ block statistics ($4k$ orders)