


A terminal window titled "MINGW64:/c/Users/Компик" with standard window controls. The terminal shows the user "Компик@DESKTOP-P8VT8I3" in a "MINGW64" environment at the "~ (master)" location. They execute the command "git --version", which returns "git version 2.47.0.windows.1". The prompt "\$" is shown again on the next line.

```
Компик@DESKTOP-P8VT8I3 MINGW64 ~ (master)
$ git --version
git version 2.47.0.windows.1

Компик@DESKTOP-P8VT8I3 MINGW64 ~ (master)
$
```

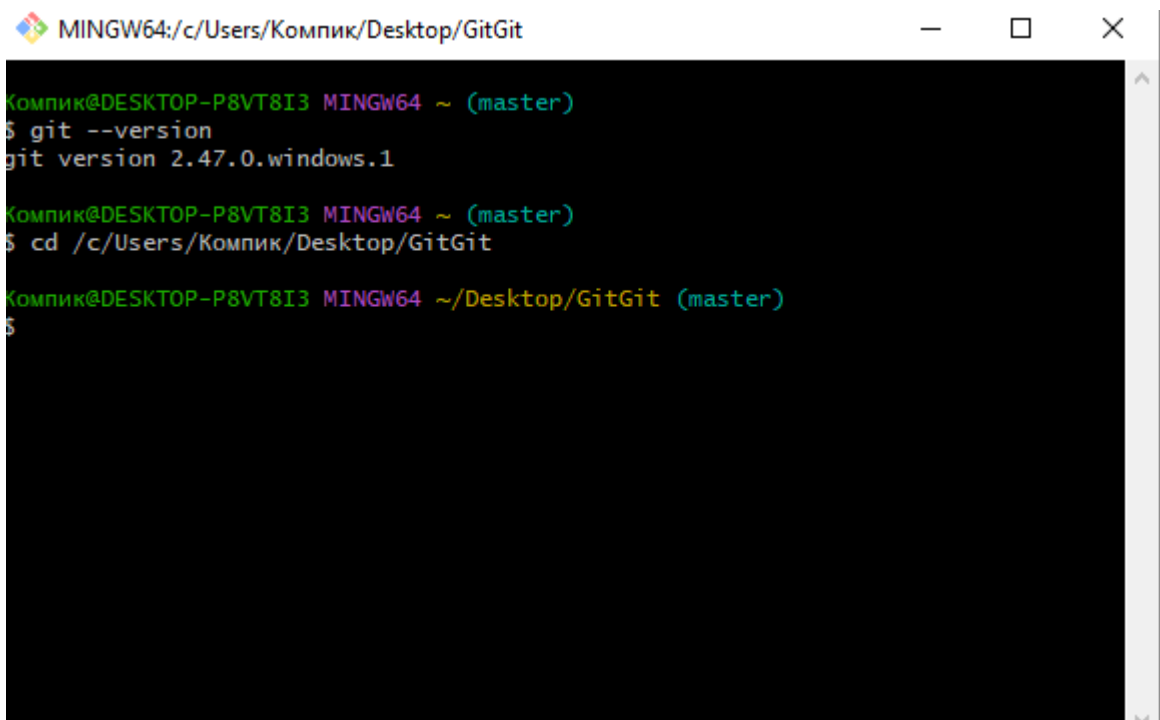

A terminal window titled "MINGW64:/c/Users/Компик/Desktop/GitGit" with standard window controls. The terminal shows the user "Компик@DESKTOP-P8VT8I3" in a "MINGW64" environment at the "~ (master)" location. They execute "git --version" (returning "git version 2.47.0.windows.1") and then "cd /c/Users/Компик/Desktop/GitGit". The prompt "\$" is shown again. On the next line, the prompt changes to "Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (master)" and the "\$" prompt is shown once more.

```
Компик@DESKTOP-P8VT8I3 MINGW64 ~ (master)
$ git --version
git version 2.47.0.windows.1

Компик@DESKTOP-P8VT8I3 MINGW64 ~ (master)
$ cd /c/Users/Компик/Desktop/GitGit

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (master)
$
```

```
index.html
C: > Users > Компик > Desktop > GitGit > index.html > html
1  <!DOCTYPE html>
2  <html lang="ru">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>поставь теру бежу автоматом пж</title>
7  </head>
8  <body>
9      <h1>Хеллоу Ворлд</h1>
10     <p>бабабаба</p>
11 </body>
12 </html>
```

```
MINGW64:/c/Users/Компик/Desktop/GitGit
Компик@DESKTOP-P8VT8I3 MINGW64 ~ (master)
$ git --version
git version 2.47.0.windows.1

Компик@DESKTOP-P8VT8I3 MINGW64 ~ (master)
$ cd /c/Users/Компик/Desktop/GitGit

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (master)
$ git init
Initialized empty Git repository in C:/Users/Компик/Desktop/GitGit/.git/

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (master)
$ git add index.html



Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (master)
$ git commit -m "добавлен файл index.html"
[master (root-commit) eed5db9] добавлен файл index.html
1 file changed, 12 insertions(+)
create mode 100644 index.html

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (master)
$
```

```
C: > Users > Компик > Desktop > GitGit > # style.css > body
1  body {
2      background-color: lightblue;
3  }
```

Comparing changes

Choose two branches to see what's changed or to start a new pull request. If you need to, you can also [compare across forks](#) or [learn more about diff comparisons](#).

 base: main  compare: master 



There isn't anything to compare.

main and master are entirely different commit histories.

Showing 1 changed file with 12 additions and 0 deletions.

Split Unified

```
12 index.html
...    ...    @@ -0,0 +1,12 @@
1 + <!DOCTYPE html>
2 + <html lang="ru">
3 + <head>
4 +   <meta charset="UTF-8">
5 +   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6 +   <title>поставьте рулежку автоматом</title>
7 + </head>
8 + <body>
9 +   <h1>Хеллоу Ворлд</h1>
10 +   <p>бабабаба</p>
11 + </body>
12 + </html>
```

MINGW64: c:/Users/Компик/Desktop/GitGit

```
Компик@DESKTOP-P8VT8I3 MINGW64 ~ (master)
$ git checkout -b feature/change-header
Switched to a new branch 'feature/change-header'

Компик@DESKTOP-P8VT8I3 MINGW64 ~ (feature/change-header)
$ git add index.html
fatal: pathspec 'index.html' did not match any files

Компик@DESKTOP-P8VT8I3 MINGW64 ~ (feature/change-header)
$ cd /c:/Users/Компик/Desktop/GitGit

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main)
$ git add index.html

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main)
$ git checkout -b feature/change-header
Switched to a new branch 'feature/change-header'

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (feature/change-header)
$ git commit -m
error: switch 'm' requires a value

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (feature/change-header)
$ git commit -m "изменен заголовок на странице"
[feature/change-header db4420f] изменен заголовок на странице
1 file changed, 2 insertions(+), 2 deletions(-)

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (feature/change-header)
$ git checkout main
Switched to branch 'main'


Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main)
$ git add index.html

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main)
$ git commit -m "изменен заголовок в основной ветке"
[main csa4782] изменен заголовок в основной ветке
1 file changed, 1 insertion(+), 1 deletion(-)

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main)
$ |
```

```
Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main)
$ git merge feature/change-header
Auto-merging index.html
CONFLICT (content): Merge conflict in index.html
Automatic merge failed; fix conflicts and then commit the result.

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main|MERGING)
$ |
```

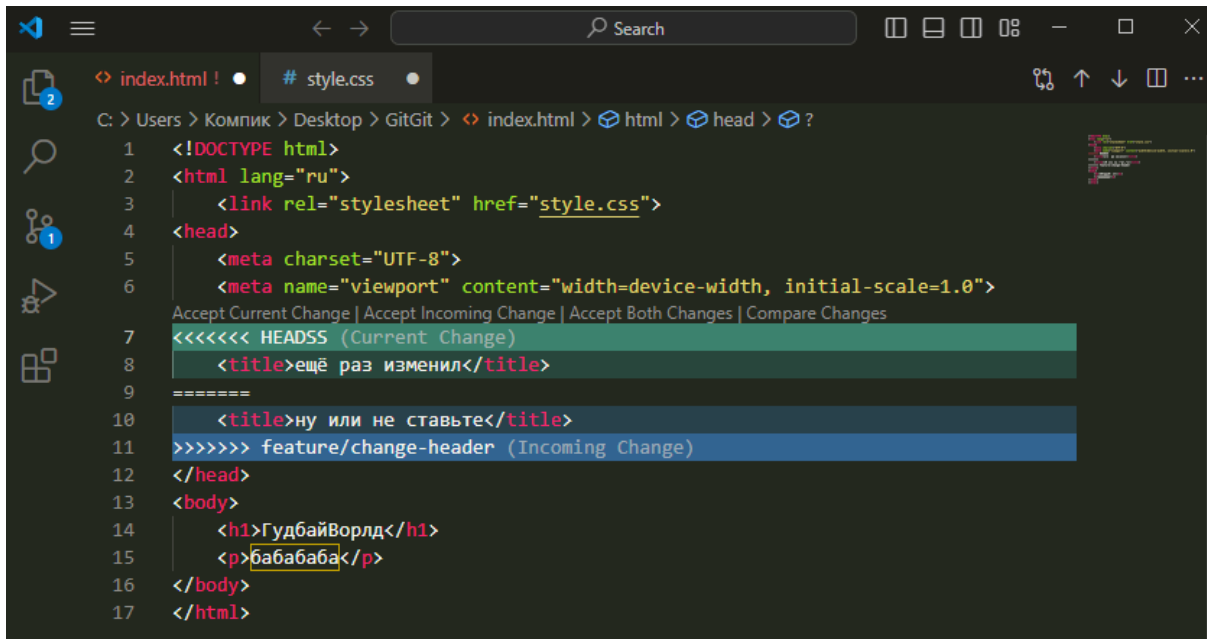

The screenshot shows a code editor with a dark theme. The file being edited is `index.html`, located at `C:\Users\Компик\Desktop\GitGit\index.html`. The editor displays a merge conflict in the `<title>` tag. The current change (HEADSS) is `<title>ещё раз изменил</title>`, and the incoming change (feature/change-header) is `<title>ну или не ставьте</title>`. The editor provides options to 'Accept Current Change', 'Accept Incoming Change', 'Accept Both Changes', or 'Compare Changes'. The HTML code includes a DOCTYPE declaration, a link to `style.css`, meta tags for charset and viewport, and a body with an `<h1>` and a `<p>` containing the text 'бабабаба'.

```
1 <!DOCTYPE html>
2 <html lang="ru">
3   <link rel="stylesheet" href="style.css">
4   <head>
5     <meta charset="UTF-8">
6     <meta name="viewport" content="width=device-width, initial-scale=1.0">
7     <<<<<< HEADSS (Current Change)
8     <title>ещё раз изменил</title>
9     =====
10    <title>ну или не ставьте</title>
11    >>>>>> feature/change-header (Incoming Change)
12  </head>
13  <body>
14    <h1>ГудбайВорлд</h1>
15    <p>бабабаба</p>
16  </body>
17 </html>
```

```
Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main)
$ git merge feature/change-header
Auto-merging index.html
CONFLICT (content): Merge conflict in index.html
Automatic merge failed; fix conflicts and then commit the result.

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main|MERGING)
$ git add index.html

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main|MERGING)
$ git commit -m "разрешён конфликт при объединении веток"
[main e58f3c1] разрешён конфликт при объединении веток

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main)
$ git push origin main
To https://github.com/subaruxz/html-css-asks
 ! [rejected]        main -> main (fetch first)
error: failed to push some refs to 'https://github.com/subaruxz/html-css-asks'
hint: Updates were rejected because the remote contains work that you do not
hint: have locally. This is usually caused by another repository pushing to
hint: the same ref. If you want to integrate the remote changes, use
hint: 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main)
$ git push origin master
Everything up-to-date

Компик@DESKTOP-P8VT8I3 MINGW64 ~/Desktop/GitGit (main)
$
```