

28-02-2026

Agenda:

pandas

Git

→ 4 group of students

Group-1 Group-2 Group-3 Group-4

N1

N4

N5

N6

→ Dataset

N2

↓
attribute

↓
attribute

↓
attribute

N3

↓
attributes

each of the students has their own attributes,
that is, ^{why} they belong together.

→ defines the similarity of their attributes

(All total students)

→ attributes → group

if I pass each person's attributes

↓
attributes

ML-model
(learn based on 6 student)

→ 1
→ 2
→ 3
→ 4

My ML model should tell me that they belongs to which group

this is called as

→ Classification

ML doesn't understand text, so it converted to numbers

→ (1, 1, 1)

Group-1

Group-2

Group-3

Group-4

→ ML →

1

2

3

4

} encoding

Group →

(category)

(numerical)

So we converting groups into categories

"A"

"B"

"C"

"D"

→ Character / String → pandas → D → A

D
C
B
A

A . . . 2

16

strings doesn't hold the sequence but number does.
so, they have sequence.

"Two" > "first" : Twe

String → converted → dtype → to handle order
↓
then after we can do logical operation on top of it.

Data analysis $\rightarrow$ conclusion $\rightarrow$

- string
- year
- month
- day
- weekday


→
str

Jan-1 → new year

→ today Jan-30

New year — today → -



holi — today → +

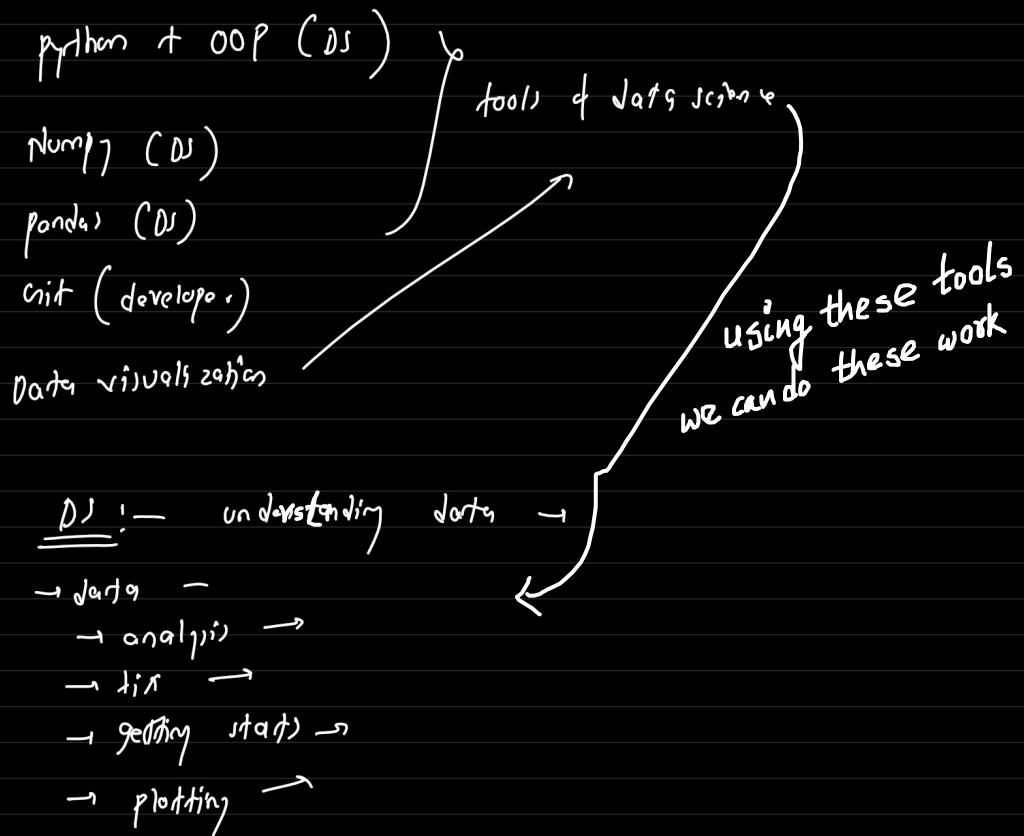

* Git :- Tool to manage code

just like uv


uv → project + dependencies
↓
env
↓
libraries
↓
python

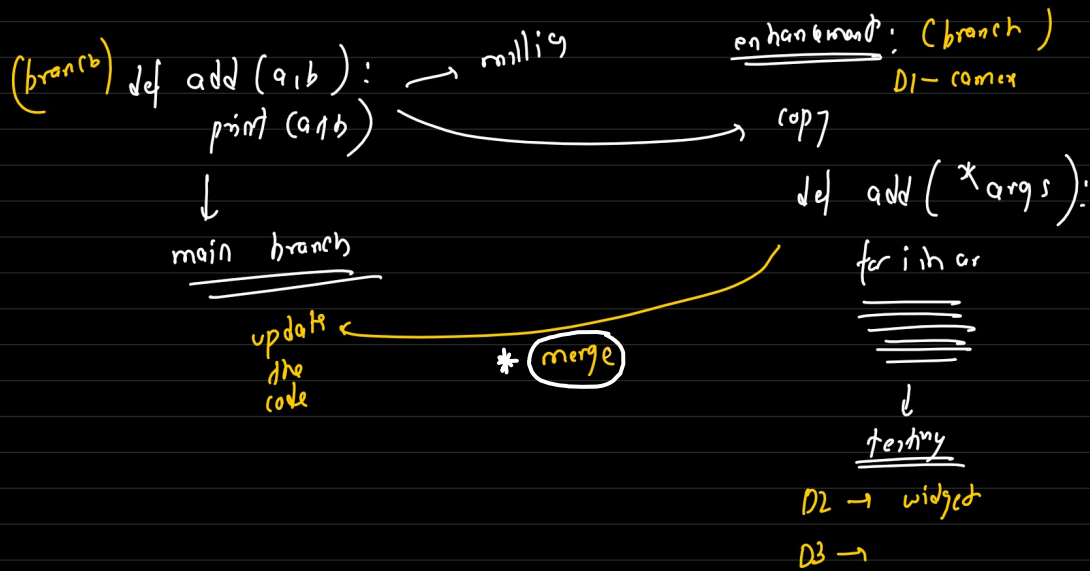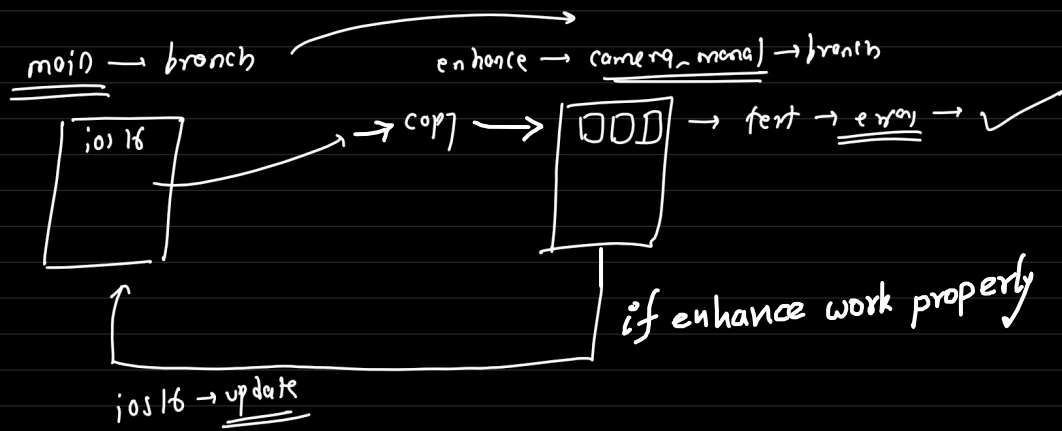

⇒ Gitbash is linux like terminal on windows.

→ git help us to -

- manage code by creating checkpoint, version
- separate code by branches

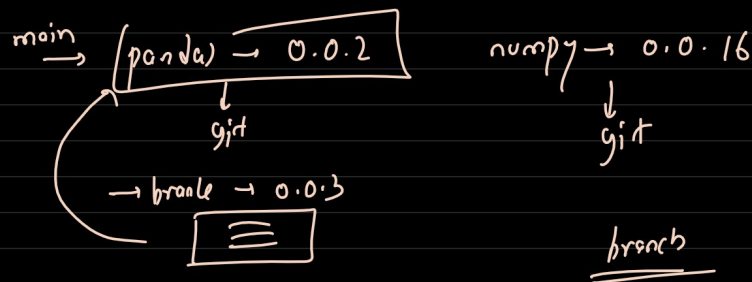

create a repo & github
online: repo → github
github

D1:
local → git
working code
↑ git init
→ git add .
→ git commit -m "abc"
1st time thing ← → git branch -M main
← → git remote add origin
url of the repo
→ git push -u origin main

D2:
git clone url-of-repo

D2: → uploaded files using github UI → .txt → github → online

github online


f1

f2

local repo

f1

→ git pull origin branch-name
↓
main

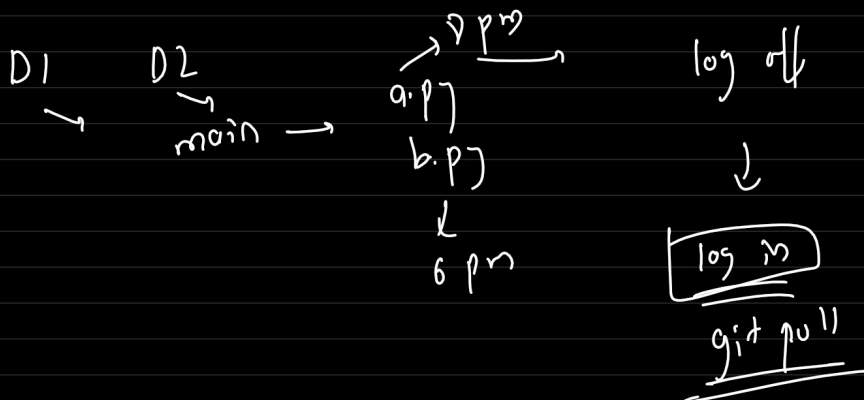

project-1

study-1

pandas
numpy

.venv

.py

pandas

.venv

.py